

<b>SOLICITATION, OFFER, AND AWARD</b> <i>(Construction, Alteration, or Repair)</i>		1. SOLICITATION NUMBER DACA67-02-B-0202	2. TYPE OF SOLICITATION <input checked="" type="checkbox"/> SEALED BID (IFB) <input type="checkbox"/> NEGOTIATED (RFP)	3. DATE ISSUED 4 Jan 2002	PAGE OF PAGES 1 4
<b>IMPORTANT - The "offer" section on the reverse must be fully completed by the offeror.</b>					
4. CONTRACT NUMBER DACA67-02-C-0208		5. REQUISITION/PURCHASE REQUEST NUMBER W68MD9-1323-7889		6. PROJECT NUMBER	
7. ISSUED BY Seattle District, Corps of Engineers ATTN: CENWS-CT-PR PO Box 3755 Seattle, WA 98124-3755		CODE W68MD9		8. ADDRESS OFFER TO Seattle Distric, Corps of Engineers PO Box 3755 ATTN: CENWS-CT-MU Seattle, WA 98124-3755  HAND CARRY: Preston Conference Room 4735 East Marginal Way South Seattle, WA 98134-2385 BID OPENING ROOM: Preston Conference Room	
9. FOR INFORMATION CALL		A. NAME See Information Page inside Front Cover		B. TELEPHONE NUMBER (Include area code) (NO COLLECT CALLS) See Information Page inside Front Cover	

**SOLICITATION**

**NOTE: In sealed bid solicitations "offer" and "offeror" mean "bid" and "bidder".**

10. THE GOVERNMENT REQUIRES PERFORMANCE OF THE WORK DESCRIBED IN THESE DOCUMENTS (Title, identifying number, date):

Furnish all labor, materials, and equipment and perform all work for Tactical Equipment Complex, Fort Lewis, Washington in accordance with the attached Contract Clauses, Special Clauses, Technical Specifications, and Drawings.

- Solicitation No. DACA67-02-B-0202 dated 4 January 2002 with (5) amendments thereto.
- Wage Determination No. WA010001 with 21 modifications and WA010002 with 19 modifications thereto.
- Drawings as listed in Section 00800.
- See page 00010-3 for alteration(s) to the contract.

11. The Contractor shall begin performance within 10 calendar days and complete it within \_\_\_\_\_ calendar days after receiving  
☐ award, ☒ notice to proceed. This performance period is ☒ mandatory, ☐ negotiable. (See Paragraph SC-1, 00800.)

12A. THE CONTRACTOR MUST FURNISH ANY REQUIRED PERFORMANCE PAYMENT BONDS?  
 (If "YES," indicate within how many calendar days after award in Item 12B.)

☒ YES ☐ NO

12B. CALENDAR DAYS

10

13. ADDITIONAL SOLICITATION REQUIREMENTS:

A. Sealed offers in original and 0 copies to perform the work required are due at the place specified in Item 8 by 2:00 p.m. (hour) local time February 21, 2002 (date). If this is a sealed bid solicitation, offers will be publicly opened at that time. Sealed envelopes containing offers shall be marked to show the offeror's name and address, the solicitation number, and the date and time offers are due.

B. An offer guarantee ☒ is, ☐ is not required.

C. All offers are subject to the (1) work requirements, and (2) other provisions and clauses incorporated in the solicitation in full text or by reference.

D. Offers providing less than 120 calendar days for Government acceptance after the date offers are due will not be considered and will be rejected.

## 14. NAME AND ADDRESS OF OFFEROR (Include ZIP Code)

LANIKAI INC + BORRAGE INC dba M J Shockey  
Construction  
1107 101<sup>st</sup> AVE  
KIRKLAND, WA 98033  
Tax ID No: 91-1734625 DUNS No:  
eMail: Michael.Shockey@AOL.COM

CODE 1G7B0

FACILITY CODE

## 15. TELEPHONE NUMBER (Include area code)

425-828-4359 Fax No.: 425-828-6391

## 16. REMITTANCE ADDRESS (Include only if different than Item 14)

SAME

17. The offeror agrees to perform the work required at the prices specified below in strict accordance with the terms of this solicitation, if this accepted by the Government in writing within \_\_\_\_\_ calendar days after the date offers are due. (Insert any number equal or greater than minimum requirement stated in 13D. Failure to insert any number means the offeror accepts the minimum in Item 13D.)

AMOUNTS

See Page 00010-5

18. The offeror agrees to furnish any required performance and payment bonds.

## 19. ACKNOWLEDGEMENT OF AMENDMENTS


(The offeror acknowledges receipt of amendments to the solicitation - give number and date of each)

AMENDMENT NO.	001	002	003	004	005					
DATE	4/30/02	4/25/02	4/31/02	2/12/02	2/11/02					

## 20A. NAME AND TITLE OF PERSON AUTHORIZED TO SIGN OFFER (Type or print)

Michael J. Shockey President/Owner

## 20B. SIGNATURE



## 20C. OFFER DATE

2-21-02

AWARD (To be completed by Government)

## 21. ITEMS ACCEPTED

0001, 0002, 0003, 0004, 0005, 0006, 0007, and 0008

## 22. AMOUNT

\$4,498,517.00

## 23. ACCOUNTING AND APPROPRIATION DATA

See alterations to contract page 00010-3

24. SUBMIT INVOICES TO ADDRESS SHOWN IN  
(4 copies unless otherwise specified)

ITEM

26

## 25. OTHER THAN FULL AND OPEN COMPETITION PURSUANT TO

☐ 10 U.S.C. 2304(c) ( ) ☐ 41 U.S.C. 253(c) ( )

## 26. ADMINISTERED BY

CODE

United States Army Corps of Engineers, Seattle District  
Northwest Area Office  
PO Box 92146  
Tillicum, WA 98492-0146

## 27. PAYMENT WILL BE MADE BY

US Army Corps of Engineers Finance Center  
CEFC-AO-P  
5722 Integrity Drive  
Millington, TN 38054-5005

## CONTRACTING OFFICER WILL COMPLETE ITEM 28 OR 29 AS APPLICABLE

☐ 28. NEGOTIATED AGREEMENT (Contractor is required to sign

document and return \_\_\_\_\_ copies to the issuing office.)  
Contractor agrees to furnish and deliver all items or perform all work requirements identified on this form and any continuation sheets for the consideration stated in this contract. The rights and obligations of the parties to this contract shall be governed by (a) this contract award, (b) the solicitation, and (c) the clauses, representations, certifications, and specifications incorporated by reference in or attached to this

☒ 29. AWARD. (Contractor is not required to sign this document.)

offer on this solicitation is hereby accepted as to the items listed. This award consummates the contract, which consists of (a) the Government solicitation and your offer, and (b) this contract award. No further contractual document is necessary.

30A. NAME AND TITLE OF CONTRACTOR OR PERSON AUTHORIZED TO SIGN  
(Type or print)

## 31A. NAME OF CONTRACTING OFFICER (Type or print)

CHERYL A. ANDERSON

## 30B. SIGNATURE

## 30C. DATE

## 31B. UNITED STATES OF AMERICA

BY 

## 31C. AWARD DATE

29 MAR 2002

## **ALTERATIONS IN CONTRACT** (FAR 52.252-4) (APR 1984)

PORTIONS OF THIS CONTRACT ARE ALTERED AS FOLLOWS:

1. The successful bidder's revised bid schedule is hereby added to and incorporated into this contract. This revised bid schedule reflects resolution of the mistake in bid.

ACCOUNTING AND APPROPRIATION DATA:

972050056SA 088082 3230002HSN14711900000 G220 35026 000000000000

Amount = \$4,498,517.00


END OF ALTERATIONS TO CONTRACT

This page intentionally blank

IF THE CONTRACTOR IS A CORPORATION OR PARTNERSHIP, THE APPLICABLE PORTION OF THE FORM LISTED BELOW MUST BE COMPLETED. IN THE ALTERNATIVE, OTHER EVIDENCE MUST BE SUBMITTED TO SUBSTANTIATE THE AUTHORITY OF THE PERSON SIGNING THE CONTRACT. IF A CORPORATION, THE SAME OFFICER SHALL NOT EXECUTE BOTH THE CONTRACT AND THE CERTIFICATE.

## CORPORATE CERTIFICATE

I, Diane Newman, certify that I am the Secretary of Lanikai Inc Secretary of the Corporation named as Contractor herein; that Michael J. Shockey, who signed this contract on behalf of the Contractor was then President of said corporation; that said contract was duly signed for and on behalf of said corporation by authority of its governing body and is within the scope of its corporate powers.

  
(Secretary) (CORPORATE SEAL)

## AUTHORITY TO BIND PARTNERSHIP

This is to certify that the names, signatures and Social Security Numbers of all partners are listed below and that the person signing the contract has authority actually to bind the partnership pursuant to its partnership agreements. Each of the partners individually has full authority to enter into and execute contractual instruments on behalf of said partnership with the United States of America, except as follows: (state "none" or describe limitations, if any)

This authority shall remain in full force and effect until such time as the revocation of authority by any cause whatsoever has been furnished in writing to, and acknowledged by, the Contracting Officer.

(Names, Signatures and Social Security Numbers of all Partners)

NAME	SIGNATURE	SOCIAL SECURITY NO.
_____	_____	_____
_____	_____	_____
_____	_____	_____
_____	_____	_____

This page intentionally blank

01062

## SCHEDULE

<u>Item No.</u>	<u>Description of Item</u>	<u>Quantity</u>	<u>Unit</u>	<u>Unit Price</u>	<u>Amount</u>
0001	All Work for Arms/EM Communications and Electronics Maintenance (ACE) Building Within a Line Five Feet Beyond the Building Wall Lines, Except Items Separately Listed	1	JOB	L.S.	\$ 1,178,330
0002	All Work for Property Book Officer Warehouse/Pallet Storage (PBO) Building Within a Line Five Feet Beyond the Building Wall Lines, Except Items Separately Listed	1	JOB	L.S.	\$ 748,363
0003	All Work for Ranger Motor Pool (RMP) Building Within a Line Five Feet Beyond the Building Wall Lines, Except Items Separately Listed	1	JOB	L.S.	\$ 787,382
0004	All Work for Ranger Special Operations Vehicle /Boat/Bike Storage (VBB) Building Within a Line Five Feet Beyond the Building Wall Lines, Except Items Separately Listed	1	JOB	L.S.	\$ 927,205
0005	All Sitework and Utilities Outside the Line Five feet Beyond Each Building's Wall Lines, Except Items Separately Listed	1	JOB	L.S.	\$ 760,237
0006	All Work for As-Built Drawings	1	JOB	L.S.	\$ 25,000.00
0007	All Work for O&M Manuals	1	JOB	L.S.	\$ 60,000.00
0008	All Work for Form 1354 Checklist and Equipment in Place List	1	JOB	L.S.	\$ 12,000.00
TOTAL ALL ITEMS					\$ 4,498,517

**Note:**

1. The dollar amounts established in Items No. 0006, 0007, and 0008 shall not be revised by bidders.

Corrected Bid Schedule  
DACA67-02-B-0202

00010-5

This page intentionally blank



<b>AMENDMENT OF SOLICITATION/MODIFICATION OF CONTRACT</b>				1. CONTRACT ID CODE		PAGE OF PAGES 1   2	
2. AMENDMENT/MODIFICATION NO. 0005		3. EFFECTIVE DATE 11-Feb-2002		4. REQUISITION/PURCHASE REQ. NO. W68MD9-1323-7889		5. PROJECT NO.(If applicable)	
6. ISSUED BY USA ENGINEER DISTRICT, SEATTLE ATTN: CENWS-CT P.O. BOX 3755 SEATTLE WA 98124-3755		CODE DACA67		7. ADMINISTERED BY (If other than item 6)  <b>See Item 6</b>		CODE	
8. NAME AND ADDRESS OF CONTRACTOR (No., Street, County, State and Zip Code)				X		9A. AMENDMENT OF SOLICITATION NO. DACA67-02-B-0202	
				X		9B. DATED (SEE ITEM 11) 04-Jan-2002	
						10A. MOD. OF CONTRACT/ORDER NO.	
						10B. DATED (SEE ITEM 13)	
CODE		FACILITY CODE					
<b>11. THIS ITEM ONLY APPLIES TO AMENDMENTS OF SOLICITATIONS</b>							
<input checked="" type="checkbox"/> The above numbered solicitation is amended as set forth in Item 14. The hour and date specified for receipt of Offer <input checked="" type="checkbox"/> is extended, <input type="checkbox"/> is not extended.  Offer must acknowledge receipt of this amendment prior to the hour and date specified in the solicitation or as amended by one of the following methods: (a) By completing Items 8 and 15, and returning _____ copies of the amendment; (b) By acknowledging receipt of this amendment on each copy of the offer submitted; or (c) By separate letter or telegram which includes a reference to the solicitation and amendment numbers. FAILURE OF YOUR ACKNOWLEDGMENT TO BE RECEIVED AT THE PLACE DESIGNATED FOR THE RECEIPT OF OFFERS PRIOR TO THE HOUR AND DATE SPECIFIED MAY RESULT IN REJECTION OF YOUR OFFER. If by virtue of this amendment you desire to change an offer already submitted, such change may be made by telegram or letter, provided each telegram or letter makes reference to the solicitation and this amendment, and is received prior to the opening hour and date specified.							
12. ACCOUNTING AND APPROPRIATION DATA (If required)							
13. THIS ITEM APPLIES ONLY TO MODIFICATIONS OF CONTRACTS/ORDERS. IT MODIFIES THE CONTRACT/ORDER NO. AS DESCRIBED IN ITEM 14.							
A.THIS CHANGE ORDER IS ISSUED PURSUANT TO: (Specify authority) THE CHANGES SET FORTH IN ITEM 14 ARE MADE IN THE CONTRACT ORDER NO. IN ITEM 10A.							
B.THE ABOVE NUMBERED CONTRACT/ORDER IS MODIFIED TO REFLECT THE ADMINISTRATIVE CHANGES (such as changes in paying office, appropriation date, etc.) SET FORTH IN ITEM 14, PURSUANT TO THE AUTHORITY OF FAR 43.103(B).							
C.THIS SUPPLEMENTAL AGREEMENT IS ENTERED INTO PURSUANT TO AUTHORITY OF:							
D.OTHER (Specify type of modification and authority)							
E. IMPORTANT: Contractor <input type="checkbox"/> is not, <input type="checkbox"/> is required to sign this document and return _____ copies to the issuing office.							
14. DESCRIPTION OF AMENDMENT/MODIFICATION (Organized by UCF section headings, including solicitation/contract subject matter where feasible.) Solicitation: DACA67-02-B-0202      Title: Tactical Equipment Complex Amendment No. 5      Fort Lewis, Washington  A. This Amendment is being issued in order to Extend the Bid Opening Time/Date from 2:00 p.m. on 12 February 2002 to 2:00 p.m. on 21 February 2002.  B. Amendment No. 4 has been reserved for Technical issues/changes and is forthcoming.  C. Bidders must acknowledge receipt of this Amendment by number and date on the Standard Form 1442 back in block 19, or by telegram.							
Except as provided herein, all terms and conditions of the document referenced in Item 9A or 10A, as heretofore changed, remains unchanged and in full force and effect.							
15A. NAME AND TITLE OF SIGNER (Type or print)				16A. NAME AND TITLE OF CONTRACTING OFFICER (Type or print)			
15B. CONTRACTOR/OFFEROR		15C. DATE SIGNED		16B. UNITED STATES OF AMERICA		16C. DATE SIGNED	
_____ (Signature of person authorized to sign)				BY _____ (Signature of Contracting Officer)		11-Feb-2002	

**This page was intentionally left blank for duplex printing.**

<b>AMENDMENT OF SOLICITATION/MODIFICATION OF CONTRACT</b>				1. CONTRACT ID CODE		PAGE OF PAGES 1   2	
2. AMENDMENT/MODIFICATION NO. 0004		3. EFFECTIVE DATE 12-Feb-2002		4. REQUISITION/PURCHASE REQ. NO. W68MD9-1323-7889		5. PROJECT NO.(If applicable)	
6. ISSUED BY USA ENGINEER DISTRICT, SEATTLE ATTN: CENWS-CT P.O. BOX 3755 SEATTLE WA 98124-3755		CODE DACA67		7. ADMINISTERED BY (If other than item 6)  <b>See Item 6</b>		CODE	
8. NAME AND ADDRESS OF CONTRACTOR (No., Street, County, State and Zip Code)				X		9A. AMENDMENT OF SOLICITATION NO. DACA67-02-B-0202	
				X		9B. DATED (SEE ITEM 11) 04-Jan-2002	
						10A. MOD. OF CONTRACT/ORDER NO.	
						10B. DATED (SEE ITEM 13)	
CODE		FACILITY CODE					
<b>11. THIS ITEM ONLY APPLIES TO AMENDMENTS OF SOLICITATIONS</b>							
<input checked="" type="checkbox"/> The above numbered solicitation is amended as set forth in Item 14. The hour and date specified for receipt of Offer <input type="checkbox"/> is extended, <input checked="" type="checkbox"/> is not extended.  Offer must acknowledge receipt of this amendment prior to the hour and date specified in the solicitation or as amended by one of the following methods: (a) By completing Items 8 and 15, and returning _____ copies of the amendment; (b) By acknowledging receipt of this amendment on each copy of the offer submitted; or (c) By separate letter or telegram which includes a reference to the solicitation and amendment numbers. FAILURE OF YOUR ACKNOWLEDGMENT TO BE RECEIVED AT THE PLACE DESIGNATED FOR THE RECEIPT OF OFFERS PRIOR TO THE HOUR AND DATE SPECIFIED MAY RESULT IN REJECTION OF YOUR OFFER. If by virtue of this amendment you desire to change an offer already submitted, such change may be made by telegram or letter, provided each telegram or letter makes reference to the solicitation and this amendment, and is received prior to the opening hour and date specified.							
12. ACCOUNTING AND APPROPRIATION DATA (If required)							
13. THIS ITEM APPLIES ONLY TO MODIFICATIONS OF CONTRACTS/ORDERS. IT MODIFIES THE CONTRACT/ORDER NO. AS DESCRIBED IN ITEM 14.							
A.THIS CHANGE ORDER IS ISSUED PURSUANT TO: (Specify authority) THE CHANGES SET FORTH IN ITEM 14 ARE MADE IN THE CONTRACT ORDER NO. IN ITEM 10A.							
B.THE ABOVE NUMBERED CONTRACT/ORDER IS MODIFIED TO REFLECT THE ADMINISTRATIVE CHANGES (such as changes in paying office, appropriation date, etc.) SET FORTH IN ITEM 14, PURSUANT TO THE AUTHORITY OF FAR 43.103(B).							
C.THIS SUPPLEMENTAL AGREEMENT IS ENTERED INTO PURSUANT TO AUTHORITY OF:							
D.OTHER (Specify type of modification and authority)							
E. IMPORTANT: Contractor <input type="checkbox"/> is not, <input type="checkbox"/> is required to sign this document and return _____ copies to the issuing office.							
14. DESCRIPTION OF AMENDMENT/MODIFICATION (Organized by UCF section headings, including solicitation/contract subject matter where feasible.) Solicitation No. DACA67-02-B-0202 Amendment No. 4  Title: Tactical Equipment Complex Fort Lewis, Washington  SEE CONTINUATION SHEET							
Except as provided herein, all terms and conditions of the document referenced in Item 9A or 10A, as heretofore changed, remains unchanged and in full force and effect.							
15A. NAME AND TITLE OF SIGNER (Type or print)				16A. NAME AND TITLE OF CONTRACTING OFFICER (Type or print)			
15B. CONTRACTOR/OFFEROR		15C. DATE SIGNED		16B. UNITED STATES OF AMERICA		16C. DATE SIGNED	
_____ (Signature of person authorized to sign)				BY _____ (Signature of Contracting Officer)		12-Feb-2002	

## SECTION SF 30 BLOCK 14 CONTINUATION PAGE

- A. This Amendment No. 1 is issued to provide for revisions to the solicitation as follows:
- 1) Revisions to Drawing Sheets E-3, A301ACE, S201ACE, A302PBO, A502PBO, S202PBO, A303RMP, S203RMP and A304VBB by sketches attached to 00800A;
  - 2) Revisions to access requirements specified in Section 01005, Paragraph 1.1.2.2;
  - 3) Addition of Section 07840, Firestopping;
  - 4) Addition of Section 15080, Thermal Insulation for Mechanical Systems;
  - 5) Corresponding revisions to the Table of Contents.
- B. The attached revised sections are to be replaced in their entirety. Specification changes are generally identified, for convenience, either by strikeout for deletions, and double underlining of text for additions or a single dark line in the right hand margin. All portions of the revised or new pages shall apply whether or not changes have been indicated.
- C. NOTICE TO BIDDERS: Bidders must acknowledge receipt of this Amendment by Number and Date on the Standard Form 1442 BACK in block 19, or by telegram. Please mark the outside of the envelope in which your bid is enclosed to show amendments received.
- D. The Time/Date of the Bid Opening for this Solicitation is not effected by this Amendment. The Time/Date of the Bid Opening remains at **2:00 p.m. Pacific Time on 21 February 2002** as per Amendment No. 5 issued 11 February 2002.

## Enclosures:

- 1) Revisions to Drawing Sheets E-3, A301ACE, S201ACE, A302PBO, A502PBO, S202PBO, A303RMP, S203RMP and A304VBB by sketches attached to 00800A;
- 2) Revisions to access requirements specified in Section 01005, Paragraph 1.1.2.2;
- 3) Addition of Section 07840, Firestopping;
- 4) Addition of Section 15080, Thermal Insulation for Mechanical Systems;
- 5) Corresponding revisions to the Table of Contents.

<b>AMENDMENT OF SOLICITATION/MODIFICATION OF CONTRACT</b>				1. CONTRACT ID CODE		PAGE OF PAGES 1	
2. AMENDMENT/MODIFICATION NO. 0003		3. EFFECTIVE DATE 31-Jan-2002		4. REQUISITION/PURCHASE REQ. NO. W68MD9-1323-7889		5. PROJECT NO.(If applicable)	
6. ISSUED BY USA ENGINEER DISTRICT, SEATTLE ATTN: CENWS-CT P.O. BOX 3755 SEATTLE WA 98124-3755		CODE DACA67		7. ADMINISTERED BY (If other than item 6)		CODE	
				<b>See Item 6</b>			
8. NAME AND ADDRESS OF CONTRACTOR (No., Street, County, State and Zip Code)				X		9A. AMENDMENT OF SOLICITATION NO. DACA67-02-B-0202	
				X		9B. DATED (SEE ITEM 11) 04-Jan-2002	
						10A. MOD. OF CONTRACT/ORDER NO.	
						10B. DATED (SEE ITEM 13)	
CODE		FACILITY CODE					
<b>11. THIS ITEM ONLY APPLIES TO AMENDMENTS OF SOLICITATIONS</b>							
<input checked="" type="checkbox"/> The above numbered solicitation is amended as set forth in Item 14. The hour and date specified for receipt of Offer <input type="checkbox"/> is extended, <input checked="" type="checkbox"/> is not extended.							
Offer must acknowledge receipt of this amendment prior to the hour and date specified in the solicitation or as amended by one of the following methods: (a) By completing Items 8 and 15, and returning _____ copies of the amendment; (b) By acknowledging receipt of this amendment on each copy of the offer submitted; or (c) By separate letter or telegram which includes a reference to the solicitation and amendment numbers. FAILURE OF YOUR ACKNOWLEDGMENT TO BE RECEIVED AT THE PLACE DESIGNATED FOR THE RECEIPT OF OFFERS PRIOR TO THE HOUR AND DATE SPECIFIED MAY RESULT IN REJECTION OF YOUR OFFER. If by virtue of this amendment you desire to change an offer already submitted, such change may be made by telegram or letter, provided each telegram or letter makes reference to the solicitation and this amendment, and is received prior to the opening hour and date specified.							
12. ACCOUNTING AND APPROPRIATION DATA (If required)							
<b>13. THIS ITEM APPLIES ONLY TO MODIFICATIONS OF CONTRACTS/ORDERS. IT MODIFIES THE CONTRACT/ORDER NO. AS DESCRIBED IN ITEM 14.</b>							
A.THIS CHANGE ORDER IS ISSUED PURSUANT TO: (Specify authority) THE CHANGES SET FORTH IN ITEM 14 ARE MADE IN THE CONTRACT ORDER NO. IN ITEM 10A.							
B.THE ABOVE NUMBERED CONTRACT/ORDER IS MODIFIED TO REFLECT THE ADMINISTRATIVE CHANGES (such as changes in paying office, appropriation date, etc.) SET FORTH IN ITEM 14, PURSUANT TO THE AUTHORITY OF FAR 43.103(B).							
C.THIS SUPPLEMENTAL AGREEMENT IS ENTERED INTO PURSUANT TO AUTHORITY OF:							
D.OTHER (Specify type of modification and authority)							
E. IMPORTANT: Contractor <input type="checkbox"/> is not, <input type="checkbox"/> is required to sign this document and return _____ copies to the issuing office.							
14. DESCRIPTION OF AMENDMENT/MODIFICATION (Organized by UCF section headings, including solicitation/contract subject matter where feasible.) Solicitation: # DACA67-02-B-0202 Title: Tactical Equipment Complex  1. Amendment No. 1 issued 30 January 2002, Item D. is corrected to read as follows:  D. The Time/Date of the Bid Opening for this Solicitation is not effected by this Amendment The Time/Date of the Bid Opening remains at 2:00 p.m. on 12 February 2002 as per Amendment No. 2 issued 25 January 2002.  2. All other terms and conditions of Amendment No. 1 remains unchanged.  3. Bidders must acknowledge receipt of this Amendment by number and date on the Standard Form 1442 BACK in block 19, or by telegram.							
Except as provided herein, all terms and conditions of the document referenced in Item 9A or 10A, as heretofore changed, remains unchanged and in full force and effect.							
15A. NAME AND TITLE OF SIGNER (Type or print)				16A. NAME AND TITLE OF CONTRACTING OFFICER (Type or print)			
15B. CONTRACTOR/OFFEROR		15C. DATE SIGNED		16B. UNITED STATES OF AMERICA		16C. DATE SIGNED	
_____ (Signature of person authorized to sign)				BY _____ (Signature of Contracting Officer)		31-Jan-2002	

**This page was intentionally left blank for duplex printing.**

<b>AMENDMENT OF SOLICITATION/MODIFICATION OF CONTRACT</b>				1. CONTRACT ID CODE		PAGE OF PAGES 1   2	
2. AMENDMENT/MODIFICATION NO. 0002		3. EFFECTIVE DATE 25-Jan-2002		4. REQUISITION/PURCHASE REQ. NO. W68MD9-1323-7889		5. PROJECT NO.(If applicable)	
6. ISSUED BY USA ENGINEER DISTRICT, SEATTLE ATTN: CENWS-CT P.O. BOX 3755 SEATTLE WA 98124-3755		CODE DACA67		7. ADMINISTERED BY (If other than item 6)		CODE	
				<b>See Item 6</b>			
8. NAME AND ADDRESS OF CONTRACTOR (No., Street, County, State and Zip Code)				X		9A. AMENDMENT OF SOLICITATION NO. DACA67-02-B-0202	
				X		9B. DATED (SEE ITEM 11) 04-Jan-2002	
						10A. MOD. OF CONTRACT/ORDER NO.	
						10B. DATED (SEE ITEM 13)	
CODE		FACILITY CODE					
<b>11. THIS ITEM ONLY APPLIES TO AMENDMENTS OF SOLICITATIONS</b>							
<input checked="" type="checkbox"/> The above numbered solicitation is amended as set forth in Item 14. The hour and date specified for receipt of Offer <input checked="" type="checkbox"/> is extended, <input type="checkbox"/> is not extended.							
Offer must acknowledge receipt of this amendment prior to the hour and date specified in the solicitation or as amended by one of the following methods: (a) By completing Items 8 and 15, and returning <u>0</u> copies of the amendment; (b) By acknowledging receipt of this amendment on each copy of the offer submitted; or (c) By separate letter or telegram which includes a reference to the solicitation and amendment numbers. FAILURE OF YOUR ACKNOWLEDGMENT TO BE RECEIVED AT THE PLACE DESIGNATED FOR THE RECEIPT OF OFFERS PRIOR TO THE HOUR AND DATE SPECIFIED MAY RESULT IN REJECTION OF YOUR OFFER. If by virtue of this amendment you desire to change an offer already submitted, such change may be made by telegram or letter, provided each telegram or letter makes reference to the solicitation and this amendment, and is received prior to the opening hour and date specified.							
12. ACCOUNTING AND APPROPRIATION DATA (If required)							
<b>13. THIS ITEM APPLIES ONLY TO MODIFICATIONS OF CONTRACTS/ORDERS. IT MODIFIES THE CONTRACT/ORDER NO. AS DESCRIBED IN ITEM 14.</b>							
A.THIS CHANGE ORDER IS ISSUED PURSUANT TO: (Specify authority) THE CHANGES SET FORTH IN ITEM 14 ARE MADE IN THE CONTRACT ORDER NO. IN ITEM 10A.							
B.THE ABOVE NUMBERED CONTRACT/ORDER IS MODIFIED TO REFLECT THE ADMINISTRATIVE CHANGES (such as changes in paying office, appropriation date, etc.) SET FORTH IN ITEM 14, PURSUANT TO THE AUTHORITY OF FAR 43.103(B).							
C.THIS SUPPLEMENTAL AGREEMENT IS ENTERED INTO PURSUANT TO AUTHORITY OF:							
D.OTHER (Specify type of modification and authority)							
E. IMPORTANT: Contractor <input type="checkbox"/> is not, <input type="checkbox"/> is required to sign this document and return _____ copies to the issuing office.							
14. DESCRIPTION OF AMENDMENT/MODIFICATION (Organized by UCF section headings, including solicitation/contract subject matter where feasible.) Solicitation No. DACA67-02-B-0202  Title: Tactical Equipment Complex Fort Lewis, Washington  SEE CONTINUATION SHEET							
Except as provided herein, all terms and conditions of the document referenced in Item 9A or 10A, as heretofore changed, remains unchanged and in full force and effect.							
15A. NAME AND TITLE OF SIGNER (Type or print)				16A. NAME AND TITLE OF CONTRACTING OFFICER (Type or print)			
15B. CONTRACTOR/OFFEROR		15C. DATE SIGNED		16B. UNITED STATES OF AMERICA		16C. DATE SIGNED	
_____ (Signature of person authorized to sign)				BY _____ (Signature of Contracting Officer)		25-Jan-2002	

SECTION SF 30 BLOCK 14 CONTINUATION PAGE

- A. The purpose of this Amendment, Amendment No. 2, is to **Extend the Bid-Opening Time/Date** from 2:00 p.m. on 05 February 2002 **to 2:00 p.m. on 12 February 2002.**
- B. Amendment No. 1 has been reserved for Technical issues/changes and is forthcoming.**
- C. Bidders must acknowledge receipt of this Amendment by number and date on the Standard Form 1442 back in block 19, or by telegram.



<b>AMENDMENT OF SOLICITATION/MODIFICATION OF CONTRACT</b>				1. CONTRACT ID CODE		PAGE OF PAGES 1   2	
2. AMENDMENT/MODIFICATION NO. 0001		3. EFFECTIVE DATE		4. REQUISITION/PURCHASE REQ. NO. W68MD9-1323-7889		5. PROJECT NO.(If applicable)	
6. ISSUED BY USA ENGINEER DISTRICT, SEATTLE ATTN: CENWS-CT P.O. BOX 3755 SEATTLE WA 98124-3755		CODE DACA67		7. ADMINISTERED BY (If other than item 6)  <b>See Item 6</b>		CODE	
8. NAME AND ADDRESS OF CONTRACTOR (No., Street, County, State and Zip Code)				X		9A. AMENDMENT OF SOLICITATION NO. DACA67-02-B-0202	
				X		9B. DATED (SEE ITEM 11) 04-Jan-2002	
						10A. MOD. OF CONTRACT/ORDER NO.	
						10B. DATED (SEE ITEM 13)	
CODE		FACILITY CODE					
<b>11. THIS ITEM ONLY APPLIES TO AMENDMENTS OF SOLICITATIONS</b>							
<input checked="" type="checkbox"/> The above numbered solicitation is amended as set forth in Item 14. The hour and date specified for receipt of Offer <input type="checkbox"/> is extended, <input checked="" type="checkbox"/> is not extended.  Offer must acknowledge receipt of this amendment prior to the hour and date specified in the solicitation or as amended by one of the following methods: (a) By completing Items 8 and 15, and returning <u>0</u> copies of the amendment; (b) By acknowledging receipt of this amendment on each copy of the offer submitted; or (c) By separate letter or telegram which includes a reference to the solicitation and amendment numbers. FAILURE OF YOUR ACKNOWLEDGMENT TO BE RECEIVED AT THE PLACE DESIGNATED FOR THE RECEIPT OF OFFERS PRIOR TO THE HOUR AND DATE SPECIFIED MAY RESULT IN REJECTION OF YOUR OFFER. If by virtue of this amendment you desire to change an offer already submitted, such change may be made by telegram or letter, provided each telegram or letter makes reference to the solicitation and this amendment, and is received prior to the opening hour and date specified.							
12. ACCOUNTING AND APPROPRIATION DATA (If required)							
13. THIS ITEM APPLIES ONLY TO MODIFICATIONS OF CONTRACTS/ORDERS. IT MODIFIES THE CONTRACT/ORDER NO. AS DESCRIBED IN ITEM 14.							
A.THIS CHANGE ORDER IS ISSUED PURSUANT TO: (Specify authority) THE CHANGES SET FORTH IN ITEM 14 ARE MADE IN THE CONTRACT ORDER NO. IN ITEM 10A.							
B.THE ABOVE NUMBERED CONTRACT/ORDER IS MODIFIED TO REFLECT THE ADMINISTRATIVE CHANGES (such as changes in paying office, appropriation date, etc.) SET FORTH IN ITEM 14, PURSUANT TO THE AUTHORITY OF FAR 43.103(B).							
C.THIS SUPPLEMENTAL AGREEMENT IS ENTERED INTO PURSUANT TO AUTHORITY OF:							
D.OTHER (Specify type of modification and authority)							
E. IMPORTANT: Contractor <input type="checkbox"/> is not, <input type="checkbox"/> is required to sign this document and return _____ copies to the issuing office.							
14. DESCRIPTION OF AMENDMENT/MODIFICATION (Organized by UCF section headings, including solicitation/contract subject matter where feasible.) Solicitation: #DACA67-02-B-0202  Title: Tactical Equipment Complex Fort Lewis, Washington  SEE CONTINUATION SHEET							
<small>Except as provided herein, all terms and conditions of the document referenced in Item 9A or 10A, as heretofore changed, remains unchanged and in full force and effect.</small>							
15A. NAME AND TITLE OF SIGNER (Type or print)				16A. NAME AND TITLE OF CONTRACTING OFFICER (Type or print)			
15B. CONTRACTOR/OFFEROR		15C. DATE SIGNED		16B. UNITED STATES OF AMERICA		16C. DATE SIGNED	
_____ (Signature of person authorized to sign)				BY _____ (Signature of Contracting Officer)		25-Jan-2002	

## SECTION SF 30 BLOCK 14 CONTINUATION PAGE

A. This Amendment No. 1 is issued to provide for revisions to the solicitation as follows:

1. Revision to Drawing Sheet T-1 to correct the signature block;
2. Revision to Drawing Sheet T-2 to correct the Drawing Index;
3. Miscellaneous revisions to drawings by notation and sketch in 00800A;
4. Revision to Table of Contents;
5. Revision to 01001, Paragraph 1.10, to include new Contractor access requirements;
6. Revision to 01005, Paragraph 1.1.2, to include new Vehicle access requirements;
7. Revision to 05500, to add new Paragraph 2.8, Shelving;
8. Addition of new Section 07190, Water Repellents;
9. Revision to 09915, to add new Paragraph 2.2.1(a)3
10. General Wage Decisions are revised as follows:
  - a. WA010001 is revised to incorporate modification no. 21, dated 04 January 2002.
  - b. WA010002 is revised to incorporate modification no. 19, dated 04 January 2002.

B. The attached revised sections are to be replaced in their entirety. Specification changes are generally identified, for convenience, either by strikeout for deletions, and double underlining of text for additions or a single dark line in the right hand margin. All portions of the revised or new pages shall apply whether or not changes have been indicated.

- C. NOTICE TO BIDDERS: Bidders must acknowledge receipt of this Amendment by Number and Date on the Standard Form 1442 BACK in block 19, or by telegram. Please mark the outside of the envelope in which your bid is enclosed to show amendments received.
- D. The Time/Date of the Bid Opening for this Solicitation is not effected by this Amendment The Time/Date of the Bid Opening remains at **2:00 p.m. on 07 February 2002** as per Amendment No. 2 issued 25 January 2002.

Enclosures:

Revision to Drawing Sheet T-1 to correct the signature block;  
Revision to Drawing Sheet T-2 to correct the Drawing Index;  
Miscellaneous revisions to drawings by notation and sketch in 00800A;  
Revision to Table of Contents;  
Revision to 01001, Paragraph 1.10, to include new Contractor access requirements;  
Revision to 01005, Paragraph 1.1.2, to include new Vehicle access requirements;  
Revision to 05500, to add new Paragraph 2.8, Shelving;  
Addition of new Section 07190, Water Repellents;  
Revision to 09915, to add new Paragraph 2.2.1(a)3.  
Revision General Wage Decisions WA010001 and WA010002

**This page was intentionally left blank for duplex printing.**

## SECTION 00700 Contract Clauses

## CLAUSES INCORPORATED BY FULL TEXT

## INDEX OF CLAUSES: SECTION 00700 Contract Clauses

52.201-4001	Successor Contracting Officers	DEC 1999
52.202-1 Alt I	Definitions (May 2001) --Alternate I	MAY 2001
52.203-3	Gratuities	APR 1984
52.203-5	Covenant Against Contingent Fees	APR 1984
52.203-7	Anti-Kickback Procedures	JUL 1995
52.203-8	Cancellation, Rescission, and Recovery of Funds for Illegal or Improper Activity	JAN 1997
52.203-10	Price Or Fee Adjustment For Illegal Or Improper Activity	JAN 1997
52.203-12	Limitation On Payments To Influence Certain Federal Transactions	JUN 1997
52.204-4	Printed or Copied Double-Sided on Recycled Paper	AUG 2000
52.209-6	Protecting the Government's Interest When Subcontracting With Contractors Debarred, Suspended, or Proposed for Debarment	JUL 1995
52.212-4007	Environmental Litigation	NOV 1999
52.214-26	Audit and Records--Sealed Bidding	OCT 1997
52.214-27	Price Reduction for Defective Cost or Pricing Data - Modifications - Sealed Bidding	OCT 1997
52.214-28	Subcontracting Cost Or Pricing Data--Modifications--Sealed Bidding	OCT 1997
52.214-29	Order Of Precedence--Sealed Bidding	JAN 1986
52.219-8	Utilization of Small Business Concerns	OCT 2000
52.219-9	Small Business Subcontracting Plan	OCT 2001
52.219-16	Liquidated Damages-Subcontracting Plan	JAN 1999
52.219-25	Small Disadvantaged Business Participation Program--Disadvantaged Status and Reporting	OCT 1999
52.222-1	Notice To The Government Of Labor Disputes	FEB 1997
52.222-3	Convict Labor	AUG 1996
52.222-4	Contract Work Hours and Safety Standards Act - Overtime Compensation	SEP 2000
52.222-6	Davis Bacon Act	FEB 1995
52.222-7	Withholding of Funds	FEB 1988
52.222-8	Payrolls and Basic Records	FEB 1988
52.222-9	Apprentices and Trainees	FEB 1988
52.222-10	Compliance with Copeland Act Requirements	FEB 1988
52.222-11	Subcontracts (Labor Standards)	FEB 1988
52.222-12	Contract Termination-Debarment	FEB 1988
52.222-13	Compliance with Davis-Bacon and Related Act Regulations.	FEB 1988
52.222-14	Disputes Concerning Labor Standards	FEB 1988
52.222-15	Certification of Eligibility	FEB 1988
52.222-21	Prohibition Of Segregated Facilities	FEB 1999
52.222-23	Notice of Requirement for Affirmative Action to Ensure Equal Employment Opportunity for Construction	FEB 1999
52.222-26	Equal Opportunity	FEB 1999
52.222-27	Affirmative Action Compliance Requirements for Construction	FEB 1999
52.222-35	Equal Opportunity For Disabled Veterans, Veterans of the Vietnam	DEC 2001

	Era and Other Eligible Veterans	
52.222-36	Affirmative Action For Workers With Disabilities	JUN 1998
52.222-37	Employment Reports On Special Disabled Veterans, Veterans Of The Vietnam Era and Other Eligible Veterans	DEC 2001
52.223-3	Hazardous Material Identification And Material Safety Data	JAN 1997
52.223-6	Drug Free Workplace	MAY 2001
52.223-14	Toxic Chemical Release Reporting	OCT 2000
52.225-9	Buy American Act--Balance of Payments Program--Construction Materials	FEB 2000
52.225-13	Restrictions on Certain Foreign Purchases	JUL 2000
52.226-1	Utilization Of Indian Organizations And Indian-Owned Economic Enterprises	JUN 2000
52.227-1	Authorization and Consent	JUL 1995
52.227-2	Notice And Assistance Regarding Patent And Copyright Infringement	AUG 1996
52.227-4	Patent Indemnity-Construction Contracts	APR 1984
52.228-2	Additional Bond Security	OCT 1997
52.228-11	Pledges Of Assets	FEB 1992
52.228-12	Prospective Subcontractor Requests for Bonds	OCT 1995
52.228-14	Irrevocable Letter of Credit	DEC 1999
52.228-15	Performance and Payment Bonds--Construction	JUL 2000
52.229-3	Federal, State And Local Taxes	JAN 1991
52.232-5	Payments under Fixed-Price Construction Contracts	MAY 1997
52.232-9	Limitation On Withholding Of Payments	APR 1984
52.232-17	Interest	JUN 1996
52.232-23	Assignment Of Claims	JAN 1986
52.232-27	Prompt Payment for Construction Contracts	MAY 2001
52.233-33	Payment by Electronic Funds Transfer—Central Contractor Registration	May 1999
52.233-1	Disputes	DEC 1998
52.233-3	Protest After Award	AUG 1996
52.236-2	Differing Site Conditions	APR 1984
52.236-3	Site Investigation and Conditions Affecting the Work	APR 1984
52.236-5	Material and Workmanship	APR 1984
52.236-6	Superintendence by the Contractor	APR 1984
52.236-7	Permits and Responsibilities	NOV 1991
52.236-8	Other Contracts	APR 1984
52.236-9	Protection of Existing Vegetation, Structures, Equipment, Utilities, and Improvements	APR 1984
52.236-10	Operations and Storage Areas	APR 1984
52.236-11	Use and Possession Prior to Completion	APR 1984
52.236-12	Cleaning Up	APR 1984
52.236-13	Accident Prevention	NOV 1991
52.236-15	Schedules for Construction Contracts	APR 1984
52.236-26	Preconstruction Conference	FEB 1995
52.242-13	Bankruptcy	JUL 1995
52.242-14	Suspension of Work	APR 1984
52.243-4	Changes	AUG 1987
52.243-5	Changes and Changed Conditions	APR 1984
52.246-12	Inspection of Construction	AUG 1996
52.246-21	Warranty of Construction	MAR 1994
52.247-63	Preference For U.S. Flag Air Carriers	JAN 1997
52.248-3	Value Engineering-Construction	FEB 2000
52.249-2 Alt I	Termination for Convenience of the Government (Fixed-Price) (Sep 1996) - Alternate I	SEP 1996

52.249-10	Default (Fixed-Price Construction)	APR 1984
252.201-7000	Contracting Officer's Representative	DEC 1991
252.203-7001	Prohibition On Persons Convicted of Fraud or Other Defense- Contract-Related Felonies	MAR 1999
252.203-7002	Display Of DOD Hotline Poster	DEC 1991
252.204-7003	Control Of Government Personnel Work Product	APR 1992
252.209-7004	Subcontracting With Firms That Are Owned or Controlled By The Government of a Terrorist Country	MAR 1998
252.219-7003	Small, Small Disadvantaged and Women-Owned Small Business Subcontracting Plan (DOD Contracts)	APR 1996
252.223-7004	Drug Free Work Force	SEP 1988
252.223-7006	Prohibition On Storage And Disposal Of Toxic And Hazardous Materials	APR 1993
252.225-7031	Secondary Arab Boycott Of Israel	JUN 1992
252.227-7033	Rights in Shop Drawings	APR 1966
252.231-7000	Supplemental Cost Principles	DEC 1991
252.236-7000	Modification Proposals-Price Breakdown	DEC 1991
252.243-7001	Pricing Of Contract Modifications	DEC 1991
252.243-7002	Requests for Equitable Adjustment	MAR 1998
252.248-7000	Preparation Of Value Engineering Change Proposal	MAY 1994

#### Successor Contracting Officers (52.201-4001)

The Contracting Officer who signed this contract is the primary Contracting Officer for the contract. Nevertheless, any Contracting Officer assigned to the Seattle District and acting within his/her authority may take formal action on this contract when a contract action needs to be taken and the primary Contracting Officer is unavailable.

#### 52.202-1 DEFINITIONS (MAY 2001) --ALTERNATE I (MAY 2001)

(a) Agency head or head of the agency means the Secretary (Attorney General, Administrator, Governor, Chairperson, or other chief official, as appropriate) of the agency, unless otherwise indicated, including any deputy or assistant chief official of the executive agency.

(b) "Commercial component" means any component that is a commercial item.

(c) Except as otherwise provided in this contract, the term "subcontracts" includes, but is not limited to, purchase orders and changes and modifications to purchase orders under this contract.

(d) Component means any item supplied to the Government as part of an end item or of another component, except that for use in 52.225-9, and 52.225-11 see the definitions in 52.225-9(a) and 52.225-11(a).

(e) Contracting Officer means a person with the authority to enter into, administer, and/or terminate contracts and make related determinations and findings. The term includes certain authorized representatives of the Contracting Officer acting within the limits of their authority as delegated by the Contracting Officer.

(f) Nondevelopmental item means--

(1) Any previously developed item of supply used exclusively for governmental purposes by a Federal agency, a State or local government, or a foreign government with which the United States has a mutual defense cooperation agreement;

(2) Any item described in paragraph (f)(1) of this definition that requires only minor modification or modifications of a type customarily available in the commercial marketplace in order to meet the requirements of the procuring department or agency; or

(3) Any item of supply being produced that does not meet the requirements of paragraph (f)(1) or (f)(2) solely because the item is not yet in use.

(End of clause)

#### 52.203-3 GRATUITIES (APR 1984)

(a) The right of the Contractor to proceed may be terminated by written notice if, after notice and hearing, the agency head or a designee determines that the Contractor, its agent, or another representative--

(1) Offered or gave a gratuity (e.g., an entertainment or gift) to an officer, official, or employee of the Government; and

(2) Intended, by the gratuity, to obtain a contract or favorable treatment under a contract.

(b) The facts supporting this determination may be reviewed by any court having lawful jurisdiction.

(c) If this contract is terminated under paragraph (a) of this clause, the Government is entitled--

(1) To pursue the same remedies as in a breach of the contract; and

(2) In addition to any other damages provided by law, to exemplary damages of not less than 3 nor more than 10 times the cost incurred by the Contractor in giving gratuities to the person concerned, as determined by the agency head or a designee. (This subparagraph (c)(2) is applicable only if this contract uses money appropriated to the Department of Defense.)

(d) The rights and remedies of the Government provided in this clause shall not be exclusive and are in addition to any other rights and remedies provided by law or under this contract.

(End of clause)

#### 52.203-5 COVENANT AGAINST CONTINGENT FEES (APR 1984)

(a) The Contractor warrants that no person or agency has been employed or retained to solicit or obtain this contract upon an agreement or understanding for a contingent fee, except a bona fide employee or agency. For breach or violation of this warranty, the Government shall have the right to annul this contract without liability or, in its discretion, to deduct from the contract price or consideration, or otherwise recover, the full amount of the contingent fee.

(b) "Bona fide agency," as used in this clause, means an established commercial or selling agency, maintained by a contractor for the purpose of securing business, that neither exerts nor proposes to exert improper influence to solicit or obtain Government contracts nor holds itself out as being able to obtain any Government contract or contracts through improper influence.

"Bona fide employee," as used in this clause, means a person, employed by a contractor and subject to the contractor's supervision and control as to time, place, and manner of performance, who neither exerts nor proposes to exert improper influence to solicit or obtain Government contracts nor holds out as being able to obtain any Government contract or contracts through improper influence.

"Contingent fee," as used in this clause, means any commission, percentage, brokerage, or other fee that is



contingent upon the success that a person or concern has in securing a Government contract.

"Improper influence," as used in this clause, means any influence that induces or tends to induce a Government employee or officer to give consideration or to act regarding a Government contract on any basis other than the merits of the matter.

(End of clause)

#### 52.203-7 ANTI-KICKBACK PROCEDURES. (JUL 1995)

##### (a) Definitions.

"Kickback," as used in this clause, means any money, fee, commission, credit, gift, gratuity, thing of value, or compensation of any kind which is provided, directly or indirectly, to any prime Contractor, prime Contractor employee, subcontractor, or subcontractor employee for the purpose of improperly obtaining or rewarding favorable treatment in connection with a prime contract or in connection with a subcontract relating to a prime contract.

"Person," as used in this clause, means a corporation, partnership, business association of any kind, trust, joint-stock company, or individual.

"Prime contract," as used in this clause, means a contract or contractual action entered into by the United States for the purpose of obtaining supplies, materials, equipment, or services of any kind.

"Prime Contractor," as used in this clause, means a person who has entered into a prime contract with the United States.

"Prime Contractor employee," as used in this clause, means any officer, partner, employee, or agent of a prime Contractor.

"Subcontract," as used in this clause, means a contract or contractual action entered into by a prime Contractor or subcontractor for the purpose of obtaining supplies, materials, equipment, or services of any kind under a prime contract.

"Subcontractor," as used in this clause, (1) means any person, other than the prime Contractor, who offers to furnish or furnishes any supplies, materials, equipment, or services of any kind under a prime contract or a subcontract entered into in connection with such prime contract, and (2) includes any person who offers to furnish or furnishes general supplies to the prime Contractor or a higher tier subcontractor.

"Subcontractor employee," as used in this clause, means any officer, partner, employee, or agent of a subcontractor.

##### (b) The Anti-Kickback Act of 1986 (41 U.S.C. 51-58) (the Act), prohibits any person from -

(1) Providing or attempting to provide or offering to provide any kickback;

(2) Soliciting, accepting, or attempting to accept any kickback; or

(3) Including, directly or indirectly, the amount of any kickback in the contract price charged by a prime Contractor to the United States or in the contract price charged by a subcontractor to a prime Contractor or higher tier subcontractor.

(c)(1) The Contractor shall have in place and follow reasonable procedures designed to prevent and detect possible violations described in paragraph (b) of this clause in its own operations and direct business relationships.

(2) When the Contractor has reasonable grounds to believe that a violation described in paragraph (b) of this clause may have occurred, the Contractor shall promptly report in writing the possible violation. Such reports shall be made

to the inspector general of the contracting agency, the head of the contracting agency if the agency does not have an inspector general, or the Department of Justice.

(3) The Contractor shall cooperate fully with any Federal agency investigating a possible violation described in paragraph (b) of this clause.

(4) The Contracting Officer may (i) offset the amount of the kickback against any monies owed by the United States under the prime contract and/or (ii) direct that the Prime Contractor withhold, from sums owed a subcontractor under the prime contract, the amount of any kickback. The Contracting Officer may order the monies withheld under subdivision (c)(4)(ii) of this clause be paid over to the Government unless the Government has already offset those monies under subdivision (c)(4)(i) of this clause. In either case, the Prime Contractor shall notify the Contracting Officer when the monies are withheld.

(5) The Contractor agrees to incorporate the substance of this clause, including this subparagraph (c)(5) but excepting subparagraph (c)(1), in all subcontracts under this contract which exceed \$100,000.

(End of clause)

#### 52.203-8 CANCELLATION, RESCISSION, AND RECOVERY OF FUNDS FOR ILLEGAL OR IMPROPER ACTIVITY (JAN 1997)

(a) If the Government receives information that a contractor or a person has engaged in conduct constituting a violation of subsection (a), (b), (c), or (d) of Section 27 of the Office of Federal Procurement Policy Act (41 U.S.C. 423) (the Act), as amended by section 4304 of the 1996 National Defense Authorization Act for Fiscal Year 1996 (Pub. L. 104-106), the Government may--

(1) Cancel the solicitation, if the contract has not yet been awarded or issued; or

(2) Rescind the contract with respect to which--

(i) The Contractor or someone acting for the Contractor has been convicted for an offense where the conduct constitutes a violation of subsection 27(a) or (b) of the Act for the purpose of either--

(A) Exchanging the information covered by such subsections for anything of value; or

(B) Obtaining or giving anyone a competitive advantage in the award of a Federal agency procurement contract; or

(ii) The head of the contracting activity has determined, based upon a preponderance of the evidence, that the Contractor or someone acting for the Contractor has engaged in conduct constituting an offense punishable under subsections 27(e)(1) of the Act.

(b) If the Government rescinds the contract under paragraph (a) of this clause, the Government is entitled to recover, in addition to any penalty prescribed by law, the amount expended under the contract.

(c) The rights and remedies of the Government specified herein are not exclusive, and are in addition to any other rights and remedies provided by law, regulation, or under this contract.

(End of clause)

#### 52.203-10 PRICE OR FEE ADJUSTMENT FOR ILLEGAL OR IMPROPER ACTIVITY (JAN 1997)

(a) The Government, at its election, may reduce the price of a fixed-price type contract and the total cost and fee under a cost-type contract by the amount of profit or fee determined as set forth in paragraph (b) of this clause if the head of the contracting activity or designee determines that there was a violation of subsection 27 (a), (b), or (c) of the Office of Federal Procurement Policy Act, as amended (41 U.S.C. 423), as implemented in section 3.104 of the

Federal Acquisition Regulation.

(b) The price or fee reduction referred to in paragraph (a) of this clause shall be--

(1) For cost-plus-fixed-fee contracts, the amount of the fee specified in the contract at the time of award;

(2) For cost-plus-incentive-fee contracts, the target fee specified in the contract at the time of award, notwithstanding any minimum fee or "fee floor" specified in the contract;

(3) For cost-plus-award-fee contracts--

(i) The base fee established in the contract at the time of contract award;

(ii) If no base fee is specified in the contract, 30 percent of the amount of each award fee otherwise payable to the Contractor for each award fee evaluation period or at each award fee determination point.

(4) For fixed-price-incentive contracts, the Government may--

(i) Reduce the contract target price and contract target profit both by an amount equal to the initial target profit specified in the contract at the time of contract award; or

(ii) If an immediate adjustment to the contract target price and contract target profit would have a significant adverse impact on the incentive price revision relationship under the contract, or adversely affect the contract financing provisions, the Contracting Officer may defer such adjustment until establishment of the total final price of the contract. The total final price established in accordance with the incentive price revision provisions of the contract shall be reduced by an amount equal to the initial target profit specified in the contract at the time of contract award and such reduced price shall be the total final contract price.

(5) For firm-fixed-price contracts, by 10 percent of the initial contract price or a profit amount determined by the Contracting Officer from records or documents in existence prior to the date of the contract award.

(c) The Government may, at its election, reduce a prime contractor's price or fee in accordance with the procedures of paragraph (b) of this clause for violations of the Act by its subcontractors by an amount not to exceed the amount of profit or fee reflected in the subcontract at the time the subcontract was first definitively priced.

(d) In addition to the remedies in paragraphs (a) and (c) of this clause, the Government may terminate this contract for default. The rights and remedies of the Government specified herein are not exclusive, and are in addition to any other rights and remedies provided by law or under this contract.

(End of clause)

52.203-12 LIMITATION ON PAYMENTS TO INFLUENCE CERTAIN FEDERAL TRANSACTIONS (JUN 1997)

(a) Definitions.

"Agency," as used in this clause, means executive agency as defined in 2.101.

"Covered Federal action," as used in this clause, means any of the following Federal actions:

(1) The awarding of any Federal contract.

(2) The making of any Federal grant.

(3) The making of any Federal loan.

(4) The entering into of any cooperative agreement.

(5) The extension, continuation, renewal, amendment, or modification of any Federal contract, grant, loan, or cooperative agreement.

"Indian tribe" and "tribal organization," as used in this clause, have the meaning provided in section 4 of the Indian Self-Determination and Education Assistance Act (25 U.S.C. 450B) and include Alaskan Natives.

"Influencing or attempting to influence," as used in this clause, means making, with the intent to influence, any communication to or appearance before an officer or employee of any agency, a Member of Congress, an officer or employee of Congress, or an employee of a Member of Congress in connection with any covered Federal action.

"Local government," as used in this clause, means a unit of government in a State and, if chartered, established, or otherwise recognized by a State for the performance of a governmental duty, including a local public authority, a special district, an intrastate district, a council of governments, a sponsor group representative organization, and any other instrumentality of a local government.

"Officer or employee of an agency," as used in this clause, includes the following individuals who are employed by an agency:

(1) An individual who is appointed to a position in the Government under Title 5, United States Code, including a position under a temporary appointment.

(2) A member of the uniformed services, as defined in subsection 101(3), Title 37, United States Code.

(3) A special Government employee, as defined in section 202, Title 18, United States Code.

(4) An individual who is a member of a Federal advisory committee, as defined by the Federal Advisory Committee Act, Title 5, United States Code, appendix 2.

"Person," as used in this clause, means an individual, corporation, company, association, authority, firm, partnership, society, State, and local government, regardless of whether such entity is operated for profit, or not for profit. This term excludes an Indian tribe, tribal organization, or any other Indian organization with respect to expenditures specifically permitted by other Federal law.

"Reasonable compensation," as used in this clause, means, with respect to a regularly employed officer or employee of any person, compensation that is consistent with the normal compensation for such officer or employee for work that is not furnished to, not funded by, or not furnished in cooperation with the Federal Government.

"Reasonable payment," as used in this clause, means, with respect to professional and other technical services, a payment in an amount that is consistent with the amount normally paid for such services in the private sector.

"Recipient," as used in this clause, includes the Contractor and all subcontractors. This term excludes an Indian tribe, tribal organization, or any other Indian organization with respect to expenditures specifically permitted by other Federal law.

"Regularly employed," as used in this clause, means, with respect to an officer or employee of a person requesting or receiving a Federal contract, an officer or employee who is employed by such person for at least 130 working days within 1 year immediately preceding the date of the submission that initiates agency consideration of such person for receipt of such contract. An officer or employee who is employed by such person for less than 130 working days within 1 year immediately preceding the date of the submission that initiates agency consideration of such person shall be considered to be regularly employed as soon as he or she is employed by such person for 130 working days.

"State," as used in this clause, means a State of the United States, the District of Columbia, the Commonwealth of Puerto Rico, a territory or possession of the United States, an agency or instrumentality of a State, and multi-State, regional, or interstate entity having governmental duties and powers.

(b) Prohibitions.

(1) Section 1352 of Title 31, United States Code, among other things, prohibits a recipient of a Federal contract, grant, loan, or cooperative agreement from using appropriated funds to pay any person for influencing or attempting to influence an officer or employee of any agency, a Member of Congress, an officer or employee of Congress, or an employee of a Member of Congress in connection with any of the following covered Federal actions: the awarding of any Federal contract; the making of any Federal grant; the making of any Federal loan; the entering into of any cooperative agreement; or the modification of any Federal contract, grant, loan, or cooperative agreement.

(2) The Act also requires Contractors to furnish a disclosure if any funds other than Federal appropriated funds (including profit or fee received under a covered Federal transaction) have been paid, or will be paid, to any person for influencing or attempting to influence an officer or employee of any agency, a Member of Congress, an officer or employee of Congress, or an employee of a Member of Congress in connection with a Federal contract, grant, loan, or cooperative agreement.

(3) The prohibitions of the Act do not apply under the following conditions:

(i) Agency and legislative liaison by own employees.

(A) The prohibition on the use of appropriated funds, in subparagraph (b)(1) of this clause, does not apply in the case of a payment of reasonable compensation made to an officer or employee of a person requesting or receiving a covered Federal action if the payment is for agency and legislative liaison activities not directly related to a covered Federal action.

(B) For purposes of subdivision (b)(3)(i)(A) of this clause, providing any information specifically requested by an agency or Congress is permitted at any time.

(C) The following agency and legislative liaison activities are permitted at any time where they are not related to a specific solicitation for any covered Federal action:

(1) Discussing with an agency the qualities and characteristics (including individual demonstrations) of the person's products or services, conditions or terms of sale, and service capabilities.

(2) Technical discussions and other activities regarding the application or adaptation of the person's products or services for an agency's use.

(D) The following agency and legislative liaison activities are permitted where they are prior to formal solicitation of any covered Federal action--

(1) Providing any information not specifically requested but necessary for an agency to make an informed decision about initiation of a covered Federal action;

(2) Technical discussions regarding the preparation of an unsolicited proposal prior to its official submission; and

(3) Capability presentations by persons seeking awards from an agency pursuant to the provisions of the Small Business Act, as amended by Pub. L. 95-507, and subsequent amendments.

(E) Only those services expressly authorized by subdivision (b)(3)(i)(A) of this clause are permitted under this clause.

(ii) Professional and technical services.

(A) The prohibition on the use of appropriated funds, in subparagraph (b)(1) of this clause, does not apply in the case of--

(1) A payment of reasonable compensation made to an officer or employee of a person requesting or receiving a covered Federal action or an extension, continuation, renewal, amendment, or modification of a covered Federal action, if payment is for professional or technical services rendered directly in the preparation, submission, or negotiation of any bid, proposal, or application for that Federal action or for meeting requirements imposed by or pursuant to law as a condition for receiving that Federal action.

(2) Any reasonable payment to a person, other than an officer or employee of a person requesting or receiving a covered Federal action or an extension, continuation, renewal, amendment, or modification of a covered Federal action if the payment is for professional or technical services rendered directly in the preparation, submission, or negotiation of any bid, proposal, or application for that Federal action or for meeting requirements imposed by or pursuant to law as a condition for receiving that Federal action. Persons other than officers or employees of a person requesting or receiving a covered Federal action include consultants and trade associations.

(B) For purposes of subdivision (b)(3)(ii)(A) of this clause, "professional and technical services" shall be limited to advice and analysis directly applying any professional or technical discipline. For example, drafting of a legal document accompanying a bid or proposal by a lawyer is allowable. Similarly, technical advice provided by an engineer on the performance or operational capability of a piece of equipment rendered directly in the negotiation of a contract is allowable. However, communications with the intent to influence made by a professional (such as a licensed lawyer) or a technical person (such as a licensed accountant) are not allowable under this section unless they provide advice and analysis directly applying their professional or technical expertise and unless the advice or analysis is rendered directly and solely in the preparation, submission or negotiation of a covered Federal action. Thus, for example, communications with the intent to influence made by a lawyer that do not provide legal advice or analysis directly and solely related to the legal aspects of his or her client's proposal, but generally advocate one proposal over another are not allowable under this section because the lawyer is not providing professional legal services. Similarly, communications with the intent to influence made by an engineer providing an engineering analysis prior to the preparation or submission of a bid or proposal are not allowable under this section since the engineer is providing technical services but not directly in the preparation, submission or negotiation of a covered Federal action.

(C) Requirements imposed by or pursuant to law as a condition for receiving a covered Federal award include those required by law or regulation and any other requirements in the actual award documents.

(D) Only those services expressly authorized by subdivisions (b)(3)(ii)(A)(1) and (2) of this clause are permitted under this clause.

(E) The reporting requirements of FAR 3.803(a) shall not apply with respect to payments of reasonable compensation made to regularly employed officers or employees of a person.

(c) Disclosure.

(1) The Contractor who requests or receives from an agency a Federal contract shall file with that agency a disclosure form, OMB standard form LLL, Disclosure of Lobbying Activities, if such person has made or has agreed to make any payment using nonappropriated funds (to include profits from any covered Federal action), which would be prohibited under subparagraph (b)(1) of this clause, if paid for with appropriated funds.

(2) The Contractor shall file a disclosure form at the end of each calendar quarter in which there occurs any event that materially affects the accuracy of the information contained in any disclosure form previously filed by such person under subparagraph (c)(1) of this clause. An event that materially affects the accuracy of the information reported includes--

(i) A cumulative increase of \$25,000 or more in the amount paid or expected to be paid for influencing or attempting to influence a covered Federal action; or

(ii) A change in the person(s) or individual(s) influencing or attempting to influence a covered Federal action; or

(iii) A change in the officer(s), employee(s), or Member(s) contacted to influence or attempt to influence a covered Federal action.

(3) The Contractor shall require the submittal of a certification, and if required, a disclosure form by any person who requests or receives any subcontract exceeding \$100,000 under the Federal contract.

(4) All subcontractor disclosure forms (but not certifications) shall be forwarded from tier to tier until received by the prime Contractor. The prime Contractor shall submit all disclosures to the Contracting Officer at the end of the calendar quarter in which the disclosure form is submitted by the subcontractor. Each subcontractor certification shall be retained in the subcontract file of the awarding Contractor.

(d) Agreement. The Contractor agrees not to make any payment prohibited by this clause.

(e) Penalties.

(1) Any person who makes an expenditure prohibited under paragraph (a) of this clause or who fails to file or amend the disclosure form to be filed or amended by paragraph (b) of this clause shall be subject to civil penalties as provided for by 31 U.S.C. 1352. An imposition of a civil penalty does not prevent the Government from seeking any other remedy that may be applicable.

(2) Contractors may rely without liability on the representation made by their subcontractors in the certification and disclosure form.

(f) Cost allowability. Nothing in this clause makes allowable or reasonable any costs which would otherwise be unallowable or unreasonable. Conversely, costs made specifically unallowable by the requirements in this clause will not be made allowable under any other provision.

(End of clause)

52.204-4 PRINTED OR COPIED DOUBLE-SIDED ON RECYCLED PAPER (AUG 2000)

(a) Definitions. As used in this clause--

“Postconsumer material” means a material or finished product that has served its intended use and has been discarded for disposal or recovery, having completed its life as a consumer item. Postconsumer material is a part of the broader category of “recovered material.” For paper and paper products, postconsumer material means “postconsumer fiber” defined by the U.S. Environmental Protection Agency (EPA) as--

(1) Paper, paperboard, and fibrous materials from retail stores, office buildings, homes, and so forth, after they have passed through their end-usage as a consumer item, including: used corrugated boxes; old newspapers; old magazines; mixed waste paper; tabulating cards; and used cordage; or

(2) All paper, paperboard, and fibrous materials that enter and are collected from municipal solid waste; but not

(3) Fiber derived from printers' over-runs, converters' scrap, and over-issue publications.

“Printed or copied double-sided” means printing or reproducing a document so that information is on both sides of a sheet of paper.

“Recovered material,” for paper and paper products, is defined by EPA in its Comprehensive Procurement Guideline as “recovered fiber” and means the following materials:

(1) Postconsumer fiber; and

(2) Manufacturing wastes such as--

(i) Dry paper and paperboard waste generated after completion of the papermaking process (that is, those manufacturing operations up to and including the cutting and trimming of the paper machine reel into smaller rolls or rough sheets) including: envelope cuttings, bindery trimmings, and other paper and paperboard waste resulting from printing, cutting, forming, and other converting operations; bag, box, and carton manufacturing wastes; and butt rolls, mill wrappers, and rejected unused stock; and

(ii) Repulped finished paper and paperboard from obsolete inventories of paper and paperboard manufacturers, merchants, wholesalers, dealers, printers, converters, or others.

(b) In accordance with Section 101 of Executive Order 13101 of September 14, 1998, Greening the Government through Waste Prevention, Recycling, and Federal Acquisition, the Contractor is encouraged to submit paper documents, such as offers, letters, or reports, that are printed or copied double-sided on recycled paper that meet minimum content standards specified in Section 505 of Executive Order 13101, when not using electronic commerce methods to submit information or data to the Government.

(c) If the Contractor cannot purchase high-speed copier paper, offset paper, forms bond, computer printout paper, carbonless paper, file folders, white wove envelopes, writing and office paper, book paper, cotton fiber paper, and cover stock meeting the 30 percent postconsumer material standard for use in submitting paper documents to the Government, it should use paper containing no less than 20 percent postconsumer material. This lesser standard should be used only when paper meeting the 30 percent postconsumer material standard is not obtainable at a reasonable price or does not meet reasonable performance standards.

(End of clause)

#### 52.209-6 PROTECTING THE GOVERNMENT'S INTEREST WHEN SUBCONTRACTING WITH CONTRACTORS DEBARRED, SUSPENDED, OR PROPOSED FOR DEBARMENT (JUL 1995)

(a) The Government suspends or debar Contractors to protect the Government's interests. The Contractor shall not enter into any subcontract in excess of the \$25,000 with a Contractor that is debarred, suspended, or proposed for debarment unless there is a compelling reason to do so.

(b) The Contractor shall require each proposed first-tier subcontractor, whose subcontract will exceed \$25,000, to disclose to the Contractor, in writing, whether as of the time of award of the subcontract, the subcontractor, or its principles, is or is not debarred, suspended, or proposed for debarment by the Federal Government.

(c) A corporate officer or a designee of the Contractor shall notify the Contracting Officer, in writing, before entering into a subcontract with a party that is debarred, suspended, or proposed for debarment (see FAR 9.404 for information on the List of Parties Excluded from Federal Procurement and Nonprocurement Programs). The notice must include the following:

(1) The name of the subcontractor.

(2) The Contractor's knowledge of the reasons for the subcontractor being on the List of Parties Excluded from Federal Procurement and Nonprocurement Programs.

(3) The compelling reason(s) for doing business with the subcontractor notwithstanding its inclusion on the List of Parties Excluded from Federal Procurement and Nonprocurement Programs.



(4) The systems and procedures the Contractor has established to ensure that it is fully protecting the Government's interests when dealing with such subcontractor in view of the specific basis for the party's debarment, suspension, or proposed debarment.

(End of clause)

#### 52.212-4007 ENVIRONMENTAL LITIGATION

(a) If the performance of all or any part of the work is suspended, delayed, or interrupted due to an order of a court of competent jurisdiction as a result of environmental litigation, as defined below, the Contracting Officer, at the request of the Contractor, shall determine whether the order is due in any part to the acts or omissions of the Contractor or a Subcontractor at any tier not required by the terms of this contract. If it is determined that the order is not due in any part to acts or omissions of the Contractor or a Subcontractor at any tier other than as required by the terms of this contract, such suspension, delay, or interruption shall be considered as if ordered by the Contracting Officer in the administration of this contract under the terms of the "Suspension of Work" clause of this contract. The period of such suspension, delay or interruption shall be considered unreasonable, and an adjustment shall be made for any increase in the cost of performance of this contract (excluding profit) as provided in that clause, subject to all the provisions thereof.

(b) The term "environmental litigation", as used herein, means a lawsuit alleging that the work will have an adverse effect on the environment or that the Government has not duly considered, either substantially or procedurally, the effect of the work on the environment.

#### 52.214-26 AUDIT AND RECORDS--SEALED BIDDING. (OCT 1997)

(a) As used in this clause, records includes books, documents, accounting procedures and practices, and other data, regardless of type and regardless of whether such items are in written form, in the form of computer data, or in any other form.

(b) Cost or pricing data. If the Contractor has been required to submit cost or pricing data in connection with the pricing of any modification to this contract, the Contracting Officer, or an authorized representative of the Contracting Officer, in order to evaluate the accuracy, completeness, and currency of the cost or pricing data, shall have the right to examine and audit all of the Contractor's records, including computations and projections, related to--

(1) The proposal for the modification;

(2) The discussions conducted on the proposal(s), including those related to negotiating;

(3) Pricing of the modification; or

(4) Performance of the modification.

(c) Comptroller General. In the case of pricing any modification, the Comptroller General of the United States, or an authorized representative, shall have the same rights as specified in paragraph (b) of this clause.

(d) Availability. The Contractor shall make available at its office at all reasonable times the materials described in reproduction, until 3 years after final payment under this contract, or for any other period specified in Subpart 4.7 of the Federal Acquisition Regulation (FAR). FAR Subpart 4.7, Contractor Records Retention, in effect on the date of this contract, is incorporated by reference in its entirety and made a part of this contract.

(1) If this contract is completely or partially terminated, the records relating to the work terminated shall be made available for 3 years after any resulting final termination settlement.

(2) Records pertaining to appeals under the Disputes clause or to litigation or the settlement of claims arising under or relating to the performance of this contract shall be made available until disposition of such appeals, litigation, or claims.

(e) The Contractor shall insert a clause containing all the provisions of this clause, including this paragraph (e), in all subcontracts expected to exceed the threshold in FAR 15.403-4(a)(1) for submission of cost or pricing data.

**52.214-27 PRICE REDUCTION FOR DEFECTIVE COST OR PRICING DATA - MODIFICATIONS - SEALED BIDDING. (OCT 1997)**

(a) This clause shall become operative only for any modification to this contract involving aggregate increases and/or decreases in costs, plus applicable profits, expected to exceed the threshold for the submission of cost or pricing data at FAR 15.403-4(a)(1), except that this clause does not apply to a modification if an exception under FAR 15.403-1(b) applies.

(1) Based on adequate price competition;

(2) Based on established catalog or market prices of commercial items sold in substantial quantities to the general public; or

(3) Set by law or regulation.

(b) If any price, including profit, negotiated in connection with any modification under this clause, was increased by any significant amount because

(1) the Contractor or a subcontractor furnished cost or pricing data that were not complete, accurate, and current as certified in its Certificate of Current Cost or Pricing Data;

(2) a subcontractor or prospective subcontractor furnished the Contractor cost or pricing data that were not complete, accurate, and current as certified in the Contractor's Certificate of Current Cost or Pricing Data; or

(3) any of these parties furnished data of any description that were not accurate, the price shall be reduced accordingly and the contract shall be modified to reflect the reduction. This right to a price reduction is limited to that resulting from defects in data relating to modifications for which this clause becomes operative under paragraph (a) above.

(c) Any reduction in the contract price under paragraph (b) above due to defective data from a prospective subcontractor that was not subsequently awarded the subcontract shall be limited to the amount, plus applicable overhead and profit markup, by which:

(1) the actual subcontract; or

(2) the actual cost to the Contractor, if there was no subcontract, was less than the prospective subcontract cost estimate submitted by the Contractor; provided, that the actual subcontract price was not itself affected by defective cost or pricing data.

(d) If the Contracting Officer determines under paragraph (b) of this clause that a price or cost reduction should be made:

(1) the Contractor agrees not to raise the following matters as a defense:

(i) The Contractor or subcontractor was a sole source supplier or otherwise was in a superior bargaining position and thus the price of the contract would not have been modified even if accurate, complete, and current cost or pricing data had been submitted;

(ii) The Contracting Officer should have known that the cost or pricing data in issue were defective even though the Contractor or subcontractor took no affirmative action to bring the character of the data to the attention of the Contracting Officer;

(iii) The contract was based on an agreement about the total cost of the contract and there was no agreement about the cost of each item procured under the contract; or

(iv) The Contractor or subcontractor did not submit a Certificate of Current Cost or Pricing Data.

(2) Except as prohibited by subdivision (d)(2)(ii) of this clause:

(i) an offset in an amount determined appropriate by the Contracting Officer based upon the facts shall be allowed against the amount of a contract price reduction if:

(A) The Contractor certifies to the Contracting Officer that, to the best of the Contractor's knowledge and belief, the Contractor is entitled to the offset in the amount requested; and

(B) The Contractor proves that the cost or pricing data were available before the date of agreement on the price of the contract (or price of the modification) and that the data were not submitted before such date.

(ii) An offset shall not be allowed if:

(A) The understated data was known by the Contractor to be understated when the Certificate of Current Cost or Pricing Data was signed; or (B) The Government proves that the facts demonstrate that the contract price would not have increased in the amount to be offset even if the available data had been submitted before the date of agreement on price.

(e) If any reduction in the contract price under this clause reduces the price of items for which payment was made prior to the date of the modification reflecting the price reduction, the Contractor shall be liable to and shall pay the United States at the time such overpayment is repaid:

(1) Simple interest on the amount of such overpayment to be computed from the date(s) of overpayment to the Contractor to the date the Government is repaid by the Contractor at the applicable underpayment rate effective for each quarter prescribed by the Secretary of the Treasury under 26 U.S.C. 6621(a)(2); and

(2) A penalty equal to the amount of the overpayment, if the Contractor or subcontractor knowingly submitted cost or pricing data which were incomplete, inaccurate, or noncurrent.

#### 52.214-28 SUBCONTRACTOR COST OR PRICING DATA - MODIFICATIONS - SEALED BIDDING. (OCT 1997)

(a) The requirements of paragraphs (b) and (c) of this clause shall:

(1) become operative only for any modification to this contract involving aggregate increases and/or decreases in costs, plus applicable profits, expected to exceed the threshold for submission of cost or pricing data at (FAR) 48 CFR 15.403-4(a)(1); and

(2) be limited to such modifications.

(b) Before awarding any subcontract expected to exceed the threshold for submission of cost or pricing data at FAR 15.403-4(a)(1), on the date of agreement on price or the date of award, whichever is later; or before pricing any subcontract modifications involving aggregate increases and/or decreases in costs, plus applicable profits, expected to exceed the threshold for submission of cost or pricing data at FAR 15.403-4(a)(1), the Contractor shall require the subcontractor to submit cost or pricing data (actually or by specific identification in writing), unless an exception under FAR 15.403-1(b) applies.

(1) Based on adequate price competition;

(2) Based on established catalog or market prices of commercial items sold in substantial quantities to the general public; or

(3) Set by law or regulation.

(c) The Contractor shall require the subcontractor to certify in substantially the form prescribed in subsection 15.406-2 of the Federal Acquisition Regulation that, to the best of its knowledge and belief, the data submitted under paragraph (b) above were accurate, complete, and current as of the date of agreement on the negotiated price of the subcontract or subcontract modification.

(d) The Contractor shall insert the substance of this clause, including this paragraph (d), in each subcontract that, when entered into, exceeds the threshold for submission of cost or pricing data at FAR 15.403-4(a)(1).

#### 52.214-29 ORDER OF PRECEDENCE--SEALED BIDDING (JAN 1986)

Any inconsistency in this solicitation or contract shall be resolved by giving precedence in the following order: (a) the Schedule (excluding the specifications); (b) representations and other instructions; (c) contract clauses; (d) other documents, exhibits, and attachments; and (e) the specifications.

(End of clause)

#### 52.219-8 UTILIZATION OF SMALL BUSINESS CONCERNS (OCT 2000)

(a) It is the policy of the United States that small business concerns, veteran-owned small business concerns, service-disabled veteran-owned small business concerns, HUBZone small business concerns, small disadvantaged business concerns, and women-owned small business concerns shall have the maximum practicable opportunity to participate in performing contracts let by any Federal agency, including contracts and subcontracts for subsystems, assemblies, components, and related services for major systems. It is further the policy of the United States that its prime contractors establish procedures to ensure the timely payment of amounts due pursuant to the terms of their subcontracts with small business concerns, veteran-owned small business concerns, service-disabled veteran-owned small business concerns, HUBZone small business concerns, small disadvantaged business concerns, and women-owned small business concerns.

(b) The Contractor hereby agrees to carry out this policy in the awarding of subcontracts to the fullest extent consistent with efficient contract performance. The Contractor further agrees to cooperate in any studies or surveys as may be conducted by the United States Small Business Administration or the awarding agency of the United States as may be necessary to determine the extent of the Contractor's compliance with this clause.

Definitions. As used in this contract--

HUBZone small business concern means a small business concern that appears on the List of Qualified HUBZone Small Business Concerns maintained by the Small Business Administration.

Service-disabled veteran-owned small business concern--

(1) Means a small business concern--

(i) Not less than 51 percent of which is owned by one or more service-disabled veterans or, in the case of any publicly owned business, not less than 51 percent of the stock of which is owned by one or more service-disabled veterans; and

(ii) The management and daily business operations of which are controlled by one or more service-disabled veterans or, in the case of a veteran with permanent and severe disability, the spouse or permanent caregiver of such veteran.

(2) Service-disabled veteran means a veteran, as defined in 38 U.S.C. 101(2), with a disability that is service-connected, as defined in 38 U.S.C. 101(16).

Small business concern means a small business as defined pursuant to Section 3 of the Small Business Act and relevant regulations promulgated pursuant thereto.

Small disadvantaged business concern means a small business concern that represents, as part of its offer that--

(1) It has received certification as a small disadvantaged business concern consistent with 13 CFR part 124, subpart B;

(2) No material change in disadvantaged ownership and control has occurred since its certification;

(3) Where the concern is owned by one or more individuals, the net worth of each individual upon whom the certification is based does not exceed \$750,000 after taking into account the applicable exclusions set forth at 13 CFR 124.104(c)(2); and

(4) It is identified, on the date of its representation, as a certified small disadvantaged business in the database maintained by the Small Business Administration (PRO-Net).

Veteran-owned small business concern means a small business concern--

(1) Not less than 51 percent of which is owned by one or more veterans (as defined at 38 U.S.C. 101(2)) or, in the case of any publicly owned business, not less than 51 percent of the stock of which is owned by one or more veterans; and

(2) The management and daily business operations of which are controlled by one or more veterans.

Women-owned small business concern means a small business concern--

(1) That is at least 51 percent owned by one or more women, or, in the case of any publicly owned business, at least 51 percent of the stock of which is owned by one or more women; and

(2) Whose management and daily business operations are controlled by one or more women.

(d) Contractors acting in good faith may rely on written representations by their subcontractors regarding their status as a small business concern, a veteran-owned small business concern, a service-disabled veteran-owned small business concern, a HUBZone small business concern, a small disadvantaged business concern, or a women-owned small business concern.

(End of clause)

(a) This clause does not apply to small business concerns.

(b) Definitions. As used in this clause--

Commercial item means a product or service that satisfies the definition of commercial item in section 2.101 of the Federal Acquisition Regulation.

Commercial plan means a subcontracting plan (including goals) that covers the offeror's fiscal year and that applies to the entire production of commercial items sold by either the entire company or a portion thereof (e.g., division, plant, or product line).

Individual contract plan means a subcontracting plan that covers the entire contract period (including option periods), applies to a specific contract, and has goals that are based on the offeror's planned subcontracting in support of the specific contract, except that indirect costs incurred for common or joint purposes may be allocated on a prorated basis to the contract.

Master plan means a subcontracting plan that contains all the required elements of an individual contract plan, except goals, and may be incorporated into individual contract plans, provided the master plan has been approved.

Subcontract means any agreement (other than one involving an employer-employee relationship) entered into by a Federal Government prime Contractor or subcontractor calling for supplies or services required for performance of the contract or subcontract.

(c) The offeror, upon request by the Contracting Officer, shall submit and negotiate a subcontracting plan, where applicable, that separately addresses subcontracting with small business, veteran-owned small business, service-disabled veteran-owned small business, HUBZone small business concerns, small disadvantaged business, and women-owned small business concerns. If the offeror is submitting an individual contract plan, the plan must separately address subcontracting with small business, veteran-owned small business, HUBZone small business, small disadvantaged business, and women-owned small business concerns, with a separate part for the basic contract and separate parts for each option (if any). The plan shall be included in and made a part of the resultant contract. The subcontracting plan shall be negotiated within the time specified by the Contracting Officer. Failure to submit and negotiate the subcontracting plan shall make the offeror ineligible for award of a contract.

(d) The offeror's subcontracting plan shall include the following:

(1) Goals, expressed in terms of percentages of total planned subcontracting dollars, for the use of small business, veteran-owned small business, service-disabled veteran-owned small business, HUBZone small business, small disadvantaged business, and women-owned small business concerns as subcontractors. Service-disabled veteran-owned small business concerns meet the definition of veteran-owned small business concerns, and offerors may include them within the subcontracting plan goal for veteran-owned small business concerns. A separate goal for service-disabled veteran-owned small business concerns is not required. The offeror shall include all subcontracts that contribute to contract performance, and may include a proportionate share of products and services that are normally allocated as indirect costs.

(2) A statement of--

(i) Total dollars planned to be subcontracted for an individual contract plan; or the offeror's total projected sales, expressed in dollars, and the total value of projected subcontracts to support the sales for a commercial plan;

(ii) Total dollars planned to be subcontracted to small business concerns;

(iii) Total dollars planned to be subcontracted to veteran-owned small business concerns;

(iv) Total dollars planned to be subcontracted to HUBZone small business concerns;

(v) Total dollars planned to be subcontracted to small disadvantaged business concerns; and

(vi) Total dollars planned to be subcontracted to women-owned small business concerns.

(3) A description of the principal types of supplies and services to be subcontracted, and an identification of the types planned for subcontracting to--

(i) Small business concerns;

(ii) Veteran-owned small business concerns;

(iii) HUBZone small business concerns;

(iv) Small disadvantaged business concerns; and

(v) Women-owned small business concerns.

(4) A description of the method used to develop the subcontracting goals in paragraph (d)(1) of this clause.

(5) A description of the method used to identify potential sources for solicitation purposes (e.g., existing company source lists, the Procurement Marketing and Access Network (PRO-Net) of the Small Business Administration (SBA), veterans service organizations, the National Minority Purchasing Council Vendor Information Service, the Research and Information Division of the Minority Business Development Agency in the Department of Commerce, or small, HUBZone, small disadvantaged, and women-owned small business trade associations). A firm may rely on the information contained in PRO-Net as an accurate representation of a concern's size and ownership characteristics for the purposes of maintaining a small, veteran-owned small, HUBZone small, small disadvantaged, and women-owned small business source list. Use of PRO-Net as its source list does not relieve a firm of its responsibilities (e.g., outreach, assistance, counseling, or publicizing subcontracting opportunities) in this clause.

(6) A statement as to whether or not the offeror included indirect costs in establishing subcontracting goals, and a description of the method used to determine the proportionate share of indirect costs to be incurred with—

(i) Small business concerns;

(ii) Veteran-owned small business concerns;

(iii) HUBZone small business concerns;

(iv) Small disadvantaged business concerns; and

(v) Women-owned small business concerns.

(7) The name of the individual employed by the offeror who will administer the offeror's subcontracting program, and a description of the duties of the individual.

(8) A description of the efforts the offeror will make to assure that small business, veteran-owned small business, service-disabled veteran-owned small business, HUBZone small business, small disadvantaged business and women-owned small business concerns have an equitable opportunity to compete for subcontracts.

(9) Assurances that the offeror will include the clause of this contract entitled "Utilization of Small Business Concerns" in all subcontracts that offer further subcontracting opportunities, and that the offeror will require all subcontractors (except small business concerns) that receive subcontracts in excess of \$500,000 (\$1,000,000 for construction of any public facility) to adopt a subcontracting plan that complies with the requirements of this clause.

(10) Assurances that the offeror will--

(i) Cooperate in any studies or surveys as may be required;

(ii) Submit periodic reports so that the Government can determine the extent of compliance by the offeror with the subcontracting plan;

(iii) Submit Standard Form (SF) 294, Subcontracting Report for Individual Contracts, and/or SF 295, Summary Subcontract Report, in accordance with paragraph (j) of this clause. The reports shall provide information on subcontract awards to small business concerns, veteran-owned small business concerns, service-disabled veteran-owned small business concerns, small disadvantaged business concerns, women-owned small business concerns, and Historically Black Colleges and Universities and Minority Institutions. Reporting shall be in accordance with the instructions on the forms or as provided in agency regulations.

(iv) Ensure that its subcontractors agree to submit SF 294 and SF 295.

(11) A description of the types of records that will be maintained concerning procedures that have been adopted to comply with the requirements and goals in the plan, including establishing source lists; and a description of the offeror's efforts to locate small business, veteran-owned small business, service-disabled veteran-owned small business, HUBZone small business, small disadvantaged business, and women-owned small business concerns and award subcontracts to them. The records shall include at least the following (on a plant-wide or company-wide basis, unless otherwise indicated)

(i) Source lists (e.g., PRO-Net), guides, and other data that identify small business, veteran-owner small business, service-disabled veteran-owned small business, HUBZone small business, small disadvantaged business, and women-owned small business concerns.

(ii) Organizations contacted in an attempt to locate sources that are small business, veteran-owned small business, service-disabled veteran-owned small business, HUBZone small business, small disadvantaged business, or women-owned small business concerns.

(iii) Records on each subcontract solicitation resulting in an award of more than \$100,000, indicating--

(A) Whether small business concerns were solicited and, if not, why not;

(B) Whether veteran-owned small business concerns were solicited and, if not, why not;

(C) Whether HUBZone small business concerns were solicited and, if not, why not;

(D) Whether small disadvantaged business concerns were solicited and, if not, why not;

(E) Whether women-owned small business concerns were solicited and, if not, why not; and

(F) If applicable, the reason award was not made to a small business concern.

(iv) Records of any outreach efforts to contact--

(A) Trade associations;

(B) Business development organizations;

(C) Conferences and trade fairs to locate small, HUBZone small, small disadvantaged, and women-owned small business sources; and

(D) Veterans service organizations.



(v) Records of internal guidance and encouragement provided to buyers through--

(A) Workshops, seminars, training, etc.; and

(B) Monitoring performance to evaluate compliance with the program's requirements.

(vi) On a contract-by-contract basis, records to support award data submitted by the offeror to the Government, including the name, address, and business size of each subcontractor. Contractors having commercial plans need not comply with this requirement.

(e) In order to effectively implement this plan to the extent consistent with efficient contract performance, the Contractor shall perform the following functions:

(1) Assist small business, veteran-owner small business, service-disabled veteran-owned small business, HUBZone small business, small disadvantaged business, and women-owned small business concerns by arranging solicitations, time for the preparation of bids, quantities, specifications, and delivery schedules so as to facilitate the participation by such concerns. Where the Contractor's lists of potential small business, veteran-owner small business, service-disabled veteran-owned small business, HUBZone small business, small disadvantaged business, and women-owned small business subcontractors are excessively long, reasonable effort shall be made to give all such small business concerns an opportunity to compete over a period of time.

(2) Provide adequate and timely consideration of the potentialities of small business, veteran-owner small business, service-disabled veteran-owned small business, HUBZone small business, small disadvantaged business, and women-owned small business concerns in all "make-or-buy" decisions.

(3) Counsel and discuss subcontracting opportunities with representatives of small business, veteran-owner small business, service-disabled veteran-owned small business, HUBZone small business, small disadvantaged business, and women-owned small business firms.

(4) Provide notice to subcontractors concerning penalties and remedies for misrepresentations of business status as small, veteran-owner small business, HUBZone small, small disadvantaged, or women-owned small business for the purpose of obtaining a subcontract that is to be included as part or all of a goal contained in the Contractor's subcontracting plan.

(f) A master plan on a plant or division-wide basis that contains all the elements required by paragraph (d) of this clause, except goals, may be incorporated by reference as a part of the subcontracting plan required of the offeror by this clause; provided--

(1) the master plan has been approved, (2) the offeror ensures that the master plan is updated as necessary and provides copies of the approved master plan, including evidence of its approval, to the Contracting Officer, and (3) goals and any deviations from the master plan deemed necessary by the Contracting Officer to satisfy the requirements of this contract are set forth in the individual subcontracting plan.

(g) A commercial plan is the preferred type of subcontracting plan for contractors furnishing commercial items. The commercial plan shall relate to the offeror's planned subcontracting generally, for both commercial and Government business, rather than solely to the Government contract. Commercial plans are also preferred for subcontractors that provide commercial items under a prime contract, whether or not the prime contractor is supplying a commercial item.

(h) Prior compliance of the offeror with other such subcontracting plans under previous contracts will be considered by the Contracting Officer in determining the responsibility of the offeror for award of the contract.

(i) The failure of the Contractor or subcontractor to comply in good faith with (1) the clause of this contract entitled "Utilization Of Small Business Concerns," or (2) an approved plan required by this clause, shall be a material breach of the contract.

(j) The Contractor shall submit the following reports:

(1) Standard Form 294, Subcontracting Report for Individual Contracts. This report shall be submitted to the Contracting Officer semiannually and at contract completion. The report covers subcontract award data related to this contract. This report is not required for commercial plans.

(2) Standard Form 295, Summary Subcontract Report. This report encompasses all of the contracts with the awarding agency. It must be submitted semi-annually for contracts with the Department of Defense and annually for contracts with civilian agencies. If the reporting activity is covered by a commercial plan, the reporting activity must report annually all subcontract awards under that plan. All reports submitted at the close of each fiscal year (both individual and commercial plans) shall include a breakout, in the Contractor's format, of subcontract awards, in whole dollars, to small disadvantaged business concerns by North American Industry Classification System (NAICS) Industry Subsector. For a commercial plan, the Contractor may obtain from each of its subcontractors a predominant NAICS Industry Subsector and report all awards to that subcontractor under its predominant NAICS Industry Subsector.

(End of clause)

#### 52.219-16 LIQUIDATED DAMAGES-SUBCONTRACTING PLAN (JAN 1999)

(a) Failure to make a good faith effort to comply with the subcontracting plan, as used in this clause, means a willful or intentional failure to perform in accordance with the requirements of the subcontracting plan approved under the clause in this contract entitled "Small Business Subcontracting Plan," or willful or intentional action to frustrate the plan.

(b) Performance shall be measured by applying the percentage goals to the total actual subcontracting dollars or, if a commercial plan is involved, to the pro rata share of actual subcontracting dollars attributable to Government contracts covered by the commercial plan. If, at contract completion or, in the case of a commercial plan, at the close of the fiscal year for which the plan is applicable, the Contractor has failed to meet its subcontracting goals and the Contracting Officer decides in accordance with paragraph (c) of this clause that the Contractor failed to make a good faith effort to comply with its subcontracting plan, established in accordance with the clause in this contract entitled "Small Business Subcontracting Plan," the Contractor shall pay the Government liquidated damages in an amount stated. The amount of probable damages attributable to the Contractor's failure to comply shall be an amount equal to the actual dollar amount by which the Contractor failed to achieve each subcontract goal.

(c) Before the Contracting Officer makes a final decision that the Contractor has failed to make such good faith effort, the Contracting Officer shall give the Contractor written notice specifying the failure and permitting the Contractor to demonstrate what good faith efforts have been made and to discuss the matter. Failure to respond to the notice may be taken as an admission that no valid explanation exists. If, after consideration of all the pertinent data, the Contracting Officer finds that the Contractor failed to make a good faith effort to comply with the subcontracting plan, the Contracting Officer shall issue a final decision to that effect and require that the Contractor pay the Government liquidated damages as provided in paragraph (b) of this clause.

(d) With respect to commercial plans, the Contracting Officer who approved the plan will perform the functions of the Contracting Officer under this clause on behalf of all agencies with contracts covered by the commercial plan.

(e) The Contractor shall have the right of appeal, under the clause in this contract entitled Disputes, from any final decision of the Contracting Officer.

(f) Liquidated damages shall be in addition to any other remedies that the Government may have.

(End of clause)

**52.219-25 SMALL DISADVANTAGED BUSINESS PARTICIPATION PROGRAM—DISADVANTAGED STATUS AND REPORTING (OCT 1999)**

(a) Disadvantaged status for joint venture partners, team members, and subcontractors. This clause addresses disadvantaged status for joint venture partners, teaming arrangement members, and subcontractors and is applicable if this contract contains small disadvantaged business (SDB) participation targets. The Contractor shall obtain representations of small disadvantaged status from joint venture partners, teaming arrangement members, and subcontractors through use of a provision substantially the same as paragraph (b)(1)(i) of the provision at FAR 52.219-22, Small Disadvantaged Business Status. The Contractor shall confirm that a joint venture partner, team member, or subcontractor representing itself as a small disadvantaged business concern, is identified as a certified small disadvantaged business in the database maintained by the Small Business Administration (PRO-Net) or by contacting the SBA's Office of Small Disadvantaged Business Certification and Eligibility.

(b) Reporting requirement. If this contract contains SDB participation targets, the Contractor shall report on the participation of SDB concerns at contract completion, or as otherwise provided in this contract. Reporting may be on Optional Form 312, Small Disadvantaged Business Participation Report, or in the Contractor's own format providing the same information. This report is required for each contract containing SDB participation targets. If this contract contains an individual Small, Small Disadvantaged and Women-Owned Small Business Subcontracting Plan, reports may be submitted with the final Subcontracting Report for Individual Contracts (Standard Form 294) at the completion of the contract.

(End of clause)

**52.222-1 NOTICE TO THE GOVERNMENT OF LABOR DISPUTES (FEB 1997)**

If the Contractor has knowledge that any actual or potential labor dispute is delaying or threatens to delay the timely performance of this contract, the Contractor shall immediately give notice, including all relevant information, to the Contracting Officer.

**52.222-3 CONVICT LABOR (AUG 1996)**

The Contractor agrees not to employ in the performance of this contract any person undergoing a sentence of imprisonment which has been imposed by any court of a State, the District of Columbia, the Commonwealth of Puerto Rico, the Virgin Islands, Guam, American Samoa, the Commonwealth of the Northern Mariana Islands, or the Trust Territory of the Pacific Islands. This limitation, however, shall not prohibit the employment by the Contractor in the performance of this contract of persons on parole or probation to work at paid employment during the term of their sentence or persons who have been pardoned or who have served their terms. Nor shall it prohibit the employment by the Contractor in the performance of this contract of persons confined for violation of the laws of any of the States, the District of Columbia, the Commonwealth of Puerto Rico, the Virgin Islands, Guam, American Samoa, the Commonwealth of the Northern Mariana Islands, or the Trust Territory of the Pacific Islands who are authorized to work at paid employment in the community under the laws of such jurisdiction, if--

- (a)(1) The worker is paid or is in an approved work training program on a voluntary basis;
- (2) Representatives of local union central bodies or similar labor union organizations have been consulted;
- (3) Such paid employment will not result in the displacement of employed workers, or be applied in skills, crafts, or trades in which there is a surplus of available gainful labor in the locality, or impair existing contracts for services; and
- (4) The rates of pay and other conditions of employment will not be less than those paid or provided for work of a similar nature in the locality in which the work is being performed; and

(b) The Attorney General of the United States has certified that the work-release laws or regulations of the jurisdiction involved are in conformity with the requirements of Executive Order 11755, as amended by Executive Orders 12608 and 12943.

(End of clause)

52.222-4 CONTRACT WORK HOURS AND SAFETY STANDARDS ACT - OVERTIME COMPENSATION.  
(SEP 2000)

(a) Overtime requirements. No Contractor or subcontractor employing laborers or mechanics (see Federal Acquisition Regulation 22.300) shall require or permit them to work over 40 hours in any workweek unless they are paid at least 1 and 1/2 times the basic rate of pay for each hour worked over 40 hours.

(b) Violation; liability for unpaid wages; liquidated damages. The responsible Contractor and subcontractor are liable for unpaid wages if they violate the terms in paragraph (a) of this clause. In addition, the Contractor and subcontractor are liable for liquidated damages payable to the Government. The Contracting Officer will assess liquidated damages at the rate of \$10 per affected employee for each calendar day on which the employer required or permitted the employee to work in excess of the standard workweek of 40 hours without paying overtime wages required by the Contract Work Hours and Safety Standards Act.

(c) Withholding for unpaid wages and liquidated damages. The Contracting Officer will withhold from payments due under the contract sufficient funds required to satisfy any Contractor or subcontractor liabilities for unpaid wages and liquidated damages. If amounts withheld under the contract are insufficient to satisfy Contractor or subcontractor liabilities, the Contracting Officer will withhold payments from other Federal or Federally assisted contracts held by the same Contractor that are subject to the Contract Work Hours and Safety Standards Act.

(d) Payrolls and basic records.

(1) The Contractor and its subcontractors shall maintain payrolls and basic payroll records for all laborers and mechanics working on the contract during the contract and shall make them available to the Government until 3 years after contract completion. The records shall contain the name and address of each employee, social security number, labor classifications, hourly rates of wages paid, daily and weekly number of hours worked, deductions made, and actual wages paid. The records need not duplicate those required for construction work by Department of Labor regulations at 29 CFR 5.5(a)(3) implementing the Davis-Bacon Act.

(2) The Contractor and its subcontractors shall allow authorized representatives of the Contracting Officer or the Department of Labor to inspect, copy, or transcribe records maintained under paragraph (d)(1) of this clause. The Contractor or subcontractor also shall allow authorized representatives of the Contracting Officer or Department of Labor to interview employees in the workplace during working hours.

(e) Subcontracts. The Contractor shall insert the provisions set forth in paragraphs (a) through (d) of this clause in subcontracts exceeding \$100,000 and require subcontractors to include these provisions in any lower tier subcontracts. The Contractor shall be responsible for compliance by any subcontractor or lower-tier subcontractor with the provisions set forth in paragraphs (a) through (d) of this clause.

(End of clause)

52.222-6 DAVIS-BACON ACT (FEB 1995)

(a) All laborers and mechanics employed or working upon the site of the work will be paid unconditionally and not less often than once a week, and without subsequent deduction or rebate on any account (except such payroll deductions as are permitted by regulations issued by the Secretary of Labor under the Copeland Act (29 CFR Part 3), the full amount of wages and bona fide fringe benefits (or cash equivalents thereof) due at time of payment computed at rates not less than those contained in the wage determination of the Secretary of Labor which is attached hereto and made a part hereof, regardless of any contractual relationship which may be alleged to exist

between the Contractor and such laborers and mechanics. Contributions made or costs reasonably anticipated for bona fide fringe benefits under section 1(b)(2) of the Davis-Bacon Act on behalf of laborers or mechanics are considered wages paid to such laborers or mechanics, subject to the provisions of paragraph (d) of this clause; also, regular contributions made or costs incurred for more than a weekly period (but not less often than quarterly) under plans, funds, or programs which cover the particular weekly period, are deemed to be constructively made or incurred during such period. Such laborers and mechanics shall be paid not less than the appropriate wage rate and fringe benefits in the wage determination for the classification of work actually performed, without regard to skill, except as provided in the clause entitled Apprentices and Trainees. Laborers or mechanics performing work in more than one classification may be compensated at the rate specified for each classification for the time actually worked therein; provided, That the employer's payroll records accurately set forth the time spent in each classification in which work is performed. The wage determination (including any additional classifications and wage rates conformed under paragraph (b) of this clause) and the Davis-Bacon poster (WH-1321) shall be posted at all times by the Contractor and its subcontractors at the site of the work in a prominent and accessible place where it can be easily seen by the workers.

(b)(1) The Contracting Officer shall require that any class of laborers or mechanics which is not listed in the wage determination and which is to be employed under the contract shall be classified in conformance with the wage determination. The Contracting Officer shall approve an additional classification and wage rate and fringe benefits therefor only when all the following criteria have been met:

(i) The work to be performed by the classification requested is not performed by a classification in the wage determination.

(ii) The classification is utilized in the area by the construction industry.

(iii) The proposed wage rate, including any bona fide fringe benefits, bears a reasonable relationship to the wage rates contained in the wage determination.

(2) If the Contractor and the laborers and mechanics to be employed in the classification (if known), or their representatives, and the Contracting Officer agree on the classification and wage rate (including the amount designated for fringe benefits, where appropriate), a report of the action taken shall be sent by the Contracting Officer to the Administrator of the Wage and Hour Division, Employment Standards Administration, U.S. Department of Labor, Washington, DC 20210. The Administrator or an authorized representative will approve, modify, or disapprove every additional classification action within 30 days of receipt and so advise the Contracting Officer or will notify the Contracting Officer within the 30-day period that additional time is necessary.

(3) In the event the Contractor, the laborers or mechanics to be employed in the classification, or their representatives, and the Contracting Officer do not agree on the proposed classification and wage rate (including the amount designated for fringe benefits, where appropriate), the Contracting Officer shall refer the questions, including the views of all interested parties and the recommendation of the Contracting Officer, to the Administrator of the Wage and Hour Division for determination. The Administrator, or an authorized representative, will issue a determination within 30 days of receipt and so advise the Contracting Officer or will notify the Contracting Officer within the 30-day period that additional time is necessary.

(4) The wage rate (including fringe benefits, where appropriate) determined pursuant to subparagraphs (b)(2) and (b)(3) of this clause shall be paid to all workers performing work in the classification under this contract from the first day on which work is performed in the classification.

(c) Whenever the minimum wage rate prescribed in the contract for a class of laborers or mechanics includes a fringe benefit which is not expressed as an hourly rate, the Contractor shall either pay the benefit as stated in the wage determination or shall pay another bona fide fringe benefit or an hourly cash equivalent thereof.

(d) If the Contractor does not make payments to a trustee or other third person, the Contractor may consider as part of the wages of any laborer or mechanic the amount of any costs reasonably anticipated in providing bona fide fringe benefits under a plan or program; provided, That the Secretary of Labor has found, upon the written request of

the Contractor, that the applicable standards of the Davis-Bacon Act have been met. The Secretary of Labor may require the Contractor to set aside in a separate account assets for the meeting of obligations under the plan or program.

#### 52.222-7 WITHHOLDING OF FUNDS (FEB 1988)

The Contracting Officer shall, upon his or her own action or upon written request of an authorized representative of the Department of Labor, withhold or cause to be withheld from the Contractor under this contract or any other Federal contract with the same Prime Contractor, or any other Federally assisted contract subject to Davis-Bacon prevailing wage requirements, which is held by the same Prime Contractor, so much of the accrued payments or advances as may be considered necessary to pay laborers and mechanics, including apprentices, trainees, and helpers, employed by the Contractor or any subcontractor the full amount of wages required by the contract. In the event of failure to pay any laborer or mechanic, including any apprentice, trainee, or helper, employed or working on the site of the work, all or part of the wages required by the contract, the Contracting Officer may, after written notice to the Contractor, take such action as may be necessary to cause the suspension of any further payment, advance, or guarantee of funds until such violations have ceased.

#### 52.222-8 PAYROLLS AND BASIC RECORDS (FEB 1988)

(a) Payrolls and basic records relating thereto shall be maintained by the Contractor during the course of the work and preserved for a period of 3 years thereafter for all laborers and mechanics working at the site of the work. Such records shall contain the name, address, and social security number of each such worker, his or her correct classification, hourly rates of wages paid (including rates of contributions or costs anticipated for bona fide fringe benefits or cash equivalents thereof of the types described in section 1(b)(2)(B) of the Davis-Bacon Act), daily and weekly number of hours worked, deductions made, and actual wages paid. Whenever the Secretary of Labor has found, under paragraph (d) of the clause entitled Davis-Bacon Act, that the wages of any laborer or mechanic include the amount of any costs reasonably anticipated in providing benefits under a plan or program described in section 1(b)(2)(B) of the Davis-Bacon Act, the Contractor shall maintain records which show that the commitment to provide such benefits is enforceable, that the plan or program is financially responsible, and that the plan or program has been communicated in writing to the laborers or mechanics affected, and records which show the costs anticipated or the actual cost incurred in providing such benefits. Contractors employing apprentices or trainees under approved programs shall maintain written evidence of the registration of apprenticeship programs and certification of trainee programs, the registration of the apprentices and trainees, and the ratios and wage rates prescribed in the applicable programs.

(b)(1) The Contractor shall submit weekly for each week in which any contract work is performed a copy of all payrolls to the Contracting Officer. The payrolls submitted shall set out accurately and completely all of the information required to be maintained under paragraph (a) of this clause. This information may be submitted in any form desired. Optional Form WH-347 (Federal Stock Number 029-005-00014-1) is available for this purpose and may be purchased from the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402. The Prime Contractor is responsible for the submission of copies of payrolls by all subcontractors.

(2) Each payroll submitted shall be accompanied by a "Statement of Compliance," signed by the Contractor or subcontractor or his or her agent who pays or supervises the payment of the persons employed under the contract and shall certify--

(i) That the payroll for the payroll period contains the information required to be maintained under paragraph (a) of this clause and that such information is correct and complete;

(ii) That each laborer or mechanic (including each helper, apprentice, and trainee) employed on the contract during the payroll period has been paid the full weekly wages earned, without rebate, either directly or indirectly, and that no deductions have been made either directly or indirectly from the full wages earned, other than permissible deductions as set forth in the Regulations, 29 CFR Part 3; and

(iii) That each laborer or mechanic has been paid not less than the applicable wage rates and fringe benefits or cash equivalents for the classification of work performed, as specified in the applicable wage determination incorporated into the contract.

(3) The weekly submission of a properly executed certification set forth on the reverse side of Optional Form WH-347 shall satisfy the requirement for submission of the "Statement of Compliance" required by subparagraph (b)(2) of this clause.

(4) The falsification of any of the certifications in this clause may subject the Contractor or subcontractor to civil or criminal prosecution under Section 1001 of Title 18 and Section 3729 of Title 31 of the United States Code.

(c) The Contractor or subcontractor shall make the records required under paragraph (a) of this clause available for inspection, copying, or transcription by the Contracting Officer or authorized representatives of the Contracting Officer or the Department of Labor. The Contractor or subcontractor shall permit the Contracting Officer or representatives of the Contracting Officer or the Department of Labor to interview employees during working hours on the job. If the Contractor or subcontractor fails to submit required records or to make them available, the Contracting Officer may, after written notice to the Contractor, take such action as may be necessary to cause the suspension of any further payment. Furthermore, failure to submit the required records upon request or to make such records available may be grounds for debarment action pursuant to 29 CFR 5.12.

#### 52.222-9 APPRENTICES AND TRAINEES (FEB 1988)

(a) Apprentices. Apprentices will be permitted to work at less than the predetermined rate for the work they performed when they are employed pursuant to and individually registered in a bona fide apprenticeship program registered with the U.S. Department of Labor, Employment and Training Administration, Bureau of Apprenticeship and Training, or with a State Apprenticeship Agency recognized by the Bureau, or if a person is employed in his or her first 90 days of probationary employment as an apprentice in such an apprenticeship program, who is not individually registered in the program, but who has been certified by the Bureau of Apprenticeship and Training or a State Apprenticeship Agency (where appropriate) to be eligible for probationary employment as an apprentice. The allowable ratio of apprentices to journeymen on the job site in any craft classification shall not be greater than the ratio permitted to the Contractor as to the entire work force under the registered program. Any worker listed on a payroll at an apprentice wage rate, who is not registered or otherwise employed as stated in this paragraph, shall be paid not less than the applicable wage determination for the classification of work actually performed. In addition, any apprentice performing work on the job site in excess of the ratio permitted under the registered program shall be paid not less than the applicable wage rate on the wage determination for the work actually performed. Where a contractor is performing construction on a project in a locality other than that in which its program is registered, the ratios and wage rates (expressed in percentages of the journeyman's hourly rate) specified in the Contractor's or subcontractor's registered program shall be observed. Every apprentice must be paid at not less than the rate specified in the registered program for the apprentice's level of progress, expressed as a percentage of the journeyman hourly rate specified in the applicable wage determination. Apprentices shall be paid fringe benefits in accordance with the provisions of the apprenticeship program. If the apprenticeship program does not specify fringe benefits, apprentices must be paid the full amount of fringe benefits listed on the wage determination for the applicable classification. If the Administrator determines that a different practice prevails for the applicable apprentice classification, fringes shall be paid in accordance with that determination. In the event the Bureau of Apprenticeship and Training, or a State Apprenticeship Agency recognized by the Bureau, withdraws approval of an apprenticeship program, the Contractor will no longer be permitted to utilize apprentices at less than the applicable predetermined rate for the work performed until an acceptable program is approved.

(b) Trainees. Except as provided in 29 CFR 5.16, trainees will not be permitted to work at less than the predetermined rate for the work performed unless they are employed pursuant to and individually registered in a program which has received prior approval, evidenced by formal certification by the U.S. Department of Labor, Employment and Training Administration. The ratio of trainees to journeymen on the job site shall not be greater than permitted under the plan approved by the Employment and Training Administration. Every trainee must be paid at not less than the rate specified in the approved program for the trainee's level of progress, expressed as a

percentage of the journeyman hourly rate specified in the applicable wage determination. Trainees shall be paid fringe benefits in accordance with the provisions of the trainee program. If the trainee program does not mention fringe benefits, trainees shall be paid the full amount of fringe benefits listed in the wage determination unless the Administrator of the Wage and Hour Division determines that there is an apprenticeship program associated with the corresponding journeyman wage rate in the wage determination which provides for less than full fringe benefits for apprentices. Any employee listed on the payroll at a trainee rate who is not registered and participating in a training plan approved by the Employment and Training Administration shall be paid not less than the applicable wage rate in the wage determination for the classification of work actually performed. In addition, any trainee performing work on the job site in excess of the ratio permitted under the registered program shall be paid not less than the applicable wage rate in the wage determination for the work actually performed. In the event the Employment and Training Administration withdraws approval of a training program, the Contractor will no longer be permitted to utilize trainees at less than the applicable predetermined rate for the work performed until an acceptable program is approved.

(c) Equal employment opportunity. The utilization of apprentices, trainees, and journeymen under this clause shall be in conformity with the equal employment opportunity requirements of Executive Order 11246, as amended, and 29 CFR Part 30.

#### 52.222-10 COMPLIANCE WITH COPELAND ACT REQUIREMENTS (FEB 1988)

The Contractor shall comply with the requirements of 29 CFR Part 3, which are hereby incorporated by reference in this contract.

#### 52.222-11 SUBCONTRACTS (LABOR STANDARDS (FEB 1988)

(a) The Contractor or subcontractor shall insert in any subcontracts the clauses entitled Davis-Bacon Act, Contract Work Hours and Safety Standards Act-Overtime Compensation, Apprentices and Trainees, Payrolls and Basic Records, Compliance with Copeland Act Requirements, Withholding of Funds, Subcontracts (Labor Standards), Contract Termination-Debarment, Disputes Concerning Labor Standards, Compliance with Davis-Bacon and Related Act Regulations, and Certification of Eligibility, and such other clauses as the Contracting Officer may, by appropriate instructions, require, and also a clause requiring subcontractors to include these clauses in any lower tier subcontracts. The Prime Contractor shall be responsible for compliance by any subcontractor or lower tier subcontractor with all the contract clauses cited in this paragraph.

(b)(1) Within 14 days after award of the contract, the Contractor shall deliver to the Contracting Officer a completed Statement and Acknowledgment Form (SF 1413) for each subcontract, including the subcontractor's signed and dated acknowledgment that the clauses set forth in paragraph (a) of this clause have been included in the subcontract.

(2) Within 14 days after the award of any subsequently awarded subcontract the Contractor shall deliver to the Contracting Officer an updated completed SF 1413 for such additional subcontract.

#### 52.222-12 CONTRACT TERMINATION--DEBARMENT (FEB 1988)

A breach of the contract clauses entitled Davis-Bacon Act, Contract Work Hours and Safety Standards Act--Overtime Compensation, Apprentices and Trainees, Payrolls and Basic Records, Compliance with Copeland Act Requirements, Subcontracts (Labor Standards), Compliance with Davis-Bacon and Related Act Regulations, or Certification of Eligibility may be grounds for termination of the contract, and for debarment as a Contractor and subcontractor as provided in 29 CFR 5.12.



**52.222-13 COMPLIANCE WITH DAVIS-BACON AND RELATED ACT REGULATIONS (FEB 1988)**

All rulings and interpretations of the Davis-Bacon and Related Acts contained in 29 CFR Parts 1, 3, and 5 are hereby incorporated by reference in this contract.

**52.222-14 DISPUTES CONCERNING LABOR STANDARDS (FEB 1988)**

The United States Department of Labor has set forth in 29 CFR Parts 5, 6, and 7 procedures for resolving disputes concerning labor standards requirements. Such disputes shall be resolved in accordance with those procedures and not the Disputes clause of this contract. Disputes within the meaning of this clause include disputes between the Contractor (or any of its subcontractors) and the contracting agency, the U.S. Department of Labor, or the employees or their representatives.

**52.222-15 CERTIFICATION OF ELIGIBILITY (FEB 1988)**

(a) By entering into this contract, the Contractor certifies that neither it (nor he or she) nor any person or firm who has an interest in the Contractor's firm is a person or firm ineligible to be awarded Government contracts by virtue of section 3(a) of the Davis-Bacon Act or 29 CFR 5.12(a)(1).

(b) No part of this contract shall be subcontracted to any person or firm ineligible for award of a Government contract by virtue of section 3(a) of the Davis-Bacon Act or 29 CFR 5.12(a)(1).

(c) The penalty for making false statements is prescribed in the U.S. Criminal Code, 18 U.S.C. 1001.

**52.222-21 PROHIBITION OF SEGREGATED FACILITIES (FEB 1999)**

(a) Segregated facilities, as used in this clause, means any waiting rooms, work areas, rest rooms and wash rooms, restaurants and other eating areas, time clocks, locker rooms and other storage or dressing areas, parking lots, drinking fountains, recreation or entertainment areas, transportation, and housing facilities provided for employees, that are segregated by explicit directive or are in fact segregated on the basis of race, color, religion, sex, or national origin because of written or oral policies or employee custom. The term does not include separate or single-user rest rooms or necessary dressing or sleeping areas provided to assure privacy between the sexes.

(b) The Contractor agrees that it does not and will not maintain or provide for its employees any segregated facilities at any of its establishments, and that it does not and will not permit its employees to perform their services at any location under its control where segregated facilities are maintained. The Contractor agrees that a breach of this clause is a violation of the Equal Opportunity clause in this contract.

(c) The Contractor shall include this clause in every subcontract and purchase order that is subject to the Equal Opportunity clause of this contract.

(End of clause)

**52.222-23 NOTICE OF REQUIREMENT FOR AFFIRMATIVE ACTION TO ENSURE EQUAL EMPLOYMENT OPPORTUNITY FOR CONSTRUCTION (FEB 1999)**

(a) The offeror's attention is called to the Equal Opportunity clause and the Affirmative Action Compliance Requirements for Construction clause of this solicitation.

(b) The goals for minority and female participation, expressed in percentage terms for the Contractor's aggregate workforce in each trade on all construction work in the covered area, are as follows:

Goals for minority participation for each trade	Goals for female participation for each trade
6.2%	6.9%

These goals are applicable to all the Contractor's construction work performed in the covered area. If the Contractor performs construction work in a geographical area located outside of the covered area, the Contractor shall apply the goals established for the geographical area where the work is actually performed. Goals are published periodically in the Federal Register in notice form, and these notices may be obtained from any Office of Federal Contract Compliance Programs office.

(c) The Contractor's compliance with Executive Order 11246, as amended, and the regulations in 41 CFR 60-4 shall be based on (1) its implementation of the Equal Opportunity clause, (2) specific affirmative action obligations required by the clause entitled "Affirmative Action Compliance Requirements for Construction," and (3) its efforts to meet the goals. The hours of minority and female employment and training must be substantially uniform throughout the length of the contract, and in each trade. The Contractor shall make a good faith effort to employ minorities and women evenly on each of its projects. The transfer of minority or female employees or trainees from Contractor to Contractor, or from project to project, for the sole purpose of meeting the Contractor's goals shall be a violation of the contract, Executive Order 11246, as amended, and the regulations in 41 CFR 60-4. Compliance with the goals will be measured against the total work hours performed.

(d) The Contractor shall provide written notification to the Deputy Assistant Secretary for Federal Contract Compliance, U.S. Department of Labor, within 10 working days following award of any construction subcontract in excess of \$10,000 at any tier for construction work under the contract resulting from this solicitation. The notification shall list the --

- (1) Name, address, and telephone number of the subcontractor;
- (2) Employer's identification number of the subcontractor;
- (3) Estimated dollar amount of the subcontract;
- (4) Estimated starting and completion dates of the subcontract; and
- (5) Geographical area in which the subcontract is to be performed.

(e) As used in this Notice, and in any contract resulting from this solicitation, the "covered area" is located in the State of Washington, County of Pierce, at Fort Lewis.

#### 52.222-26 EQUAL OPPORTUNITY (FEB 1999)

(a) If, during any 12-month period (including the 12 months preceding the award of this contract), the Contractor has been or is awarded nonexempt Federal contracts and/or subcontracts that have an aggregate value in excess of \$10,000, the Contractor shall comply with subparagraphs (b)(1) through (11) of this clause. Upon request, the Contractor shall provide information necessary to determine the applicability of this clause.

(b) During performing this contract, the Contractor agrees as follows:

(1) The Contractor shall not discriminate against any employee or applicant for employment because of race, color, religion, sex, or national origin. However, it shall not be a violation of this clause for the Contractor to extend a publicly announced preference in employment to Indians living on or near an Indian reservation, in connection with employment opportunities on or near an Indian reservation, as permitted by 41 CFR 60-1.5.

(2) The Contractor shall take affirmative action to ensure that applicants are employed, and that employees are treated during employment, without regard to their race, color, religion, sex, or national origin. This shall include, but not be limited to, (i) employment, (ii) upgrading, (iii) demotion, (iv) transfer, (v) recruitment or recruitment advertising, (vi) layoff or termination, (vii) rates of pay or other forms of compensation, and (viii) selection for training, including apprenticeship.

(3) The Contractor shall post in conspicuous places available to employees and applicants for employment the notices to be provided by the Contracting Officer that explain this clause.

(4) The Contractor shall, in all solicitations or advertisements for employees placed by or on behalf of the Contractor, state that all qualified applicants will receive consideration for employment without regard to race, color, religion, sex, or national origin.

(5) The Contractor shall send, to each labor union or representative of workers with which it has a collective bargaining agreement or other contract or understanding, the notice to be provided by the Contracting Officer advising the labor union or workers' representative of the Contractor's commitments under this clause, and post copies of the notice in conspicuous places available to employees and applicants for employment.

(6) The Contractor shall comply with Executive Order 11246, as amended, and the rules, regulations, and orders of the Secretary of Labor.

(7) The Contractor shall furnish to the contracting agency all information required by Executive Order 11246, as amended, and by the rules, regulations, and orders of the Secretary of Labor. The Contractor shall also file Standard Form 100 (EEO-1), or any successor form, as prescribed in 41 CFR part 60-1. Unless the Contractor has filed within the 12 months preceding the date of contract award, the Contractor shall, within 30 days after contract award, apply to either the regional Office of Federal Contract Compliance Programs (OFCCP) or the local office of the Equal Employment Opportunity Commission for the necessary forms.

(8) The Contractor shall permit access to its premises, during normal business hours, by the contracting agency or the OFCCP for the purpose of conducting on-site compliance evaluations and complaint investigations. The Contractor shall permit the Government to inspect and copy any books, accounts, records (including computerized records), and other material that may be relevant to the matter under investigation and pertinent to compliance with Executive Order 11246, as amended, and rules and regulations that implement the Executive Order.

(9) If the OFCCP determines that the Contractor is not in compliance with this clause or any rule, regulation, or order of the Secretary of Labor, this contract may be canceled, terminated, or suspended in whole or in part and the Contractor may be declared ineligible for further Government contracts, under the procedures authorized in Executive Order 11246, as amended. In addition, sanctions may be imposed and remedies invoked against the Contractor as provided in Executive Order 11246, as amended; in the rules, regulations, and orders of the Secretary of Labor; or as otherwise provided by law.

(10) The Contractor shall include the terms and conditions of subparagraphs (b)(1) through (11) of this clause in every subcontract or purchase order that is not exempted by the rules, regulations, or orders of the Secretary of Labor issued under Executive Order 11246, as amended, so that these terms and conditions will be binding upon each subcontractor or vendor.

(11) The Contractor shall take such action with respect to any subcontract or purchase order as the contracting officer may direct as a means of enforcing these terms and conditions, including sanctions for noncompliance; provided, that if the Contractor becomes involved in, or is threatened with, litigation with a subcontractor or vendor as a result of any direction, the Contractor may request the United States to enter into the litigation to protect the interests of the United States.

(c) Notwithstanding any other clause in this contract, disputes relative to this clause will be governed by the procedures in 41 CFR 60-1.1.

(End of clause)

52.222-27 AFFIRMATIVE ACTION COMPLIANCE REQUIREMENTS FOR CONSTRUCTION (FEB 1999)

(a) Definitions. "Covered area," as used in this clause, means the geographical area described in the solicitation for this contract.

"Deputy Assistant Secretary," as used in this clause, means Deputy Assistant Secretary for Federal Contract Compliance, U.S. Department of Labor, or a designee.

"Employer's identification number," as used in this clause, means the Federal Social Security number used on the employer's quarterly federal tax return, U.S. Treasury Department Form 941.

"Minority," as used in this clause, means--

(1) American Indian or Alaskan Native (all persons having origins in any of the original peoples of North America and maintaining identifiable tribal affiliations through membership and participation or community identification).

(2) Asian and Pacific Islander (all persons having origins in any of the original peoples of the Far East, Southeast Asia, the Indian Subcontinent, or the Pacific Islands);

(3) Black (all persons having origins in any of the black African racial groups not of Hispanic origin); and

(4) Hispanic (all persons of Mexican, Puerto Rican, Cuban, Central or South American, or other Spanish culture or origin, regardless of race).

(b) If the Contractor, or a subcontractor at any tier, subcontracts a portion of the work involving any construction trade, each such subcontract in excess of \$10,000 shall include this clause and the Notice containing the goals for minority and female participation stated in the solicitation for this contract.

(c) If the Contractor is participating in a Hometown Plan (41 CFR 60-4) approved by the U.S. Department of Labor in a covered area, either individually or through an association, its affirmative action obligations on all work in the plan area (including goals) shall comply with the plan for those trades that have unions participating in the plan. Contractors must be able to demonstrate participation in, and compliance with, the provisions of the plan. Each Contractor or subcontractor participating in an approved plan is also required to comply with its obligations under the Equal Opportunity clause, and to make a good faith effort to achieve each goal under the plan in each trade in which it has employees. The overall good-faith performance by other Contractors or subcontractors toward a goal in an approved plan does not excuse any Contractor's or subcontractor's failure to make good-faith efforts to achieve the plan's goals.

(d) The Contractor shall implement the affirmative action procedures in subparagraphs (g)(1) through (16) of this clause. The goals stated in the solicitation for this contract are expressed as percentages of the total hours of employment and training of minority and female utilization that the Contractor should reasonably be able to achieve in each construction trade in which it has employees in the covered area. If the Contractor performs construction work in a geographical area located outside of the covered area, it shall apply the goals established for the geographical area where that work is actually performed. The Contractor is expected to make substantially uniform progress toward its goals in each craft.

(e) Neither the terms and conditions of any collective bargaining agreement, nor the failure by a union with which the Contractor has a collective bargaining agreement, to refer minorities or women shall excuse the Contractor's obligations under this clause, Executive Order 11246, as amended, or the regulations thereunder.

(f) In order for the nonworking training hours of apprentices and trainees to be counted in meeting the goals, apprentices and trainees must be employed by the Contractor during the training period, and the Contractor must have made a commitment to employ the apprentices and trainees at the completion of their training, subject to the availability of employment opportunities. Trainees must be trained pursuant to training programs approved by the

U.S. Department of Labor.

(g) The Contractor shall take affirmative action to ensure equal employment opportunity. The evaluation of the Contractor's compliance with this clause shall be based upon its effort to achieve maximum results from its actions. The Contractor shall document these efforts fully and implement affirmative action steps at least as extensive as the following:

(1) Ensure a working environment free of harassment, intimidation, and coercion at all sites and in all facilities where the Contractor's employees are assigned to work. The Contractor, if possible, will assign two or more women to each construction project. The Contractor shall ensure that foremen, superintendents, and other onsite supervisory personnel are aware of and carry out the Contractor's obligation to maintain such a working environment, with specific attention to minority or female individuals working at these sites or facilities.

(2) Establish and maintain a current list of sources for minority and female recruitment. Provide written notification to minority and female recruitment sources and community organizations when the Contractor or its unions have employment opportunities available, and maintain a record of the organizations' responses.

(3) Establish and maintain a current file of the names, addresses, and telephone numbers of each minority and female off-the-street applicant, referrals of minorities or females from unions, recruitment sources, or community organizations, and the action taken with respect to each individual. If an individual was sent to the union hiring hall for referral and not referred back to the Contractor by the union or, if referred back, not employed by the Contractor, this shall be documented in the file, along with whatever additional actions the Contractor may have taken.

(4) Immediately notify the Deputy Assistant Secretary when the union or unions with which the Contractor has a collective bargaining agreement has not referred back to the Contractor a minority or woman sent by the Contractor, or when the Contractor has other information that the union referral process has impeded the Contractor's efforts to meet its obligations.

(5) Develop on-the-job training opportunities and/or participate in training programs for the area that expressly include minorities and women, including upgrading programs and apprenticeship and trainee programs relevant to the Contractor's employment needs, especially those programs funded or approved by the Department of Labor. The Contractor shall provide notice of these programs to the sources compiled under subparagraph (g)(2) of this clause.

(6) Disseminate the Contractor's equal employment policy by--

(i) Providing notice of the policy to unions and to training, recruitment, and outreach programs, and requesting their cooperation in assisting the Contractor in meeting its contract obligations;

(ii) Including the policy in any policy manual and in collective bargaining agreements;

(iii) Publicizing the policy in the company newspaper, annual report, etc.;

(iv) Reviewing the policy with all management personnel and with all minority and female employees at least once a year; and

(v) Posting the policy on bulletin boards accessible to employees at each location where construction work is performed.

(7) Review, at least annually, the Contractor's equal employment policy and affirmative action obligations with all employees having responsibility for hiring, assignment, layoff, termination, or other employment decisions. Conduct review of this policy with all on-site supervisory personnel before initiating construction work at a job site. A written record shall be made and maintained identifying the time and place of these meetings, persons attending, subject matter discussed, and disposition of the subject matter.

(8) Disseminate the Contractor's equal employment policy externally by including it in any advertising in the news media, specifically including minority and female news media. Provide written notification to, and discuss this policy with, other Contractors and subcontractors with which the Contractor does or anticipates doing business.

(9) Direct recruitment efforts, both oral and written, to minority, female, and community organizations, to schools with minority and female students, and to minority and female recruitment and training organizations serving the Contractor's recruitment area and employment needs. Not later than 1 month before the date for acceptance of applications for apprenticeship or training by any recruitment source, send written notification to organizations such as the above, describing the openings, screening procedures, and tests to be used in the selection process.

(10) Encourage present minority and female employees to recruit minority persons and women. Where reasonable, provide after-school, summer, and vacation employment to minority and female youth both on the site and in other areas of the Contractor's workforce.

(11) Validate all tests and other selection requirements where required under 41 CFR 60-3.

(12) Conduct, at least annually, an inventory and evaluation at least of all minority and female personnel for promotional opportunities. Encourage these employees to seek or to prepare for, through appropriate training, etc., opportunities for promotion.

(13) Ensure that seniority practices, job classifications, work assignments, and other personnel practices do not have a discriminatory effect by continually monitoring all personnel and employment-related activities to ensure that the Contractor's obligations under this contract are being carried out.

(14) Ensure that all facilities and company activities are nonsegregated except that separate or single-user rest rooms and necessary dressing or sleeping areas shall be provided to assure privacy between the sexes.

(15) Maintain a record of solicitations for subcontracts for minority and female construction contractors and suppliers, including circulation of solicitations to minority and female contractor associations and other business associations.

(16) Conduct a review, at least annually, of all supervisors' adherence to and performance under the Contractor's equal employment policy and affirmative action obligations.

(h) The Contractor is encouraged to participate in voluntary associations that may assist in fulfilling one or more of the affirmative action obligations contained in subparagraphs (g)(1) through (16) of this clause. The efforts of a contractor association, joint contractor-union, contractor-community, or similar group of which the contractor is a member and participant may be asserted as fulfilling one or more of its obligations under subparagraphs (g)(1) through (16) of this clause, provided the Contractor--

(1) Actively participates in the group;

(2) Makes every effort to ensure that the group has a positive impact on the employment of minorities and women in the industry;

(3) Ensures that concrete benefits of the program are reflected in the Contractor's minority and female workforce participation;

(4) Makes a good-faith effort to meet its individual goals and timetables; and

(5) Can provide access to documentation that demonstrates the effectiveness of actions taken on behalf of the Contractor. The obligation to comply is the Contractor's, and failure of such a group to fulfill an obligation shall not be a defense for the Contractor's noncompliance.

(i) A single goal for minorities and a separate single goal for women shall be established. The Contractor is required

to provide equal employment opportunity and to take affirmative action for all minority groups, both male and female, and all women, both minority and nonminority. Consequently, the Contractor may be in violation of Executive Order 11246, as amended, if a particular group is employed in a substantially disparate manner.

(j) The Contractor shall not use goals or affirmative action standards to discriminate against any person because of race, color, religion, sex, or national origin.

(k) The Contractor shall not enter into any subcontract with any person or firm debarred from Government contracts under Executive Order 11246, as amended.

(l) The Contractor shall carry out such sanctions and penalties for violation of this clause and of the Equal Opportunity clause, including suspension, termination, and cancellation of existing subcontracts, as may be imposed or ordered under Executive Order 11246, as amended, and its implementing regulations, by the OFCCP. Any failure to carry out these sanctions and penalties as ordered shall be a violation of this clause and Executive Order 11246, as amended.

(m) The Contractor in fulfilling its obligations under this clause shall implement affirmative action procedures at least as extensive as those prescribed in paragraph (g) of this clause, so as to achieve maximum results from its efforts to ensure equal employment opportunity. If the Contractor fails to comply with the requirements of Executive Order 11246, as amended, the implementing regulations, or this clause, the Deputy Assistant Secretary shall take action as prescribed in 41 CFR 60-4.8.

(n) The Contractor shall designate a responsible official to--

(1) Monitor all employment-related activity to ensure that the Contractor's equal employment policy is being carried out;

(2) Submit reports as may be required by the Government; and

(3) Keep records that shall at least include for each employee the name, address, telephone number, construction trade, union affiliation (if any), employee identification number, social security number, race, sex, status (e.g., mechanic, apprentice, trainee, helper, or laborer), dates of changes in status, hours worked per week in the indicated trade, rate of pay, and locations at which the work was performed. Records shall be maintained in an easily understandable and retrievable form; however, to the degree that existing records satisfy this requirement, separate records are not required to be maintained.

Nothing contained herein shall be construed as a limitation upon the application of other laws that establish different standards of compliance or upon the requirements for the hiring of local or other area residents (e.g., those under the Public Works Employment Act of 1977 and the Community Development Block Grant Program).

#### 52.222-35 EQUAL OPPORTUNITY FOR SPECIAL DISABLED VETERANS, VETERANS OF THE VIETNAM ERA AND OTHER ELIGIBLE VETERANS (DEC 2001)

(a) Definitions. As used in this clause--

All employment openings means all positions except executive and top management, those positions that will be filled from within the Contractor's organization, and positions lasting 3 days or less. This term includes full-time employment, temporary employment of more than 3 days duration, and part-time employment.

Executive and top management means any employee--

(1) Whose primary duty consists of the management of the enterprise in which the individual is employed or of a customarily recognized department or subdivision thereof;

(2) Who customarily and regularly directs the work of two or more other employees;

(3) Who has the authority to hire or fire other employees or whose suggestions and recommendations as to the hiring or firing and as to the advancement and promotion or any other change of status of other employees will be given particular weight;

(4) Who customarily and regularly exercises discretionary powers; and

(5) Who does not devote more than 20 percent or, in the case of an employee of a retail or service establishment, who does not devote more than 40 percent of total hours of work in the work week to activities that are not directly and closely related to the performance of the work described in paragraphs (1) through (4) of this definition. This paragraph (5) does not apply in the case of an employee who is in sole charge of an establishment or a physically separated branch establishment, or who owns at least a 20 percent interest in the enterprise in which the individual is employed.

Other eligible veteran means any other veteran who served on active duty during a war or in a campaign or expedition for which a campaign badge has been authorized.

Positions that will be filled from within the Contractor's organization means employment openings for which the Contractor will give no consideration to persons outside the Contractor's organization (including any affiliates, subsidiaries, and parent companies) and includes any openings the Contractor proposes to fill from regularly established "recall" lists. The exception does not apply to a particular opening once an employer decides to consider applicants outside of its organization.

Qualified special disabled veteran means a special disabled veteran who satisfies the requisite skill, experience, education, and other job-related requirements of the employment position such veteran holds or desires, and who, with or without reasonable accommodation, can perform the essential functions of such position.

Special disabled veteran means--

(1) A veteran who is entitled to compensation (or who but for the receipt of military retired pay would be entitled to compensation) under laws administered by the Department of Veterans Affairs for a disability--

(i) Rated at 30 percent or more; or

(ii) Rated at 10 or 20 percent in the case of a veteran who has been determined under 38 U.S.C. 3106 to have a serious employment handicap (i.e., a significant impairment of the veteran's ability to prepare for, obtain, or retain employment consistent with the veteran's abilities, aptitudes, and interests); or

(2) A person who was discharged or released from active duty because of a service-connected disability.

Veteran of the Vietnam era means a person who--

(1) Served on active duty for a period of more than 180 days and was discharged or released from active duty with other than a dishonorable discharge, if any part of such active duty occurred--

(i) In the Republic of Vietnam between February 28, 1961, and May 7, 1975; or

(ii) Between August 5, 1964, and May 7, 1975, in all other cases; or

(2) Was discharged or released from active duty for a service-connected disability if any part of the active duty was performed--

(i) In the Republic of Vietnam between February 28, 1961, and May 7, 1975; or

(ii) Between August 5, 1964, and May 7, 1975, in all other cases.



(b) General. (1) The Contractor shall not discriminate against the individual because the individual is a special disabled veteran, a veteran of the Vietnam era, or other eligible veteran, regarding any position for which the employee or applicant for employment is qualified. The Contractor shall take affirmative action to employ, advance in employment, and otherwise treat qualified special disabled veterans, veterans of the Vietnam era, and other eligible veterans without discrimination based upon their disability or veterans' status in all employment practices such as--

- (i) Recruitment, advertising, and job application procedures;
- (ii) Hiring, upgrading, promotion, award of tenure, demotion, transfer, layoff, termination, right of return from layoff and rehiring;
- (iii) Rate of pay or any other form of compensation and changes in compensation;
- (iv) Job assignments, job classifications, organizational structures, position descriptions, lines of progression, and seniority lists;
- (v) Leaves of absence, sick leave, or any other leave;
- (vi) Fringe benefits available by virtue of employment, whether or not administered by the Contractor;
- (vii) Selection and financial support for training, including apprenticeship, and on-the-job training under 38 U.S.C. 3687, professional meetings, conferences, and other related activities, and selection for leaves of absence to pursue training;
- (viii) Activities sponsored by the Contractor including social or recreational programs; and
- (ix) Any other term, condition, or privilege of employment.

(2) The Contractor shall comply with the rules, regulations, and relevant orders of the Secretary of Labor issued under the Vietnam Era Veterans' Readjustment Assistance Act of 1972 (the Act), as amended (38 U.S.C. 4211 and 4212).

(c) Listing openings. (1) The Contractor shall immediately list all employment openings that exist at the time of the execution of this contract and those which occur during the performance of this contract, including those not generated by this contract, and including those occurring at an establishment of the Contractor other than the one where the contract is being performed, but excluding those of independently operated corporate affiliates, at an appropriate local public employment service office of the State wherein the opening occurs. Listing employment openings with the U.S. Department of Labor's America's Job Bank shall satisfy the requirement to list jobs with the local employment service office.

(2) The Contractor shall make the listing of employment openings with the local employment service office at least concurrently with using any other recruitment source or effort and shall involve the normal obligations of placing a bona fide job order, including accepting referrals of veterans and nonveterans. This listing of employment openings does not require hiring any particular job applicant or hiring from any particular group of job applicants and is not intended to relieve the Contractor from any requirements of Executive orders or regulations concerning nondiscrimination in employment.

(3) Whenever the Contractor becomes contractually bound to the listing terms of this clause, it shall advise the State public employment agency in each State where it has establishments of the name and location of each hiring location in the State. As long as the Contractor is contractually bound to these terms and has so advised the State agency, it need not advise the State agency of subsequent contracts. The Contractor may advise the State agency when it is no longer bound by this contract clause.

(d) Applicability. This clause does not apply to the listing of employment openings that occur and are filled outside the 50 States, the District of Columbia, the Commonwealth of Puerto Rico, the Commonwealth of the Northern Mariana Islands, American Samoa, Guam, the Virgin Islands of the United States, and Wake Island.

(e) Postings. (1) The Contractor shall post employment notices in conspicuous places that are available to employees and applicants for employment.

(2) The employment notices shall--

(i) State the rights of applicants and employees as well as the Contractor's obligation under the law to take affirmative action to employ and advance in employment qualified employees and applicants who are special disabled veterans, veterans of the Vietnam era, and other eligible veterans; and

(ii) Be in a form prescribed by the Deputy Assistant Secretary for Federal Contract Compliance Programs, Department of Labor (Deputy Assistant Secretary of Labor), and provided by or through the Contracting Officer.

(3) The Contractor shall ensure that applicants or employees who are special disabled veterans are informed of the contents of the notice (e.g., the Contractor may have the notice read to a visually disabled veteran, or may lower the posted notice so that it can be read by a person in a wheelchair).

(4) The Contractor shall notify each labor union or representative of workers with which it has a collective bargaining agreement, or other contract understanding, that the Contractor is bound by the terms of the Act and is committed to take affirmative action to employ, and advance in employment, qualified special disabled veterans, veterans of the Vietnam era, and other eligible veterans.

(f) Noncompliance. If the Contractor does not comply with the requirements of this clause, the Government may take appropriate actions under the rules, regulations, and relevant orders of the Secretary of Labor issued pursuant to the Act.

(g) Subcontracts. The Contractor shall insert the terms of this clause in all subcontracts or purchase orders of \$25,000 or more unless exempted by rules, regulations, or orders of the Secretary of Labor. The Contractor shall act as specified by the Deputy Assistant Secretary of Labor to enforce the terms, including action for noncompliance.

(End of clause)

#### 52.222-36 AFFIRMATIVE ACTION FOR WORKERS WITH DISABILITIES (JUN 1998)

(a) General. (1) Regarding any position for which the employee or applicant for employment is qualified, the Contractor shall not discriminate against any employee or applicant because of physical or mental disability. The Contractor agrees to take affirmative action to employ, advance in employment, and otherwise treat qualified individuals with disabilities without discrimination based upon their physical or mental disability in all employment practices such as--

(i) Recruitment, advertising, and job application procedures;

(ii) Hiring, upgrading, promotion, award of tenure, demotion, transfer, layoff, termination, right of return from layoff, and rehiring;

(iii) Rates of pay or any other form of compensation and changes in compensation;

(iv) Job assignments, job classifications, organizational structures, position descriptions, lines of progression, and seniority lists;

(v) Leaves of absence, sick leave, or any other leave;

- (vi) Fringe benefits available by virtue of employment, whether or not administered by the Contractor;
  - (vii) Selection and financial support for training, including apprenticeships, professional meetings, conferences, and other related activities, and selection for leaves of absence to pursue training;
  - (viii) Activities sponsored by the Contractor, including social or recreational programs; and
  - (ix) Any other term, condition, or privilege of employment.
- (2) The Contractor agrees to comply with the rules, regulations, and relevant orders of the Secretary of Labor (Secretary) issued under the Rehabilitation Act of 1973 (29 U.S.C. 793) (the Act), as amended.
- (b) Postings. (1) The Contractor agrees to post employment notices stating--
- (i) The Contractor's obligation under the law to take affirmative action to employ and advance in employment qualified individuals with disabilities; and
  - (ii) The rights of applicants and employees.
- (2) These notices shall be posted in conspicuous places that are available to employees and applicants for employment. The Contractor shall ensure that applicants and employees with disabilities are informed of the contents of the notice (e.g., the Contractor may have the notice read to a visually disabled individual, or may lower the posted notice so that it might be read by a person in a wheelchair). The notices shall be in a form prescribed by the Deputy Assistant Secretary for Federal Contract Compliance of the U.S. Department of Labor (Deputy Assistant Secretary) and shall be provided by or through the Contracting Officer.
- (3) The Contractor shall notify each labor union or representative of workers with which it has a collective bargaining agreement or other contract understanding, that the Contractor is bound by the terms of Section 503 of the Act and is committed to take affirmative action to employ, and advance in employment, qualified individuals with physical or mental disabilities.
- (c) Noncompliance. If the Contractor does not comply with the requirements of this clause, appropriate actions may be taken under the rules, regulations, and relevant orders of the Secretary issued pursuant to the Act.
- (d) Subcontracts. The Contractor shall include the terms of this clause in every subcontract or purchase order in excess of \$10,000 unless exempted by rules, regulations, or orders of the Secretary. The Contractor shall act as specified by the Deputy Assistant Secretary to enforce the terms, including action for noncompliance.
- (End of clause)

**52.222-37 EMPLOYMENT REPORTS ON SPECIAL DISABLED VETERANS, VETERANS OF THE VIETNAM ERA, AND OTHER ELIGIBLE VETERANS (DEC 2001)**

- (a) Unless the Contractor is a State or local government agency, the Contractor shall report at least annually, as required by the Secretary of Labor, on--
  - (1) The number of special disabled veterans, the number of veterans of the Vietnam era, and other eligible veterans in the workforce of the Contractor by job category and hiring location; and
  - (2) The total number of new employees hired during the period covered by the report, and of the total, the number of special disabled veterans, the number of veterans of the Vietnam era, and the number of other eligible veterans; and
  - (3) The maximum number and the minimum number of employees of the Contractor during the period covered by the report.

(b) The Contractor shall report the above items by completing the Form VETS-100, entitled "Federal Contractor Veterans" Employment Report (VETS-100 Report)".

(c) The Contractor shall submit VETS-100 Reports no later than September 30 of each year beginning September 30, 1988.

(d) The employment activity report required by paragraph (a)(2) of this clause shall reflect total hires during the most recent 12-month period as of the ending date selected for the employment profile report required by paragraph (a)(1) of this clause. Contractors may select an ending date--

(1) As of the end of any pay period between July 1 and August 31 of the year the report is due; or

(2) As of December 31, if the Contractor has prior written approval from the Equal Employment Opportunity Commission to do so for purposes of submitting the Employer Information Report EEO-1 (Standard Form 100).

(e) The Contractor shall base the count of veterans reported according to paragraph (a) of this clause on voluntary disclosure. Each Contractor subject to the reporting requirements at 38 U.S.C. 4212 shall invite all special disabled veterans, veterans of the Vietnam era, and other eligible veterans who wish to benefit under the affirmative action program at 38 U.S.C. 4212 to identify themselves to the Contractor. The invitation shall state that--

(1) The information is voluntarily provided;

(2) The information will be kept confidential;

(3) Disclosure or refusal to provide the information will not subject the applicant or employee to any adverse treatment; and

(4) The information will be used only in accordance with the regulations promulgated under 38 U.S.C. 4212.

(f) The Contractor shall insert the terms of this clause in all subcontracts or purchase orders of \$25,000 or more unless exempted by rules, regulations, or orders of the Secretary of Labor.

(End of clause)

#### 52.223-3 HAZARDOUS MATERIAL IDENTIFICATION AND MATERIAL SAFETY DATA (JAN 1997)

(a) "Hazardous material", as used in this clause, includes any material defined as hazardous under the latest version of Federal Standard No. 313 (including revisions adopted during the term of the contract).

(b) The offeror must list any hazardous material, as defined in paragraph (a) of this clause, to be delivered under this contract. The hazardous material shall be properly identified and include any applicable identification number, such as National Stock Number or Special Item Number. This information shall also be included on the Material Safety Data Sheet submitted under this contract.

Material	Identification No.
(If none, insert "None")	
_____	_____
_____	_____
_____	_____

(c) This list must be updated during performance of the contract whenever the Contractor determines that any other

material to be delivered under this contract is hazardous.

(d) The apparently successful offeror agrees to submit, for each item as required prior to award, a Material Safety Data Sheet, meeting the requirements of 29 CFR 1910.1200(g) and the latest version of Federal Standard No. 313, for all hazardous material identified in paragraph (b) of this clause. Data shall be submitted in accordance with Federal Standard No. 313, whether or not the apparently successful offeror is the actual manufacturer of these items. Failure to submit the Material Safety Data Sheet prior to award may result in the apparently successful offeror being considered nonresponsible and ineligible for award.

(e) If, after award, there is a change in the composition of the item(s) or a revision to Federal Standard No. 313, which renders incomplete or inaccurate the data submitted under paragraph (d) of this clause, the Contractor shall promptly notify the Contracting Officer and resubmit the data.

(f) Neither the requirements of this clause nor any act or failure to act by the Government shall relieve the Contractor of any responsibility or liability for the safety of Government, Contractor, or subcontractor personnel or property.

(g) Nothing contained in this clause shall relieve the Contractor from complying with applicable Federal, State, and local laws, codes, ordinances, and regulations (including the obtaining of licenses and permits) in connection with hazardous material.

(h) The Government's rights in data furnished under this contract with respect to hazardous material are as follows:

(1) To use, duplicate and disclose any data to which this clause is applicable. The purposes of this right are to--

(i) Apprise personnel of the hazards to which they may be exposed in using, handling, packaging, transporting, or disposing of hazardous materials;

(ii) Obtain medical treatment for those affected by the material; and

(iii) Have others use, duplicate, and disclose the data for the Government for these purposes.

(2) To use, duplicate, and disclose data furnished under this clause, in accordance with subparagraph (h)(1) of this clause, in precedence over any other clause of this contract providing for rights in data.

(3) The Government is not precluded from using similar or identical data acquired from other sources.

(End of clause)

#### 52.223-6 DRUG-FREE WORKPLACE (MAY 2001)

(a) Definitions. As used in this clause --

"Controlled substance" means a controlled substance in schedules I through V of section 202 of the Controlled Substances Act (21 U.S.C. 812) and as further defined in regulation at 21 CFR 1308.11 - 1308.15.

"Conviction" means a finding of guilt (including a plea of nolo contendere) or imposition of sentence, or both, by any judicial body charged with the responsibility to determine violations of the Federal or State criminal drug statutes.

"Criminal drug statute" means a Federal or non-Federal criminal statute involving the manufacture, distribution, dispensing, possession, or use of any controlled substance.

"Drug-free workplace" means the site(s) for the performance of work done by the Contractor in connection with a specific contract where employees of the Contractor are prohibited from engaging in the unlawful manufacture,

distribution, dispensing, possession, or use of a controlled substance.

"Employee" means an employee of a Contractor directly engaged in the performance of work under a Government contract. "Directly engaged" is defined to include all direct cost employees and any other Contractor employee who has other than a minimal impact or involvement in contract performance.

"Individual" means an offeror/contractor that has no more than one employee including the offeror/contractor.

(b) The Contractor, if other than an individual, shall-- within 30 days after award (unless a longer period is agreed to in writing for contracts of 30 days or more performance duration), or as soon as possible for contracts of less than 30 days performance duration--

(1) Publish a statement notifying its employees that the unlawful manufacture, distribution, dispensing, possession, or use of a controlled substance is prohibited in the Contractor's workplace and specifying the actions that will be taken against employees for violations of such prohibition;

(2) Establish an ongoing drug-free awareness program to inform such employees about--

(i) The dangers of drug abuse in the workplace;

(ii) The Contractor's policy of maintaining a drug-free workplace;

(iii) Any available drug counseling, rehabilitation, and employee assistance programs; and

(iv) The penalties that may be imposed upon employees for drug abuse violations occurring in the workplace;

(3) Provide all employees engaged in performance of the contract with a copy of the statement required by subparagraph (b)(1) of this clause;

(4) Notify such employees in writing in the statement required by subparagraph (b)(1) of this clause that, as a condition of continued employment on this contract, the employee will--

(i) Abide by the terms of the statement; and

(ii) Notify the employer in writing of the employee's conviction under a criminal drug statute for a violation occurring in the workplace no later than 5 days after such conviction.

(5) Notify the Contracting Officer in writing within 10 days after receiving notice under subdivision (b)(4)(ii) of this clause, from an employee or otherwise receiving actual notice of such conviction. The notice shall include the position title of the employee;

(6) Within 30 days after receiving notice under subdivision (b)(4)(ii) of this clause of a conviction, take one of the following actions with respect to any employee who is convicted of a drug abuse violation occurring in the workplace:

(i) Taking appropriate personnel action against such employee, up to and including termination; or

(ii) Require such employee to satisfactorily participate in a drug abuse assistance or rehabilitation program approved for such purposes by a Federal, State, or local health, law enforcement, or other appropriate agency; and

(7) Make a good faith effort to maintain a drug-free workplace through implementation of subparagraphs (b)(1) through (b)(6) of this clause.

(c) The Contractor, if an individual, agrees by award of the contract or acceptance of a purchase order, not to engage in the unlawful manufacture, distribution, dispensing, possession, or use of a controlled substance while performing

this contract.

(d) In addition to other remedies available to the Government, the Contractor's failure to comply with the requirements of paragraph (b) or (c) of this clause may, pursuant to FAR 23.506, render the Contractor subject to suspension of contract payments, termination of the contract for default, and suspension or debarment.

(End of clause)

#### 52.223-14 TOXIC CHEMICAL RELEASE REPORTING (OCT 2000)

(a) Unless otherwise exempt, the Contractor, as owner or operator of a facility used in the performance of this contract, shall file by July 1 for the prior calendar year an annual Toxic Chemical Release Inventory Form (Form R) as described in sections 313(a) and (g) of the Emergency Planning and Community Right-to-Know Act of 1986 (EPCRA) (42 U.S.C. 11023(a) and (g)), and section 6607 of the Pollution Prevention Act of 1990 (PPA) (42 U.S.C. 13106). The Contractor shall file, for each facility subject to the Form R filing and reporting requirements, the annual Form R throughout the life of the contract.

(b) A Contractor owned or operated facility used in the performance of this contract is exempt from the requirement to file an annual Form R if--

(1) The facility does not manufacture, process, or otherwise use any toxic chemicals listed under section 313(c) of EPCRA, 42 U.S.C. 11023(c);

(2) The facility does not have 10 or more full-time employees as specified in section 313(b)(1)(A) of EPCRA, 42 U.S.C. 11023(b)(1)(A);

(3) The facility does not meet the reporting thresholds of toxic chemicals established under of EPCRA, 42 U.S.C. 11023(f) (including the alternate thresholds at 40 CFR 372.27, provided an appropriate certification form has been filed with EPA);

(4) The facility does not fall within Standard Industrial Classification Code (SIC) major groups 20 through 39 or their corresponding North American Industry Classification System (NAICS) sectors 31 through 33; or

(5) The facility is not located within any State of the United States, the District of Columbia, the Commonwealth of Puerto Rico, Guam, American Samoa, the United States Virgin Islands, the Northern Mariana Islands, or any other territory or possession over which the United States has jurisdiction.

(c) If the Contractor has certified to an exemption in accordance with one or more of the criteria in paragraph (b) of this clause, and after award of the contract circumstances change so that any of its owned or operated facilities used in the performance of this contract is no longer exempt--

(1) The Contractor shall notify the Contracting Officer; and

(2) The Contractor, as owner or operator of a facility used in the performance of this contract that is no longer exempt, shall (i) submit a Toxic Chemical Release Inventory Form (Form R) on or before July 1 for the prior calendar year during which the facility becomes eligible; and (ii) continue to file the annual Form R for the life of the contract for such facility.

(d) The Contracting Officer may terminate this contract or take other action as appropriate, if the Contractor fails to comply accurately and fully with the EPCRA and PPA toxic chemical release filing and reporting requirements.

(e) Except for acquisitions of commercial items, as defined in FAR Part 2, the Contractor shall--

(1) For competitive subcontracts expected to exceed \$100,000 (including all options), include a solicitation provision substantially the same as the provision at FAR 52.223-13, Certification of Toxic Chemical Release Reporting; and

(2) Include in any resultant subcontract exceeding \$100,000 (including all options), the substance of this clause, except this paragraph (e).

#### 52.225-9 BUY AMERICAN ACT--BALANCE OF PAYMENTS PROGRAM—CONSTRUCTION MATERIALS (FEB 2000)

(a) Definitions. As used in this clause--

Component means any article, material, or supply incorporated directly into construction materials.

Construction material means an article, material, or supply brought to the construction site by the Contractor or a subcontractor for incorporation into the building or work. The term also includes an item brought to the site preassembled from articles, materials, or supplies. However, emergency life safety systems, such as emergency lighting, fire alarm, and audio evacuation systems, that are discrete systems incorporated into a public building or work and that are produced as complete systems, are evaluated as a single and distinct construction material regardless of when or how the individual parts or components of those systems are delivered to the construction site. Materials purchased directly by the Government are supplies, not construction material.

Cost of components means--

(1) For components purchased by the Contractor, the acquisition cost, including transportation costs to the place of incorporation into the end product (whether or not such costs are paid to a domestic firm), and any applicable duty (whether or not a duty-free entry certificate is issued); or

(2) For components manufactured by the Contractor, all costs associated with the manufacture of the component, including transportation costs as described in paragraph (1) of this definition, plus allocable overhead costs, but excluding profit. Cost of components does not include any costs associated with the manufacture of the end product.

Domestic construction material means--

(1) An unmanufactured construction material mined or produced in the United States; or

(2) A construction material manufactured in the United States, if the cost of its components mined, produced, or manufactured in the United States exceeds 50 percent of the cost of all its components. Components of foreign origin of the same class or kind for which nonavailability determinations have been made are treated as domestic.

Foreign construction material means a construction material other than a domestic construction material.

United States means the 50 States and the District of Columbia, U.S. territories and possessions, Puerto Rico, the Northern Mariana Islands, and any other place subject to U.S. jurisdiction, but does not include leased bases.

(b) Domestic preference. (1) This clause implements the Buy American Act (41 U.S.C. 10a-10d) and the Balance of Payments Program by providing a preference for domestic construction material. The Contractor shall use only domestic construction material in performing this contract, except as provided in paragraphs (b)(2) and (b)(3) of this clause.

(2) This requirement does not apply to the construction material or components listed by the Government as follows:  
[Contracting Officer to list applicable excepted materials or indicate "none"]



(3) The Contracting Officer may add other foreign construction material to the list in paragraph (b)(2) of this clause if the Government determines that

(i) The cost of domestic construction material would be unreasonable. The cost of a particular domestic construction material subject to the requirements of the Buy American Act is unreasonable when the cost of such material exceeds the cost of foreign material by more than 6 percent. For determination of unreasonable cost under the Balance of Payments Program, the Contracting Officer will use a factor of 50 percent;

(ii) The application of the restriction of the Buy American Act or Balance of Payments Program to a particular construction material would be impracticable or inconsistent with the public interest; or

(iii) The construction material is not mined, produced, or manufactured in the United States in sufficient and reasonably available commercial quantities of a satisfactory quality.

(c) Request for determination of inapplicability of the Buy American Act or Balance of Payments Program. (1)(i) Any Contractor request to use foreign construction material in accordance with paragraph (b)(3) of this clause shall include adequate information for Government evaluation of the request, including--

(A) A description of the foreign and domestic construction materials;

(B) Unit of measure;

(C) Quantity;

(D) Price;

(E) Time of delivery or availability;

(F) Location of the construction project;

(G) Name and address of the proposed supplier; and

(H) A detailed justification of the reason for use of foreign construction materials cited in accordance with paragraph (b)(3) of this clause.

(ii) A request based on unreasonable cost shall include a reasonable survey of the market and a completed price comparison table in the format in paragraph (d) of this clause.

(iii) The price of construction material shall include all delivery costs to the construction site and any applicable duty (whether or not a duty-free certificate may be issued).

(iv) Any Contractor request for a determination submitted after contract award shall explain why the Contractor could not reasonably foresee the need for such determination and could not have requested the determination before contract award. If the Contractor does not submit a satisfactory explanation, the Contracting Officer need not make a determination.

(2) If the Government determines after contract award that an exception to the Buy American Act or Balance of Payments Program applies and the Contracting Officer and the Contractor negotiate adequate consideration, the Contracting Officer will modify the contract to allow use of the foreign construction material. However, when the basis for the exception is the unreasonable price of a domestic construction material, adequate consideration is not less than the differential established in paragraph (b)(3)(i) of this clause.

(3) Unless the Government determines that an exception to the Buy American Act or Balance of Payments Program applies, use of foreign construction material is noncompliant with the Buy American Act or Balance of Payments Program.

(d) Data. To permit evaluation of requests under paragraph (c) of this clause based on unreasonable cost, the Contractor shall include the following information and any applicable supporting data based on the survey of suppliers:

Foreign and Domestic Construction Materials Price Comparison

Construction material description	Unit of measure	Quantity	Price (dollars) \1\
Item 1			
Foreign construction material....			
Domestic construction material...			
Item 2			
Foreign construction material....			
Domestic construction material...			

Include all delivery costs to the construction site and any applicable duty (whether or not a duty-free entry certificate is issued).

List name, address, telephone number, and contact for suppliers surveyed. Attach copy of response; if oral, attach summary.

Include other applicable supporting information.

(End of clause)

52.225-13 RESTRICTIONS ON CERTAIN FOREIGN PURCHASES (JUL 2000)

(a) The Contractor shall not acquire, for use in the performance of this contract, any supplies or services originating from sources within, or that were located in or transported from or through, countries whose products are banned from importation into the United States under regulations of the Office of Foreign Assets Control, Department of the Treasury. Those countries are Cuba, Iran, Iraq, Libya, North Korea, Sudan, the territory of Afghanistan controlled by the Taliban, and Serbia (excluding the territory of Kosovo).

(b) The Contractor shall not acquire for use in the performance of this contract any supplies or services from entities controlled by the government of Iraq.

(c) The Contractor shall insert this clause, including this paragraph (c), in all subcontracts.

(End of clause)

52.226-1 UTILIZATION OF INDIAN ORGANIZATIONS AND INDIAN-OWNED ECONOMIC ENTERPRISES (JUN 2000)

(a) Definitions. As used in this clause:

"Indian" means any person who is a member of any Indian tribe, band, group, pueblo or community that is recognized by the Federal Government as eligible for services from the Bureau of Indian Affairs (BIA) in accordance with 25 U.S.C. 1452(c) and any "Native" as defined in the Alaska Native Claims Settlement Act (43 U.S.C. 1601).

"Indian organization" means the governing body of any Indian tribe or entity established or recognized by the governing body of an Indian tribe for the purposes of 25 U.S.C., chapter 17.

"Indian-owned economic enterprise" means any Indian-owned (as determined by the Secretary of the Interior)

commercial, industrial, or business activity established or organized for the purpose of profit, provided that Indian ownership constitute a not less than 51 percent of the enterprise.

"Indian tribe" means any Indian tribe, band, group, pueblo or community, including native villages and native groups (including corporations organized by Kenai, Juneau, Sitka, and Kodiak) as defined in the Alaska Native Claims Settlement Act, that is recognized by the Federal Government as eligible for services from BIA in accordance with 25 U.S.C. 1542(c).

"Interested party" means a prime contractor or an actual or prospective offeror whose direct economic interest would be affected by the award of a subcontract or by the failure to award a subcontract.

(b) The Contractor shall use its best efforts to give Indian organizations and Indian-owned economic enterprises (25 U.S.C. 1544) the maximum practicable opportunity to participate in the subcontracts it awards to the fullest extent consistent with efficient performance of its contract.

(1) The Contracting Officer and the Contractor, acting in good faith, may rely on the representation of an Indian organization or Indian-owned economic enterprise as to its eligibility, unless an interested party challenges its status or the Contracting Officer has independent reason to question that status. In the event of a challenge to the representation of a subcontractor, the Contracting Officer will refer the matter to the U.S. Department of the Interior, Bureau of Indian Affairs (BIA), Attn: Chief, Division of Contracting and Grants Administration, 1849 C Street, NW., MS 2626-MIB, Washington, DC 20240-4000.

The BIA will determine the eligibility and notify the Contracting Officer. No incentive payment will be made within 50 working days of subcontract award or while a challenge is pending. If a subcontractor is determined to be an ineligible participant, no incentive payment will be made under the Indian Incentive Program.

(2) The Contractor may request an adjustment under the Indian Incentive Program to the following:

- (i) The estimated cost of a cost-type contract.
- (ii) The target cost of a cost-plus-incentive-fee prime contract.
- (iii) The target cost and ceiling price of a fixed-price incentive prime contract.
- (iv) The price of a firm-fixed-price prime contract.

(3) The amount of the adjustment to the prime contract is 5 percent of the estimated cost, target cost, or firm-fixed-price included in the subcontract initially awarded to the Indian organization or Indian-owned economic enterprise.

(4) The Contractor has the burden of proving the amount claimed and must assert its request for an adjustment prior to completion of contract performance.

(c) The Contracting Officer, subject to the terms and conditions of the contract and the availability of funds, will authorize an incentive payment of 5 percent of the amount paid to the subcontractor. The Contracting Officer will seek funding in accordance with agency procedures.

(End of clause)

#### 52.227-1 AUTHORIZATION AND CONSENT (JUL 1995)

(a) The Government authorizes and consents to all use and manufacture, in performing this contract or any subcontract at any tier, of any invention described in and covered by a United States patent (1) embodied in the structure or composition of any article the delivery of which is accepted by the Government under this contract or

(2) used in machinery, tools, or methods whose use necessarily results from compliance by the Contractor or a subcontractor with (i) specifications or written provisions forming a part of this contract or (ii) specific written instructions given by the Contracting Officer directing the manner of performance. The entire liability to the Government for infringement of a patent of the United States shall be determined solely by the provisions of the indemnity clause, if any, included in this contract or any subcontract hereunder (including any lower-tier subcontract), and the Government assumes liability for all other infringement to the extent of the authorization and consent hereinabove granted.

(b) The Contractor agrees to include, and require inclusion of, this clause, suitably modified to identify the parties, in all subcontracts at any tier for supplies or services (including construction, architect-engineer services, and materials, supplies, models, samples, and design or testing services expected to exceed the simplified acquisition threshold (however, omission of this clause from any subcontract, including those at or below the simplified acquisition threshold, does not affect this authorization and consent.)

#### 52.227-2 NOTICE AND ASSISTANCE REGARDING PATENT AND COPYRIGHT INFRINGEMENT (AUG 1996)

(a) The Contractor shall report to the Contracting Officer, promptly and in reasonable written detail, each notice or claim of patent or copyright infringement based on the performance of this contract of which the Contractor has knowledge.

(b) In the event of any claim or suit against the Government on account of any alleged patent or copyright infringement arising out of the performance of this contract or out of the use of any supplies furnished or work or services performed under this contract, the Contractor shall furnish to the Government, when requested by the Contracting Officer, all evidence and information in possession of the Contractor pertaining to such suit or claim. Such evidence and information shall be furnished at the expense of the Government except where the Contractor has agreed to indemnify the Government.

(c) The Contractor agrees to include, and require inclusion of, this clause in all subcontracts at any tier for supplies or services (including construction and architect-engineer subcontracts and those for material, supplies, models, samples, or design or testing services) expected to exceed the simplified acquisition threshold at (FAR) 2.101 to exceed the dollar amount set forth in 13.000 of the Federal Acquisition Regulation (FAR).

(End of clause)

#### 52.227-4 PATENT INDEMNITY--CONSTRUCTION CONTRACTS (APR 1984)

Except as otherwise provided, the Contractor agrees to indemnify the Government and its officers, agents, and employees against liability, including costs and expenses, for infringement upon any United States patent (except a patent issued upon an application that is now or may hereafter be withheld from issue pursuant to a Secrecy Order under 35 U.S.C. 181) arising out of performing this contract or out of the use or disposal by or for the account of the Government of supplies furnished or work performed under this contract.

#### 52.228-2 ADDITIONAL BOND SECURITY (OCT 1997)

The Contractor shall promptly furnish additional security required to protect the Government and persons supplying labor or materials under this contract if--

(a) Any surety upon any bond, or issuing financial institution for other security, furnished with this contract becomes unacceptable to the Government.

(b) Any surety fails to furnish reports on its financial condition as required by the Government;

(c) The contract price is increased so that the penal sum of any bond becomes inadequate in the opinion of the Contracting Officer; or

(d) An irrevocable letter of credit (ILC) used as security will expire before the end of the period of required security. If the Contractor does not furnish an acceptable extension or replacement ILC, or other acceptable substitute, at least 30 days before an ILC's scheduled expiration, the Contracting officer has the right to immediately draw on the ILC.

#### 52.228-11 PLEDGES OF ASSETS (FEB 1992)

(a) Offerors shall obtain from each person acting as an individual surety on a bid guarantee, a performance bond, or a payment bond--

(1) Pledge of assets; and

(2) Standard Form 28, Affidavit of Individual Surety.

(b) Pledges of assets from each person acting as an individual surety shall be in the form of--

(1) Evidence of an escrow account containing cash, certificates of deposit, commercial or Government securities, or other assets described in FAR 28.203-2 (except see 28.203-2(b)(2) with respect to Government securities held in book entry form) and/or;

(2) A recorded lien on real estate. The offeror will be required to provide--

(i) Evidence of title in the form of a certificate of title prepared by a title insurance company approved by the United States Department of Justice. This title evidence must show fee simple title vested in the surety along with any concurrent owners; whether any real estate taxes are due and payable; and any recorded encumbrances against the property, including the lien filed in favor of the Government as required by FAR 28.203-3(d);

(ii) Evidence of the amount due under any encumbrance shown in the evidence of title;

(iii) A copy of the current real estate tax assessment of the property or a current appraisal dated no earlier than 6 months prior to the date of the bond, prepared by a professional appraiser who certifies that the appraisal has been conducted in accordance with the generally accepted appraisal standards as reflected in the Uniform Standards of Professional Appraisal Practice, as promulgated by the Appraisal Foundation.

(End of clause)

#### 52.228-12 PROSPECTIVE SUBCONTRACTOR REQUESTS FOR BONDS. (OCT 1995)

In accordance with Section 806(a)(3) of Pub. L. 102-190, as amended by Sections 2091 and 8105 of Pub. L. 103-355, upon the request of a prospective subcontractor or supplier offering to furnish labor or material for the performance of this contract for which a payment bond has been furnished to the Government pursuant to the Miller Act, the Contractor shall promptly provide a copy of such payment bond to the requester.

#### 52.228-14 IRREVOCABLE LETTER OF CREDIT (DEC 1999)

(a) "Irrevocable letter of credit" (ILC), as used in this clause, means a written commitment by a federally insured financial institution to pay all or part of a stated amount of money, until the expiration date of the letter, upon presentation by the Government (the beneficiary) of a written demand therefor. Neither the financial institution nor the offeror/Contractor can revoke or condition the letter of credit.

(b) If the offeror intends to use an ILC in lieu of a bid bond, or to secure other types of bonds such as performance and payment bonds, the letter of credit and letter of confirmation formats in paragraphs (e) and (f) of this clause shall be used.

(c) The letter of credit shall be irrevocable, shall require presentation of no document other than a written demand and the ILC (including confirming letter, if any), shall be issued/confirmed by an acceptable federally insured financial institution as provided in paragraph (d) of this clause, and--

(1) If used as a bid guarantee, the ILC shall expire no earlier than 60 days after the close of the bid acceptance period;

(2) If used as an alternative to corporate or individual sureties as security for a performance or payment bond, the offeror/Contractor may submit an ILC with an initial expiration date estimated to cover the entire period for which financial security is required or may submit an ILC with an initial expiration date that is a minimum period of one year from the date of issuance. The ILC shall provide that, unless the issuer provides the beneficiary written notice of non-renewal at least 60 days in advance of the current expiration date, the ILC is automatically extended without amendment for one year from the expiration date, or any future expiration date, until the period of required coverage is completed and the Contracting Officer provides the financial institution with a written statement waiving the right to payment. The period of required coverage shall be:

(i) For contracts subject to the Miller Act, the later of--

(A) One year following the expected date of final payment;

(B) For performance bonds only, until completion of any warranty period; or

(C) For payment bonds only, until resolution of all claims filed against the payment bond during the one-year period following final payment.

(ii) For contracts not subject to the Miller Act, the later of--

(A) 90 days following final payment; or

(B) For performance bonds only, until completion of any warranty period.

(d) Only federally insured financial institutions rated investment grade or higher shall issue or confirm the ILC. The offeror/Contractor shall provide the Contracting Officer a credit rating that indicates the financial institution has the required rating(s) as of the date of issuance of the ILC. Unless the financial institution issuing the ILC had letter of credit business of less than \$25 million in the past year, ILCs over \$5 million must be confirmed by another acceptable financial institution that had letter of credit business of less than \$25 million in the past year.

(e) The following format shall be used by the issuing financial institution to create an ILC:

---

[Issuing Financial Institution's Letterhead or Name and Address]

Issue Date \_\_\_\_\_

IRREVOCABLE LETTER OF CREDIT NO. \_\_\_\_\_

Account party's name \_\_\_\_\_

Account party's address \_\_\_\_\_

For Solicitation No. \_\_\_\_\_(for reference only)

TO: [U.S. Government agency]

[U.S. Government agency's address]

1. We hereby establish this irrevocable and transferable Letter of Credit in your favor for one or more drawings up to United States \$ \_\_\_\_\_. This Letter of Credit is payable at [issuing financial institution's and, if any, confirming financial institution's] office at [issuing financial institution's address and, if any, confirming financial institution's address] and expires with our close of business on \_\_\_\_\_, or any automatically extended expiration date.

2. We hereby undertake to honor your or the transferee's sight draft(s) drawn on the issuing or, if any, the confirming financial institution, for all or any part of this credit if presented with this Letter of Credit and confirmation, if any, at the office specified in paragraph 1 of this Letter of Credit on or before the expiration date or any automatically extended expiration date.

3. [This paragraph is omitted if used as a bid guarantee, and subsequent paragraphs are renumbered.] It is a condition of this Letter of Credit that it is deemed to be automatically extended without amendment for one year from the expiration date hereof, or any future expiration date, unless at least 60 days prior to any expiration date, we notify you or the transferee by registered mail, or other receipted means of delivery, that we elect not to consider this Letter of Credit renewed for any such additional period. At the time we notify you, we also agree to notify the account party (and confirming financial institution, if any) by the same means of delivery.

4. This Letter of Credit is transferable. Transfers and assignments of proceeds are to be effected without charge to either the beneficiary or the transferee/assignee of proceeds. Such transfer or assignment shall be only at the written direction of the Government (the beneficiary) in a form satisfactory to the issuing financial institution and the confirming financial institution, if any.

5. This Letter of Credit is subject to the Uniform Customs and Practice (UCP) for Documentary Credits, 1993 Revision, International Chamber of Commerce Publication No. 500, and to the extent not inconsistent therewith, to the laws of \_\_\_\_\_ [state of confirming financial institution, if any, otherwise state of issuing financial institution].

6. If this credit expires during an interruption of business of this financial institution as described in Article 17 of the UCP, the financial institution specifically agrees to effect payment if this credit is drawn against within 30 days after the resumption of our business.

Sincerely,

\_\_\_\_\_

[Issuing financial institution]

(f) The following format shall be used by the financial institution to confirm an ILC:

\_\_\_\_\_  
[Confirming Financial Institution's Letterhead or Name and Address]

(Date) \_\_\_\_\_

Our Letter of Credit Advice Number \_\_\_\_\_

Beneficiary: \_\_\_\_\_ [U.S. Government agency]

Issuing Financial Institution: \_\_\_\_\_

Issuing Financial Institution's LC No.: \_\_\_\_\_

Gentlemen:

1. We hereby confirm the above indicated Letter of Credit, the original of which is attached, issued by \_\_\_\_\_ [name of issuing financial institution] for drawings of up to United States dollars \_\_\_\_\_/U.S. \$\_\_\_\_\_ and expiring with our close of business on \_\_\_\_\_ [the expiration date], or any automatically extended expiration date.

2. Draft(s) drawn under the Letter of Credit and this Confirmation are payable at our office located at \_\_\_\_\_.

3. We hereby undertake to honor sight draft(s) drawn under and presented with the Letter of Credit and this Confirmation at our offices as specified herein.

4. [This paragraph is omitted if used as a bid guarantee, and subsequent paragraphs are renumbered.] It is a condition of this confirmation that it be deemed automatically extended without amendment for one year from the expiration date hereof, or any automatically extended expiration date, unless:

(a) At least 60 days prior to any such expiration date, we shall notify the Contracting Officer, or the transferee and the issuing financial institution, by registered mail or other receipted means of delivery, that we elect not to consider this confirmation extended for any such additional period; or

(b) The issuing financial institution shall have exercised its right to notify you or the transferee, the account party, and ourselves, of its election not to extend the expiration date of the Letter of Credit.

5. This confirmation is subject to the Uniform Customs and Practice (UCP) for Documentary Credits, 1993 Revision, International Chamber of Commerce Publication No. 500, and to the extent not inconsistent therewith, to the laws of \_\_\_\_\_ [state of confirming financial institution].

6. If this confirmation expires during an interruption of business of this financial institution as described in Article 17 of the UCP, we specifically agree to effect payment if this credit is drawn against within 30 days after the resumption of our business.

Sincerely,

\_\_\_\_\_

[Confirming financial institution]

(g) The following format shall be used by the Contracting Officer for a sight draft to draw on the Letter of Credit:

SIGHT DRAFT

\_\_\_\_\_

[City, State]

(Date) \_\_\_\_\_

[Name and address of financial institution]

Pay to the order of \_\_\_\_\_ [Beneficiary Agency] \_\_\_\_\_ the sum of United States \$\_\_\_\_\_.



This draft is drawn under Irrevocable Letter of Credit No. \_\_\_\_\_.

\_\_\_\_\_  
[Beneficiary Agency]

By: \_\_\_\_\_

(End of clause)

#### 52.228-15 PERFORMANCE AND PAYMENT BONDS--CONSTRUCTION (JUL 2000)-

(a) Definitions. As used in this clause--

Original contract price means the award price of the contract; or, for requirements contracts, the price payable for the estimated total quantity; or, for indefinite-quantity contracts, the price payable for the specified minimum quantity. Original contract price does not include the price of any options, except those options exercised at the time of contract award.

(b) Amount of required bonds. Unless the resulting contract price is \$100,000 or less, the successful offeror shall furnish performance and payment bonds to the Contracting Officer as follows:

(1) Performance bonds (Standard Form 25). The penal amount of performance bonds at the time of contract award shall be 100 percent of the original contract price.

(2) Payment Bonds (Standard Form 25-A). The penal amount of payment bonds at the time of contract award shall be 100 percent of the original contract price.

(3) Additional bond protection. (i) The Government may require additional performance and payment bond protection if the contract price is increased. The increase in protection generally will equal 100 percent of the increase in contract price.

(ii) The Government may secure the additional protection by directing the Contractor to increase the penal amount of the existing bond or to obtain an additional bond.

(c) Furnishing executed bonds. The Contractor shall furnish all executed bonds, including any necessary reinsurance agreements, to the Contracting Officer, within the time period specified in the Bid Guarantee provision of the solicitation, or otherwise specified by the Contracting Officer, but in any event, before starting work.

(d) Surety or other security for bonds. The bonds shall be in the form of firm commitment, supported by corporate sureties whose names appear on the list contained in Treasury Department Circular 570, individual sureties, or by other acceptable security such as postal money order, certified check, cashier's check, irrevocable letter of credit, or, in accordance with Treasury Department regulations, certain bonds or notes of the United States. Treasury Circular 570 is published in the Federal Register or may be obtained from the U.S. Department of Treasury, Financial Management Service, Surety Bond Branch, 401 14th Street, NW, 2nd Floor, West Wing, Washington, DC 20227.

(e) Notice of subcontractor waiver of protection (40 U.S.C. 270b(c)). Any waiver of the right to sue on the payment bond is void unless it is in writing, signed by the person whose right is waived, and executed after such person has first furnished labor or material for use in the performance of the contract.

(End of clause)

#### 52.229-3 FEDERAL, STATE, AND LOCAL TAXES (JAN 1991)

(a) "Contract date," as used in this clause, means the date set for bid opening or, if this is a negotiated contract or a

modification, the effective date of this contract or modification.

"All applicable Federal, State, and local taxes and duties," as used in this clause, means all taxes and duties, in effect on the contract date, that the taxing authority is imposing and collecting on the transactions or property covered by this contract.

"After-imposed Federal tax," as used in this clause, means any new or increased Federal excise tax or duty, or tax that was exempted or excluded on the contract date but whose exemption was later revoked or reduced during the contract period, on the transactions or property covered by this contract that the Contractor is required to pay or bear as the result of legislative, judicial, or administrative action taking effect after the contract date. It does not include social security tax or other employment taxes.

"After-relieved Federal tax," as used in this clause, means any amount of Federal excise tax or duty, except social security or other employment taxes, that would otherwise have been payable on the transactions or property covered by this contract, but which the Contractor is not required to pay or bear, or for which the Contractor obtains a refund or drawback, as the result of legislative, judicial, or administrative action taking effect after the contract date.

(b) The contract price includes all applicable Federal, State, and local taxes and duties.

(c) The contract price shall be increased by the amount of any after-imposed Federal tax, provided the Contractor warrants in writing that no amount for such newly imposed Federal excise tax or duty or rate increase was included in the contract price, as a contingency reserve or otherwise.

(d) The contract price shall be decreased by the amount of any after-relieved Federal tax.

(e) The contract price shall be decreased by the amount of any Federal excise tax or duty, except social security or other employment taxes, that the Contractor is required to pay or bear, or does not obtain a refund of, through the Contractor's fault, negligence, or failure to follow instructions of the Contracting Officer.

(f) No adjustment shall be made in the contract price under this clause unless the amount of the adjustment exceeds \$250.

(g) The Contractor shall promptly notify the Contracting Officer of all matters relating to any Federal excise tax or duty that reasonably may be expected to result in either an increase or decrease in the contract price and shall take appropriate action as the Contracting Officer directs.

(h) The Government shall, without liability, furnish evidence appropriate to establish exemption from any Federal, State, or local tax when the Contractor requests such evidence and a reasonable basis exists to sustain the exemption.

(End of clause)

## 52.232-5 PAYMENTS UNDER FIXED-PRICE CONSTRUCTION CONTRACTS (MAY 1997)

(a) Payment of price. The Government shall pay the Contractor the contract price as provided in this contract.

(b) Progress payments. The Government shall make progress payments monthly as the work proceeds, or at more frequent intervals as determined by the Contracting Officer, on estimates of work accomplished which meets the standards of quality established under the contract, as approved by the Contracting Officer.

(1) The Contractor's request for progress payments shall include the following substantiation:

(i) An itemization of the amounts requested, related to the various elements of work required by the contract covered by the payment requested.

(ii) A listing of the amount included for work performed by each subcontractor under the contract.

(iii) A listing of the total amount of each subcontract under the contract.

(iv) A listing of the amounts previously paid to each such subcontractor under the contract.

(v) Additional supporting data in a form and detail required by the Contracting Officer.

(2) In the preparation of estimates, the Contracting Officer may authorize material delivered on the site and preparatory work done to be taken into consideration. Material delivered to the Contractor at locations other than the site also may be taken into consideration if--

(i) Consideration is specifically authorized by this contract; and

(ii) The Contractor furnishes satisfactory evidence that it has acquired title to such material and that the material will be used to perform this contract.

(c) Contractor certification. Along with each request for progress payments, the Contractor shall furnish the following certification, or payment shall not be made: (However, if the Contractor elects to delete paragraph (c)(4) from the certification, the certification is still acceptable.)

I hereby certify, to the best of my knowledge and belief, that--

(1) The amounts requested are only for performance in accordance with the specifications, terms, and conditions of the contract;

(2) Payments to subcontractors and suppliers have been made from previous payments received under the contract, and timely payments will be made from the proceeds of the payment covered by this certification, in accordance with subcontract agreements and the requirements of chapter 39 of Title 31, United States Code;

(3) This request for progress payments does not include any amounts which the prime contractor intends to withhold or retain from a subcontractor or supplier in accordance with the terms and conditions of the subcontract; and

(4) This certification is not to be construed as final acceptance of a subcontractor's performance.

\_\_\_\_\_

(Name)

\_\_\_\_\_

(Title)

\_\_\_\_\_

(Date)

(d) Refund of unearned amounts. If the Contractor, after making a certified request for progress payments, discovers that a portion or all of such request constitutes a payment for performance by the Contractor that fails to conform to the specifications, terms, and conditions of this contract (hereinafter referred to as the "unearned amount"), the Contractor shall--

(1) Notify the Contracting Officer of such performance deficiency; and

(2) Be obligated to pay the Government an amount (computed by the Contracting Officer in the manner provided in paragraph (j) of this clause) equal to interest on the unearned amount from the 8th day after the date of receipt of the

unearned amount until--

(i) The date the Contractor notifies the Contracting Officer that the performance deficiency has been corrected; or

(ii) The date the Contractor reduces the amount of any subsequent certified request for progress payments by an amount equal to the unearned amount.

(e) Retainage. If the Contracting Officer finds that satisfactory progress was achieved during any period for which a progress payment is to be made, the Contracting Officer shall authorize payment to be made in full. However, if satisfactory progress has not been made, the Contracting Officer may retain a maximum of 10 percent of the amount of the payment until satisfactory progress is achieved. When the work is substantially complete, the Contracting Officer may retain from previously withheld funds and future progress payments that amount the Contracting Officer considers adequate for protection of the Government and shall release to the Contractor all the remaining withheld funds. Also, on completion and acceptance of each separate building, public work, or other division of the contract, for which the price is stated separately in the contract, payment shall be made for the completed work without retention of a percentage.

(f) Title, liability, and reservation of rights. All material and work covered by progress payments made shall, at the time of payment, become the sole property of the Government, but this shall not be construed as--

(1) Relieving the Contractor from the sole responsibility for all material and work upon which payments have been made or the restoration of any damaged work; or

(2) Waiving the right of the Government to require the fulfillment of all of the terms of the contract.

(g) Reimbursement for bond premiums. In making these progress payments, the Government shall, upon request, reimburse the Contractor for the amount of premiums paid for performance and payment bonds (including coinsurance and reinsurance agreements, when applicable) after the Contractor has furnished evidence of full payment to the surety. The retainage provisions in paragraph (e) of this clause shall not apply to that portion of progress payments attributable to bond premiums.

(h) Final payment. The Government shall pay the amount due the Contractor under this contract after--

(1) Completion and acceptance of all work;

(2) Presentation of a properly executed voucher; and

(3) Presentation of release of all claims against the Government arising by virtue of this contract, other than claims, in stated amounts, that the Contractor has specifically excepted from the operation of the release. A release may also be required of the assignee if the Contractor's claim to amounts payable under this contract has been assigned under the Assignment of Claims Act of 1940 (31 U.S.C. 3727 and 41 U.S.C. 15).

(i) Limitation because of undefinitized work. Notwithstanding any provision of this contract, progress payments shall not exceed 80 percent on work accomplished on undefinitized contract actions. A "contract action" is any action resulting in a contract, as defined in FAR Subpart 2.1, including contract modifications for additional supplies or services, but not including contract modifications that are within the scope and under the terms of the contract, such as contract modifications issued pursuant to the Changes clause, or funding and other administrative changes.

(j) Interest computation on unearned amounts. In accordance with 31 U.S.C. 3903(c)(1), the amount payable under subparagraph (d)(2) of this clause shall be--

(1) Computed at the rate of average bond equivalent rates of 91-day Treasury bills auctioned at the most recent auction of such bills prior to the date the Contractor receives the unearned amount; and

(2) Deducted from the next available payment to the Contractor.

#### 52.232-9 LIMITATION ON WITHHOLDING OF PAYMENTS (APR 1984)

If more than one clause or Schedule term of this contract authorizes the temporary withholding of amounts otherwise payable to the Contractor for supplies delivered or services performed, the total of the amounts withheld at any one time shall not exceed the greatest amount that may be withheld under any one clause or Schedule term at that time; provided, that this limitation shall not apply to--

- (a) Withholdings pursuant to any clause relating to wages or hours of employees;
- (b) Withholdings not specifically provided for by this contract;
- (c) The recovery of overpayments; and
- (d) Any other withholding for which the Contracting Officer determines that this limitation is inappropriate.

#### 52.232-17 INTEREST (JUNE 1996)

(a) Except as otherwise provided in this contract under a Price Reduction for Defective Cost or Pricing Data clause or a Cost Accounting Standards clause, all amounts that become payable by the Contractor to the Government under this contract (net of any applicable tax credit under the Internal Revenue Code (26 U.S.C. 1481)) shall bear simple interest from the date due until paid unless paid within 30 days of becoming due. The interest rate shall be the interest rate established by the Secretary of the Treasury as provided in Section 12 of the Contract Disputes Act of 1978 (Public Law 95-563), which is applicable to the period in which the amount becomes due, as provided in paragraph (b) of this clause, and then at the rate applicable for each six-month period as fixed by the Secretary until the amount is paid. reproduce, prepare derivative works, distribute copies to the public, and (b) Amounts shall be due at the earliest of the following dates:

- (1) The date fixed under this contract.
  - (2) The date of the first written demand for payment consistent with this contract, including any demand resulting from a default termination.
  - (3) The date the Government transmits to the Contractor a proposed supplemental agreement to confirm completed negotiations establishing the amount of debt.
  - (4) If this contract provides for revision of prices, the date of written notice to the Contractor stating the amount of refund payable in connection with a pricing proposal or a negotiated pricing agreement not confirmed by contract modification.
- (c) The interest charge made under this clause may be reduced under the procedures prescribed in 32.614-2 of the Federal Acquisition Regulation in effect on the date of this contract.

#### 52.232-23 ASSIGNMENT OF CLAIMS (JAN 1986)

(a) The Contractor, under the Assignment of Claims Act, as amended, 31 U.S.C. 3727, 41 U.S.C. 15 (hereafter referred to as "the Act"), may assign its rights to be paid amounts due or to become due as a result of the performance of this contract to a bank, trust company, or other financing institution, including any Federal lending agency. The assignee under such an assignment may thereafter further assign or reassign its right under the original

assignment to any type of financing institution described in the preceding sentence.

(b) Any assignment or reassignment authorized under the Act and this clause shall cover all unpaid amounts payable under this contract, and shall not be made to more than one party, except that an assignment or reassignment may be made to one party as agent or trustee for two or more parties participating in the financing of this contract.

(c) The Contractor shall not furnish or disclose to any assignee under this contract any classified document (including this contract) or information related to work under this contract until the Contracting Officer authorizes such action in writing.

#### 52.232-27 PROMPT PAYMENT FOR CONSTRUCTION CONTRACTS (MAY 2001)

Notwithstanding any other payment terms in this contract, the Government will make invoice payments and contract financing payments under the terms and conditions specified in this clause. Payment shall be considered as being made on the day a check is dated or the date of an electronic funds transfer. Definitions of pertinent terms are set forth in sections 2.101 and 32.902 of the Federal Acquisition Regulation. All days referred to in this clause are calendar days, unless otherwise specified. (However, see subparagraph (a)(3) concerning payments due on Saturdays, Sundays, and legal holidays.)

(a) Invoice payments. (1) Types of invoice payments. For purposes of this clause, there are several types of invoice payments that may occur under this contract, as follows:

(i) Progress payments, if provided for elsewhere in this contract, based on Contracting Officer approval of the estimated amount and value of work or services performed, including payments for reaching milestones in any project:

(A) The due date for making such payments shall be 14 days after receipt of the payment request by the designated billing office. If the designated billing office fails to annotate the payment request with the actual date of receipt at the time of receipt, the payment due date shall be the 14th day after the date of the Contractor's payment request, provided a proper payment request is received and there is no disagreement over quantity, quality, or Contractor compliance with contract requirements.

(B) The due date for payment of any amounts retained by the Contracting Officer in accordance with the clause at 52.232-5, Payments Under Fixed-Price Construction Contracts, shall be as specified in the contract or, if not specified, 30 days after approval for release to the Contractor by the Contracting Officer.

(ii) Final payments based on completion and acceptance of all work and presentation of release of all claims against the Government arising by virtue of the contract, and payments for partial deliveries that have been accepted by the Government (e.g., each separate building, public work, or other division of the contract for which the price is stated separately in the contract):

(A) The due date for making such payments shall be either the 30th day after receipt by the designated billing office of a proper invoice from the Contractor, or the 30th day after Government acceptance of the work or services completed by the Contractor, whichever is later. If the designated billing office fails to annotate the invoice with the date of actual receipt at the time of receipt, the invoice payment due date shall be the 30th day after the date of the Contractor's invoice, provided a proper invoice is received and there is no disagreement over quantity, quality, or Contractor compliance with contract requirements.

(B) On a final invoice where the payment amount is subject to contract settlement actions (e.g., release of claims), acceptance shall be deemed to have occurred on the effective date of the contract settlement.

(2) Contractor's invoice. The Contractor shall prepare and submit invoices to the designated billing office specified in the contract. A proper invoice must include the items listed in subdivisions (a)(2)(i) through (a)(2)(ix) of this

clause. If the invoice does not comply with these requirements, it shall be returned within 7 days after the date the designated billing office received the invoice, with a statement of the reasons why it is not a proper invoice. Untimely notification will be taken into account in computing any interest penalty owed the Contractor in the manner described in subparagraph (a)(4) of this clause.

(i) Name and address of the Contractor.

(ii) Invoice date. (The Contractor is encouraged to date invoices as close as possible to the date of mailing or transmission.)

(iii) Contract number or other authorization for work or services performed (including order number and contract line item number).

(iv) Description of work or services performed.

(v) Delivery and payment terms (e.g., prompt payment discount terms).

(vi) Name and address of Contractor official to whom payment is to be sent (must be the same as that in the contract or in a proper notice of assignment).

(vii) Name (where practicable), title, phone number, and mailing address of person to be notified in the event of a defective invoice.

(viii) For payments described in subdivision (a)(1)(i) of this clause, substantiation of the amounts requested and certification in accordance with the requirements of the clause at 52.232-5, Payments Under Fixed-Price Construction Contracts.

(ix) Any other information or documentation required by the contract.

(x) While not required, the Contractor is strongly encouraged to assign an identification number to each invoice.

(3) Interest penalty. An interest penalty shall be paid automatically by the designated payment office, without request from the Contractor, if payment is not made by the due date and the conditions listed in subdivisions (a)(3)(i) through (a)(3)(iii) of this clause are met, if applicable. However, when the due date falls on a Saturday, Sunday, or legal holiday when Federal Government offices are closed and Government business is not expected to be conducted, payment may be made on the following business day without incurring a late payment interest penalty.

(i) A proper invoice was received by the designated billing office.

(ii) A receiving report or other Government documentation authorizing payment was processed and there was no disagreement over quantity, quality, Contractor compliance with any contract term or condition, or requested progress payment amount.

(iii) In the case of a final invoice for any balance of funds due the Contractor for work or services performed, the amount was not subject to further contract settlement actions between the Government and the Contractor.

(4) Computing penalty amount. The interest penalty shall be at the rate established by the Secretary of the Treasury under section 12 of the Contract Disputes Act of 1978 (41 U.S.C. 611) that is in effect on the day after the due date, except where the interest penalty is prescribed by other governmental authority (e.g., tariffs). This rate is referred to as the "Renegotiation Board Interest Rate," and it is published in the Federal Register semiannually on or about January 1 and July 1. The interest penalty shall accrue daily on the invoice principal payment amount approved by the Government until the payment date of such approved principal amount; and will be compounded in 30-day increments inclusive from the first day after the due date through the payment date. That is, interest accrued at the end of any 30-day period will be added to the approved invoice principal payment amount and will be subject to

interest penalties if not paid in the succeeding 30-day period. If the designated billing office failed to notify the Contractor of a defective invoice within the periods prescribed in subparagraph (a)(2) of this clause, the due date on the corrected invoice will be adjusted by subtracting from such date the number of days taken beyond the prescribed notification of defects period. Any interest penalty owed the Contractor will be based on this adjusted due date. Adjustments will be made by the designated payment office for errors in calculating interest penalties.

(i) For the sole purpose of computing an interest penalty that might be due the Contractor for payments described in subdivision (a)(1)(ii) of this clause, Government acceptance or approval shall be deemed to have occurred constructively on the 7th day after the Contractor has completed the work or services in accordance with the terms and conditions of the contract. In the event that actual acceptance or approval occurs within the constructive acceptance or approval period, the determination of an interest penalty shall be based on the actual date of acceptance or approval. Constructive acceptance or constructive approval requirements do not apply if there is a disagreement over quantity, quality, or Contractor compliance with a contract provision. These requirements also do not compel Government officials to accept work or services, approve Contractor estimates, perform contract administration functions, or make payment prior to fulfilling their responsibilities.

(ii) The following periods of time will not be included in the determination of an interest penalty:

(A) The period taken to notify the Contractor of defects in invoices submitted to the Government, but this may not exceed 7 days.

(B) The period between the defects notice and resubmission of the corrected invoice by the Contractor.

(C) For incorrect electronic funds transfer (EFT) information, in accordance with the EFT clause of this contract.

(iii) Interest penalties will not continue to accrue after the filing of a claim for such penalties under the clause at 52.233-1, Disputes, or for more than 1 year. Interest penalties of less than \$1 need not be paid.

(iv) Interest penalties are not required on payment delays due to disagreement between the Government and the Contractor over the payment amount or other issues involving contract compliance, or on amounts temporarily withheld or retained in accordance with the terms of the contract. Claims involving disputes, and any interest that may be payable, will be resolved in accordance with the clause at 52.233-1, Disputes.

(5) Prompt payment discounts. An interest penalty also shall be paid automatically by the designated payment office, without request from the Contractor, if a discount for prompt payment is taken improperly. The interest penalty will be calculated on the amount of discount taken for the period beginning with the first day after the end of the discount period through the date when the Contractor is paid.

(6) Additional interest penalty. (i) If this contract was awarded on or after October 1, 1989, a penalty amount, calculated in accordance with subdivision (a)(6)(iii) of this clause, shall be paid in addition to the interest penalty amount if the Contractor--

(A) Is owed an interest penalty of \$1 or more;

(B) Is not paid the interest penalty within 10 days after the date the invoice amount is paid; and

(C) Makes a written demand to the designated payment office for additional penalty payment, in accordance with subdivision (a)(6)(ii) of this clause, postmarked not later than 40 days after the date the invoice amount is paid.

(ii)(A) Contractors shall support written demands for additional penalty payments with the following data. No additional data shall be required. Contractors shall--

(1) Specifically assert that late payment interest is due under a specific invoice, and request payment of all overdue late payment interest penalty and such additional penalty as may be required;



(2) Attach a copy of the invoice on which the unpaid late payment interest was due; and

(3) State that payment of the principal has been received, including the date of receipt.

(B) Demands must be postmarked on or before the 40th day after payment was made, except that--

(1) If the postmark is illegible or nonexistent, the demand must have been received and annotated with the date of receipt by the designated payment office on or before the 40th day after payment was made; or

(2) If the postmark is illegible or nonexistent and the designated payment office fails to make the required annotation, the demand's validity will be determined by the date the Contractor has placed on the demand; provided such date is no later than the 40th day after payment was made.

(iii)(A) The additional penalty shall be equal to 100 percent of any original late payment interest penalty, except--

(1) The additional penalty shall not exceed \$5,000;

(2) The additional penalty shall never be less than \$25; and

(3) No additional penalty is owed if the amount of the underlying interest penalty is less than \$1.

(B) If the interest penalty ceases to accrue in accordance with the limits stated in subdivision (a)(4)(iii) of this clause, the amount of the additional penalty shall be calculated on the amount of interest penalty that would have accrued in the absence of these limits, subject to the overall limits on the additional penalty specified in subdivision (a)(6)(iii)(A) of this clause.

(C) For determining the maximum and minimum additional penalties, the test shall be the interest penalty due on each separate payment made for each separate contract. The maximum and minimum additional penalty shall not be based upon individual invoices unless the invoices are paid separately. Where payments are consolidated for disbursing purposes, the maximum and minimum additional penalty determination shall be made separately for each contract therein.

(D) The additional penalty does not apply to payments regulated by other Government regulations (e.g., payments under utility contracts subject to tariffs and regulation).

(b) Contract financing payments. (1) Due dates for recurring financing payments. If this contract provides for contract financing, requests for payment shall be submitted to the designated billing office as specified in this contract or as directed by the Contracting Officer. Contract financing payments shall be made on the **30th** day after receipt of a proper contract financing request by the designated billing office. In the event that an audit or other review of a specific financing request is required to ensure compliance with the terms and conditions of the contract, the designated payment office is not compelled to make payment by the due date specified.

(2) Due dates for other contract financing. For advance payments, loans, or other arrangements that do not involve recurring submissions of contract financing requests, payment shall be made in accordance with the corresponding contract terms or as directed by the Contracting Officer.

(3) Interest penalty not applicable. Contract financing payments shall not be assessed an interest penalty for payment delays.

(c) Subcontract clause requirements. The Contractor shall include in each subcontract for property or services (including a material supplier) for the purpose of performing this contract the following:

(1) Prompt payment for subcontractors. A payment clause that obligates the Contractor to pay the subcontractor for satisfactory performance under its subcontract not later than 7 days from receipt of payment out of such amounts as are paid to the Contractor under this contract.

(2) Interest for subcontractors. An interest penalty clause that obligates the Contractor to pay to the subcontractor an interest penalty for each payment not made in accordance with the payment clause--

(i) For the period beginning on the day after the required payment date and ending on the date on which payment of the amount due is made; and

(ii) Computed at the rate of interest established by the Secretary of the Treasury, and published in the Federal Register, for interest payments under section 12 of the Contract Disputes Act of 1978 (41 U.S.C. 611) in effect at the time the Contractor accrues the obligation to pay an interest penalty.

(3) Subcontractor clause flowdown. A clause requiring each subcontractor to include a payment clause and an interest penalty clause conforming to the standards set forth in subparagraphs (c)(1) and (c)(2) of this clause in each of its subcontracts, and to require each of its subcontractors to include such clauses in their subcontracts with each lower-tier subcontractor or supplier.

(d) Subcontract clause interpretation. The clauses required by paragraph (c) of this clause shall not be construed to impair the right of the Contractor or a subcontractor at any tier to negotiate, and to include in their subcontract, provisions that--

(1) Retainage permitted. Permit the Contractor or a subcontractor to retain (without cause) a specified percentage of each progress payment otherwise due to a subcontractor for satisfactory performance under the subcontract without incurring any obligation to pay a late payment interest penalty, in accordance with terms and conditions agreed to by the parties to the subcontract, giving such recognition as the parties deem appropriate to the ability of a subcontractor to furnish a performance bond and a payment bond;

(2) Withholding permitted. Permit the Contractor or subcontractor to make a determination that part or all of the subcontractor's request for payment may be withheld in accordance with the subcontract agreement; and

(3) Withholding requirements. Permit such withholding without incurring any obligation to pay a late payment penalty if--

(i) A notice conforming to the standards of paragraph (g) of this clause previously has been furnished to the subcontractor; and

(ii) A copy of any notice issued by a Contractor pursuant to subdivision (d)(3)(i) of this clause has been furnished to the Contracting Officer.

(e) Subcontractor withholding procedures. If a Contractor, after making a request for payment to the Government but before making a payment to a subcontractor for the subcontractor's performance covered by the payment request, discovers that all or a portion of the payment otherwise due such subcontractor is subject to withholding from the subcontractor in accordance with the subcontract agreement, then the Contractor shall--

(1) Subcontractor notice. Furnish to the subcontractor a notice conforming to the standards of paragraph (g) of this clause as soon as practicable upon ascertaining the cause giving rise to a withholding, but prior to the due date for subcontractor payment;

(2) Contracting Officer notice. Furnish to the Contracting Officer, as soon as practicable, a copy of the notice furnished to the subcontractor pursuant to subparagraph (e)(1) of this clause;

(3) Subcontractor progress payment reduction. Reduce the subcontractor's progress payment by an amount not to exceed the amount specified in the notice of withholding furnished under subparagraph (e)(1) of this clause;

(4) Subsequent subcontractor payment. Pay the subcontractor as soon as practicable after the correction of the identified subcontract performance deficiency, and--

(i) Make such payment within--

(A) Seven days after correction of the identified subcontract performance deficiency (unless the funds therefor must be recovered from the Government because of a reduction under subdivision (e)(5)(i)) of this clause; or

(B) Seven days after the Contractor recovers such funds from the Government; or

(ii) Incur an obligation to pay a late payment interest penalty computed at the rate of interest established by the Secretary of the Treasury, and published in the Federal Register, for interest payments under section 12 of the Contracts Disputes Act of 1978 (41 U.S.C. 611) in effect at the time the Contractor accrues the obligation to pay an interest penalty;

(5) Notice to Contracting Officer. Notify the Contracting Officer upon--

(i) Reduction of the amount of any subsequent certified application for payment; or

(ii) Payment to the subcontractor of any withheld amounts of a progress payment, specifying--

(A) The amounts withheld under subparagraph (e)(1) of this clause; and

(B) The dates that such withholding began and ended; and

(6) Interest to Government. Be obligated to pay to the Government an amount equal to interest on the withheld payments (computed in the manner provided in 31 U.S.C. 3903(c)(1)), from the 8th day after receipt of the withheld amounts from the Government until--

(i) The day the identified subcontractor performance deficiency is corrected; or

(ii) The date that any subsequent payment is reduced under subdivision (e)(5)(i) of this clause.

(f) Third-party deficiency reports. (1) Withholding from subcontractor. If a Contractor, after making payment to a first-tier subcontractor, receives from a supplier or subcontractor of the first-tier subcontractor (hereafter referred to as a "second-tier subcontractor") a written notice in accordance with section 2 of the Act of August 24, 1935 (40 U.S.C. 270b, Miller Act), asserting a deficiency in such first-tier subcontractor's performance under the contract for which the Contractor may be ultimately liable, and the Contractor determines that all or a portion of future payments otherwise due such first-tier subcontractor is subject to withholding in accordance with the subcontract agreement, the Contractor may, without incurring an obligation to pay an interest penalty under subparagraph (e)(6) of this clause--

(i) Furnish to the first-tier subcontractor a notice conforming to the standards of paragraph (g) of this clause as soon as practicable upon making such determination; and

(ii) Withhold from the first-tier subcontractor's next available progress payment or payments an amount not to exceed the amount specified in the notice of withholding furnished under subdivision (f)(1)(i) of this clause.

(2) Subsequent payment or interest charge. As soon as practicable, but not later than 7 days after receipt of satisfactory written notification that the identified subcontract performance deficiency has been corrected, the Contractor shall--

(i) Pay the amount withheld under subdivision (f)(1)(ii) of this clause to such first-tier subcontractor; or

(ii) Incur an obligation to pay a late payment interest penalty to such first-tier subcontractor computed at the rate of interest established by the Secretary of the Treasury, and published in the Federal Register, for interest payments under section 12 of the Contracts Disputes Act of 1978 (41 U.S.C. 611) in effect at the time the Contractor accrues

the obligation to pay an interest penalty.

(g) Written notice of subcontractor withholding. A written notice of any withholding shall be issued to a subcontractor (with a copy to the Contracting Officer of any such notice issued by the Contractor), specifying--

- (1) The amount to be withheld;
- (2) The specific causes for the withholding under the terms of the subcontract; and
- (3) The remedial actions to be taken by the subcontractor in order to receive payment of the amounts withheld.

(h) Subcontractor payment entitlement. The Contractor may not request payment from the Government of any amount withheld or retained in accordance with paragraph (d) of this clause until such time as the Contractor has determined and certified to the Contracting Officer that the subcontractor is entitled to the payment of such amount.

(i) Prime-subcontractor disputes. A dispute between the Contractor and subcontractor relating to the amount or entitlement of a subcontractor to a payment or a late payment interest penalty under a clause included in the subcontract pursuant to paragraph (c) of this clause does not constitute a dispute to which the United States is a party. The United States may not be interpleaded in any judicial or administrative proceeding involving such a dispute.

(j) Preservation of prime-subcontractor rights. Except as provided in paragraph (i) of this clause, this clause shall not limit or impair any contractual, administrative, or judicial remedies otherwise available to the Contractor or a subcontractor in the event of a dispute involving late payment or nonpayment by the Contractor or deficient subcontract performance or nonperformance by a subcontractor.

(k) Non-recourse for prime contractor interest penalty. The Contractor's obligation to pay an interest penalty to a subcontractor pursuant to the clauses included in a subcontract under paragraph (c) of this clause shall not be construed to be an obligation of the United States for such interest penalty. A cost-reimbursement claim may not include any amount for reimbursement of such interest penalty.

#### 52.232-33 PAYMENT BY ELECTRONIC FUNDS TRANSFER—CENTRAL CONTRACTOR REGISTRATION (MAY 1999)

(a) Method of payment. (1) All payments by the Government under this contract shall be made by electronic funds transfer (EFT), except as provided in paragraph (a)(2) of this clause. As used in this clause, the term "EFT" refers to the funds transfer and may also include the payment information transfer.

(2) In the event the Government is unable to release one or more payments by EFT, the Contractor agrees to either--

- (i) Accept payment by check or some other mutually agreeable method of payment; or
- (ii) Request the Government to extend the payment due date until such time as the Government can make payment by EFT (but see paragraph (d) of this clause).

(b) Contractor's EFT information. The Government shall make payment to the Contractor using the EFT information contained in the Central Contractor Registration (CCR) database. In the event that the EFT information changes, the Contractor shall be responsible for providing the updated information to the CCR database.

(c) Mechanisms for EFT payment. The Government may make payment by EFT through either the Automated Clearing House (ACH) network, subject to the rules of the National Automated Clearing House Association, or the Fedwire Transfer System. The rules governing Federal payments through the ACH are contained in 31 CFR part 210.

(d) Suspension of payment. If the Contractor's EFT information in the CCR database is incorrect, then the Government need not make payment to the Contractor under this contract until correct EFT information is entered into the CCR database; and any invoice or contract financing request shall be deemed not to be a proper invoice for the purpose of prompt payment under this contract. The prompt payment terms of the contract regarding notice of an improper invoice and delays in accrual of interest penalties apply.

(e) Contractor EFT arrangements. If the Contractor has identified multiple payment receiving points (i.e., more than one remittance address and/or EFT information set) in the CCR database, and the Contractor has not notified the Government of the payment receiving point applicable to this contract, the Government shall make payment to the first payment receiving point (EFT information set or remittance address as applicable) listed in the CCR database.

(f) Liability for uncompleted or erroneous transfers. (1) If an uncompleted or erroneous transfer occurs because the Government used the Contractor's EFT information incorrectly, the Government remains responsible for--

(i) Making a correct payment;

(ii) Paying any prompt payment penalty due; and

(iii) Recovering any erroneously directed funds.

(2) If an uncompleted or erroneous transfer occurs because the Contractor's EFT information was incorrect, or was revised within 30 days of Government release of the EFT payment transaction instruction to the Federal Reserve System, and--

(i) If the funds are no longer under the control of the payment office, the Government is deemed to have made payment and the Contractor is responsible for recovery of any erroneously directed funds; or

(ii) If the funds remain under the control of the payment office, the Government shall not make payment, and the provisions of paragraph (d) of this clause shall apply.

(g) EFT and prompt payment. A payment shall be deemed to have been made in a timely manner in accordance with the prompt payment terms of this contract if, in the EFT payment transaction instruction released to the Federal Reserve System, the date specified for settlement of the payment is on or before the prompt payment due date, provided the specified payment date is a valid date under the rules of the Federal Reserve System.

(h) EFT and assignment of claims. If the Contractor assigns the proceeds of this contract as provided for in the assignment of claims terms of this contract, the Contractor shall require as a condition of any such assignment, that the assignee shall register in the CCR database and shall be paid by EFT in accordance with the terms of this clause. In all respects, the requirements of this clause shall apply to the assignee as if it were the Contractor. EFT information that shows the ultimate recipient of the transfer to be other than the Contractor, in the absence of a proper assignment of claims acceptable to the Government, is incorrect EFT information within the meaning of paragraph (d) of this clause.

(i) Liability for change of EFT information by financial agent. The Government is not liable for errors resulting from changes to EFT information made by the Contractor's financial agent.

(j) Payment information. The payment or disbursing office shall forward to the Contractor available payment information that is suitable for transmission as of the date of release of the EFT instruction to the Federal Reserve System. The Government may request the Contractor to designate a desired format and method(s) for delivery of payment information from a list of formats and methods the payment office is capable of executing. However, the Government does not guarantee that any particular format or method of delivery is available at any particular payment office and retains the latitude to use the format and delivery method most convenient to the Government. If the Government makes payment by check in accordance with paragraph (a) of this clause, the Government shall mail the payment information to the remittance address contained in the CCR database.

(End of Clause)

52.233-1 DISPUTES. (DEC 1998)

(a) This contract is subject to the Contract Disputes Act of 1978, as amended (41 U.S.C. 601-613).

(b) Except as provided in the Act, all disputes arising under or relating to this contract shall be resolved under this clause.

(c) "Claim," as used in this clause, means a written demand or written assertion by one of the contracting parties seeking, as a matter of right, the payment of money in a sum certain, the adjustment or interpretation of contract terms, or other relief arising under or relating to this contract. A claim arising under a contract, unlike a claim relating to that contract, is a claim that can be resolved under a contract clause that provides for the relief sought by the claimant. However, a written demand or written assertion by the Contractor seeking the payment of money exceeding \$100,000 is not a claim under the Act until certified as required by subparagraph (d)(2) of this clause. A voucher, invoice, or other routine request for payment that is not in dispute when submitted is not a claim under the Act. The submission may be converted to a claim under the Act, by complying with the submission and certification requirements of this clause, if it is disputed either as to liability or amount or is not acted upon in a reasonable time.

(d)(1) A claim by the Contractor shall be made in writing and, unless otherwise stated in this contract, submitted within 6 years after accrual of the claim to the Contracting Officer for a written decision. A claim by the Government against the Contractor shall be subject to a written decision by the Contracting Officer.

(2)(i) The contractors shall provide the certification specified in subparagraph (d)(2)(iii) of this clause when submitting any claim -

(A) Exceeding \$100,000; or

(B) Regardless of the amount claimed, when using -

(1) Arbitration conducted pursuant to 5 U.S.C. 575-580; or

(2) Any other alternative means of dispute resolution (ADR) technique that the agency elects to handle in accordance with the Administrative Dispute Resolution Act (ADRA).

(ii) The certification requirement does not apply to issues in controversy that have not been submitted as all or part of a claim.

(iii) The certification shall state as follows: "I certify that the claim is made in good faith; that the supporting data are accurate and complete to the best of my knowledge and belief; that the amount requested accurately reflects the contract adjustment for which the Contractor believes the Government is liable; and that I am duly authorized to certify the claim on behalf of the Contractor.

(3) The certification may be executed by any person duly authorized to bind the Contractor with respect to the claim.

(e) For Contractor claims of \$100,000 or less, the Contracting Officer must, if requested in writing by the Contractor, render a decision within 60 days of the request. For Contractor-certified claims over \$100,000, the Contracting Officer must, within 60 days, decide the claim or notify the Contractor of the date by which the decision will be made.

(f) The Contracting Officer's decision shall be final unless the Contractor appeals or files a suit as provided in the Act.

(g) If the claim by the Contractor is submitted to the Contracting Officer or a claim by the Government is presented to the Contractor, the parties, by mutual consent, may agree to use alternative dispute resolution (ADR). If the

Contractor refuses an offer for ADR, the Contractor shall inform the Contracting Officer, in writing, of the Contractor's specific reasons for rejecting the request.

(h) The Government shall pay interest on the amount found due and unpaid from (1) the date the Contracting Officer receives the claim (certified, if required); or (2) the date that payment otherwise would be due, if that date is later, until the date of payment. With regard to claims having defective certifications, as defined in (FAR) 48 CFR 33.201, interest shall be paid from the date that the Contracting Officer initially receives the claim. Simple interest on claims shall be paid at the rate, fixed by the Secretary of the Treasury as provided in the Act, which is applicable to the period during which the Contracting Officer receives the claim and then at the rate applicable for each 6-month period as fixed by the Treasury Secretary during the pendency of the claim.

(i) The Contractor shall proceed diligently with performance of this contract, pending final resolution of any request for relief, claim, appeal, or action arising under the contract, and comply with any decision of the Contracting Officer.

(End of clause)

#### 52.233-3 PROTEST AFTER AWARD (AUG. 1996)

(a) Upon receipt of a notice of protest (as defined in FAR 33.101) or a determination that a protest is likely (see FAR 33.102(d)), the Contracting Officer may, by written order to the Contractor, direct the Contractor to stop performance of the work called for by this contract. The order shall be specifically identified as a stop-work order issued under this clause. Upon receipt of the order, the Contractor shall immediately comply with its terms and take all reasonable steps to minimize the incurrence of costs allocable to the work covered by the order during the period of work stoppage. Upon receipt of the final decision in the protest, the Contracting Officer shall either--

(1) Cancel the stop-work order; or

(2) Terminate the work covered by the order as provided in the Default, or the Termination for Convenience of the Government, clause of this contract.

(b) If a stop-work order issued under this clause is canceled either before or after a final decision in the protest, the Contractor shall resume work. The Contracting Officer shall make an equitable adjustment in the delivery schedule or contract price, or both, and the contract shall be modified, in writing, accordingly, if--

(1) The stop-work order results in an increase in the time required for, or in the Contractor's cost properly allocable to, the performance of any part of this contract; and

(2) The Contractor asserts its right to an adjustment within 30 days after the end of the period of work stoppage; provided, that if the Contracting Officer decides the facts justify the action, the Contracting Officer may receive and act upon a proposal at any time before final payment under this contract.

(c) If a stop-work order is not canceled and the work covered by the order is terminated for the convenience of the Government, the Contracting Officer shall allow reasonable costs resulting from the stop-work order in arriving at the termination settlement.

(d) If a stop-work order is not canceled and the work covered by the order is terminated for default, the Contracting Officer shall allow, by equitable adjustment or otherwise, reasonable costs resulting from the stop-work order.

(e) The Government's rights to terminate this contract at any time are not affected by action taken under this clause.

(f) If, as the result of the Contractor's intentional or negligent misstatement, misrepresentation, or miscertification, a protest related to this contract is sustained, and the Government pays costs, as provided in FAR 33.102(b)(2) or 33.104(h)(1), the Government may require the Contractor to reimburse the Government the amount of such costs. In addition to any other remedy available, and pursuant to the requirements of Subpart 32.6, the Government may

collect this debt by offsetting the amount against any payment due the Contractor under any contract between the Contractor and the Government.

#### 52.236-2 DIFFERING SITE CONDITIONS (APR 1984)

(a) The Contractor shall promptly, and before the conditions are disturbed, give a written notice to the Contracting Officer of

(1) subsurface or latent physical conditions at the site which differ materially from those indicated in this contract, or

(2) unknown physical conditions at the site, of an unusual nature, which differ materially from those ordinarily encountered and generally recognized as inhering in work of the character provided for in the contract.

(b) The Contracting Officer shall investigate the site conditions promptly after receiving the notice. If the conditions do materially so differ and cause an increase or decrease in the Contractor's cost of, or the time required for, performing any part of the work under this contract, whether or not changed as a result of the conditions, an equitable adjustment shall be made under this clause and the contract modified in writing accordingly.

(c) No request by the Contractor for an equitable adjustment to the contract under this clause shall be allowed, unless the Contractor has given the written notice required; provided, that the time prescribed in (a) above for giving written notice may be extended by the Contracting Officer.

(d) No request by the Contractor for an equitable adjustment to the contract for differing site conditions shall be allowed if made after final payment under this contract.

#### 52.236-3 SITE INVESTIGATION AND CONDITIONS AFFECTING THE WORK (APR 1984)

(a) The Contractor acknowledges that it has taken steps reasonably necessary to ascertain the nature and location of the work, and that it has investigated and satisfied itself as to the general and local conditions which can affect the work or its cost, including but not limited to

(1) conditions bearing upon transportation, disposal, handling, and storage of materials;

(2) the availability of labor, water, electric power, and roads;

(3) uncertainties of weather, river stages, tides, or similar physical conditions at the site;

(4) the conformation and conditions of the ground; and (5) the character of equipment and facilities needed preliminary to and during work performance. The Contractor also acknowledges that it has satisfied itself as to the character, quality, and quantity of surface and subsurface materials or obstacles to be encountered insofar as this information is reasonably ascertainable from an inspection of the site, including all exploratory work done by the Government, as well as from the drawings and specifications made a part of this contract. Any failure of the Contractor to take the actions described and acknowledged in this paragraph will not relieve the Contractor from responsibility for estimating properly the difficulty and cost of successfully performing the work, or for proceeding to successfully perform the work without additional expense to the Government.

(b) The Government assumes no responsibility for any conclusions or interpretations made by the Contractor based on the information made available by the Government. Nor does the Government assume responsibility for any understanding reached or representation made concerning conditions which can affect the work by any of its officers or agents before the execution of this contract, unless that understanding or representation is expressly stated in this contract.



**52.236-5 MATERIAL AND WORKMANSHIP (APR 1984)**

(a) All equipment, material, and articles incorporated into the work covered by this contract shall be new and of the most suitable grade for the purpose intended, unless otherwise specifically provided in this contract. References in the specifications to equipment, material, articles, or patented processes by trade name, make, or catalog number, shall be regarded as establishing a standard of quality and shall not be construed as limiting competition. The Contractor may, at its option, use any equipment, material, article, or process that, in the judgment of the Contracting Officer, is equal to that named in the specifications, unless otherwise specifically provided in this contract.

(b) The Contractor shall obtain the Contracting Officer's approval of the machinery and mechanical and other equipment to be incorporated into the work. When requesting approval, the Contractor shall furnish to the Contracting Officer the name of the manufacturer, the model number, and other information concerning the performance, capacity, nature, and rating of the machinery and mechanical and other equipment. When required by this contract or by the Contracting Officer, the Contractor shall also obtain the Contracting Officer's approval of the material or articles which the Contractor contemplates incorporating into the work. When requesting approval, the Contractor shall provide full information concerning the material or articles. When directed to do so, the Contractor shall submit samples for approval at the Contractor's expense, with all shipping charges prepaid. Machinery, equipment, material, and articles that do not have the required approval shall be installed or used at the risk of subsequent rejection.

(c) All work under this contract shall be performed in a skillful and workmanlike manner. The Contracting Officer may require, in writing, that the Contractor remove from the work any employee the Contracting Officer deems incompetent, careless, or otherwise objectionable.

**52.236-6 SUPERINTENDENCE BY THE CONTRACTOR (APR 1984)**

At all times during performance of this contract and until the work is completed and accepted, the Contractor shall directly superintend the work or assign and have on the worksite a competent superintendent who is satisfactory to the Contracting Officer and has authority to act for the Contractor.

**52.236-7 PERMITS AND RESPONSIBILITIES (NOV 1991)**

The Contractor shall, without additional expense to the Government, be responsible for obtaining any necessary licenses and permits, and for complying with any Federal, State, and municipal laws, codes, and regulations applicable to the performance of the work. The Contractor shall also be responsible for all damages to persons or property that occur as a result of the Contractor's fault or negligence. The Contractor shall also be responsible for all materials delivered and work performed until completion and acceptance of the entire work, except for any completed unit of work which may have been accepted under the contract.

**52.236-8 OTHER CONTRACTS (APR 1984)**

The Government may undertake or award other contracts for additional work at or near the site of the work under this contract. The Contractor shall fully cooperate with the other contractors and with Government employees and shall carefully adapt scheduling and performing the work under this contract to accommodate the additional work, heeding any direction that may be provided by the Contracting Officer. The Contractor shall not commit or permit any act that will interfere with the performance of work by any other contractor or by Government employees.

**52.236-9 PROTECTION OF EXISTING VEGETATION, STRUCTURES, EQUIPMENT, UTILITIES, AND IMPROVEMENTS (APR 1984)**

(a) The Contractor shall preserve and protect all structures, equipment, and vegetation (such as trees, shrubs, and grass) on or adjacent to the work site, which are not to be removed and which do not unreasonably interfere with the work required under this contract. The Contractor shall only remove trees when specifically authorized to do so, and shall avoid damaging vegetation that will remain in place. If any limbs or branches of trees are broken during contract performance, or by the careless operation of equipment, or by workmen, the Contractor shall trim those limbs or branches with a clean cut and paint the cut with a tree-pruning compound as directed by the Contracting Officer.

(b) The Contractor shall protect from damage all existing improvements and utilities

(1) at or near the work site, and

(2) on adjacent property of a third party, the locations of which are made known to or should be known by the Contractor. The Contractor shall repair any damage to those facilities, including those that are the property of a third party, resulting from failure to comply with the requirements of this contract or failure to exercise reasonable care in performing the work. If the Contractor fails or refuses to repair the damage promptly, the Contracting Officer may have the necessary work performed and charge the cost to the Contractor.

#### 52.236-10 OPERATIONS AND STORAGE AREAS (APR 1984)

(a) The Contractor shall confine all operations (including storage of materials) on Government premises to areas authorized or approved by the Contracting Officer. The Contractor shall hold and save the Government, its officers and agents, free and harmless from liability of any nature occasioned by the Contractor's performance.

(b) Temporary buildings (e.g., storage sheds, shops, offices) and utilities may be erected by the Contractor only with the approval of the Contracting Officer and shall be built with labor and materials furnished by the Contractor without expense to the Government. The temporary buildings and utilities shall remain the property of the Contractor and shall be removed by the Contractor at its expense upon completion of the work. With the written consent of the Contracting Officer, the buildings and utilities may be abandoned and need not be removed.

(c) The Contractor shall, under regulations prescribed by the Contracting Officer, use only established roadways, or use temporary roadways constructed by the Contractor when and as authorized by the Contracting Officer. When materials are transported in prosecuting the work, vehicles shall not be loaded beyond the loading capacity recommended by the manufacturer of the vehicle or prescribed by any Federal, State, or local law or regulation. When it is necessary to cross curbs or sidewalks, the Contractor shall protect them from damage. The Contractor shall repair or pay for the repair of any damaged curbs, sidewalks, or roads.

#### 52.236-11 USE AND POSSESSION PRIOR TO COMPLETION (APR 1984)

(a) The Government shall have the right to take possession of or use any completed or partially completed part of the work. Before taking possession of or using any work, the Contracting Officer shall furnish the Contractor a list of items of work remaining to be performed or corrected on those portions of the work that the Government intends to take possession of or use. However, failure of the Contracting Officer to list any item of work shall not relieve the Contractor of responsibility for complying with the terms of the contract. The Government's possession or use shall not be deemed an acceptance of any work under the contract.

(b) While the Government has such possession or use, the Contractor shall be relieved of the responsibility for the loss of or damage to the work resulting from the Government's possession or use, notwithstanding the terms of the clause in this contract entitled "Permits and Responsibilities." If prior possession or use by the Government delays the progress of the work or causes additional expense to the Contractor, an equitable adjustment shall be made in the contract price or the time of completion, and the contract shall be modified in writing accordingly.

## 52.236-12 CLEANING UP (APR 1984)

The Contractor shall at all times keep the work area, including storage areas, free from accumulations of waste materials. Before completing the work, the Contractor shall remove from the work and premises any rubbish, tools, scaffolding, equipment, and materials that are not the property of the Government. Upon completing the work, the Contractor shall leave the work area in a clean, neat, and orderly condition satisfactory to the Contracting Officer.

## 52.236-13 ACCIDENT PREVENTION (NOV 1991)

(a) The Contractor shall provide and maintain work environments and procedures which will

(1) safeguard the public and Government personnel, property, materials, supplies, and equipment exposed to Contractor operations and activities;

(2) avoid interruptions of Government operations and delays in project completion dates; and

(3) control costs in the performance of this contract.

(b) For these purposes on contracts for construction or dismantling, demolition, or removal of improvements, the Contractor shall-

(1) Provide appropriate safety barricades, signs, and signal lights;

(2) Comply with the standards issued by the Secretary of Labor at 29 CFR Part 1926 and 29 CFR Part 1910; and

(3) Ensure that any additional measures the Contracting Officer determines to be reasonably necessary for the purposes are taken.

(c) If this contract is for construction or dismantling, demolition or removal of improvements with any Department of Defense agency or component, the Contractor shall comply with all pertinent provisions of the latest version of U.S. Army Corps of Engineers Safety and Health Requirements Manual, EM 385-1-1, in effect on the date of the solicitation.

(d) Whenever the Contracting Officer becomes aware of any noncompliance with these requirements or any condition which poses a serious or imminent danger to the health or safety of the public or Government personnel, the Contracting Officer shall notify the Contractor orally, with written confirmation, and request immediate initiation of corrective action. This notice, when delivered to the Contractor or the Contractor's representative at the work site, shall be deemed sufficient notice of the noncompliance and that corrective action is required. After receiving the notice, the Contractor shall immediately take corrective action. If the Contractor fails or refuses to promptly take corrective action, the Contracting Officer may issue an order stopping all or part of the work until satisfactory corrective action has been taken. The Contractor shall not be entitled to any equitable adjustment of the contract price or extension of the performance schedule on any stop work order issued under this clause.

(e) The Contractor shall insert this clause, including this paragraph (e), with appropriate changes in the designation of the parties, in subcontracts.

## 52.236-15 SCHEDULES FOR CONSTRUCTION CONTRACTS (APR 1984)

(a) The Contractor shall, within five days after the work commences on the contract or another period of time determined by the Contracting Officer, prepare and submit to the Contracting Officer for approval three copies of a practicable schedule showing the order in which the Contractor proposes to perform the work, and the dates on which the Contractor contemplates starting and completing the several salient features of the work (including

acquiring materials, plant, and equipment). The schedule shall be in the form of a progress chart of suitable scale to indicate appropriately the percentage of work scheduled for completion by any given date during the period. If the Contractor fails to submit a schedule within the time prescribed, the Contracting Officer may withhold approval of progress payments until the Contractor submits the required schedule.

(b) The Contractor shall enter the actual progress on the chart as directed by the Contracting Officer, and upon doing so shall immediately deliver three copies of the annotated schedule to the Contracting Officer. If, in the opinion of the Contracting Officer, the Contractor falls behind the approved schedule, the Contractor shall take steps necessary to improve its progress, including those that may be required by the Contracting Officer, without additional cost to the Government. In this circumstance, the Contracting Officer may require the Contractor to increase the number of shifts, overtime operations, days of work, and/or the amount of construction plant, and to submit for approval any supplementary schedule or schedules in chart form as the Contracting Officer deems necessary to demonstrate how the approved rate of progress will be regained.

(c) Failure of the Contractor to comply with the requirements of the Contracting Officer under this clause shall be grounds for a determination by the Contracting Officer that the Contractor is not prosecuting the work with sufficient diligence to ensure completion within the time specified in the contract. Upon making this determination, the Contracting Officer may terminate the Contractor's right to proceed with the work, or any separable part of it, in accordance with the default terms of this contract.

#### 52.236-26 PRECONSTRUCTION CONFERENCE (FEB 1995)

If the Contracting Officer decides to conduct a preconstruction conference, the successful offeror will be notified and will be required to attend. The Contracting Officer's notification will include specific details regarding the date, time, and location of the conference, any need for attendance by subcontractors, and information regarding the items to be discussed.

#### 52.242-13 BANKRUPTCY (JUL 1995)

In the event the Contractor enters into proceedings relating to bankruptcy, whether voluntary or involuntary, the Contractor agrees to furnish, by certified mail or electronic commerce method authorized by the contract, written notification of the bankruptcy to the Contracting Officer responsible for administering the contract. This notification shall be furnished within five days of the initiation of the proceedings relating to bankruptcy filing. This notification shall include the date on which the bankruptcy petition was filed, the identity of the court in which the bankruptcy petition was filed, and a listing of Government contract numbers and contracting offices for all Government contracts against which final payment has not been made. This obligation remains in effect until final payment under this contract.

(End of clause)

#### 52.242-14 SUSPENSION OF WORK (APR 1984)

(a) The Contracting Officer may order the Contractor, in writing, to suspend, delay, or interrupt all or any part of the work of this contract for the period of time that the Contracting Officer determines appropriate for the convenience of the Government.

(b) If the performance of all or any part of the work is, for an unreasonable period of time, suspended, delayed, or interrupted (1) by an act of the Contracting Officer in the administration of this contract, or (2) by the Contracting Officer's failure to act within the time specified in this contract (or within a reasonable time if not specified), an adjustment shall be made for any increase in the cost of performance of this contract (excluding profit) necessarily caused by the unreasonable suspension, delay, or interruption, and the contract modified in writing accordingly. However, no adjustment shall be made under this clause for any suspension, delay, or interruption to the extent that

performance would have been so suspended, delayed, or interrupted by any other cause, including the fault or negligence of the Contractor, or for which an equitable adjustment is provided for or excluded under any other term or condition of this contract. (c) A claim under this clause shall not be allowed (1) for any costs incurred more than 20 days before the Contractor shall have notified the Contracting Officer in writing of the act or failure to act involved (but this requirement shall not apply as to a claim resulting from a suspension order), and (2) unless the claim, in an amount stated, is asserted in writing as soon as practicable after the termination of the suspension, delay, or interruption, but not later than the date of final payment under the contract.

#### 52.243-4 CHANGES (AUG 1987)

(a) The Contracting Officer may, at any time, without notice to the sureties, if any, by written order designated or indicated to be a change order, make changes in the work within the general scope of the contract, including changes--

- (1) In the specifications (including drawings and designs);
- (2) In the method or manner of performance of the work;
- (3) In the Government-furnished facilities, equipment, materials, services, or site; or
- (4) Directing acceleration in the performance of the work.

(b) Any other written or oral order (which, as used in this paragraph (b), includes direction, instruction, interpretation, or determination) from the Contracting Officer that causes a change shall be treated as a change order under this clause; provided, that the Contractor gives the Contracting Officer written notice stating

- (1) the date, circumstances, and source of the order and
- (2) that the Contractor regards the order as a change order.

(c) Except as provided in this clause, no order, statement, or conduct of the Contracting Officer shall be treated as a change under this clause or entitle the Contractor to an equitable adjustment.

(d) If any change under this clause causes an increase or decrease in the Contractor's cost of, or the time required for, the performance of any part of the work under this contract, whether or not changed by any such order, the Contracting Officer shall make an equitable adjustment and modify the contract in writing. However, except for an adjustment based on defective specifications, no adjustment for any change under paragraph (b) of this clause shall be made for any costs incurred more than 20 days before the Contractor gives written notice as required. In the case of defective specifications for which the Government is responsible, the equitable adjustment shall include any increased cost reasonably incurred by the Contractor in attempting to comply with the defective specifications.

(e) The Contractor must assert its right to an adjustment under this clause within 30 days after

(1) receipt of a written change order under paragraph (a) of this clause or (2) the furnishing of a written notice under paragraph (b) of this clause, by submitting to the Contracting Officer a written statement describing the general nature and amount of the proposal, unless this period is extended by the Government. The statement of proposal for adjustment may be included in the notice under paragraph (b) above.

(f) No proposal by the Contractor for an equitable adjustment shall be allowed if asserted after final payment under this contract.

#### 52.243-5 CHANGES AND CHANGED CONDITIONS (APR 1984)

- (a) The Contracting Officer may, in writing, order changes in the drawings and specifications within the general scope of the contract.
- (b) The Contractor shall promptly notify the Contracting Officer, in writing, of subsurface or latent physical conditions differing materially from those indicated in this contract or unknown unusual physical conditions at the site before proceeding with the work.
- (c) If changes under paragraph (a) or conditions under paragraph (b) increase or decrease the cost of, or time required for performing the work, the Contracting Officer shall make an equitable adjustment (see paragraph (d)) upon submittal of a "proposal for adjustment" (hereafter referred to as proposal) by the Contractor before final payment under the contract.
- (d) The Contracting Officer shall not make an equitable adjustment under paragraph (b) unless--
  - (1) The Contractor has submitted and the Contracting Officer has received the required written notice; or
  - (2) The Contracting Officer waives the requirement for the written notice.
- (e) Failure to agree to any adjustment shall be a dispute under the Disputes clause.

#### 52.246-12 INSPECTION OF CONSTRUCTION (AUG 1996)

- (a) Definition. "Work" includes, but is not limited to, materials, workmanship, and manufacture and fabrication of components.
- (b) The Contractor shall maintain an adequate inspection system and perform such inspections as will ensure that the work performed under the contract conforms to contract requirements. The Contractor shall maintain complete inspection records and make them available to the Government. All work shall be conducted under the general direction of the Contracting Officer and is subject to Government inspection and test at all places and at all reasonable times before acceptance to ensure strict compliance with the terms of the contract.
- (c) Government inspections and tests are for the sole benefit of the Government and do not--
  - (1) Relieve the Contractor of responsibility for providing adequate quality control measures;
  - (2) Relieve the Contractor of responsibility for damage to or loss of the material before acceptance;
  - (3) Constitute or imply acceptance; or
  - (4) Affect the continuing rights of the Government after acceptance of the completed work under paragraph (i) of this section.
- (d) The presence or absence of a Government inspector does not relieve the Contractor from any contract requirement, nor is the inspector authorized to change any term or condition of the specification without the Contracting Officer's written authorization.
- (e) The Contractor shall promptly furnish, at no increase in contract price, all facilities, labor, and material reasonably needed for performing such safe and convenient inspections and tests as may be required by the Contracting Officer. The Government may charge to the Contractor any additional cost of inspection or test when work is not ready at the time specified by the Contractor for inspection or test, or when prior rejection makes reinspection or retest necessary. The Government shall perform all inspections and tests in a manner that will not unnecessarily delay the work. Special, full size, and performance tests shall be performed as described in the contract.

(f) The Contractor shall, without charge, replace or correct work found by the Government not to conform to contract requirements, unless in the public interest the Government consents to accept the work with an appropriate adjustment in contract price. The Contractor shall promptly segregate and remove rejected material from the premises.

(g) If the Contractor does not promptly replace or correct rejected work, the Government may (1) by contract or otherwise, replace or correct the work and charge the cost to the Contractor or (2) terminate for default the Contractor's right to proceed.

(h) If, before acceptance of the entire work, the Government decides to examine already completed work by removing it or tearing it out, the Contractor, on request, shall promptly furnish all necessary facilities, labor, and material. If the work is found to be defective or nonconforming in any material respect due to the fault of the Contractor or its subcontractors, the Contractor shall defray the expenses of the examination and of satisfactory reconstruction. However, if the work is found to meet contract requirements, the Contracting Officer shall make an equitable adjustment for the additional services involved in the examination and reconstruction, including, if completion of the work was thereby delayed, an extension of time.

(i) Unless otherwise specified in the contract, the Government shall accept, as promptly as practicable after completion and inspection, all work required by the contract or that portion of the work the Contracting Officer determines can be accepted separately. Acceptance shall be final and conclusive except for latent defects, fraud, gross mistakes amounting to fraud, or the Government's rights under any warranty or guarantee.

#### 52.246-21 WARRANTY OF CONSTRUCTION (MAR 1994)

(a) In addition to any other warranties in this contract, the Contractor warrants, except as provided in paragraph (i) of this clause, that work performed under this contract conforms to the contract requirements and is free of any defect in equipment, material, or design furnished, or workmanship performed by the Contractor or any subcontractor or supplier at any tier.

(b) This warranty shall continue for a period of 1 year from the date of final acceptance of the work. If the Government takes possession of any part of the work before final acceptance, this warranty shall continue for a period of 1 year from the date the Government takes possession.

(c) The Contractor shall remedy at the Contractor's expense any failure to conform, or any defect. In addition, the Contractor shall remedy at the Contractor's expense any damage to Government-owned or controlled real or personal property, when that damage is the result of--

(1) The Contractor's failure to conform to contract requirements; or

(2) Any defect of equipment, material, workmanship, or design furnished.

(d) The Contractor shall restore any work damaged in fulfilling the terms and conditions of this clause. The Contractor's warranty with respect to work repaired or replaced will run for 1 year from the date of repair or replacement.

(e) The Contracting Officer shall notify the Contractor, in writing, within a reasonable time after the discovery of any failure, defect, or damage.

(f) If the Contractor fails to remedy any failure, defect, or damage within a reasonable time after receipt of notice, the Government shall have the right to replace, repair, or otherwise remedy the failure, defect, or damage at the Contractor's expense.

(g) With respect to all warranties, express or implied, from subcontractors, manufacturers, or suppliers for work performed and materials furnished under this contract, the Contractor shall--

(1) Obtain all warranties that would be given in normal commercial practice;

(2) Require all warranties to be executed, in writing, for the benefit of the Government, if directed by the Contracting Officer; and

(3) Enforce all warranties for the benefit of the Government, if directed by the Contracting Officer.

(h) In the event the Contractor's warranty under paragraph (b) of this clause has expired, the Government may bring suit at its expense to enforce a subcontractor's, manufacturer's, or supplier's warranty.

(i) Unless a defect is caused by the negligence of the Contractor or subcontractor or supplier at any tier, the Contractor shall not be liable for the repair of any defects of material or design furnished by the Government nor for the repair of any damage that results from any defect in Government-furnished material or design.

(j) This warranty shall not limit the Government's rights under the Inspection and Acceptance clause of this contract with respect to latent defects, gross mistakes, or fraud.

(End of clause)

#### 52.247-63 PREFERENCE FOR U.S.-FLAG AIR CARRIERS (JAN 1997)

(a) "International air transportation," as used in this clause, means transportation by air between a place in the United States and a place outside the United States or between two places both of which are outside the United States.

"United States," as used in this clause, means the 50 States, the District of Columbia, the Commonwealth of Puerto Rico, and possessions of the United States.

"U.S.-flag air carrier", as used in this clause, means an air carrier holding a certificate under 49 U.S.C. Chapter 411.

(b) Section 5 of the International Air Transportation Fair Competitive Practices Act of 1974 (49 U.S.C. 40118) (Fly America Act) requires that all Federal agencies and Government contractors and subcontractors use U.S.-flag air carriers for U.S. Government-financed international air transportation of personnel (and their personal effects) or property, to the extent that service by those carriers is available. It requires the Comptroller General of the United States, in the absence of satisfactory proof of the necessity for foreign-flag air transportation, to disallow expenditures from funds, appropriated or otherwise established for the account of the United States, for international air transportation secured aboard a foreign-flag air carrier if a U.S.-flag air carrier is available to provide such services.

(c) The Contractor agrees, in performing work under this contract, to use U.S.-flag air carriers for international air transportation of personnel (and their personal effects) or property to the extent that service by those carriers is available.

(d) In the event that the Contractor selects a carrier other than a U.S.-flag air carrier for international air transportation, the Contractor shall include a statement on vouchers involving such transportation essentially as follows:

#### STATEMENT OF UNAVAILABILITY OF U.S.-FLAG AIR CARRIERS

International air transportation of persons (and their personal effects) or property by U.S.-flag air carrier was not available or it was necessary to use foreign-flag air carrier service for the following reasons (see section 47.403 of the Federal Acquisition Regulation): [State reasons]: \_\_\_\_\_

(End of statement)



(e) The Contractor shall include the substance of this clause, including this paragraph (e), in each subcontract or purchase under this contract that may involve international air transportation.

#### 52.248-3 VALUE ENGINEERING--CONSTRUCTION (FEB 2000)

(a) General. The Contractor is encouraged to develop, prepare, and submit value engineering change proposals (VECP's) voluntarily. The Contractor shall share in any instant contract savings realized from accepted VECP's, in accordance with paragraph (f) below.

(b) Definitions. "Collateral costs," as used in this clause, means agency costs of operation, maintenance, logistic support, or Government-furnished property.

"Collateral savings," as used in this clause, means those measurable net reductions resulting from a VECP in the agency's overall projected collateral costs, exclusive of acquisition savings, whether or not the acquisition cost changes.

"Contractor's development and implementation costs," as used in this clause, means those costs the Contractor incurs on a VECP specifically in developing, testing, preparing, and submitting the VECP, as well as those costs the Contractor incurs to make the contractual changes required by Government acceptance of a VECP.

"Government costs," as used in this clause, means those agency costs that result directly from developing and implementing the VECP, such as any net increases in the cost of testing, operations, maintenance, and logistic support. The term does not include the normal administrative costs of processing the VECP.

"Instant contract savings," as used in this clause, means the estimated reduction in Contractor cost of performance resulting from acceptance of the VECP, minus allowable Contractor's development and implementation costs, including subcontractors' development and implementation costs (see paragraph (h) below).

"Value engineering change proposal (VECP)" means a proposal that--

(1) Requires a change to this, the instant contract, to implement; and

(2) Results in reducing the contract price or estimated cost without impairing essential functions or characteristics; provided, that it does not involve a change--

(i) In deliverable end item quantities only; or

(ii) To the contract type only.

(c) VECP preparation. As a minimum, the Contractor shall include in each VECP the information described in subparagraphs (1) through (7) below. If the proposed change is affected by contractually required configuration management or similar procedures, the instructions in those procedures relating to format, identification, and priority assignment shall govern VECP preparation. The VECP shall include the following:

(1) A description of the difference between the existing contract requirement and that proposed, the comparative advantages and disadvantages of each, a justification when an item's function or characteristics are being altered, and the effect of the change on the end item's performance.

(2) A list and analysis of the contract requirements that must be changed if the VECP is accepted, including any suggested specification revisions.

(3) A separate, detailed cost estimate for

(i) the affected portions of the existing contract requirement and

(ii) the VECP. The cost reduction associated with the VECP shall take into account the Contractor's allowable development and implementation costs, including any amount attributable to subcontracts under paragraph (h) below.

(4) A description and estimate of costs the Government may incur in implementing the VECP, such as test and evaluation and operating and support costs.

(5) A prediction of any effects the proposed change would have on collateral costs to the agency.

(6) A statement of the time by which a contract modification accepting the VECP must be issued in order to achieve the maximum cost reduction, noting any effect on the contract completion time or delivery schedule.

(7) Identification of any previous submissions of the VECP, including the dates submitted, the agencies and contract numbers involved, and previous Government actions, if known.

(d) Submission. The Contractor shall submit VECP's to the Resident Engineer at the worksite, with a copy to the Contracting Officer.

(e) Government action.

(1) The Contracting Officer will notify the Contractor of the status of the VECP within 45 calendar days after the contracting office receives it. If additional time is required, the Contracting Officer will notify the Contractor within the 45-day period and provide the reason for the delay and the expected date of the decision. The Government will process VECP's expeditiously; however, it shall not be liable for any delay in acting upon a VECP.

If the VECP is not accepted, the Contracting Officer will notify the Contractor in writing, explaining the reasons for rejection. The Contractor may withdraw any VECP, in whole or in part, at any time before it is accepted by the Government. The Contracting Officer may require that the Contractor provide written notification before undertaking significant expenditures for VECP effort.

Any VECP may be accepted, in whole or in part, by the Contracting Officer's award of a modification to this contract citing this clause. The Contracting Officer may accept the VECP, even though an agreement on price reduction has not been reached, by issuing the Contractor a notice to proceed with the change. Until a notice to proceed is issued or a contract modification applies a VECP to this contract, the Contractor shall perform in accordance with the existing contract. The decision to accept or reject all or part of any VECP is a unilateral decision made solely at the discretion of the Contracting Officer.

(f) Sharing.

(1) Rates. The Government's share of savings is determined by subtracting Government costs from instant contract savings and multiplying the result by

(i) 45 percent for fixed-price contracts or

(ii) 75 percent for cost-reimbursement contracts.

(2) Payment. Payment of any share due the Contractor for use of a VECP on this contract shall be authorized by a modification to this contract to--

(i) Accept the VECP;

(ii) Reduce the contract price or estimated cost by the amount of instant contract savings; and

(iii) Provide the Contractor's share of savings by adding the amount calculated to the contract price or fee.

(g) Collateral savings. If a VECP is accepted, the Contracting Officer will increase the instant contract amount by 20 percent of any projected collateral savings determined to be realized in a typical year of use after subtracting any Government costs not previously offset. However, the Contractor's share of collateral savings will not exceed the contract's firm-fixed-price or estimated cost, at the time the VECP is accepted, or \$100,000, whichever is greater. The Contracting Officer is the sole determiner of the amount of collateral savings.

(h) Subcontracts. The Contractor shall include an appropriate value engineering clause in any subcontract of \$50,000 or more and may include one in subcontracts of lesser value. In computing any adjustment in this contract's price under paragraph (f) above, the Contractor's allowable development and implementation costs shall include any subcontractor's allowable development and implementation costs clearly resulting from a VECP accepted by the Government under this contract, but shall exclude any value engineering incentive payments to a subcontractor. The Contractor may choose any arrangement for subcontractor value engineering incentive payments; provided, that these payments shall not reduce the Government's share of the savings resulting from the VECP.

(i) Data. The Contractor may restrict the Government's right to use any part of a VECP or the supporting data by marking the following legend on the affected parts:

"These data, furnished under the Value Engineering-- Construction clause of contract . . . . ., shall not be disclosed outside the Government or duplicated, used, or disclosed, in whole or in part, for any purpose other than to evaluate a value engineering change proposal submitted under the clause. This restriction does not limit the Government's right to use information contained in these data if it has been obtained or is otherwise available from the Contractor or from another source without limitations." If a VECP is accepted, the Contractor hereby grants the Government unlimited rights in the VECP and supporting data, except that, with respect to data qualifying and submitted as limited rights technical data, the Government shall have the rights specified in the contract modification implementing the VECP and shall appropriately mark the data. (The terms "unlimited rights" and "limited rights" are defined in Part 27 of the Federal Acquisition Regulation.)

(End of clause)

#### 52.249-2 TERMINATION FOR CONVENIENCE OF THE GOVERNMENT (FIXED-PRICE) (SEP 1996) - ALTERNATE I (SEP 1996)

(a) The Government may terminate performance of work under this contract in whole or, from time to time, in part if the Contracting Officer determines that a termination is in the Government's interest. The Contracting Officer shall terminate by delivering to the Contractor a Notice of Termination specifying the extent of termination and the effective date.

(b) After receipt of a Notice of Termination, and except as directed by the Contracting Officer, the Contractor shall immediately proceed with the following obligations, regardless of any delay in determining or adjusting any amounts due under this clause:

(1) Stop work as specified in the notice.

(2) Place no further subcontracts or orders (referred to as subcontracts in this clause) for materials, services, or facilities, except as necessary to complete the continued portion of the contract.

(3) Terminate all subcontracts to the extent they relate to the work terminated.

(4) Assign to the Government, as directed by the Contracting Officer, all right, title, and interest of the Contractor under the subcontracts terminated, in which case the Government shall have the right to settle or to pay any termination settlement proposal arising out of those terminations.

(5) With approval or ratification to the extent required by the Contracting Officer, settle all outstanding liabilities and termination settlement proposals arising from the termination of subcontracts; the approval or ratification will be final for purposes of this clause.

(6) As directed by the Contracting Officer, transfer title and deliver to the Government (i) the fabricated or unfabricated parts, work in process, completed work, supplies, and other material produced or acquired for the work terminated, and (ii) the completed or partially completed plans, drawings, information, and other property that, if the contract had been completed, would be required to be furnished to the Government.

(7) Complete performance of the work not terminated.

(8) Take any action that may be necessary, or that the Contracting Officer may direct, for the protection and preservation of the property related to this contract that is in the possession of the Contractor and in which the Government has or may acquire an interest.

(9) Use its best efforts to sell, as directed or authorized by the Contracting Officer, any property of the types referred to in subparagraph (b)(6) of this clause; provided, however, that the Contractor (i) is not required to extend credit to any purchaser and (ii) may acquire the property under the conditions prescribed by, and at prices approved by, the Contracting Officer. The proceeds of any transfer or disposition will be applied to reduce any payments to be made by the Government under this contract, credited to the price or cost of the work, or paid in any other manner directed by the Contracting Officer.

(c) The Contractor shall submit complete termination inventory schedules no later than 120 days from the effective date of termination, unless extended in writing by the Contracting Officer upon written request of the Contractor within this 120-day period.

(d) After expiration of the plant clearance period as defined in Subpart 45.6 of the Federal Acquisition Regulation, the Contractor may submit to the Contracting Officer a list, certified as to quantity and quality, of termination inventory not previously disposed of, excluding items authorized for disposition by the Contracting Officer. The Contractor may request the Government to remove those items or enter into an agreement for their storage. Within 15 days, the Government will accept title to those items and remove them or enter into a storage agreement. The Contracting Officer may verify the list upon removal of the items, or if stored, within 45 days from submission of the list, and shall correct the list, as necessary, before final settlement.

(e) After termination, the Contractor shall submit a final termination settlement proposal to the Contracting Officer in the form and with the certification prescribed by the Contracting Officer. The Contractor shall submit the proposal promptly, but no later than 1 year from the effective date of termination, unless extended in writing by the Contracting Officer upon written request of the Contractor within this 1-year period. However, if the Contracting Officer determines that the facts justify it, a termination settlement proposal may be received and acted on after 1 year or any extension. If the Contractor fails to submit the proposal within the time allowed, the Contracting Officer may determine, on the basis of information available, the amount, if any, due the Contractor because of the termination and shall pay the amount determined.

(f) Subject to paragraph (e) of this clause, the Contractor and the Contracting Officer may agree upon the whole or any part of the amount to be paid or remaining to be paid because of the termination. The amount may include a reasonable allowance for profit on work done. However, the agreed amount, whether under this paragraph (g) or paragraph (g) of this clause, exclusive of costs shown in subparagraph (g)(3) of this clause, may not exceed the total contract price as reduced by (1) the amount of payments previously made and (2) the contract price of work not terminated. The contract shall be modified, and the Contractor paid the agreed amount. Paragraph (g) of this clause shall not limit, restrict, or affect the amount that may be agreed upon to be paid under this paragraph.

(g) If the Contractor and Contracting Officer fail to agree on the whole amount to be paid the Contractor because of the termination of work, the Contracting Officer shall pay the Contractor the amounts determined as follows, but without duplication of any amounts agreed upon under paragraph (f) of this clause:

(1) For contract work performed before the effective date of termination, the total (without duplication of any items) of--

(i) The cost of this work;

(ii) The cost of settling and paying termination settlement proposals under terminated subcontracts that are properly chargeable to the terminated portion of the contract if not included in subdivision (g)(1)(i) of this clause; and

(iii) A sum, as profit on subdivision (g)(1)(i) of this clause, determined by the Contracting Officer under 49.202 of the Federal Acquisition Regulation, in effect on the date of this contract, to be fair and reasonable; however, if it appears that the Contractor would have sustained a loss on the entire contract had it been completed, the Contracting Officer shall allow no profit under this subdivision (iii) and shall reduce the settlement to reflect the indicated rate of loss.

(2) The reasonable costs of settlement of the work terminated, including--

(i) Accounting, legal, clerical, and other expenses reasonably necessary for the preparation of termination settlement proposals and supporting data;

(ii) The termination and settlement of subcontracts (excluding the amounts of such settlements); and

(iii) Storage, transportation, and other costs incurred, reasonably necessary for the preservation, protection, or disposition of the termination inventory.

(h) Except for normal spoilage, and except to the extent that the Government expressly assumed the risk of loss, the Contracting Officer shall exclude from the amounts payable to the Contractor under paragraph (g) of this clause, the fair value, as determined by the Contracting Officer, of property that is destroyed, lost, stolen, or damaged so as to become undeliverable to the Government or to a buyer.

(i) The cost principles and procedures of Part 31 of the Federal Acquisition Regulation, in effect on the date of this contract, shall govern all costs claimed, agreed to, or determined under this clause.

(j) The Contractor shall have the right of appeal, under the Disputes clause, from any determination made by the Contracting Officer under paragraph (e), (g), or (l) of this clause, except that if the Contractor failed to submit the termination settlement proposal or request for equitable adjustment within the time provided in paragraph (e) or (l), respectively, and failed to request a time extension, there is no right of appeal.

(k) In arriving at the amount due the Contractor under this clause, there shall be deducted--

(1) All unliquidated advance or other payments to the Contractor under the terminated portion of this contract;

(2) Any claim which the Government has against the Contractor under this contract; and

(3) The agreed price for, or the proceeds of sale of, materials, supplies, or other things acquired by the Contractor or sold under the provisions of this clause and not recovered by or credited to the Government.

(l) If the termination is partial, the Contractor may file a proposal with the Contracting Officer for an equitable adjustment of the price(s) of the continued portion of the contract. The Contracting Officer shall make any equitable adjustment agreed upon. Any proposal by the Contractor for an equitable adjustment under this clause shall be requested within 90 days from the effective date of termination unless extended in writing by the Contracting Officer.

(m)(1) The Government may, under the terms and conditions it prescribes, make partial payments and payments against costs incurred by the Contractor for the terminated portion of the contract, if the Contracting Officer believes the total of these payments will not exceed the amount to which the Contractor will be entitled.

(2) If the total payments exceed the amount finally determined to be due, the Contractor shall repay the excess to the Government upon demand, together with interest computed at the rate established by the Secretary of the Treasury under 50 U.S.C. App. 1215(b)(2). Interest shall be computed for the period from the date the excess payment is received by the Contractor to the date the excess is repaid. Interest shall not be charged on any excess payment due to a reduction in the Contractor's termination settlement proposal because of retention or other disposition of termination inventory until 10 days after the date of the retention or disposition, or a later date determined by the Contracting Officer because of the circumstances.

(n) Unless otherwise provided in this contract or by statute, the Contractor shall maintain all records and documents relating to the terminated portion of this contract for 3 years after final settlement. This includes all books and other evidence bearing on the Contractor's costs and expenses under this contract. The Contractor shall make these records and documents available to the Government, at the Contractor's office, at all reasonable times, without any direct charge. If approved by the Contracting Officer, photographs, microphotographs, or other authentic reproductions may be maintained instead of original records and documents.

#### 52.249-10 DEFAULT (FIXED-PRICE CONSTRUCTION) (APR 1984)

(a) If the Contractor refuses or fails to prosecute the work or any separable part, with the diligence that will insure its completion within the time specified in this contract including any extension, or fails to complete the work within this time, the Government may, by written notice to the Contractor, terminate the right to proceed with the work (or the separable part of the work) that has been delayed. In this event, the Government may take over the work and complete it by contract or otherwise, and may take possession of and use any materials, appliances, and plant on the work site necessary for completing the work. The Contractor and its sureties shall be liable for any damage to the Government resulting from the Contractor's refusal or failure to complete the work within the specified time, whether or not the Contractor's right to proceed with the work is terminated. This liability includes any increased costs incurred by the Government in completing the work.

(b) The Contractor's right to proceed shall not be terminated nor the Contractor charged with damages under this clause, if--

(1) The delay in completing the work arises from unforeseeable causes beyond the control and without the fault or negligence of the Contractor. Examples of such causes include

(i) acts of God or of the public enemy,

(ii) acts of the Government in either its sovereign or contractual capacity,

(iii) acts of another Contractor in the performance of a contract with the Government,

(iv) fires,

(v) floods,

(vi) epidemics,

(vii) quarantine restrictions,

(viii) strikes,

(ix) freight embargoes,

(x) unusually severe weather, or delays of subcontractors or suppliers at any tier arising from unforeseeable causes beyond the control and without the fault or negligence of both the Contractor and the subcontractors or suppliers;

and

(2) The Contractor, within 10 days from the beginning of any delay (unless extended by the Contracting Officer), notifies the Contracting Officer in writing of the causes of delay. The Contracting Officer shall ascertain the facts and the extent of delay. If, in the judgment of the Contracting Officer, the findings of fact warrant such action, the time for completing the work shall be extended. The findings of the Contracting Officer shall be final and conclusive on the parties, but subject to appeal under the Disputes clause.

(c) If, after termination of the Contractor's right to proceed, it is determined that the Contractor was not in default, or that the delay was excusable, the rights and obligations of the parties will be the same as if the termination had been issued for the convenience of the Government.

The rights and remedies of the Government in this clause are in addition to any other rights and remedies provided by law or under this contract.

#### 252.201-7000 CONTRACTING OFFICER'S REPRESENTATIVE (DEC 1991)

(a) "Definition. Contracting officer's representative" means an individual designated in accordance with subsection 201.602-2 of the Defense Federal Acquisition Regulation Supplement and authorized in writing by the contracting officer to perform specific technical or administrative functions.

(b) If the Contracting Officer designates a contracting officer's representative (COR), the Contractor will receive a copy of the written designation. It will specify the extent of the COR's authority to act on behalf of the contracting officer. The COR is not authorized to make any commitments or changes that will affect price, quality, quantity, delivery, or any other term or condition of the contract.

(End of clause)

#### 252.203-7001 PROHIBITION ON PERSONS CONVICTED OF FRAUD OR OTHER DEFENSE-CONTRACT-RELATED FELONIES (MAR 1999)

(a) Definitions. As used in this clause—

(1) "Arising out of a contract with the DoD" means any act in connection with—

(i) Attempting to obtain;

(ii) Obtaining, or

(iii) Performing a contract or first-tier subcontract of any agency, department, or component of the Department of Defense (DoD).

(2) "Conviction of fraud or any other felony" means any conviction for fraud or a felony in violation of state or Federal criminal statutes, whether entered on a verdict or plea, including a plea of *nolo contendere*, for which sentence has been imposed.

(3) "Date of conviction" means the date judgment was entered against the individual.

(b) Any individual who is convicted after September 29, 1988, of fraud or any other felony arising out of a contract with the DoD is prohibited from serving--

(1) In a management or supervisory capacity on any DoD contract or first-tier subcontract;

- (2) On the board of directors of any DoD contractor or first-tier subcontractor;
  - (3) As a consultant, agent, or representative for any DoD contractor or first-tier subcontractor; or
  - (4) In any other capacity with the authority to influence, advise, or control the decisions of any DoD contractor or subcontractor with regard to any DoD contract or first-tier subcontract.
- (c) Unless waived, the prohibition in paragraph (b) of this clause applies for not less than 5 years from the date of conviction.
- (d) 10 U.S.C. 2408 provides that a defense contractor or first-tier subcontractor shall be subject to a criminal penalty of not more than \$500,000 if convicted of knowingly—
- (1) Employing a person under a prohibition specified in paragraph (b) of this clause; or
  - (2) Allowing such a person to serve on the board of directors of the contractor or first-tier subcontractor.
- (e) In addition to the criminal penalties contained in 10 U.S.C. 2408, the Government may consider other available remedies, such as—
- (1) Suspension or debarment;
  - (2) Cancellation of the contract at no cost to the Government; or
  - (3) Termination of the contract for default.
- (f) The Contractor may submit written requests for waiver of the prohibition in paragraph (b) of this clause to the Contracting Officer. Requests shall clearly identify—
- (1) The person involved;
  - (2) The nature of the conviction and resultant sentence or punishment imposed;
  - (3) The reasons for the requested waiver; and
  - (4) An explanation of why a waiver is in the interest of national security.
- (g) The Contractor agrees to include the substance of this clause, appropriately modified to reflect the identity and relationship of the parties, in all first-tier subcontracts exceeding the simplified acquisition threshold in Part 2 of the Federal Acquisition Regulation, except those for commercial items or components.
- (h) Pursuant to 10 U.S.C. 2408(c), defense contractors and subcontractors may obtain information as to whether a particular person has been convicted of fraud or any other felony arising out of a contract with the DoD by contacting The Office of Justice Programs, The Denial of Federal Benefits Office, U.S. Department of Justice, telephone (202) 616-3507.

(End of clause)

#### 252.203-7002 DISPLAY OF DOD HOTLINE POSTER (DEC 1991)

- (a) The Contractor shall display prominently in common work areas within business segments performing work under Department of Defense (DoD) contracts, DoD Hotline Posters prepared by the DoD Office of the Inspector General.



(b) DoD Hotline Posters may be obtained from the DoD Inspector General, ATTN: Defense Hotline, 400 Army Navy Drive, Washington, DC 22202-2884.

(c) The Contractor need not comply with paragraph (a) of this clause if it has established a mechanism, such as a hotline, by which employees may report suspected instances of improper conduct, and instructions that encourage employees to make such reports.

(End of clause)

#### 252.204-7003 CONTROL OF GOVERNMENT PERSONNEL WORK PRODUCT (APR 1992)

The Contractor's procedures for protecting against unauthorized disclosure of information shall not require Department of Defense employees or members of the Armed Forces to relinquish control of their work products, whether classified or not, to the contractor.

(End of clause)

#### 252.209-7004 SUBCONTRACTING WITH FIRMS THAT ARE OWNED OR CONTROLLED BY THE GOVERNMENT OF A TERRORIST COUNTRY (MAR 1998)

(a) Unless the Government determines that there is a compelling reason to do so, the Contractor shall not enter into any subcontract in excess of \$25,000 with a firm, or subsidiary of a firm, that is identified, on the List of Parties Excluded from Federal Procurement and Nonprocurement Programs, as being ineligible for the award of Defense contracts or subcontracts because it is owned or controlled by the government of a terrorist country.

(b) A corporate officer or a designee of the Contractor shall notify the Contracting Officer, in writing, before entering into a subcontract with a party that is identified, on the List of Parties Excluded from Federal Procurement and Nonprocurement Programs, as being ineligible for the award of Defense contracts or subcontracts because it is owned or controlled by the government of a terrorist country. The notice must include the name of the proposed subcontractor notwithstanding its inclusion on the List of Parties Excluded From Federal Procurement and Nonprocurement Programs.

#### 252.219-7003 SMALL, SMALL DISADVANTAGED AND WOMEN-OWNED SMALL BUSINESS SUBCONTRACTING PLAN (DOD CONTRACTS) (APR. 1996)

This clause supplements the Federal Acquisition Regulation 52.219-9, Small, Small Disadvantaged and Women-Owned Small Business Subcontracting Plan, clause of this contract.

(a) *Definitions. Historically black colleges and universities*, as used in this clause, means institutions determined by the Secretary of Education to meet the requirements of 34 CFR 608.2. The term also means any nonprofit research institution that was an integral part of such a college or university before November 14, 1986.

*Minority institutions*, as used in this clause, means institutions meeting the requirements of section 1046(3) of the Higher Education Act of 1965 (20 U.S.C. 1135d-5(3)). The term also includes Hispanic-serving institutions as defined in section 316(b)(1) of such Act (20 U.S.C. 1059c(b)(1)).

(b) Except for company or division-wide commercial items subcontracting plans, the term *small disadvantaged business*, when used in the FAR 52.219-9 clause, includes historically black colleges and universities and minority institutions, in addition to small disadvantaged business concerns.

(c) Work under the contract or its subcontracts shall be credited toward meeting the small disadvantaged business concern goal required by paragraph (d) of the FAR 52.219-9 clause when:

- (1) It is performed on Indian lands or in joint venture with an Indian tribe or a tribally-owned corporation, and
- (2) It meets the requirements of 10 U.S.C. 2323a.
- (d) Subcontracts awarded to workshops approved by the Committee for Purchase from People Who are Blind or Severely Disabled (41 U.S.C. 46-48), may be counted toward the Contractor's small business subcontracting goal.
- (e) A mentor firm, under the Pilot Mentor-Protege Program established under Section 831 of Pub. L. 101-510, as amended, may count toward its small disadvantaged business goal, subcontracts awarded--
- (f) The master plan approval referred to in paragraph (f) of the FAR 52.219-9 clause is approval by the Contractor's cognizant contract administration activity.
- (g) In those subcontracting plans which specifically identify small, small disadvantaged, and women-owned small businesses, the Contractor shall notify the Administrative Contracting Officer of any substitutions of firms that are not small, small disadvantaged, or women-owned small businesses for the firms listed in the subcontracting plan. Notifications shall be in writing and shall occur within a reasonable period of time after award of the subcontract. Contractor-specified formats shall be acceptable.

(End of clause)

#### 252.223-7004 DRUG-FREE WORK FORCE (SEP 1988)

##### (a) Definitions.

- (1) "Employee in a sensitive position," as used in this clause, means an employee who has been granted access to classified information; or employees in other positions that the Contractor determines involve national security; health or safety, or functions other than the foregoing requiring a high degree of trust and confidence.
- (2) "Illegal drugs," as used in this clause, means controlled substances included in Schedules I and II, as defined by section 802(6) of title 21 of the United States Code, the possession of which is unlawful under chapter 13 of that Title. The term "illegal drugs" does not mean the use of a controlled substance pursuant to a valid prescription or other uses authorized by law.
- (b) The Contractor agrees to institute and maintain a program for achieving the objective of a drug-free work force. While this clause defines criteria for such a program, contractors are encouraged to implement alternative approaches comparable to the criteria in paragraph (c) that are designed to achieve the objectives of this clause.
- (c) Contractor programs shall include the following, or appropriate alternatives:
  - (1) Employee assistance programs emphasizing high level direction, education, counseling, rehabilitation, and coordination with available community resources;
  - (2) Supervisory training to assist in identifying and addressing illegal drug use by Contractor employees;
  - (3) Provision for self-referrals as well as supervisory referrals to treatment with maximum respect for individual confidentiality consistent with safety and security issues;
  - (4) Provision for identifying illegal drug users, including testing on a controlled and carefully monitored basis. Employee drug testing programs shall be established taking account of the following:
    - (i) The Contractor shall establish a program that provides for testing for the use of illegal drugs by employees in sensitive positions. The extent of and criteria for such testing shall be determined by the Contractor based on considerations that include the nature of the work being performed under the contract, the employee's duties, and

efficient use of Contractor resources, and the risks to health, safety, or national security that could result from the failure of an employee adequately to discharge his or her position.

(ii) In addition, the Contractor may establish a program for employee drug testing--

(A) When there is a reasonable suspicion that an employee uses illegal drugs; or

(B) When an employee has been involved in an accident or unsafe practice;

(C) As part of or as a follow-up to counseling or rehabilitation for illegal drug use;

(D) As part of a voluntary employee drug testing program.

(iii) The Contractor may establish a program to test applicants for employment for illegal drug use.

(iv) For the purpose of administering this clause, testing for illegal drugs may be limited to those substances for which testing is prescribed by section 2.1 of subpart B of the "Mandatory Guidelines for Federal Workplace Drug Testing Programs" (53 FR 11980 (April 11, 1988), issued by the Department of Health and Human Services.

(d) Contractors shall adopt appropriate personnel procedures to deal with employees who are found to be using drugs illegally. Contractors shall not allow any employee to remain on duty or perform in a sensitive position who is found to use illegal drugs until such time as the Contractor, in accordance with procedures established by the Contractor, determines that the employee may perform in such a position.

(e) The provisions of this clause pertaining to drug testing program shall not apply to the extent that are inconsistent with state or local law, or with an existing collective bargaining agreement; provided that with respect to the latter, the Contractor agrees those issues that are in conflict will be a subject of negotiation at the next collective bargaining session.

(End of clause)

#### 252.223-7006 PROHIBITION ON STORAGE AND DISPOSAL OF TOXIC AND HAZARDOUS MATERIALS (APR 1993)

(a) "Definitions".

As used in this clause --

(1) "Storage" means a non-transitory, semi-permanent or permanent holding, placement, or leaving of material. It does not include a temporary accumulation of a limited quantity of a material used in or a waste generated or resulting from authorized activities, such as servicing, maintenance, or repair of Department of Defense (DoD) items, equipment, or facilities.

(2) "Toxic or hazardous materials" means:

(i) Materials referred to in section 101(14) of the Comprehensive Environmental Response, Compensation, and Liability Act (CERCLA) of 1980 (42 U.S.C. 9601(14)) and materials designated under section 102 of CERCLA (42 U.S.C. 9602) (40 CFR part 302);

(ii) Materials that are of an explosive, flammable, or pyrotechnic nature; or

(iii) Materials otherwise identified by the Secretary of Defense as specified in DoD regulations.

(b) In accordance with 10 U.S.C. 2692, the Contractor is prohibited from storing or disposing of non-DoD-owned toxic or hazardous materials on a DoD installation, except to the extent authorized by a statutory exception to 10 U.S.C. 2692 or as authorized by the Secretary of Defense or his designee.

(End of clause)

#### 252.225-7031 SECONDARY ARAB BOYCOTT OF ISRAEL (JUN 1992)

(a) Definitions. As used in this clause--

(1) "Foreign person" means any person other than a United States person as defined in Section 16(2) of the Export Administration Act of 1979 (50 U.S.C. App. Sec 2415).

(2) "United States person" is defined in Section 16(2) of the Export Administration Act of 1979 and means any United States resident or national (other than an individual resident outside the United States and employed by other than a United States person), any domestic concern (including any permanent domestic establishment of any foreign concern), and any foreign subsidiary or affiliate (including any permanent foreign establishment) of any domestic concern which is controlled in fact by such domestic concerns, as determined under regulations of the President.

(b) Certification. By submitting this offer, the Offeror, if a foreign person, company or entity, certifies that it--

(1) Does not comply with the Secondary Arab Boycott of Israel; and

(2) Is not taking or knowingly agreeing to take any action, with respect to the Secondary Boycott of Israel by Arab countries, which 50 U.S.C. App. Sec 2407(a) prohibits a United States person from taking.

(End of clause)

#### 252.227-7033 RIGHTS IN SHOP DRAWINGS (APR 1966)

(a) Shop drawings for construction means drawings, submitted to the Government by the Construction Contractor, subcontractor or any lower-tier subcontractor pursuant to a construction contract, showing in detail (i) the proposed fabrication and assembly of structural elements and (ii) the installation (i.e., form, fit, and attachment details) of materials or equipment. The Government may duplicate, use, and disclose in any manner and for any purpose shop drawings delivered under this contract.

(b) This clause, including this paragraph (b), shall be included in all subcontracts hereunder at any tier.

#### 252.231-7000 SUPPLEMENTAL COST PRINCIPLES (DEC 1991)

When the allowability of costs under this contract is determined in accordance with part 31 of the Federal Acquisition Regulation (FAR), allowability shall also be determined in accordance with part 231 of the Defense FAR Supplement, in effect on the date of this contract.

#### 252.236-7000 MODIFICATION PROPOSALS - PRICE BREAKDOWN. (DEC 1991)

(a) The Contractor shall furnish a price breakdown, itemized as required and within the time specified by the Contracting Officer, with any proposal for a contract modification.

(b) The price breakdown --

(1) Must include sufficient detail to permit an analysis of profit, and of all costs for --

- (i) Material;
  - (ii) Labor;
  - (iii) Equipment;
  - (iv) Subcontracts; and
  - (v) Overhead; and
- (2) Must cover all work involved in the modification, whether the work was deleted, added, or changed.
- (c) The Contractor shall provide similar price breakdowns to support any amounts claimed for subcontracts.
- (d) The Contractor's proposal shall include a justification for any time extension proposed.

#### 252.243-7001 PRICING OF CONTRACT MODIFICATIONS (DEC 1991)

When costs are a factor in any price adjustment under this contract, the contract cost principles and procedures in FAR part 31 and DFARS part 231, in effect on the date of this contract, apply.

#### 252.243-7002 REQUESTS FOR EQUITABLE ADJUSTMENT (MAR 1998)

(a) The amount of any request for equitable adjustment to contract terms shall accurately reflect the contract adjustment for which the Contractor believes the Government is liable. The request shall include only costs for performing the change, and shall not include any costs that already have been reimbursed or that have been separately claimed. All indirect costs included in the request shall be properly allocable to the change in accordance with applicable acquisition regulations.

(b) In accordance with 10 U.S.C. 2410(a), any request for equitable adjustment to contract terms that exceeds the simplified acquisition threshold shall bear, at the time of submission, the following certificate executed by an individual authorized to certify the request on behalf of the Contractor:

I certify that the request is made in good faith, and that the supporting data are accurate and complete to the best of my knowledge and belief.

-----  
(Official's Name)

-----  
(Title)

(c) The certification in paragraph (b) of this clause requires full disclosure of all relevant facts, including--

(1) Cost or pricing data if required in accordance with subsection 15.403-4 of the Federal Acquisition Regulation (FAR); and

(2) Information other than cost or pricing data, in accordance with subsection 15.403-3 of the FAR, including actual cost data and data to support any estimated costs, even if cost or pricing data are not required.

(d) The certification requirement in paragraph (b) of this clause does not apply to---

(1) Requests for routine contract payments; for example, requests for payment for accepted supplies and services, routine vouchers under a cost-reimbursement type contract, or progress payment invoices; or

(2) Final adjustment under an incentive provision of the contract.

252.248-7000 PREPARATION OF VALUE ENGINEERING CHANGE PROPOSALS (MAY 1994)

Prepare value engineering change proposals, for submission pursuant to the value engineering clause of this contract, in the format prescribed by the version of MIL-STD-973 in effect on the date of contract award.

(End of clause)

## TABLE OF CONTENTS

### SPECIAL CLAUSES

PARAGRAPH NO.	PARAGRAPH TITLE
SC-1	COMMENCEMENT, PROSECUTION, AND COMPLETION OF WORK
SC-1.1	DELETED - OPTION FOR INCREASED QUANTITY
SC-1.2	EXCEPTION TO COMPLETION PERIOD
SC-2	LIQUIDATED DAMAGES - CONSTRUCTION
SC-3	TIME EXTENSIONS
SC-4	DELETED - VARIATIONS IN ESTIMATED QUANTITIES - SUBDIVIDED ITEMS
SC-5	INSURANCE - WORK ON A GOVERNMENT INSTALLATION
SC-6	DELETED - CONTINUING CONTRACTS
SC-7	PERFORMANCE OF WORK BY THE CONTRACTOR
SC-8	PHYSICAL DATA
SC-9	DELETED- QUANTITY SURVEYS
SC-10	LAYOUT OF WORK
SC-11	DELETED - PAYMENT FOR MOBILIZATION AND DEMOBILIZATION
SC-12	DELETED - AIRFIELD SAFETY PRECAUTIONS
SC-13	DELETED - IDENTIFICATION OF GOVERNMENT-FURNISHED PROPERTY
SC-14	EQUIPMENT OWNERSHIP AND OPERATING EXPENSE SCHEDULE
SC-15	PAYMENT FOR MATERIALS DELIVERED OFF-SITE
SC-16	DELETED - ORDER OF PRECEDENCE
SC-17	DELETED - LIMITATION OF PAYMENT FOR DESIGN
SC-18	CONTRACT DRAWINGS, MAPS AND SPECIFICATIONS
SC-19	DELETED - TECHNICAL PROPOSAL - COPIES TO BE FURNISHED UPON AWARD
SC-20	DELETED - COMPLIANCE CERTIFICATION
SC-21	DELETED - VALUE ENGINEERING
SC-22	EPA ENERGY STAR
SC-23	RECOVERED MATERIALS

01062

Tactical Equipment Complex, Fort Lewis, Washington

## ATTACHMENT A      INDEX OF DRAWINGS



## SPECIAL CLAUSES

### SC-1. COMMENCEMENT, PROSECUTION, AND COMPLETION OF WORK (APR 1984) (FAR 52.211-10).

The Contractor shall be required to (a) commence work under this Contract within 10 calendar days after the date the Contractor receives the notice to proceed, (b) prosecute the work diligently, and (c) complete the entire work ready for use not later than 545 calendar days after date of receipt by Contractor of notice to proceed. The time stated for completion shall include final cleanup of the premises.

#### SC-1.1 DELETED

SC-1.2 Exception to Completion Period(s): In case the Contracting Officer determines that completion of seeding, sodding, and planting, and establishment of same is not feasible within the completion period(s) stated above, the Contractor shall accomplish such work in the first planting period following the contract completion period and shall complete such work as specified, unless other planting periods are directed or approved by the Contracting Officer.

### SC-2. LIQUIDATED DAMAGES - CONSTRUCTION (SEP 2000) (FAR 52.211-12)

(a) If the Contractor fails to complete the work within the time specified in the Contract, or any extension, the Contractor shall pay to the Government as liquidated damages, the sum of \$798.00 for each day of delay.

(b) If the Government terminates the Contractor's right to proceed, the resulting damage will consist of liquidated damages until such reasonable time as may be required for final completion of the work together with any increased costs occasioned the Government in completing the work.

(c) If the Government does not terminate the Contractor's right to proceed, the resulting damage will consist of liquidated damages until the work is completed or accepted.

(d) Exception to Liquidated Damage: In case the Contracting Officer determines that completion of work stated above in paragraph Exception to Completion Period(s) is not feasible during the completion period(s) stated in SC-1, such work will be exempted from liquidated damages.

SC-3. TIME EXTENSIONS (APR 1984) (FAR 52.211-13) Notwithstanding any other provisions of this Contract, it is mutually understood that the time extensions for changes in the work will depend upon the extent, if any, by which the changes cause delay in the completion of the various elements of construction. The change order granting the time extension may provide that the Contract completion date will be extended only for those specific elements so delayed and that the remaining Contract completion dates for all other portions of the work will not be altered and may further provide for an equitable readjustment of liquidated damages under the new completion schedule.

#### SC-4. DELETED.

SC-5. INSURANCE - WORK ON A GOVERNMENT INSTALLATION (JAN 1997) (FAR 52.228-5)

(a) The Contractor shall, at its own expense, provide and maintain during the entire performance period of this Contract at least the kinds and minimum amounts of insurance required in the Insurance Liability Schedule or elsewhere in the Contract.

(b) Before commencing work under this Contract, the Contractor shall certify to the Contracting Officer in writing that the required insurance has been obtained. The policies evidencing required insurance shall contain an endorsement to the effect that any cancellation or any material change adversely affecting the Government's interest shall not be effective:

(1) for such period as the laws of the State in which this Contract is to be performed prescribe;  
or

(2) until 30 days after the insurer or the Contractor gives written notice to the Contracting Officer, whichever period is longer.

(c) The Contractor shall insert the substance of this clause, including this paragraph (c), in subcontracts under this Contract that require work on a Government installation and shall require subcontractors to provide and maintain the insurance required in the Schedule or elsewhere in the Contract. The Contractor shall maintain a copy of all subcontractors' proofs of required insurance, and shall make copies available to the Contracting Officer upon request.

(d) Insurance Liability Schedule (FAR 28.307-2)

(1) Workers' compensation and employer's liability. Contractors are required to comply with applicable Federal and State workers' compensation and occupational disease statutes. If occupational diseases are not compensable under those statutes, they shall be covered under the employer's liability section of the insurance policy, except when Contract operations are so commingled with a Contractor's commercial operation that it would not be practical to require this coverage. Employer's liability coverage of at least \$100,000 shall be required, except in states with exclusive or monopolistic funds that do not permit workers' compensation to be written by private carriers.

(2) General Liability.

(a) The Contracting Officer shall require bodily injury liability insurance coverage written on the comprehensive form of policy of at least \$500,000 per occurrence.

(b) Property damage liability insurance shall be required only in special circumstances as determined by the agency.

(3) Automobile liability. The Contracting Officer shall require automobile liability insurance written on the comprehensive form of policy. The policy shall provide for bodily injury and property damage liability covering the operation of all automobiles used in connection with performing the Contract.

Policies covering automobiles operated in the United States shall provide coverage of at least \$200,000 per person and \$500,000 per occurrence for bodily injury and \$20,000 per occurrence for property damage. The amount of liability coverage on other policies shall be commensurate with any legal requirements of the locality and sufficient to meet normal and customary claims.

(4) Aircraft public and passenger liability. When aircraft are used in connection with performing the Contract, the Contracting Officer shall require aircraft public and passenger liability insurance. Coverage shall be at least \$200,000 per person and \$500,000 per occurrence for bodily injury, other than passenger liability, and \$200,000 per occurrence for property damage. Coverage for passenger liability bodily injury shall be at least \$200,000 multiplied by the number of seats or passengers, whichever is greater.

(5) Environmental Liability. If this contract includes the transport, treatment, storage, or disposal of hazardous material waste the following coverage is required.

The Contractor shall ensure the transporter and disposal facility have liability insurance in effect for claims arising out of the death or bodily injury and property damage from hazardous material/waste transport, treatment, storage and disposal, including vehicle liability and legal defense costs in the amount of \$1,000,000.00 as evidenced by a certificate of insurance for General, Automobile, and Environmental Liability Coverage. Proof of this insurance shall be provided to the Contracting Officer.

SC-6. DELETED.

SC-7. PERFORMANCE OF WORK BY THE CONTRACTOR (APR 1984) (FAR 52.236-1): The Contractor shall perform on the site, and with its own organization, work equivalent to at least fifteen percent (15%) of the total amount of work to be performed under the Contract. The percentage may be reduced by a supplemental agreement to this Contract if, during performing the work, the Contractor requests a reduction and the Contracting Officer determines that the reduction would be to the advantage of the Government.

SC-8. PHYSICAL DATA (APR 1984) (FAR 52.236-4): Data and information furnished or referred to below is for the Contractor's information. The Government will not be responsible for any interpretation of or conclusion drawn from the data or information by the Contractor.

(a) Physical Conditions: The indications of physical conditions on the drawings and in the specifications are the result of site investigations by test holes shown on the drawings.

(b) Weather Conditions: Each bidder shall be satisfied before submitting his bid as to the hazards likely to arise from weather conditions. Complete weather records and reports may be obtained from any National Weather Service Office.

(c) Transportation Facilities: Each bidder, before submitting his bid, shall make an investigation of the conditions of existing public and private roads and of clearances, restrictions, bridge load limits, and other limitations affecting transportation and ingress and egress at the jobsite. The unavailability of transportation facilities or limitations thereon shall not become a basis for claims for damages or extension of time for completion of the work.

SC-9. DELETED.

SC-10. LAYOUT OF WORK (APR 1984) (FAR 52.236-17): The Contractor shall lay out its work from Government-established base lines and bench marks indicated on the drawings, and shall be responsible for all measurements in connection with the layout. The Contractor shall furnish, at its own expense, all stakes, templates, platforms, equipment, tools, materials, and labor required to lay out any part of the work. The Contractor shall be responsible for executing the work to the lines and grades that may be established or indicated by the Contracting Officer. The Contractor shall also be responsible for maintaining and preserving all stakes and other marks established by the Contracting Officer until authorized to remove them. If such marks are destroyed by the Contractor or through its negligence before their removal is authorized, the Contracting Officer may replace them and deduct the expense of the replacement from any amounts due, or to become due, to the Contractor.

SC-11 THROUGH SC-13. DELETED.

SC-14. EQUIPMENT OWNERSHIP AND OPERATING EXPENSE SCHEDULE (MAY 1999)-  
(EFARS 52.231-5000)

(a) This clause does not apply to terminations. See 52.249-5000, Basis for Settlement of Proposals and FAR Part 49.

(b) Allowable cost for construction and marine plant and equipment in sound workable condition owned or controlled and furnished by a contractor or subcontractor at any tier shall be based on actual cost data for each piece of equipment or groups of similar serial and series for which the Government can determine both ownership and operating costs from the contractor's accounting records. When both ownership and operating costs cannot be determined for any piece of equipment or groups of similar serial or series equipment from the contractor's accounting records, costs for that equipment shall be based upon the applicable provisions of EP 1110-1-8, Construction Equipment Ownership and Operating Expense Schedule, Region VIII. Working conditions shall be considered to be average for determining equipment rates using the schedule unless specified otherwise by the contracting officer. For equipment not included in the schedule, rates for comparable pieces of equipment may be used or a rate may be developed using the formula provided in the schedule. For forward pricing, the schedule in effect at the time of negotiations shall apply. For retroactive pricing, the schedule in effect at the time the work was performed shall apply.

(c) Equipment rental costs are allowable, subject to the provisions of FAR 31.105(d)(ii) and FAR 31.205-36. Rates for equipment rented from an organization under common control, lease-purchase arrangements, and sale-leaseback arrangements, will be determined using the schedule, except that actual rates will be used for equipment leased from an organization under common control that has an established practice of leasing the same or similar equipment to unaffiliated lessees.

(d) When actual equipment costs are proposed and the total amount of the pricing action exceeds the small purchase threshold, the contracting officer shall request the contractor to submit either certified cost or pricing data, or partial/limited data, as appropriate. The data shall be submitted on Standard Form 1411, Contract Pricing Proposal Cover Sheet.

(e) Copies of EP1110-1-8 "Construction Equipment Ownership and Operating Expense Schedule" Volumes 1 through 12 are available in Portable Document Format (PDF) and can be viewed or downloaded at <http://www.usace.army.mil/inet/usace-docs/eng-pamphlets/cecw.htm>. A CD-ROM containing (Volumes 1-12) is available through either the Superintendent of Documents or Government bookstores. For additional information telephone 202-512-2250, or access on the Internet at [http://www.access.gpo.gov/su\\_docs](http://www.access.gpo.gov/su_docs).

SC-15. PAYMENT FOR MATERIALS DELIVERED OFF-SITE (MAY 1999)-(EFARS 52.232-5000)

(a) Pursuant to FAR clause 52.232-5, Payments Under Fixed Priced Construction Contracts, materials delivered to the contractor at locations other than the site of the work may be taken into consideration in making payments if included in payment estimates and if all the conditions of the General Provisions are fulfilled. Payment for items delivered to locations other than the work site will be limited to: (1) materials required by the technical provisions; or (2) materials that have been fabricated to the point where they are identifiable to an item of work required under this contract.

(b) Such payment will be made only after receipt of paid or receipted invoices or invoices with canceled check showing title to the items in the prime contractor and including the value of material and labor incorporated into the item.

SC-16 AND SC-17. DELETED.

SC-18. CONTRACT DRAWINGS, MAPS, AND SPECIFICATIONS (OCT 1996) (52.0236-4001 EBS)

(a) The Government--

(1) Will provide the Contractor, without charge, one set of contract drawings and one set of specifications in electronic format on a compact disk. The Government will not give the Contractor any hard copy paper drawings or specifications for any contract resulting from this solicitation.

(b) The Contractor shall--

(1) check all drawings furnished immediately upon receipt;

(2) Compare all drawings and verify the figures before laying out the work;

(3) Promptly notify the Contracting Officer of any discrepancies;

and

(4) Be responsible for any errors which might have been avoided by complying with this paragraph (b).

(c) Large scale drawings shall, in general, govern small scale drawings. Figures marked on drawings shall, in general, be followed in preference to scale measurements.

(d) Omissions from the drawings or specifications or the misdescription of details of work which are manifestly necessary to carry out the intent of the drawings and specifications, or which are customarily performed, shall not relieve the Contractor from performing such omitted or misdescribed details of the work, but shall be performed as if fully and correctly set forth and described in the drawings and specifications.

(e) The work shall conform to the specifications and the contract drawings identified in the index of drawings attached at the end of the Special Clauses.

SC-19 THROUGH SC-21. DELETED.

SC-22. EPA ENERGY STAR: The Government requires that certain equipment be Energy Star compliant. Initially, the sole Energy Star requirement shall be the self certification by the bidder that the specified equipment is Energy Star compliant. Within 3 months of the availability of an EPA sanctioned test for Energy Star compliance, the Contractor shall submit all equipment upgrades and additions for testing and provide proof of compliance to the Government upon completion of testing. Testing shall be at the Contractor's expense.

SC-23. RECOVERED MATERIALS: The Corps of Engineers encourages all bidders to utilize recovered materials to the maximum extent practicable. The attached APPENDIX R contains procurement guidelines for products containing recovered materials.

## APPENDIX R

### PART 247 - COMPREHENSIVE PROCUREMENT GUIDELINE FOR PRODUCTS CONTAINING RECOVERED MATERIALS

40 CFR Ch. 1 (9-1-99 Edition)

#### Subpart B-Item Designations

##### § 247.10 Paper and paper products.

Paper and paper products, excluding building and construction paper grades.

##### § 247.11 Vehicular products.

- (a) Lubricating oils containing re-refined oil, including engine lubricating oils, hydraulic fluids, and gear oils, excluding marine and aviation oils.
- (b) Tires, excluding airplane tire
- (e) Reclaimed engine coolants, excluding coolants used in non-vehicular applications.

##### 247.12 Construction products.

- (a) Building insulation product including the following items:
  - (1) Loose-fill insulation, including but not limited to cellulose fiber, mineral fibers (fiberglass and rock vermiculite, and perlite;
  - (2) Blanket and batt insulation, including but not limited to mineral fibers (fiberglass and rock wool).
  - (3) Board (sheathing, roof decking wall panel) insulation, including but not limited to structural fiberboard and laminated paperboard products perlite composite board, polyurethane, polyisocyanurate, polystyrene, phenolics, and composites; and
  - (4) Spray-in-place insulation, including but not limited to foam-in-place polyurethane and polyisocyanurate and spray-on cellulose.
- (b) Structural fiberboard and laminated paperboard products for applications other than building insulation, including building board, sheathing shingle backer, sound deadening board, roof insulating board, insulating wallboard, acoustical and non-acoustical ceiling tile, acoustical and non-acoustical lay-in panels, floor underlayments, and roof overlay (cover board).
- (c) Cement and concrete, including concrete products such as pipe and block, containing coal fly as ground granulated blast furnace (GGBF) slag.
- (d) Carpet made of polyester fiber use in low- and medium-wear applications.
- (e) Floor tiles and patio block containing recovered rubber or plastic.
- (f) Shower and restroom dividers/partitions containing recovered plastic or steel.
- (g) (1) Consolidated latex paint used for covering graffiti; and
- (2) Reprocessed latex paint used for interior and exterior architectural applications such as wallboard, ceilings, and trim; gutter boards; and concrete, stucco, masonry, wood and metal surfaces.

##### §247.13 Transportation products.

- (a) Traffic barricades and traffic cones used in controlling or restricting vehicular traffic.
- (b) Parking stops made from concrete or containing recovered plastic or rubber.
- (c) Channelizers containing recovered plastic or rubber.
- (d) Delineators containing recovered plastic, rubber, or steel.
- (e) Flexible delineators containing recovered plastic.

§ 247.14 Park and recreation products

- (a) Playground surfaces and running tracks containing recovered rubber or plastic.
- (b) Plastic fencing containing recovered plastic for use in controlling snow or sand drifting and as a warning/safety barrier in construction or other applications.

247.15 Landscaping products.

- (a) Hydraulic mulch products containing recovered paper or recovered wood used for hydroseeding and as an over-spray for straw mulch in landscaping, erosion control, and soil reclamation.
- (b) Compost made from yard trimmings, leaves, and/or grass clippings for use in landscaping, seeding of grass or other plants on roadsides and embankments, as a nutritious mulch under trees and shrubs, and in erosion control and soil reclamation.
- (c) Garden and soaker hoses containing recovered plastic or rubber.
- (d) Lawn and garden edging containing recovered plastic or rubber.

§ 247.16 Non-paper office product.

- (a) Office recycling containers and office waste receptacles.
- (b) Plastic desktop accessories.
- (c) Toner cartridges.
- (d) Binders.
- (e) Plastic trash bags.
- (f) Printer ribbons.
- (g) Plastic envelopes.

§ 247.17 Miscellaneous products.

Pallets containing recovered wood, plastic, or paperboard.

END OF SECTION



## ATTACHMENT A

## INDEX OF DRAWINGS

TACTICAL EQUIPMENT COMPLEX,  
 FORT LEWIS, WASHINGTON  
 PN 47119  
 Drawing No. 22s/214-10-38

SHEET NUMBER	PLATE NUMBER	TITLE	REVISION NUMBER	DATE
1	T-1	Title Sheet		9NOV2001
2	T-2	Drawing Index		9NOV2001
3	GT-1	Exploration Logs		9NOV2001
4	GT-2	Exploration Logs		9NOV2001
5	GT-3	Locations of Explorations		9NOV2001
6	C-1	Civil Notes and Details		9NOV2001
7	C-2	Dimensional Plan		9NOV2001
8	C-3	Grading Plan		9NOV2001
9	C-4	Drainage Plan		9NOV2001
10	C-5	Sewer and Water Plan		9NOV2001
11	C-6	Civil Details		9NOV2001
12	C-7	Civil Details		9NOV2001
13	C-8	Civil Details		9NOV2001
14	C-9	Civil Details		9NOV2001
15	C-10	Civil Details		9NOV2001
16	L-1	Landscape Plan and Details		9NOV2001
17	A-1	Details		9NOV2001
18	A-2	Details		9NOV2001

SHEET NUMBER	PLATE NUMBER	TITLE	REVISION NUMBER	DATE
19	S-1	General Notes		9NOV2001
20	S-2	Concrete Details		9NOV2001
21	S-3	Foundation Details		9NOV2001
22	S-4	Framing Details		9NOV2001
23	S-5	Framing Details		9NOV2001
24	S-6	Concrete Framing Details		9NOV2001
25	M-1	Legend and Schedules		9NOV2001
26	M-2	Waste and Vent Riser Details		9NOV2001
27	M-3	Waste and Vent Riser Details		9NOV2001
28	M-4	Mechanical Details		9NOV2001
29	M-5	Mechanical Details		9NOV2001
30	E-1	Legend and Schedules		9NOV2001
31	E-2	Lighting Fixture Schedule		9NOV2001
32	E-3	Electrical Site Plan		9NOV2001
33	E-4	Riser Diagram		9NOV2001
34	E-5	Details		9NOV2001
35	E-6	Details		9NOV2001
36	A201ACE	Floor Plan		9NOV2001
37	A211ACE	Reflected Ceiling Plan		9NOV2001
38	A301ACE	Schedules, Door, and Window Types		9NOV2001
39	A401ACE	Exterior Elevations		9NOV2001
40	A501ACE	Building Sections		9NOV2001
41	A601ACE	Roof Plan		9NOV2001

SHEET NUMBER	PLATE NUMBER	TITLE	REVISION NUMBER	DATE
42	S201ACE	Foundation Plan		9NOV2001
43	S301ACE	Roof Framing Plan		9NOV2001
44	S501ACE	Braced Frame Elevation		9NOV2001
45	S511ACE	Framing Details		9NOV2001
46	P201ACE	Plumbing Foundation Plan		9NOV2001
47	P301ACE	Plumbing Floor Plan		9NOV2001
48	M201ACE	HVAC Furred Ceiling Plan		9NOV2001
49	M301ACE	HVAC Reflected Ceiling Plan		9NOV2001
50	E201ACE	Lighting Floor Plan		9NOV2001
51	E301ACE	Power Floor Plan		9NOV2001
52	E401ACE	Systems Floor Plan		9NOV2001
53	A202PBO	Floor Plan		9NOV2001
54	A212PBO	Reflected Ceiling Plan		9NOV2001
55	A302PBO	Schedules, Door, and Window Types		9NOV2001
56	A402PBO	Exterior Elevations		9NOV2001
57	A502PBO	Building Sections		9NOV2001
58	A602PBO	Roof Plan		9NOV2001
59	S202PBO	Foundation Plan		9NOV2001
60	S302PBO	Roof Framing Plan		9NOV2001
61	S402PBO	Foundation Details		9NOV2001
62	S502PBO	Braced Frame Elevation		9NOV2001
63	P202PBO	Plumbing Foundation Plan		9NOV2001
64	P302PBO	Plumbing Floor Plan		9NOV2001

SHEET NUMBER	PLATE NUMBER	TITLE	REVISION NUMBER	DATE
65	M202PBO	HVAC Furred Ceiling Plan		9NOV2001
66	M302PBO	HVAC Reflected Ceiling Plan		9NOV2001
67	E202PBO	Lighting Floor Plan		9NOV2001
68	E302PBO	Power Floor Plan		9NOV2001
69	E402PBO	Systems Floor Plan		9NOV2001
70	A203RMP	Floor Plan		9NOV2001
71	A213RMP	Reflected Ceiling Plan		9NOV2001
72	A303RMP	Schedules, Door, and Window Types		9NOV2001
73	A403RMP	Exterior Elevations		9NOV2001
74	A503RMP	Building Sections		9NOV2001
75	A603RMP	Roof Plan		9NOV2001
76	S203RMP	Foundation Plan		9NOV2001
77	S303RMP	Roof Framing Plan		9NOV2001
78	S403RMP	Foundation Details		9NOV2001
79	S503RMP	Braced Frame Elevation		9NOV2001
80	S513RMP	Framing Details		9NOV2001
81	S603RMP	Typical CMU Details		9NOV2001
82	P203RMP	Plumbing Foundation Plan		9NOV2001
83	P303RMP	Plumbing Floor Plan		9NOV2001
84	M203RMP	HVAC Furred Ceiling Plan		9NOV2001
85	M303RMP	HVAC Reflected Ceiling Plan		9NOV2001
86	E203RMP	Lighting Floor Plan		9NOV2001

SHEET NUMBER	PLATE NUMBER	TITLE	REVISION NUMBER	DATE
87	E303RMP	Power Floor Plan		9NOV2001
88	E403RMP	Systems Floor Plan		9NOV2001
89	A204VBB	Floor Plan		9NOV2001
90	A214VBB	Reflected Ceiling Plan		9NOV2001
91	A304VBB	Schedules, Door, and Window Types		9NOV2001
92	A404VBB	Exterior Elevations		9NOV2001
93	A504VBB	Building Sections		9NOV2001
94	A604VBB	Roof Plan		9NOV2001
95	S204VBB	Foundation Plan		9NOV2001
96	S304VBB	Roof Framing Plan		9NOV2001
97	S504VBB	Braced Frame Elevation		9NOV2001
98	P204VBB	Plumbing Foundation Plan		9NOV2001
99	P304VBB	Plumbing Floor Plan		9NOV2001
100	M204VBB	HVAC Plan		9NOV2001
101	FP204VBB	Fire Protection Plan		9NOV2001
102	E204VBB	Electrical Floor Plans		9NOV2001

#### REVISIONS TO DRAWINGS BY NOTATION

Drawing, Sheet C-2: Revise as shown on Sketches CSK-1, CSK-2 and CSK-3 attached.

Drawing, Sheet A-1: In Detail 2F, revise note reading: "Sloped Sill - Solid (101.6) CMU - Color To Match Adjacent Units" to read: "Sloped Sill - Solid (101.6) CMU - Color To Match Adjacent Units, See Detail 1A On Sheet A2 For Sill Details."

Drawing, Sheet A-2: Add Detail 1A, as shown on Sketch ASK-1, attached.

Drawing, Sheet E-3: Revise according to Sketches RE-3A through RE-3E, attached.

Drawing, Sheet A301ACE: Revise Room Finish Schedule as shown on Sketches ASK-2 and ASK-5, attached.

Drawing, Sheet S201ACE: Revise according to Sketch SSK-1, attached.

Drawing, Sheet A302PBO: Revise according to Sketch ASK-6, attached.

Drawing, Sheet A502PBO: Revise all references to sheet "A501PBO" to read "A502PBO."

Drawing, Sheet S202PBO: Add footing mark "F1" to the interior footings surrounding the Secured Storage Room. Also revise according to Sketch SSK-2.

Drawing, Sheet A203RMP: Add NIC to SOLVENT TANKS (2) noted in the upper right hand corner of room 114. Add NIC to WELDING CURTAIN noted in the lower right hand corner of room 114 (note curtain frame is part of the contract.)

Drawing, Sheet A303RMP: In Detail 1A, Add NIC to Note D REFRIDGERATOR and Note E MICROWAVE noted in the NOTES/LEGEND. Revise Room Finish Schedule according to Sketches ASK-3 and ASK-7, attached.

Drawing, Sheet S203RMP: Revise according to Sketch SSK-3.

Drawing, Sheet A304VBB: Revise according to Sketch ASK-4, attached.


Drawing, Sheet S204VBB: Add Note 7, to read: "TOF depth for VBB building shall be -0.50M below finished floor."

STANDARD DETAILS BOUND IN THE SPECIFICATIONS


DRAWING NUMBER	SHEET NUMBER	TITLE	DATE
<u>SECTION 01501 - CONSTRUCTION FACILITIES AND TEMPORARY CONTROLS</u>			
	1 & 2	U.S. Army Project Construction Sign	84JUN20
	1	Hard Hat Sign	10SEP90

# ING

ICAP

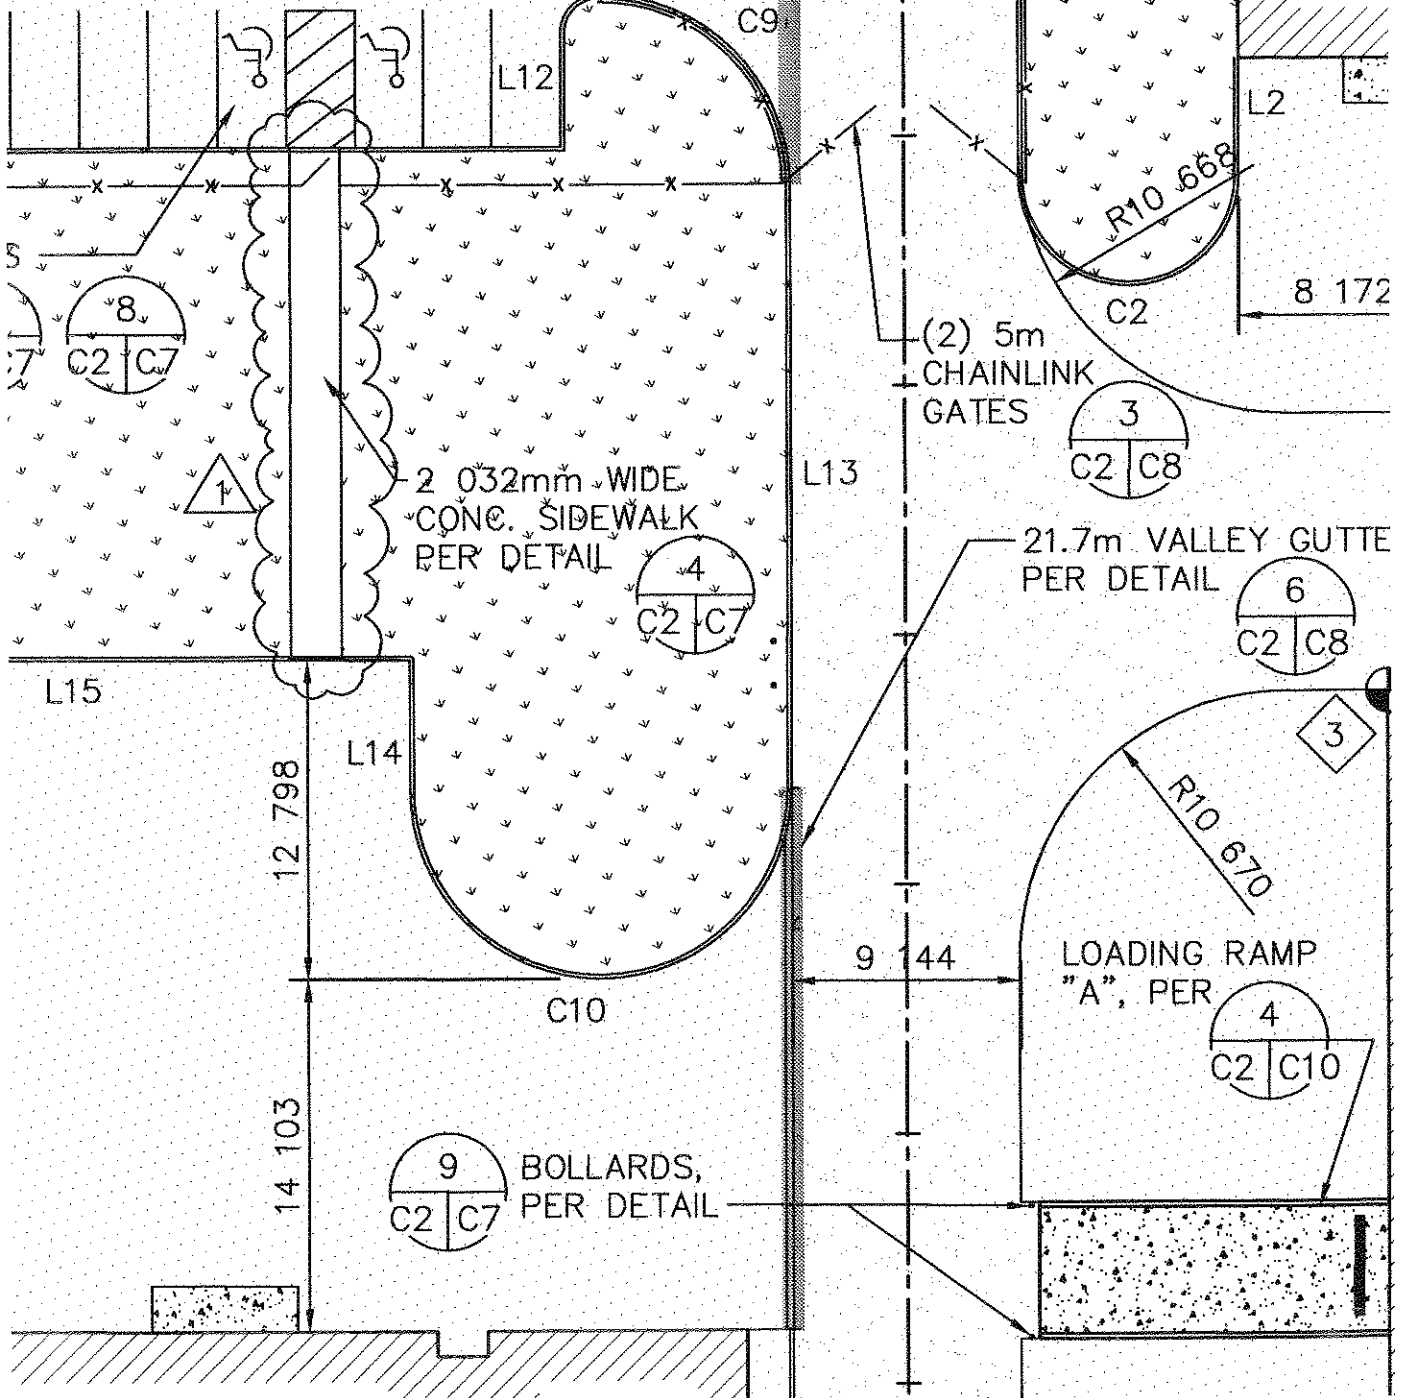

Drawn on 11/17/2002 at 07:29AM by Hald The Name: 0:12001 A00107-010 (CSK) [wpf] [2001] LSC, Long Scale: 0.5

TACTICAL EQUIPMENT COMPLEX — FORT LEWIS, WA		R0001	
 <p>US Army Corps of Engineers Seattle District</p>	<b>BERGER/ABAM</b> ENGINEERS INC. 33301 9TH AVENUE SOUTH FEDERAL WAY, WASHINGTON 98003-6395 (206)431-2300 FAX: (206)431-2250	REFERENCE NO. C2  DATE 1/21/02	B/A PROJ. # A00107-010
			SKETCH NO. CSK-1

A triangle with the number 1 inside.

\_\_\_\_\_ 4. \_\_\_\_\_

\_\_\_\_\_ 5. \_\_\_\_\_

\_\_\_\_\_ 6. \_\_\_\_\_

\_\_\_\_\_ 7. \_\_\_\_\_

\_\_\_\_\_ 8. \_\_\_\_\_

\_\_\_\_\_ 9. \_\_\_\_\_

\_\_\_\_\_ 10. \_\_\_\_\_

\_\_\_\_\_ 11. \_\_\_\_\_

\_\_\_\_\_ 12. \_\_\_\_\_

\_\_\_\_\_ 13. \_\_\_\_\_

\_\_\_\_\_ 14. \_\_\_\_\_

\_\_\_\_\_ 15. \_\_\_\_\_

\_\_\_\_\_ 16. \_\_\_\_\_

\_\_\_\_\_ 17. \_\_\_\_\_

\_\_\_\_\_ 18. \_\_\_\_\_

\_\_\_\_\_ 19. \_\_\_\_\_

\_\_\_\_\_ 20. \_\_\_\_\_

\_\_\_\_\_ 21. \_\_\_\_\_

\_\_\_\_\_ 22. \_\_\_\_\_

\_\_\_\_\_ 23. \_\_\_\_\_

\_\_\_\_\_ 24. \_\_\_\_\_

\_\_\_\_\_ 25. \_\_\_\_\_

\_\_\_\_\_ 26. \_\_\_\_\_

\_\_\_\_\_ 27. \_\_\_\_\_

\_\_\_\_\_ 28. \_\_\_\_\_

\_\_\_\_\_ 29. \_\_\_\_\_

\_\_\_\_\_ 30. \_\_\_\_\_

\_\_\_\_\_ 31. \_\_\_\_\_

\_\_\_\_\_ 32. \_\_\_\_\_

\_\_\_\_\_ 33. \_\_\_\_\_

\_\_\_\_\_ 34. \_\_\_\_\_

\_\_\_\_\_ 35. \_\_\_\_\_

\_\_\_\_\_ 36. \_\_\_\_\_

\_\_\_\_\_ 37. \_\_\_\_\_

\_\_\_\_\_ 38. \_\_\_\_\_

\_\_\_\_\_ 39. \_\_\_\_\_

\_\_\_\_\_ 40. \_\_\_\_\_

\_\_\_\_\_ 41. \_\_\_\_\_

\_\_\_\_\_ 42. \_\_\_\_\_

\_\_\_\_\_ 43. \_\_\_\_\_

\_\_\_\_\_ 44. \_\_\_\_\_

\_\_\_\_\_ 45. \_\_\_\_\_

\_\_\_\_\_ 46. \_\_\_\_\_

\_\_\_\_\_ 47. \_\_\_\_\_

\_\_\_\_\_ 48. \_\_\_\_\_

\_\_\_\_\_ 49. \_\_\_\_\_

\_\_\_\_\_ 50. \_\_\_\_\_

\_\_\_\_\_ 51. \_\_\_\_\_

\_\_\_\_\_ 52. \_\_\_\_\_

\_\_\_\_\_ 53. \_\_\_\_\_

\_\_\_\_\_ 54. \_\_\_\_\_

\_\_\_\_\_ 55. \_\_\_\_\_

\_\_\_\_\_ 56. \_\_\_\_\_

\_\_\_\_\_ 57. \_\_\_\_\_

\_\_\_\_\_ 58. \_\_\_\_\_

\_\_\_\_\_ 59. \_\_\_\_\_

\_\_\_\_\_ 60. \_\_\_\_\_

\_\_\_\_\_ 61. \_\_\_\_\_

\_\_\_\_\_ 62. \_\_\_\_\_

\_\_\_\_\_ 63. \_\_\_\_\_

\_\_\_\_\_ 64. \_\_\_\_\_

\_\_\_\_\_ 65. \_\_\_\_\_

\_\_\_\_\_ 66. \_\_\_\_\_

\_\_\_\_\_ 67. \_\_\_\_\_

\_\_\_\_\_ 68. \_\_\_\_\_

\_\_\_\_\_ 69. \_\_\_\_\_

\_\_\_\_\_ 70. \_\_\_\_\_

\_\_\_\_\_ 71. \_\_\_\_\_

\_\_\_\_\_ 72. \_\_\_\_\_

\_\_\_\_\_ 73. \_\_\_\_\_

\_\_\_\_\_ 74. \_\_\_\_\_

\_\_\_\_\_ 75. \_\_\_\_\_

\_\_\_\_\_ 76. \_\_\_\_\_

\_\_\_\_\_ 77. \_\_\_\_\_

\_\_\_\_\_ 78. \_\_\_\_\_

\_\_\_\_\_ 79. \_\_\_\_\_

\_\_\_\_\_ 80. \_\_\_\_\_

\_\_\_\_\_ 81. \_\_\_\_\_

\_\_\_\_\_ 82. \_\_\_\_\_

\_\_\_\_\_ 83. \_\_\_\_\_

\_\_\_\_\_ 84. \_\_\_\_\_

\_\_\_\_\_ 85. \_\_\_\_\_

\_\_\_\_\_ 86. \_\_\_\_\_

\_\_\_\_\_ 87. \_\_\_\_\_

\_\_\_\_\_ 88. \_\_\_\_\_

\_\_\_\_\_ 89. \_\_\_\_\_

\_\_\_\_\_ 90. \_\_\_\_\_

\_\_\_\_\_ 91. \_\_\_\_\_

\_\_\_\_\_ 92. \_\_\_\_\_

\_\_\_\_\_ 93. \_\_\_\_\_

\_\_\_\_\_ 94. \_\_\_\_\_

\_\_\_\_\_ 95. \_\_\_\_\_


\_\_\_\_\_ 96. \_\_\_\_\_


\_\_\_\_\_ 97. \_\_\_\_\_

\_\_\_\_\_ 98. \_\_\_\_\_

\_\_\_\_\_ 99. \_\_\_\_\_


\_\_\_\_\_ 100. \_\_\_\_\_



TACTICAL EQUIPMENT COMPLEX — FORT LEWIS, WA		R0001	
 US Army Corps of Engineers Seattle District	<b>BERGER/ABAM</b> ENGINEERS INC. 33301 9TH AVENUE SOUTH FEDERAL WAY, WASHINGTON 98003-6395 (206)431-2300 FAX: (206)431-2250	REFERENCE NO. C2	B/A PROJ. #: A00107-010
		DATE 1/21/02	SKETCH NO. CSK-2





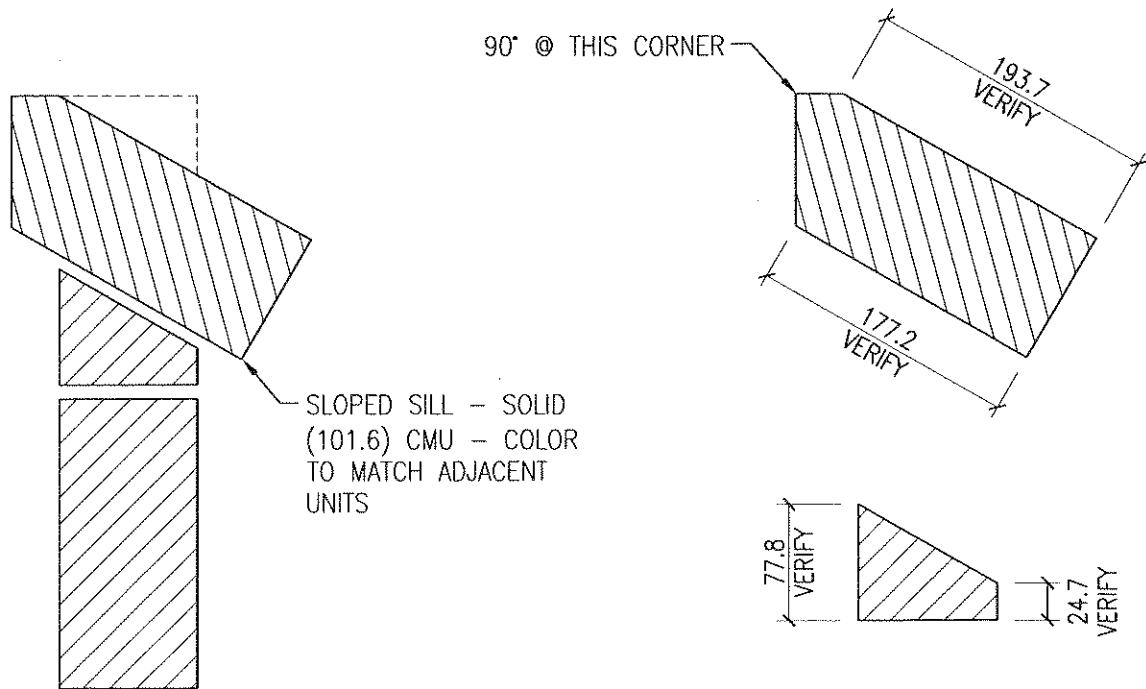


NOTE: ALL DIMENSIONS NEED TO BE VERIFIED IN THE FIELD TO COORDINATE WITH CMU COURSING.

SILL BLOCK

Sibik-01

TACTICAL EQUIPMENT COMPLEX - FORT LEWIS, WA		R0001	
 US Army Corps of Engineers Seattle District	<b>BERGER/ABAM</b> ENGINEERS INC. 33301 9TH AVENUE SOUTH FEDERAL WAY, WASHINGTON 98003-6395 (206)431-2300 FAX: (206)431-2250	REFERENCE NO. A2	B/A PROJ. #: A00107-010
		DATE 1/17/02	SKETCH NO. ASK-1

AND (1) 103mm SPARE CONDUIT.

# ACE

RETENTION  
POND #1

AA-27,29

(1) 27mm C.,  
(3) #10  
(TYPICAL)

C

12 WAY CONCRETE ENCASED DUCT BANK  
SYSTEM WITH (12) 103mm PVC CONDUITS.  
TWO CONDUITS SHALL HAVE (4) 27mm  
INNER DUCTS. PROVIDE 400 PAIR CABLE  
& 48 STRANDS OF SINGLE MODE FIBER  
FROM EXISTING MAN HOLE TO NEW  
MANHOLE.

CONCRETE E  
SYSTEM WITH  
CONDUIT WIT  
AND (1) 53  
WITH (4)#3/

EXISTING COMMUNICATION MAN HOLE

H

Sheet \_\_\_ of \_\_\_


RE-3A

PLATE  
NUMBER:

TACTICAL EQUIPMENT COMPLEX  
FORT LEWIS, WASHINGTON  
FY02 SOCOM PN 47119

TEC - TYPICAL  
ELECTRICAL SITE PLAN

4 WAY CONCRETE ENCASED DUCT BANK SYSTEM WITH (4) 103mm PVC CONDUITS. ONE CONDUIT SHALL HAVE (4) 27mm INNER DUCTS. PROVIDE 200 PAIR CABLE & 72 STRANDS OF SINGLE MODE FIBER TO ACE BUILDING COMMUNICATIONS ROOM. ROUTE 12 STRANDS TO PBO BUILDING AND 12 STRANDS TO RMP BUILDING.

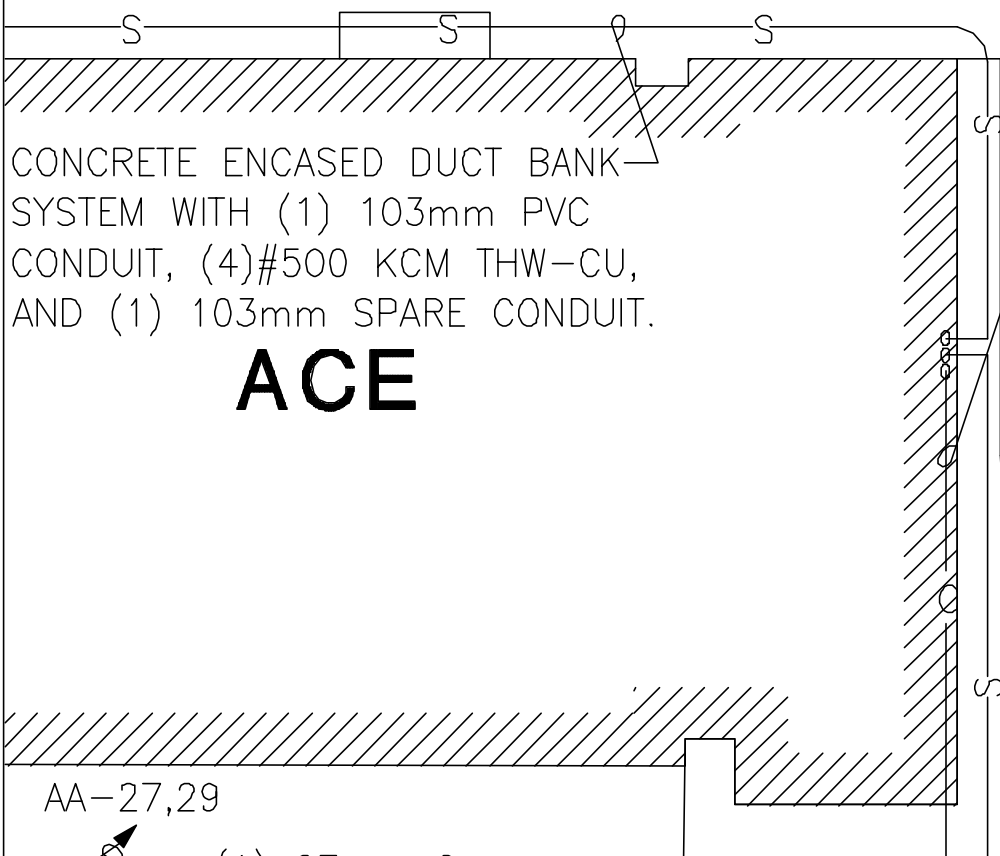

AA-31,33

(1) 27mm C.,  
(3) #10  
(TYPICAL)

EH1  
1-400

AA-27,29

(1) 27mm C.,  
(3) #10  
(TYPICAL)

Sheet \_\_\_ of \_\_\_

RE-3B

PLATE  
NUMBER:

TACTICAL EQUIPMENT COMPLEX  
FORT LEWIS, WASHINGTON  
FY02 SOCOM PN 47119

TEC - TYPICAL  
ELECTRICAL SITE PLAN

PBO

AA-31,33

(1) 27mm C.,  
(3) #10  
(TYPICAL)

EH1  
1-400

EH1  
1-400

EH1  
1-400

DUCT BANK  
mm PVC  
O THW-CU  
CONDUIT  
-CU.

8 WAY CONCRETE ENCASED DUCT BANK  
SYSTEM WITH (8) 103mm PVC CONDUITS.  
ONE CONDUIT SHALL HAVE (4) 27mm  
INNER DUCTS. PROVIDE 200 PAIR CABLE  
& 24 STRANDS OF SINGLE MODE FIBER  
ROUTE 12 STRANDS TO PBO BUILDING  
AND 12 STRANDS TO RMP BUILDING.

4 W  
SYS  
ONE  
INN  
&  
TO

Sheet \_\_\_ of \_\_\_

RE-3C

PLATE  
NUMBER:

TACTICAL EQUIPMENT COMPLEX  
FORT LEWIS, WASHINGTON  
FY02 SOCOM PN 47119

TEC - TYPICAL  
ELECTRICAL SITE PLAN


(4) 103mm PVC CONDUITS.  
SHALL HAVE (4) 27mm  
PROVIDE 100 PAIR CABLE  
S OF SINGLE MODE FIBER  
ING COMMUNICATIONS ROOM.

TYPICAL ALL PRIMARY,  
SECONDARY, AND  
COMMUNICATION RACEWAYS.

4 WAY CONCRETE ENCASED DUCT BANK  
SYSTEM WITH (4) 103mm PVC CONDUITS.  
ONE CONDUIT SHALL HAVE (4) 27mm  
INNER DUCTS. PROVIDE 100 PAIR CABLE  
& 12 STRANDS OF SINGLE MODE FIBER  
TO RMP BUILDING COMMUNICATIONS ROOM.

(1) 27mm C.,  
(3) #10  
(TYPICAL)

CONCRETE ENCASED DUCT BANK SYSTEM WITH (1)  
53mm PVC CONDUIT, (4)#3/0 THWN-CU.

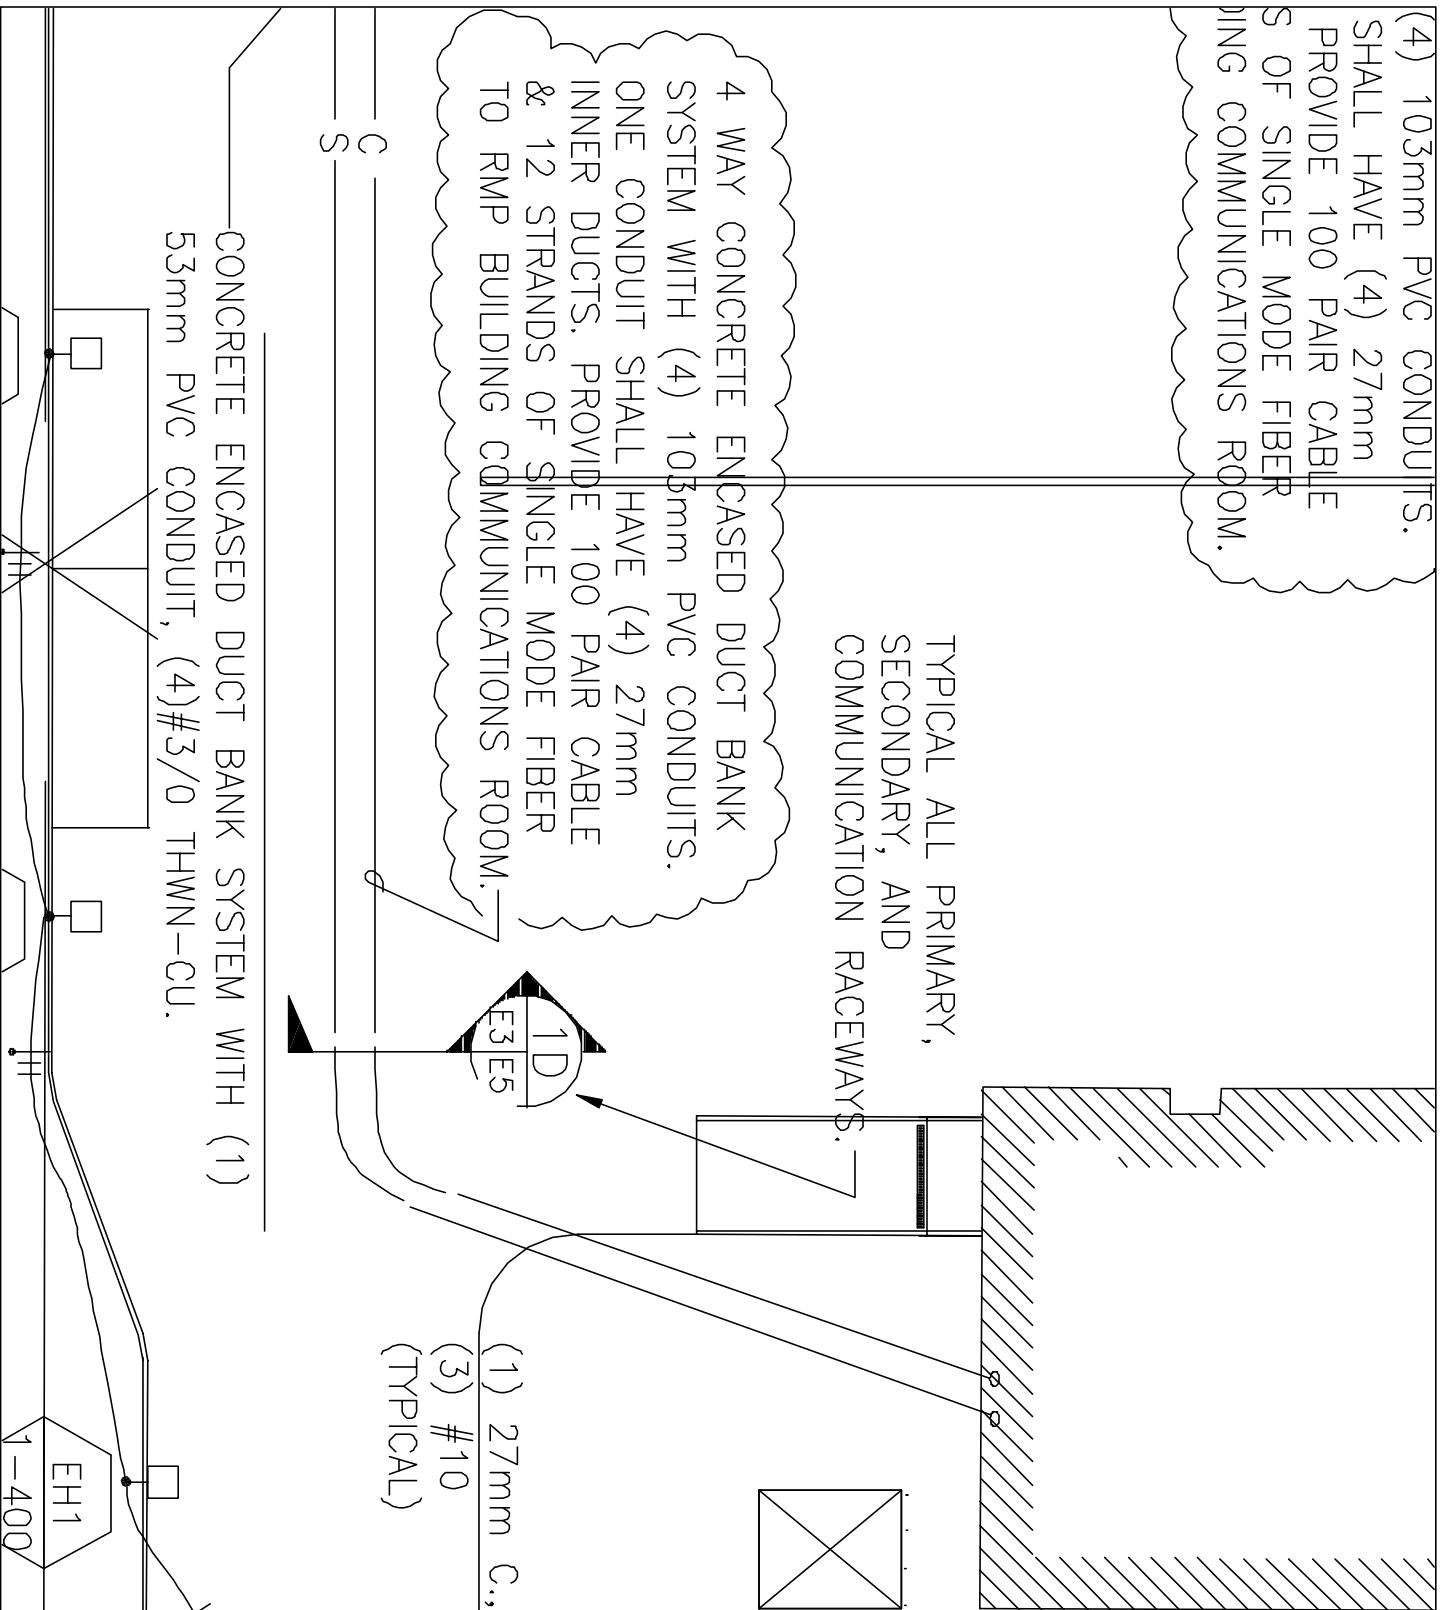

TACTICAL EQUIPMENT COMPLEX  
FORT LEWIS, WASHINGTON  
FY02 SOCOM PN 47119

TEC - TYPICAL  
ELECTRICAL SITE PLAN

PLATE  
NUMBER:

RE-3D

Sheet \_\_\_ of \_\_\_

VBB

(2) 103mm CONDUITS.  
PROVIDE 25 PAIR CABLE  
IN ~~ONE~~ CONDUIT.

CONCRETE ENCASED  
DUCT BANK SYSTEM  
WITH (1) 53mm PVC  
CONDUIT, (3) #1/0  
THW-CU.

4 WAY CONCRETE ENCASED DUCT BANK  
SYSTEM WITH (4) 103mm PVC CONDUITS.  
ONE CONDUIT SHALL HAVE (4) 27mm  
INNER DUCTS. PROVIDE 100 PAIR CABLE  
& 12 STRANDS OF SINGLE MODE FIBER  
TO PBO BUILDING COMMUNICATIONS ROOM.

PBO

TACTICAL EQUIPMENT COMPLEX  
FORT LEWIS, WASHINGTON  
FY02 SOCOM PN 47119  
TEC - TYPICAL  
ELECTRICAL SITE PLAN

PLATE  
NUMBER:

RE-3E

Sheet \_\_\_ of \_\_\_



US Army Corps  
of Engineers  
Seattle District

**BERGER/ABAM**  
ENGINEERS INC.

33301 9TH AVENUE SOUTH  
FEDERAL WAY, WASHINGTON 98003-6395  
(206)431-2300 FAX: (206)431-2250

REFERENCE NO.  
A301ACE

DATE 1/23/02

R0001

B/A PROJ. #:  
A00107-010


SKETCH NO.  
ASK-2


## TACTICAL EQUIPMENT COMPLEX - FORT LEWIS, WA

ROOM FINISH SCHEDULE - A.C.E. BUILDING																	
NO.	NAME	FLOOR		BASE		NORTH WALL		EAST WALL		SOUTH WALL		WEST WALL		CEILING		REMARKS	
		MAT'L	FIN	MAT'L	FIN	MAT'L	FIN	MAT'L	FIN	MAT'L	FIN	MAT'L	FIN	MAT'L	FIN		
100	HALL			CONC	VCT-1	RB-1	-	GWB	P-2	GWB	P-2	GWB	P-2	GWB	ACT	-	C = 2743mm
101	CLASSROOM			CONC	CPT	RB-1	-	GWB	P-1	GWB	P-2	GWB	P-2	GWB	ACT	-	C = 3048mm
102	COMM CLOSET			CONC	T/CS	RB-2	-	FRPLY	P-2	FRPLY	P-2	FRPLY	P-2	FRPLY	ACT	P-2	
103	ELECTRICAL			CONC	T/CS	RB-2	-	GWB	P-2	GWB	P-2	GWB	P-2	GWB	ES	P-2	
104	MECHANICAL ROOM			CONC	T/CS	RB-2	-	GWB	P-2	GWB	P-2	GWB	P-2	GWB	ES	P-2	
105	MENS RESTROOM			CONC	MSCT	CT	-	CT / TBB	-	CT / TBB	-	CT / TBB	-	MRGWB	P-2	C = 2438mm	
106	SHOWER			CONC	MSCT	CT	-	CT / TBB	-	CT / TBB	-	CT / TBB	-	MRGWB	P-2	C = 2438mm	
107	H/C FEMALE RESTROOM			CONC	MSCT	CT	-	CT/TBB - GWB	P-2	CT/TBB - GWB	P-2	CT/TBB - GWB	P-2	MRGWB	P-2	C = 2438mm	
108	COMM/MO MAINTENANCE BAY			CONC	SDT	RB-1	-	FRPLY-GWB	P-1	FRPLY-GWB	P-2	GWB-CONC	P-1	FRPLY-GWB	ES	P-2	
109	HALL			CONC	VCT-1	RB-1	-	GWB	P-2	GWB	P-2	GWB	P-2	GWB	ACT	-	C = 2743mm
110	JANITOR			CONC	T/CS	RB-2	-	FRP-MRGWB	P-2	FRP-MRGWB	P-2	MRGWB	P-2	MRGWB	P-2	P-2	C = 2438mm
111	VESTIBULE			CONC	T/CS	RB-2	-	GWB	P-2	GWB	P-2	GWB	P-2	GWB	ACT	-	C = 2438mm
112	ELM SHOP AREA			CONC	SDT	RB-1	-	GWB	P-1	GWB	P-2	GWB	P-2	CONC	ACT	-	C = 3048mm
113	ELM SECURE STORAGE			CONC	T/CS	RB-2	-	CONC	P-2	CONC	P-2	CONC	P-2	CONC	CONC	P-2	C = 3048mm +/-
114	COMM/MO P/L STORAGE			CONC	T/CS	RB-2	-	FRPLY-GWB	P-2	FRPLY-GWB	P-2	CONC	P-2	CONC	WM	P-2	C = 3048mm
115	VEHICLE STORAGE BAY			CONC	T/CS	RB-2	-	FRPLY-GWB	P-2	FRPLY-GWB	P-2	FRPLY-GWB	P-2	FRPLY-GWB	ES	P-2	
116	OFFICE			CONC	VCT-1	RB-1	-	GWB	P-2	FRPLY-GWB	P-2	GWB	P-2	GWB	ACT	-	C = 2743mm
117	COMM/MO TEAM STORAGE			CONC	T/CS	RB-2	-	GWB	P-2	GWB	P-2	GWB	P-2	GWB	WM	P-2	C = 3048mm
118	COMM/MO TEAM STORAGE			CONC	T/CS	RB-2	-	GWB	P-2	GWB	P-2	GWB	P-2	GWB	WM	P-2	C = 3048mm
119	WEAPONS MAINTENANCE AREA			CONC	T/CS	RB-2	-	GWB	P-2	GWB	P-2	CONC	P-2	GWB	ES	P-2	
120	SECURED WEAPONS STORAGE			CONC	T/CS	RB-2	-	CONC	P-2	CONC	P-2	CONC	P-2	CONC	CONC	P-2	C = 3048mm +/-




ROOM FINISH SCHEDULE - A.C.E. BUILDING																
NO.	NAME	FLOOR		BASE		NORTH WALL		EAST WALL		SOUTH WALL		WEST WALL		CEILING		REMARKS
		MAT'L	FIN	MAT'L	FIN	MAT'L	FIN	MAT'L	FIN	MAT'L	FIN	MAT'L	FIN	MAT'L	FIN	
100	HALL	CONC	VCT-1	RB-1	-	GWB	P-2	GWB	GWB	GWB	GWB	GWB	GWB	P-2	ACT	C = 2743mm
101	CLASSROOM	CONC	CPT	RB-1	-	GWB	P-1	GWB	GWB	GWB	GWB	GWB	GWB	P-2	ACT	C = 3048mm
102	COMM CLOSET	CONC	T/C/S	RB-2	-	FRPLY	P-2	FRPLY	FRPLY	FRPLY	FRPLY	FRPLY	FRPLY	P-2	ACT	
103	ELECTRICAL	CONC	T/C/S	RB-2	-	GWB	P-2	GWB	GWB	GWB	GWB	GWB	GWB	P-2	ES	
104	MECHANICAL ROOM	CONC	T/C/S	RB-2	-	GWB	P-2	GWB	GWB	GWB	GWB	GWB	GWB	P-2	ES	
105	MENS RESTROOM	CONC	CT	CT	-	CT / TBB	-	CT / TBB	CT / TBB	CT / TBB	CT / TBB	CT / TBB	CT / TBB	P-2	MRGWB	C = 2438mm
106	SHOWER	CONC	MSCT	CT	-	MSCT / TBB	-	MSCT / TBB	MSCT / TBB	MSCT / TBB	MSCT / TBB	MSCT / TBB	MSCT / TBB	P-2	MRGWB	C = 2438mm
107	H/C FEMALE RESTROOM	CONC	CT	CT	-	CT / TBB	-	CT / TBB	CT / TBB	CT / TBB	CT / TBB	CT / TBB	CT / TBB	P-2	MRGWB	C = 2438mm
108	COMMO MAINTENANCE BAY	CONC	SDT	RB-1	-	FRPLY-GWB	P-1	FRPLY-GWB	FRPLY-GWB	FRPLY-GWB	FRPLY-GWB	FRPLY-GWB	FRPLY-GWB	P-1	ES	
109	HALL	CONC	VCT-1	RB-1	-	GWB	P-2	GWB	GWB	GWB	GWB	GWB	GWB	P-2	ACT	C = 2743mm
110	JANITOR	CONC	T/C/S	RB-2	-	FRP-MRGWB	P-2	FRP-MRGWB	MRGWB	MRGWB	MRGWB	MRGWB	MRGWB	P-2	MRGWB	C = 2438mm
111	VESTIBULE	CONC	T/C/S	RB-2	-	GWB	P-2	GWB	GWB	GWB	GWB	GWB	GWB	P-2	ACT	C = 2438mm
112	ELM SHOP AREA	CONC	SDT	RB-1	-	GWB	P-1	GWB	GWB	GWB	GWB	GWB	GWB	P-1	ACT	C = 3048mm
113	ELM SECURE STORAGE	CONC	T/C/S	RB-2	-	CONC	P-2	CONC	CONC	CONC	CONC	CONC	CONC	P-2	CONC	C = 3048mm +/-
114	COMMO P/L STORAGE	CONC	T/C/S	RB-2	-	FRPLY-GWB	P-2	FRPLY-GWB	FRPLY-GWB	FRPLY-GWB	FRPLY-GWB	FRPLY-GWB	FRPLY-GWB	P-2	WM	C = 3048mm
115	VEHICLE STORAGE BAY	CONC	T/C/S	RB-2	-	FRPLY-GWB	P-2	FRPLY-GWB	FRPLY-GWB	FRPLY-GWB	FRPLY-GWB	FRPLY-GWB	FRPLY-GWB	P-2	ES	
116	OFFICE	CONC	VCT-1	RB-1	-	GWB	P-2	GWB	GWB	GWB	GWB	GWB	GWB	P-1	ACT	C = 2743mm
117	COMMO TEAM STORAGE	CONC	T/C/S	RB-2	-	GWB	P-2	GWB	GWB	GWB	GWB	GWB	GWB	P-2	WM	C = 3048mm
118	COMMO TEAM STORAGE	CONC	T/C/S	RB-2	-	GWB	P-2	GWB	GWB	GWB	GWB	GWB	GWB	P-2	WM	C = 3048mm
119	WEAPONS MAINTENANCE AREA	CONC	T/C/S	RB-2	-	GWB	P-2	GWB	GWB	GWB	GWB	GWB	GWB	P-2	ES	
121	SECURED WEAPONS STORAGE	CONC	T/C/S	RB-2	-	CONC	P-2	CONC	CONC	CONC	CONC	CONC	CONC	P-2	CONC	C = 3048mm +/-


TACTICAL EQUIPMENT COMPLEX — FORT LEWIS, WA		R0004	
 US Army Corps of Engineers Seattle District	<b>BERGER/ABAM</b> ENGINEERS INC. 33301 9TH AVENUE SOUTH FEDERAL WAY, WASHINGTON 98003-6395 (206)431-2300 FAX: (206)431-2250	REFERENCE NO. A301ACE	B/A PROJ. #: A00107-010
		DATE 2/11/02	SKETCH NO. ASK-5

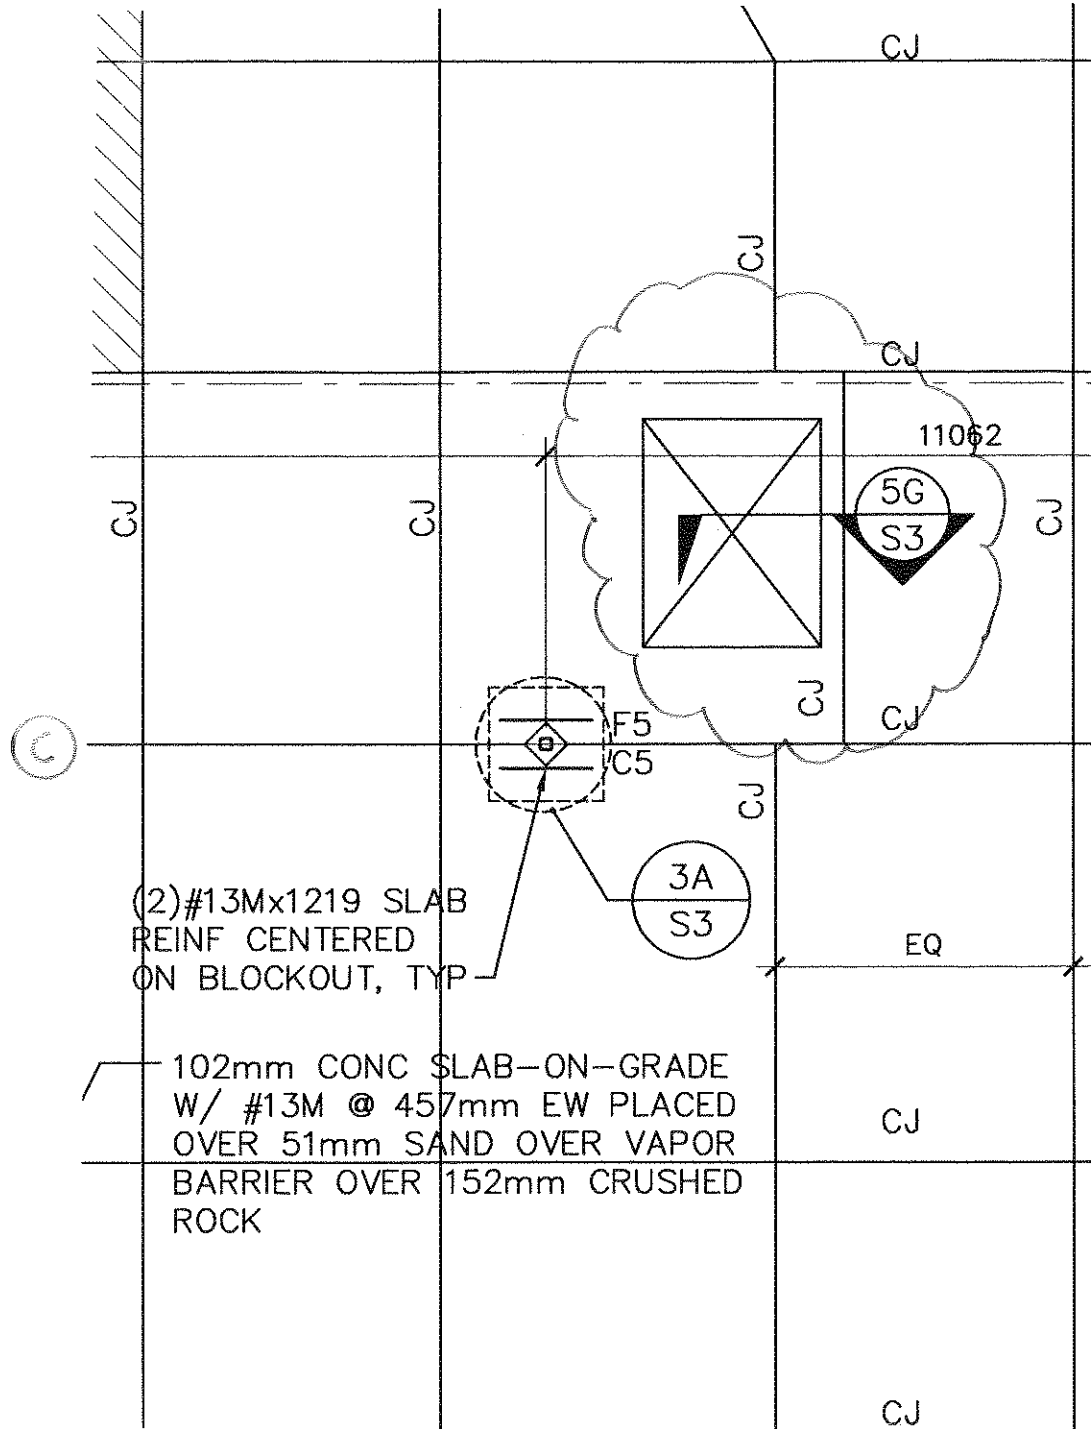


3


TACTICAL EQUIPMENT COMPLEX - FORT LEWIS, WA		R0004	
 <p>US Army Corps of Engineers Seattle District</p>	<p><b>BERGER/ABAM</b> ENGINEERS INC.</p> <p>33301 9TH AVENUE SOUTH FEDERAL WAY, WASHINGTON 98003-6395 (206)431-2300 FAX: (206)431-2250</p>	REFERENCE NO. S201ACE	B/A PROJ. # A00107-010
		DATE 2/11/02	SKETCH NO. SSK-1

ROOM FINISH SCHEDULE - P.B.O. BUILDING																	
NO.	NAME	FLOOR		BASE		NORTH WALL		EAST WALL		SOUTH WALL		WEST WALL		CEILING		REMARKS	NO.
		MAT'L	FIN	MAT'L	FIN	MAT'L	FIN	MAT'L	FIN	MAT'L	FIN	MAT'L	FIN	MAT'L	FIN		
100	HALL	CONC	VCT-1	RB-1	-	GWB	P-2	GWB	P-2	GWB	P-2	GWB	P-2	ACT	-	C = 2743mm	100
102	OIG/NOIC	CONC	CPT	RB-1	-	GWB	P-1	GWB	P-1	GWB	P-1	GWB	P-1	ACT	-	C = 2743mm	102
104	GENERAL ADMINISTRATION	CONC	CPT	RB-1	-	GWB	P-1	GWB	P-1	GWB	P-1	GWB	P-1	ACT	-	C = 2743mm	104
105	SECURE STORAGE	CONC	T-CS	RB-2	-	CONC	P-2	CONC	P-2	CONC	P-2	CONC	P-2	CONC	P-2	C = 3048mm	105
106	MUD ROOM	CONC	T-CS	RB-2	-	GWB	P-2	GWB	P-2	GWB	P-2	GWB	P-2	ACT	-	C = 2743mm	106
107	MENS RESTROOM	CONC	CT	CT	-	CT / TBB	-	CT / TBB	-	CT / TBB	-	CT / TBB	-	MRGWB	P-2	C = 2438mm	107
108	SHOWER	CONC	MSCT	CT	-	MSCT / TBB	-	MSCT / TBB	-	MSCT / TBB	-	MSCT / TBB	-	MRGWB	P-2	C = 2438mm	108
109	JANITOR	CONC	T-CS	RB-2	-	MRGWB	P-2	MRGWB	P-2	FRPLY-MRGWB	P-2	FRPLY-MRGWB	P-2	MRGWB	P-2	C = 2438mm	109
110	HC/F RESTROOM	CONC	CT	CT	-	CT / TBB	-	CT / TBB	-	CT / TBB	-	CT / TBB	-	GWB	P-2	C = 2438mm	110
111	COMM CLOSET	CONC	T-CS	RB-2	-	FRPLY	P-2	FRPLY	P-2	FRPLY	P-2	FRPLY	P-2	ES	P-2		111
112	MECHANICAL	CONC	T-CS	RB-2	-	GWB	P-2	GWB	P-2	GWB	P-2	GWB	P-2	ES	P-2		112
113	ELECTRICAL	CONC	T-CS	RB-2	-	GWB	P-2	GWB	P-2	GWB	P-2	GWB	P-2	ES	P-2		113
114	CLASS II STORAGE AND SUPPLY	CONC	T-CS	RB-2	-	GWB	P-2	GWB	P-2	GWB	P-2	GWB	P-2	ES	P-2		114
115	WAREHOUSE	CONC	T-CS	RB-2	-	FRPLY-GWB	P-2	FRPLY-GWB	P-2	FRPLY-GWB	P-2	FRPLY-GWB	P-2	ES	P-2		115
116	CONTINGENCY PALLET STORAGE	CONC	T-CS	RB-2	-	FRPLY-GWB	P-2	FRPLY-GWB	P-2	FRPLY-GWB	P-2	FRPLY-GWB	P-2	ES	P-2		116
117	PALLET AREA	CONC	T-CS	RB-2	-	FRPLY-GWB	P-2	FRPLY-GWB	P-2	FRPLY-GWB	P-2	FRPLY-GWB	P-2	ES	P-2		117

TACTICAL EQUIPMENT COMPLEX — FORT LEWIS, WA		R0004	
 US Army Corps of Engineers Seattle District	<b>BERGER/ABAM</b> ENGINEERS INC. 33301 9TH AVENUE SOUTH FEDERAL WAY, WASHINGTON 98003-6395 (206)431-2300 FAX: (206)431-2250	REFERENCE NO. A302PBO	B/A PROJ. #: A00107-010
		DATE 2/11/02	SKETCH NO. ASK-6

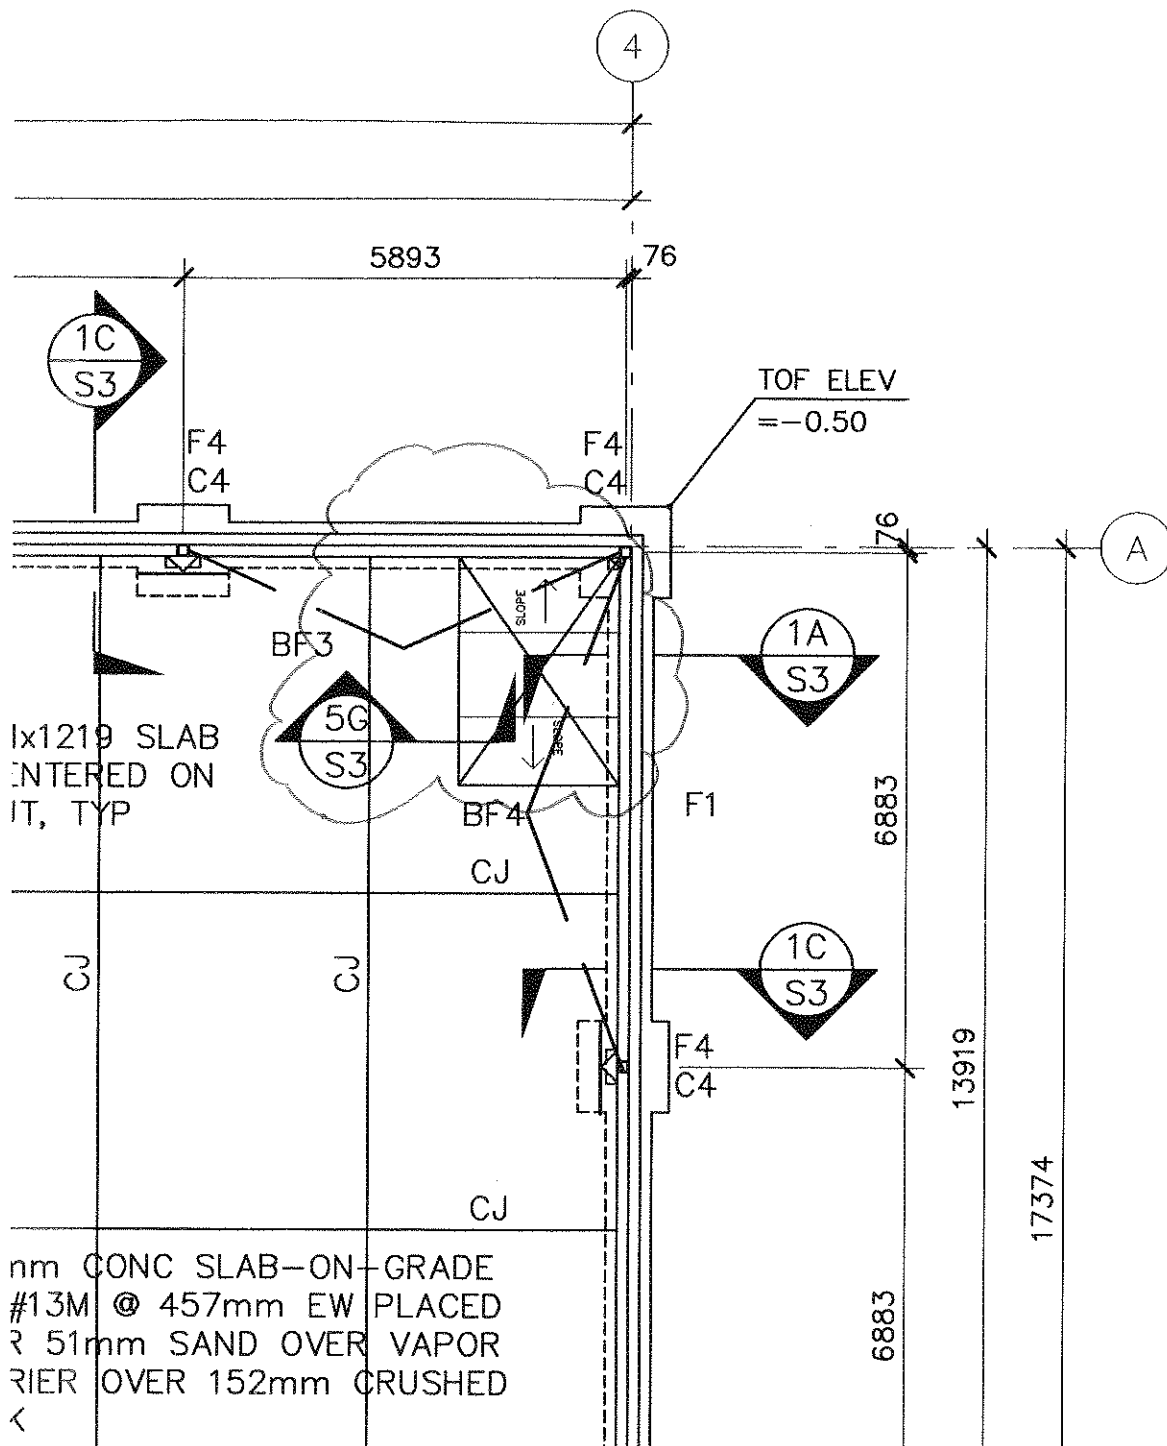


Lot Saved on Mon Jan 21 2002 at 01:58PM by Heide File Name: G:\2000\40000\010\2000\img\00001\A001.dwg Scale: AS

TACTICAL EQUIPMENT COMPLEX - FORT LEWIS, WA		R0004	
 <p>US Army Corps of Engineers Seattle District</p>	<p><b>BERGER/ABAM</b> ENGINEERS INC. 33301 9TH AVENUE SOUTH FEDERAL WAY, WASHINGTON 98003-6395 (206)431-2300 FAX: (206)431-2250</p>	REFERENCE NO. S202PBO	B/A PROJ. #: A00107-010
		DATE 2/11/02	SKETCH NO. SSK-2

ROOM FINISH SCHEDULE - R.M.P. BUILDING

NO.	NAME	FLOOR		BASE		NORTH WALL		EAST WALL		SOUTH WALL		WEST WALL		CEILING		REMARKS	NO.
		MAT'L	FIN	MAT'L	FIN	MAT'L	FIN	MAT'L	FIN	MAT'L	FIN	MAT'L	FIN	MAT'L	FIN		
100	HALL	CONC	VCT-1	RB-1	-	GWB	P-2	GWB	P-2	GWB	P-2	GWB	P-2	ACT	-	C = 2743mm	100
101	PL STORAGE	CONC	T-CS	RB-2	-	GWB	P-2	GWB	P-2	GWB	P-2	GWB	P-2	ES	P-2		101
102	BREAKROOM	CONC	VCT-1/VCT-2*	RB-1	-	GWB	P-1	GWB	P-1	GWB	P-2	GWB	P-2	ACT	-	C = 2743mm, *CHECKERED PATTERN	102
103	JANITOR	CONC	T-CS	RB-2	-	MRGWB	P-2	MRGWB	P-2	FRP-MRGWB	P-2	FRP-MRGWB	P-2	MRGWB	P-2	C = 2438mm	103
104	COMM CLOSET	CONC	T-CS	RB-2	-	FRPLY	P-2	FRPLY	P-2	FRPLY	P-2	FRPLY	P-2	ES	P-2		104
105	ELECTRICAL	CONC	T-CS	RB-2	-	GWB	P-2	GWB	P-2	GWB	P-2	GWB	P-2	ES	P-2		105
106	MECHANICAL	CONC	T-CS	RB-2	-	GWB	P-2	GWB	P-2	GWB	P-2	GWB	P-2	ES	P-2		106
107	MENS RESTROOM	CONC	MSCT	CT	-	CT / TBB	-	CT / TBB	-	CT / TBB	-	CT / TBB	-	MRGWB	P-2	C = 2438mm	107
108	SHOWER	CONC	MSCT	CT	-	CT / TBB	-	CT / TBB	-	CT / TBB	-	CT / TBB	-	MRGWB	P-2	C = 2438mm	108
109	H/C/F RESTROOM	CONC	MSCT	CT	-	CT/TBB - GWB	P-2	CT/TBB - GWB	P-2	CT/TBB - GWB	P-2	CT/TBB - GWB	P-2	MRGWB	P-2	C = 2438mm	109
110	MOTOR SARGENT	CONC	VCT-1	RB-1	-	GWB	P-1	GWB	P-1	GWB	P-2	GWB	P-2	ACT	-	C = 2743mm	110
111	TOOL ROOM	CONC	T-CS	RB-2	-	FRPLY-GWB	P-2	FRPLY-GWB	P-2	FRPLY-GWB	P-2	FRPLY-GWB	P-2	ES	P-2		111
112	GENERAL ITEM REPAIR	CONC	T-CS	RB-2	-	FRPLY-GWB	P-1	FRPLY-GWB	P-1	FRPLY-GWB	P-2	FRPLY-GWB	P-2	ES	P-2		112
113	TAMMS/DISPATCH	CONC	VCT-1	RB-1	-	GWB	P-1	GWB	P-2	GWB	P-1	GWB	P-1	ACT	-	C = 2743mm	113
114	MAINTENANCE BAY	CONC	T-CS	-	-	FRPLY-GWB	P-2	FRPLY-GWB	P-2	FRPLY-GWB	P-2	FRPLY-GWB	P-2	ES	P-2		114
115	AIR COMPRESSOR	CONC	T-CS	-	-	CHU/FRPLY	P-2	CHU/FRPLY	P-2	CHU	P-2	CHU/FRPLY	P-2	ES	P-2		115
116	POL STORAGE	CONC	T-CS	-	-	CHU	P-2	CHU	P-2	CHU	P-2	CHU	P-2	ES	P-2		116
117	FENCED HAZMAT STORAGE AREA	CONC	T-CS	-	-	FENCE	-	FENCE	-	CHU	BS	CHU	BS	ES	P-2		117

TACTICAL EQUIPMENT COMPLEX — FORT LEWIS, WA		R0001	
 US Army Corps of Engineers Seattle District	<b>BERGER/ABAM</b> ENGINEERS INC. 33301 9TH AVENUE SOUTH FEDERAL WAY, WASHINGTON 98003-6395 (206)431-2300 FAX: (206)431-2250	REFERENCE NO. A303RMP	B/A PROJ. # A00107-010
		DATE 1/23/02	SKETCH NO. ASK-3



## TACTICAL EQUIPMENT COMPLEX - FORT LEWIS, WA

R0004

REFERENCE NO.  
A303RMP

B/A PROJ. #:  
A00107-010


DATE 2/11/02


SKETCH NO. ASK-7

**BERGER/ABAM**  
ENGINEERS INC.

33301 9TH AVENUE SOUTH  
FEDERAL WAY, WASHINGTON 98003-6395  
(206)431-2300 FAX: (206)431-2250

ROOM FINISH SCHEDULE - R.M.P. BUILDING																	
NO.	NAME	FLOOR		BASE		NORTH WALL		EAST WALL		SOUTH WALL		WEST WALL		CEILING		REMARKS	NO.
		MAT'L	FIN	MAT'L	FIN	MAT'L	FIN	MAT'L	FIN	MAT'L	FIN	MAT'L	FIN	MAT'L	FIN		
100	HALL	CONC	VCT-1	RB-1	-	GWB	P-2	GWB	P-2	GWB	P-2	GWB	P-2	ACT	-	C = 2743mm	100
101	PUL STORAGE	CONC	T-CS	RB-2	-	GWB	P-2	GWB	P-2	GWB	P-2	GWB	P-2	ES	P-2		101
102	BREAKROOM	CONC	VCT-1/VCT-2*	RB-1	-	GWB	P-1	GWB	P-1	GWB	P-2	GWB	P-2	ACT	-	C = 2743mm, "CHECKERED PATTERN"	102
103	JANITOR	CONC	T-CS	RB-2	-	MRGWB	P-2	MRGWB	P-2	FRP-MRGWB	P-2	FRP-MRGWB	P-2	MRGWB	P-2	C = 2438mm	103
104	COMM CLOSET	CONC	T-CS	RB-2	-	FRPLY	P-2	FRPLY	P-2	FRPLY	P-2	FRPLY	P-2	ES	P-2		104
105	ELECTRICAL	CONC	T-CS	RB-2	-	GWB	P-2	GWB	P-2	GWB	P-2	GWB	P-2	ES	P-2		105
106	MECHANICAL	CONC	T-CS	RB-2	-	GWB	P-2	GWB	P-2	GWB	P-2	GWB	P-2	ES	P-2		106
107	MENS RESTROOM	CONC	CT	CT	-	CT / TBB	-	CT / TBB	-	CT / TBB	-	CT / TBB	-	MRGWB	P-2	C = 2438mm	107
108	SHOWER	CONC	MSCT	CT	-	MSCT / TBB	-	MSCT / TBB	-	MSCT / TBB	-	MSCT / TBB	-	MRGWB	P-2	C = 2438mm	108
109	H/C/F RESTROOM	CONC	CT	CT	-	CT / TBB	-	CT / TBB	-	CT / TBB	-	CT / TBB	-	MRGWB	P-2	C = 2438mm	109
110	MOTOR SARGENT	CONC	VCT-1	RB-1	-	GWB	P-1	GWB	P-2	GWB	P-2	GWB	P-2	ACT	-	C = 2743mm	110
111	TOOL ROOM	CONC	T-CS	RB-2	-	FRPLY-GWB	P-2	FRPLY-GWB	P-2	FRPLY-GWB	P-2	FRPLY-GWB	P-2	ES	P-2		111
112	GENERAL ITEM REPAIR	CONC	T-CS	RB-2	-	FRPLY-GWB	P-1	FRPLY-GWB	P-2	FRPLY-GWB	P-2	FRPLY-GWB	P-2	ES	P-2		112
113	TAMPS/DISPATCH	CONC	VCT-1	RB-1	-	GWB	P-1	GWB	P-1	GWB	P-1	GWB	P-1	ACT	-	C = 2743mm	113
114	MAINTENANCE BAY	CONC	T-CS	-	-	FRPLY-GWB	P-2	FRPLY-GWB	P-2	FRPLY-GWB	P-2	FRPLY-GWB	P-2	ES	P-2		114
115	AIR COMPRESSOR	CONC	T-CS	-	-	CMU/FRPLY	P-2	CMU/FRPLY	P-2	CMU	P-2	CMU/FRPLY	P-2	ES	P-2		115
116	POL STORAGE	CONC	T-CS	-	-	CMU	P-2	CMU	P-2	CMU	P-2	CMU	P-2	ES	P-2		116
117	FENCED HAZMAT STORAGE AREA	CONC	T-CS	-	-	FENCE	-	FENCE	-	CMU	BS	CMU	BS	ES	P-2		117

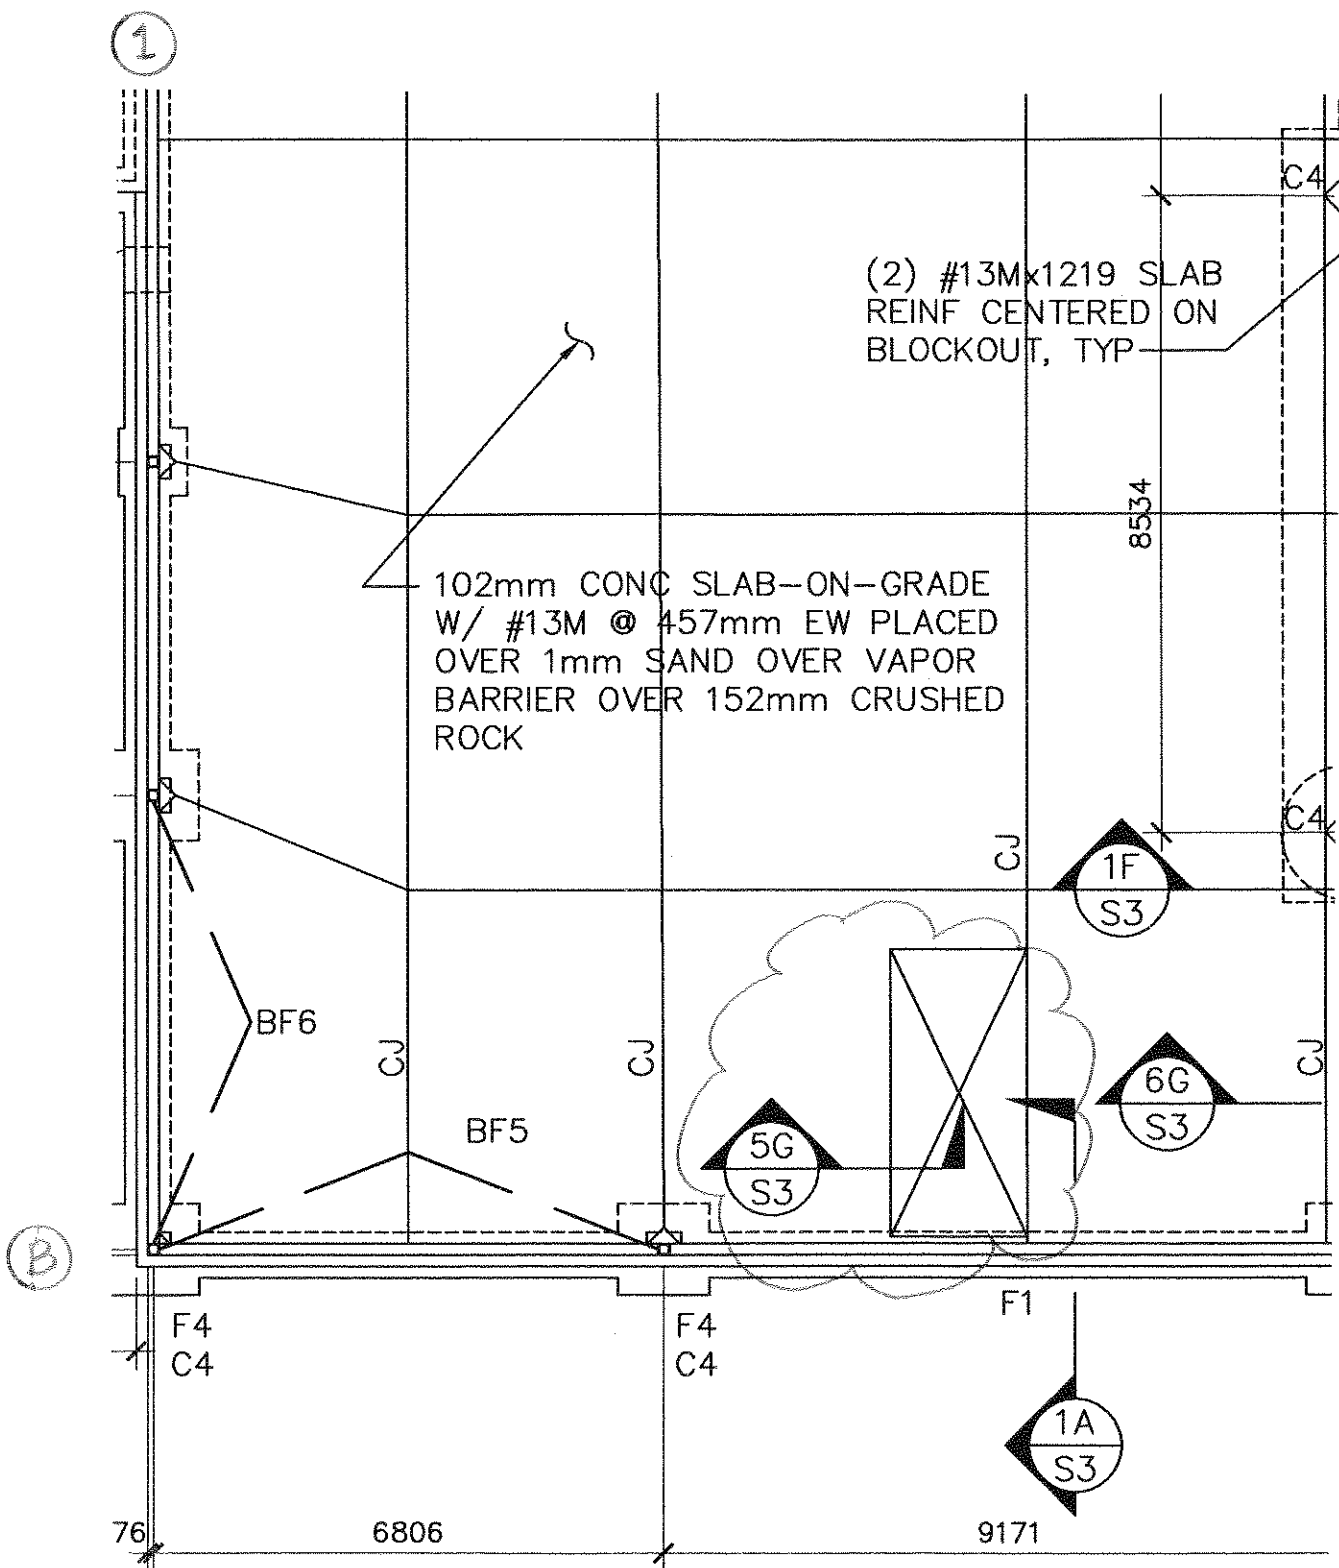

TACTICAL EQUIPMENT COMPLEX — FORT LEWIS, WA		R0004	
 US Army Corps of Engineers Seattle District	<b>BERGER/ABAM</b> ENGINEERS INC. 33301 9TH AVENUE SOUTH FEDERAL WAY, WASHINGTON 98003-6395 (206) 431-2300 FAX: (206) 431-2250	REFERENCE NO. S203RMP	B/A PROJ. #: A00107-010
		DATE 2/11/02	SKETCH NO. SSK-3






# DESIGN AUTHENTICATION


TACTICAL EQUIPMENT COMPLEX  
FORT LEWIS, WASHINGTON  
(PN 47119)  
DACA67-02-B-0202


Signatures affixed below indicate the drawings and specifications included in this solicitation were prepared, reviewed and certified in accordance with Department of Army Engineer Regulation ER 1110-345-100, DESIGN POLICY FOR MILITARY CONSTRUCTION.


(Signed Drawings on File)

Jeff Feeney, P.E. Berger Abam Engineers, Inc.

  
For Karen Peterson  
COE Project Manager

  
for Dean M. Schmidt, Chief  
Tech. Eng. & Review Section,  
Construction Branch

  
Mark A. Ohlstrom, P.E.  
Chief, Design Branch

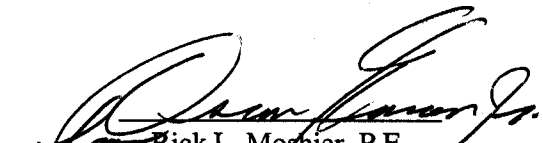  
Rick L. Moshier, P.E.  
Chief, Engineering & Construction Division

This project was designed for the U.S. Army Corps of Engineers, Seattle District. The initials and/or signatures and registration designations of individuals appearing on these project documents are as required by ER 1110-1-8152, ENGINEERING AND DESIGN PROFESSIONAL REGISTRATION.

This page intentionally blank

## **DAVIS-BACON GENERAL WAGE DECISIONS:**

a) **WA010001 (Heavy and Highway)** - All work more than 5 feet (1.5 meters) from the perimeter of a building is to be performed under this wage decision.

b) **WA010002 (Building)** - All work inside and within 5 feet (1.5 meters) of the building(s) is to be performed under this wage decision.

**This page was intentionally left blank for duplex printing.**

GENERAL DECISION **WA010001** 01/04/2002 WA1

Date: January 4, 2002

General Decision Number **WA010001**

Superseded General Decision No. WA000001

State: Washington

Construction Type:

DREDGING

HEAVY

HIGHWAY

County(ies):

STATEWIDE

HEAVY AND HIGHWAY AND DREDGING CONSTRUCTION PROJECTS

(Excludes D.O.E. Hanford Site in Benton and Franklin Counties)

Modification Number	Publication Date
0	03/02/2001
1	03/09/2001
2	03/16/2001
3	03/30/2001
4	04/06/2001
5	05/11/2001
6	06/01/2001
7	06/08/2001
8	06/15/2001
9	06/22/2001
10	06/29/2001
11	07/06/2001
12	07/13/2001
13	08/03/2001
14	08/31/2001
15	09/28/2001
16	10/19/2001
17	11/02/2001
18	11/16/2001
19	12/14/2001
20	12/28/2001
21	01/04/2002

COUNTY(ies):

STATEWIDE

CARP0001W 06/01/2001

	Rates	Fringes
COLUMBIA RIVER AREA - ADAMS, BENTON, COLUMBIA, DOUGLAS (EAST OF THE 120TH MERIDIAN), FERRY, FRANKLIN, GRANT, OKANOGAN (EAST OF THE 120TH MERIDIAN) AND WALLA WALLA COUNTIES		

CARPENTERS:

GROUP 1:	23.18	6.00
GROUP 2:	24.29	6.00
GROUP 3:	23.45	6.00
GROUP 4:	23.18	6.00
GROUP 5:	57.45	6.00
GROUP 6:	25.56	6.00

SPOKANE AREA: ASOTIN, GARFIELD, LINCOLN, PEND OREILLE, SPOKANE, STEVENS AND WHITMAN COUNTIES

CARPENTERS:

GROUP 1:	22.51	6.00
GROUP 2:	23.61	6.00
GROUP 3:	22.77	6.00
GROUP 4:	22.51	6.00
GROUP 5:	55.78	6.00
GROUP 6:	24.82	6.00

CARPENTERS CLASSIFICATIONS

GROUP 1: Carpenter; Burner-Welder; Rigger and Signaler; Insulators (all types), Acoustical, Drywall and Metal Studs, Metal Panels and Partitions; Floor Layer, Sander, Finisher and Astro Turf; Layout Carpenters; Form Builder; Rough Framers; Outside or Inside Finisher, including doors, windows, and jams; Sawfiler; Shingler (wood, composition) Solar, Fiberglass, Aluminum or Metal; Scaffold Erecting and Dismantling; Stationary Saw-Off Bearer; Wire, Wood and Metal Lather Applicator

GROUP 2: Millwright, machine erector

GROUP 3: Piledriver - includes driving, pulling, cutting, placing collars, setting, welding, or creosote treated material, on all piling

GROUP 4: Bridge, dock and wharf carpenters

GROUP 5: Divers

GROUP 6: Divers Tender

DEPTH PAYY FOR DIVERS:

Each foot over 50-100 feet	\$1.00
Each foot over 100-175 feet	2.25
Each foot over 175-250 feet	5.50

HAZMAT PROJECTS

Anyone working on a HAZMAT job (task), where HAZMAT certification is required, shall be compensated at a premium, in addition to the classification working in as follows:

LEVEL D + \$.25 per hour - This is the lowest level of protection. No respirator is used and skin protection is minimal.

LEVEL C + \$.50 per hour - This level uses an air purifying respirator or additional protective clothing.

LEVEL B + \$.75 per hour - Uses same respirator protection as Level A. Supplied air line is provided in conjunction with a chemical "splash suit".

LEVEL A +\$1.00 per hour - This level utilizes a fully encapsulated suit with a self-contained breathing apparatus or a supplied air line.

-----  
CARP00030 12/01/2001

Rates Fringes  
SOUTHWEST WASHINGTON: CLARK, COWLITZ, KLICKITAT,  
LEWIS(Piledriver only), PACIFIC (South of a straight line made by  
extending the north boundary line of Wahkiakum County west to  
Willapa Bay to the Pacific Ocean), SKAMANIA AND WAHAKIYAKUM  
COUNTIES and INCLUDES THE ENTIRE PENINSULA WEST OF WILLAPA BAY

SEE ZONE DESCRIPTION FOR CITIES BASE POINTS

ZONE 1:

CARPENTERS; ACOUSTICAL	26.83	8.29
DRYWALL	26.83	8.29
FLOOR LAYERS & FLOOR FINISHERS (the laying of all hardwood floors nailed and mastic set, parquet and wood-type tiles, and block floors, the sanding and finishing of floors, the preparation of old and new floors when the materials mentioned above are to be installed); INSULATORS (fiberglass and similar irritating materials		
MILLWRIGHTS	26.98	8.29
PILEDRIEVERS	27.33	8.29
DIVERS	27.33	8.29
DIVERS TENDERS	63.75	8.29
	29.33	8.29

DEPTH PAY

50 TO 100 FEET	\$1.00 PER FOOT OVER 50 FEET
100 TO 150 FEET	1.50 PER FOOT OVER 100 FEET
150 TO 200 FEET	2.00 PER FOOT OVER 150 FEET

Zone Differential (Add up Zone 1 rates):

Zone 2 - \$0.85

Zone 3 - 1.25

Zone 4 - 1.70

Zone 5 - 2.00

Zone 6 - 3.00

BASEPOINTS: ASTORIA, LONGVIEW, PORTLAND, THE DALLES,  
AND VANCOUVER, (NOTE: All dispatches for Washington State  
Counties: Cowlitz, Wahkiakum and Pacific shall be from Longview  
Local #1707 and mileage shall be computed from that point.)

ZONE 1: Projects located within 30 miles of the respective  
city hall of the above mentioned cities

ZONE 2: Projects located more than 30 miles and less than 40  
miles of the respective city of the above mentioned  
cities

ZONE 3: Projects located more than 40 miles and less than 50

miles of the respective city of the above mentioned cities

ZONE 4: Projects located more than 50 miles and less than 60 miles of the respective city of the above mentioned cities.

ZONE 5: Projects located more than 60 miles and less than 70 miles of the respective city of the above mentioned cities

ZONE 6: Projects located more than 70 miles of the respected city of the above mentioned cities

-----

CARP0770D 12/01/2001

	Rates	Fringes
WESTERN WASHINGTON: CLALLAM, GRAYS HARBOR, ISLAND, JEFFERSON, KING, KITSAP, LEWIS (excludes piledrivers only), MASON, PACIFIC (North of a straight line made by extending the north boundary line of Wahkiakum County west to the Pacific Ocean), PIERCE, SAN JUAN, SKAGIT, SNOHOMISH, THURSTON AND WHATCOM COUNTIES		

CARPENTERS AND DRYWALL APPLICATORS	27.54	7.61
CARPENTERS ON CREOSOTE MATERIAL	27.82	7.61
SAWFILERS, STATIONARY POWER SAW OPERATORS, FLOOR FINISHER, FLOOR LAYER, SHINGLER, FLOOR SANDER OPERATOR AND OPERATORS OF OTHER STATIONARY WOOD WORKING TOOLS	27.67	7.61
MILLWRIGHT AND MACHINE ERECTORS	28.54	7.61
ACOUSTICAL WOKRERS	27.70	7.61
PILEDRIIVER, DRIVING, PULLING, CUTTING, PLACING COLLARS, SETTING, WELDING OR CRESOTE TREATED MATERIAL, ALL PILING	27.74	7.61
PILEDRIIVER, BRIDGE, DOCK & WHARF CARPENTERS	27.54	7.61
DIVERS	67.96	7.61
DIVERS TENDER	30.24	7.61

(HOURLY ZONE PAY APPLICABLE TO ALL CLASSIFICATIONS EXCEPT MILLWRIGHT AND PILEDRIIVER)

Hourly Zone Pay shall be paid on jobs located outside of the free zone computed from the city center of the following listed cities:

Seattle	Olympia	Bellingham
Auburn	Bremerton	Anacortes
Renton	Shelton	Yakima
Aberdeen-Hoquiam	Tacoma	Wenatchee
Ellensburg	Everett	Port Angeles
Centralia	Mount Vernon	Sunnyside
Chelan	Pt. Townsend	

Zone Pay	
0 -25 radius miles	Free



25-35 radius miles	\$1.00/hour
35-45 radius miles	\$1.15/hour
45-55 radius miles	\$1.35/hour
Over 55 radius miles	\$1.55/hour

(HOURLY ZONE PAY - MILLWRIGHT AND PILEDRIVER ONLY)

Hourly Zone Pay shall be computed from Seattle Union Hall, Tacoma City center, and Everett City center

Zone Pay	
0 -25 radius miles	Free
25-45 radius miles	\$ .70/hour
Over 45 radius miles	\$1.50/hour

CENTRAL WASHINGTON: CHELAN, DOUGLAS (WEST OF THE 120TH MERIDIAN), KITTITAS, OKANOGAN (WEST OF THE 120TH MERIDIAN) AND YAKIMA COUNTIES

CARPENTERS AND DRYWALL APPLICATORS	20.72	7.47
CARPENTERS ON CREOSOTED MATERIAL	20.82	7.47
SAWFILERS, STATIONARY POWER S37 OPERATORS, FLOOR FINISHER, FLOOR LAYER, SHINGLERS, FLOOR SANDER OPERATORS	20.85	7.47
MILLWRIGHT AND MACHINE ERECTORS	28.22	7.47
PILEDRIVER, DRIVING, PULLING, CUTTING, PLACING COLLARS, SETTING, WELDING OR CRESOTE TREATED MATERIAL, ALL PILING	27.42	7.47
PILEDRIVER, BRIDGE DOCK AND WHARF CARPENTERS	27.22	7.47
DIVERS	65.81	6.62
DIVERS TENDER	29.28	6.62

(HOURLY ZONE PAY APPLICABLE TO ALL CLASSIFICATIONS EXCEPT MILLWRIGHT AND PILEDRIVER)

Hourly Zone Pay shall be paid on jobs located outside of the free zone computed from the city center of the

following listed cities:

Seattle	Olympia	Bellingham
Auburn	Bremerton	Anacortes
Renton	Shelton	Yakima
Aberdeen-Hoquiam	Tacoma	Wenatchee
Ellensburg	Everett	Port Angeles
Centralia	Mount Vernon	Sunnyside
Chelan	Pt. Townsend	

Zone Pay	
0 -25 radius miles	Free
25-35 radius miles	\$1.00/hour
35-45 radius miles	\$1.15/hour
45-55 radius miles	\$1.35/hour
Over 55 radius miles	\$1.55/hour

(HOURLY ZONE PAY - MILLWRIGHT AND PILEDRIVER ONLY)

Hourly Zone Pay shall be computed from Seattle Union Hall, Tacoma City center, and Everett City center

Zone Pay	
0 -25 radius miles	Free
25-45 radius miles	\$ .70/hour
Over 45 radius miles	\$1.50/hour

---

ELEC0046A 06/04/2001		
	Rates	Fringes
CALLAM, JEFFERSON, KING AND KITSAP COUNTIES		
ELECTRICIANS	31.50	3%+8.88
CABLE SPLICERS	34.65	3%+8.88

---

ELEC0048C 07/01/2001		
	Rates	Fringes
CLARK, KLUCKITAT AND SKAMANIA COUNTIES		
ELECTRICIANS	30.20	3%+10.25
CABLE SPLICERS	30.45	3%+10.25

---

ELEC0073A 07/01/2001		
	Rates	Fringes
ADAMS, FERRY, LINCOLN, PEND OREILLE, SPOKANE, STEVENS, WHITMAN COUNTIES		
ELECTRICIANS	23.67	3%+9.13
CABLE SPLICERS	24.07	3%+9.13

---

ELEC0076B 07/01/2001		
	Rates	Fringes
GRAYS HARBOR, LEWIS, MASON, PACIFIC, PIERCE, AND THURSTON COUNTIES		
ELECTRICIANS	28.29	3%+10.32
CABLE SPLICERS	31.12	3%+10.32

---

ELEC0077C 02/01/2001		
	Rates	Fringes
LINE CONSTRUCTION:		
CABLE SPLICERS	33.89	3.875%+6.95
LINEMEN, POLE SPRAYERS,		
HEAVY LINE EQUIPMENT MAN	30.58	3.875%+6.95
LINE EQUIPMENT MEN	26.72	3.875%+5.20
POWDERMEN, JACKHAMMERMEN	23.69	3.875%+5.20
GROUND MEN	22.31	3.875%+5.20
TREE TRIMMER	21.39	3.875%+5.20

-----

ELEC0112E 12/01/2000

	Rates	Fringes
ASOTIN, BENTON, COLUMBIA, FRANKLIN, GARFIELD, KITTITAS, WALLA WALLA, YAKIMA COUNTIES		

ELECTRICIANS	27.75	3%+6.93
CABLE SPLICERS	29.14	3%+6.93

-----

ELEC0191C 08/31/2001

	Rates	Fringes
ISLAND, SAN JUAN, SNOHOMISH, SKAGIT AND WHATCOM COUNTIES		

ELECTRICIANS	29.66	3%+8.33
CABLE SPLICERS	33.23	3%+8.33

-----

ELEC0191D 08/31/2001

	Rates	Fringes
CHELAN, DOUGLAS, GRANT AND OKANOGAN COUNTIES		

ELECTRICIANS	26.66	3%+8.03
CABLE SPLICERS	29.33	3%+8.03

-----

\* ELEC0970A 01/01/2002

	Rates	Fringes
COWLITZ AND WAHAKIAKUM COUNTIES		

ELECTRICIANS	27.55	3%+8.75
CABLE SPLICERS	30.31	3%+8.75

-----

ENGI0302E 06/01/2001

	Rates	Fringes
CHELAN (WEST OF THE 120TH MERIDIAN), CLALLAM, DOUGLAS (WEST OF THE 120TH MERIDIAN), GRAYS HARBOR, ISLAND, JEFFERSON, KING,  KITSAP, KITTITAS, MASON, OKANOGAN (WEST OF THE 120TH MERIDIAN), SAN JUAN, SKAGIT, SNOHOMISH, WHATCOM AND YAKIMA (WEST OF THE 120TH MERIDIAN) COUNTIES		

#### PROJECTS

CATEGORY A PROJECTS (excludes Category B projects, as show  
below)

##### POWER EQUIPMENT OPERATORS:

Zone 1 (0-25 radius miles):

GROUP 1AAA	29.61	8.38
GROUP 1AA	29.11	8.38
GROUP 1A	28.61	8.38
GROUP 1	28.11	8.38
GROUP 2	27.67	8.38
GROUP 3	27.31	8.38
GROUP 4	25.21	8.38

Zone 2 (26-45 radius miles) - Add \$ .70 to Zone 1 rates  
Zone 3 (Over 45 radius miles) - Add \$1.00 to Zone 1 rates

BASEPOINTS: Bellingham, Mount Vernon, Kent, Port Angeles, Port Townsend, Aberdeen, Shelton, Bremerton, Wenatchee, Yakima, Seattle, Everett

#### POWER EQUIPMENT OPERATORS CLASSIFICATIONS

GROUP 1AAA - Cranes-over 300 tons or 300 ft. of boom (including job with attachments)

GROUP 1AA - Cranes - 200 tons to 300 tons or 250 ft. of boom (including jib and attachments); Tower crane over 175 ft. in height, base to boom

GROUP 1A - Cranes - 100 tons thru 199 tons or 150' of boom (including jib with attachments); Crane-overhead, bridge type, 100 tons and over; Tower crane up to 175 ft. in height base to boom; Loader-overhead, 8 yards and over; Shovel, excavator, backhoes-6 yards and over with attachments

GROUP 1 - Cableway; Cranes-45 tons thru 99 tons, under 150 ft. of boom (including jib with attachments); Crane-overhead, bridge type, 45 tons thru 99 tons; Shovel, excavator, backhoes over 3 yards and under 6 yards; Hard tail end dump articulating off-road equipment 45 yards and over; Loader-overhead, 6 yards to, but not including 8 yards; Mucking machine, mole, tunnel, drill and/or shield; Quad 9, HD 41, d-10; Remote control operator on rubber tired earth moving equipment; Rollagon; Scrapers-self-propelled-45 yards and over; Slipform pavers; Transporters, all track or truck type

GROUP 2 - Barrier machine (zipper); Barch Plant operator-concrete; Bump cutter; Cranes-20 tons thru 44 tons with attachments; Cranes-overheads, bridge type-20 tons through 44 tons; Chipper; Concrete pump-truck mount with boom attachment; Crusher; Deck Engineer/Deck Winches (power); Drilling machine;

Excavator, shovel backhoe-3 yards and under; Finishing machine Bidwell, Gamaco and similar equipment; Guardrail punch; Horizontal/directional drill operator; Loaders, overhead under 6 yds.; Loaders-plant feed; Locomotives-all; Mechanics-all; Mixers-asphalt plant; Motor patrol graders-finishing; Pildriver (other than crane mount); Roto-mill, roto-grinder; Screedman, Spreader, Topside Operator-Blaw Knox, Cedar Rapids, Jaeger, Caterpillar, Barbar Green; Scraper-self-propelled, hard tail end dump, articulating off-road equipment-under 45 yards; Subgrader trimmer; Tractors, backhoes-over 75 hp; Transfer material service machine-shuttle buggy, blow knox, roadtec; Truck crane oiler/driver-100 tons and over; Truck mount portable conveyor;Yo Yo Pay Dozer

GROUP 3 - Conveyors; Cranes-thru 19 tons with attachments; Cranes-A-frame over 10 tons; Drill oilers-auger type, truck or crane mount; Dozers D9 and under; Forklifts-3000 lbs and over with attachments; horizontal/directional drill locator; Outside

hoists-(elevators and manlifts), air tuggers, strao tower bucket elevators; Hydralifts/boom truck-over 10 tons; Loader-elevating type belt; Motor Patrol Grader-non-finishing; Plant Oiler-asphalt, crusher; Pumps-concrete; Roller, plant mix or multi-lift materials; Saws-concrete; Scrapers-concrete and carryall; Service engineers-equipment; Trenching machines; Truck crane oiler/driver-under 100 tons Tractors, backhoes-under 75 hp

GROUP 4 - Assistant Engineer; Bobcat; Brooms; Compressor; Concrete Finish Machine-laser screed; Cranes-A-frame-10 tons and under; Elevator and manlift-permanent and shaft type; Forklifts-under 3000 lbs. with attachments; Gradechecker, stakehop; Hydralifts, boom trucks-10 tons and under; Oil distributors, blower distribution and mulch seeding operator; Pavement breaker; Post Hole Digger-mechanical; Power Plant; Pumps-water; Rigger and Bellman; Roller-other than plant mix; Wheel Tractors, farmall type; Shot crete/gunite equipment operator

CATEGORY B PROJECTS - 95% of the basic hourly rate for each group plus full fringe benefits applicable to Category A projects shall apply to the following projects. Reduced rates may be paid on the following:

1. Projects involving work on structures such as buildings and structures whose total value is less than \$1.5 million excluding mechanical, electrical, and utility portions of the contract.
2. Projects of less than \$1 million where no building is involved. Surfacing and paving included, but utilities excluded.
3. Marine projects (docks, wharfs, etc.) less than \$150,000.

WORK PERFORMED ON HYDRAULIC DREDGES:

Total Project Cost \$300,000 and over

GROUP 1	26.85	8.38
GROUP 2	26.95	8.38
GROUP 3	27.29	8.38
GROUP 4	27.34	8.38
GROUP 5	28.73	8.38
GROUP 6	26.85	8.38

GROUP 1: Assistant Mate (Deckhand)

GROUP 2: Oiler

GROUP 3: Assistant Engineer (Electric, Diesel, Steam or Booster Pump); Mates and Boatmen

GROUP 4: Craneman, Engineer Welder

GROUP 5: Leverman, Hydraulic

GROUP 6: Maintenance

Total Project cost under \$300,000

GROUP 1	25.51	8.38
GROUP 2	25.60	8.38
GROUP 3	25.93	8.38
GROUP 4	25.97	8.38
GROUP 5	27.29	8.38
GROUP 6	25.51	8.38

GROUP 1: Assistant Mate (Deckhand)  
 GROUP 2: Oiler  
 GROUP 3: Assistant Engineer (Electric, Diesel, Steam,  
 or Booster Pump); Mates and Boatmen  
 GROUP 4: Craneman, Engineer Welder  
 GROUP 5: Leverman, Hydraulic  
 GROUP 6: Maintenance

HEAVY WAGE RATES (CATEGORY A) APPLIES TO CLAM SHELL DREDGE, HOE  
 AND DIPPER, SHOVELS AND SHOVEL ATTACHMENTS, CRANES AND  
 BULLDOZERS.

HANDLING OF HAZARDOUS WASTE MATERIALS: Personnel in all craft  
 classifications subject to working inside a federally designated  
 hazardous perimeter shall be eligible for compensation in  
 accordance with the following group schedule relative to the  
 level of hazardous waste as outlined in the specific hazardous  
 waste project site safety plan.

H-1 Base wage rate when on a hazardous waste site when not  
 outfitted with protective clothing  
 H-2 Class "C" Suit - Base wage rate plus \$.25 per hour.  
 H-3 Class "B" Suit - Base wage rate plus \$.50 per hour.  
 H-4 Class "A" Suit - Base wage rate plus \$.75 per hour.

-----  
 ENGI0370C 06/01/2001

	Rates	Fringes
ADAMS, ASOTIN, BENTON, CHELAN (EAST OF THE 120TH MERIDIAN), COLUMBIA, DOUGLAS (EAST OF THE 120TH MERIDIAN), FERRY, FRANKLIN, GARFIELD, GRANT, LINCOLN, OKANOGAN (EAST OF THE 120TH MERIDIAN), PEND OREILLE, SPOKANE, STEVENS, WALLA WALLA, WHITMAN AND YAKIMA (EAST OF THE 120TH MERIDIAN) COUNTIES		

ZONE 1:

POWER EQUIPMENT OPERATORS:

GROUP 1A	20.94	6.02
GROUP 1	21.49	6.02
GROUP 2	21.81	6.02
GROUP 3	22.42	6.02
GROUP 4	22.58	6.02
GROUP 5	22.74	6.02
GROUP 6	23.02	6.02
GROUP 7	23.29	6.02
GROUP 8	24.39	6.02

ZONE DIFFERENTIAL (Add to Zone 1  
 rate): Zone 2 - \$2.00

Zone 1: Within 45 mile radius of Spokane, Moses Lake, Pasco,  
 Washington; Lewiston, Idaho

Zone 2: Outside 45 mile radius of Spokane, Moses Lake, Pasco,  
 Washington; Lewiston, Idaho

POWER EQUIPMENT OPERATORS CLASSIFICATIONS

GROUP 1A: Boat Operator; Crush Feeder; Oiler; Steam Cleaner

GROUP 1: Bit Grinders; Bolt Threading Machine; Compressors (under 2000 CFM, gas, diesel, or electric power); Deck Hand; Drillers Helper (Assist driller in making drill rod connections, service drill engine and air compressor, repair drill rig and drill tools, drive drill support truck to and on the job site, remove drill cuttings from around bore hole and inspect drill rig while in operation); Fireman & Heater Tender; Grade Checker; Hydro-seeder, Mulcher, Nozzleman; Oiler Driver, & Cable Tender, Mucking Machine; Pumpman; Rollers, all types on subgrade, including seal and chip coatings (farm type, Case, John Deere & similar, or Compacting Vibrator), except when pulled by Dozer with operable blade; Welding Machine

GROUP 2: A-frame Truck (single drum); Assistant Refrigeration Plant (under 1000 ton); Assistant Plant Operator, Fireman or Pugmixer (asphalt); Bagley or Stationary Scraper; Belt Finishing Machine; Blower Operator (cement); Cement Hog; Compressor (2000 CFM or over, 2 or more, gas diesel or electric power); Concrete Saw (multiple cut); Distributor Leverman; Ditch Witch or similar; Elevator Hoisting Materials; Dope Pots (power agitated); Fork Lift or Lumber Stacker, hydra-lift & similar; Gin Trucks (pipeline); Hoist, single drum; Loaders (bucket elevators and conveyors); Longitudinal Float; Mixer (portable-concrete); Pavement Breaker, Hydra-Hammer & similar; Power Broom; Railroad Ballast Regulation Operator (self-propelled); Railroad Power Tamper Operator (self-propelled); Railroad Tamper Jack Operator (self-propelled); Spray Curing Machine (concrete); Spreader Box (self-propelled); Straddle Buggy (Ross & similar on construction job only); Tractor (Farm type R/T with attachment, except Backhoe); Tugger Operator

GROUP 3: A-frame Truck (2 or more drums); Assistant Refrigeration Plant & Chiller Operator (over 1000 ton); Backfillers (Cleveland & similar); Batch Plant & Wet Mix Operator, single unit (concrete); Belt-Crete Conveyors with power pack or similar; Belt Loader (Kocal or similar); Bending

Machine; Bob Cat; Boring Machine (earth); Boring Machine (rock under 8" bit) (Quarry Master, Joy or similar); Bump Cutter (Wayne, Saginaw or similar); Canal Lining Machine (concrete); Chipper (without crane); Cleaning & Doping Machine (pipeline); Deck Engineer; Elevating Belt-type Loader (Euclid, Barber Green & similar); Elevating Grader-type Loader (Dumort, Adams or similar); Generator Plant Engineers (diesel or electric); Gunnite Combination Mixer & Compressor; Locomotive Engineer; Mixermobile; Mucking Machine; Posthole Auger or Punch; Pump (grout or jet); Soil Stabilizer (P & H or similar); Spreader Machine; Tractor (to D-6 or equivalent) and Traxcavator; Traverse Finish Machine; Turnhead Operator

GROUP 4: Concrete Pumps (squeeze-crete, flow-crete, pump-crete, Whitman & similar); Curb Extruder (asphalt or concrete); Drills (churn, core, calyx or diamond)(operate drilling machine, drive or transport drill rig to and on job site and weld well casing); Equipment Serviceman; Greaser & Oiler;

Hoist (2 or more drums or Tower Hoist); Loaders (overhead & front-end, under 4 yds. R/T); Refrigeration Plant Engineer (under 1000 ton); Rubber-tired Skidders (R/T with or without attachments); Surface Heater & Plant Machine; Trenching Machines (under 7 ft. depth capacity); Turnhead (with re-screening); Vacuum Drill (reverse circulation drill under 8" bit)

GROUP 5: Backhoe (under 45,000 gw); Backhoe & Hoe Ram (under 3/4 yd.); Carrydeck & Boom Truck (under 25 tons); Cranes (25 tons & under), all attachments including clamshell, dragline; Derricks & Stifflegs (under 65 tons); Drilling Equipment(8" bit & over) (Robbins, reverse circulation & similar)(operates drilling machine, drive or transport drill rig to and on job site and weld well casing); Hoe Ram; Piledriving Engineers; Paving (dual drum); Railroad Track Liner Operaoatr (self-propelled); Refrigeration Plant Engineer (1000 tons & over); Signalman (Whirleys, Highline Hammerheads or similar)

GROUP 6: Asphalt Plant Operator; Automatic Subgrader (Ditches & Trimmers)(Autograde, ABC, R.A. Hansen & similar on grade wire); Backhoe (45,000 gw and over to 110,000 gw); Backhoes & Hoe Ram (3/4 yd. to 3 yd.); Batch Plant (over 4 units); Batch & Wet Mix Operator (multiple units, 2 & incl. 4); Blade Operator (motor patrol & attachments, Athey & Huber); Boom Cats (side); Cable Controller (dispatcher); Clamshell Operator (under 3 yds.); Compactor (self-propelled with blade); Concrete Pump Boom Truck; Concrete Slip Form Paver; Cranes (over 25 tons, to and including 45 tons), all attachments including clamshell, dragline; Crusher, Grizzle & Screening Plant Operator; Dozer, 834 R/T & similar; Draglines (under 3 yds.); Drill Doctor; H.D. Mechanic; H.D. Welder; Loader Operator (front-end & overhead, 4 yds. incl. 8 yds.); Multiple Dozer Units with single blade; Paving Machine (asphalt and concrete); Quad-Track or similar equipment; Rollerman (finishing asphalt pavement); Roto Mill (pavement grinder); Scrapers, all, rubber-tired; Screed Operator; Shovel(under 3 yds.); Tractors (D-6 & equivalent & over); Trenching Machines (7 ft. depth & over); Tug Boat Operator Vactor guzzler, super sucker

GROUP 7: Backhoe (over 110,000 gw); Backhoes & Hoe Ram (3 yds & over); Blade (finish & bluetop) Automatic, CMI, ABC, Finish Athey & Huber & similar when used as automatic; Cableway Operators; Concrete Cleaning/Decontamination machine operator; Cranes (over 45 tons to but not including 85 tons), all attachments including clamshell and dragline; Derricks & Stiffleys (65 tons & over); Elevating Belt (Holland type); Heavy equipment robotics operator; Loader (360 degrees revolving Koehring Scooper or similar); Loaders (overhead & front-end, over 8 yds. to 10 yds.); Rubber-tired Scrapers (multiple engine with three or more scrapers); Shovels (3 yds. & over); Whirleys & Hammerheads, ALL

GROUP 8: Cranes (85 tons and over, and all climbing, overhead,rail and tower), all attachments including clamshell, dragline; Loaders (overhead and front-end, 10 yards and over); Helicopter Pilot



BOOM PAY: (All Cranes, Including Tower)  
180' to 250' \$ .30 over scale  
Over 250' \$ .60 over scale

NOTE: In computing the length of the boom on Tower Cranes, they shall be measured from the base of the Tower to the point of the boom.

HAZMAT: Anyone working on HAZMAT jobs, working with supplied air shall receive \$1.00 an hour above classification.

-----

ENGI0370G 06/01/2000

	Rates	Fringes
ADAMS, ASOTIN, BENTON, CHELAN (EAST OF THE 120TH MERIDIAN), COLUMBIA, DOUGLAS (EAST OF THE 120TH MERIDIAN), FERRY, FRANKLIN, GARFIELD, GRANT, LINCOLN, OKANOGAN (EAST OF THE 120TH MERIDIAN), PEND OREILLE, SPOKANE, STEVENS, WALLA WALLA, WHITMAN AND YAKIMA (EAST OF THE 120TH MERIDIAN) COUNTIES		

WORK PERFORMED ON HYDRAULIC DREDGES

GROUP 1:	24.23	5.77
GROUP 2:	24.60	5.77
GROUP 3:	24.63	5.77
GROUP 4:	25.02	5.77
GROUP 5:	24.13	5.77

GROUP 1: Assistant Mate (Deckhand) and Oiler  
GROUP 2: Assistant Engineer (Electric, Diesel, Steam, or Booster Pump); Mates and Boatmen  
GROUP 3: Engineer Welder  
GROUP 4: Leverman, Hydraulic  
GROUP 5: Maintenance

HEAVY WAGE RATES APPLIES TO CLAM SHELL DREDGE, HOE AND DIPPER, SHOVELS AND SHOVEL ATTACHMENTS, CRANES AND BULLDOZERS.

-----

ENGI0612A 06/01/2001

	Rates	Fringes
LEWIS, PIERCE, PACIFIC (THAT PORTION WHICH LIES NORTH OF A PARALLEL LINE EXTENDED WEST FROM THE NORTHERN BOUNDARY OF WAHKAUKUM COUNTY TO THE SEA IN THE STATE OF WASHINGTON) AND THURSTON COUNTIES		

PROJECTS:

CATEGORY A PROJECTS (excludes Category B projects, as shown below)

POWER EQUIPMENT OPERATORS:

ZONE 1 (0-25 radius miles):

GROUP 1AAA	29.61	8.38
GROUP 1AA	29.11	8.38
GROUP 1A	28.61	8.38
GROUP 1	28.11	8.38
GROUP 2	27.67	8.38

GROUP 3	27.31	8.38
GROUP 4	25.21	8.38

ZONE 2 (26-45 radius miles) - Add \$.70 to Zone 1 rates  
 ZONE 3 (Over 45 radius miles) - Add \$1.00 to Zone 1 rates

BASEPOINTS: Tacoma, Olympia, and Centralia

#### POWER EQUIPMENT OPERATORS CLASSIFICATIONS

GROUP 1AAA - Cranes-300 tons, or 300 ft of boom (including jib with attachments)

GROUP 1AA - Cranes 200 tons to 300 tons, or 250 ft of boom (including jib with attachments); Tower crane over 175 ft in height, base to boom

GROUP 1A - Crane 100 tons thru 199 tons, or 150 of boom (including jib with attachments); Crane-overhead, bridge type, 100 tons and over; Shovel, excavator, backhoes-6 yds and over with attachments

GROUP 1 - Cableways; Cranes-45 tons thru 99 tons, under 150 ft of boom (including jib with attachments); Crane-overhead, bridge type - 45 tons thru 99 tons; Excavator, shovel, backhoes over 3 yards and under 6 yards; hard tail end dump articulating off-road equipment 45 yards and over; loader-overhead 6 yards to, but not including 8 yards; Mucking machine, mole, tunnel, drill and/or shield; Quad 9, HD 41, D-10; Remote control operator on rubber tired earth moving equipment; Rollagon; Scrapers-self-propelled-45 yds and over; Slipform pavers; Transporters-all track or truck type

GROUP 2 - Barrier machine (zipper); Batch Plant Operator-concrete; Bump cutter; Cranes-20 tons through 44 tons with attachments; Crane-overhead, bridge type-20 tons thru 44 tons; Chipper, Concrete Pump-truck mounted with boom attachment; Crushers; Deck Engineer/Deck Winches (power); Drilling machine;

Excavator, shovel, backhoe-3yards and under; Finishing machine, Bidwell, Gamaco and similar equipment; Guardrail punch; Horizontal/directional drill operator; Loaders, overhead under 6 yds.; Loaders, plant feed; Locomotive-all; Mechanics-all; Mixers, asphalt plant; Motor patrol graders-finishing; Piledriver (other than crane mount); Roto-mill, roto grinder; screedman, spreader, topside operator-Blaw Knox, Cedar Rapids, Jaeger, Caterpillar, Barbar Green; Scraper-self propelled, hard tail end dump, articulating off-road equipment under 45 yds.; Subgrader trimmer; Tractors, backhoes over 75 hp.; Transfer material service machine-shuttle buggy, Blaw Knox-Roadtec; Truck Crane Oiler/driver-100 tons and over, Truck Mount Portable Conveyor; Yo Yo Pay dozer.

GROUP 3 - Conveyors; Cranes-thru 19 tons with attachments; Cranes-A-frame over 10 tons; Drill Oilers-Auger type, truck or crane mount; Dozers-D-9 and under; Forklifts-3000 lbs. and over with attachments; Horizontal/directional drill locator;

Outside hoists-(elevators and manlifts), air tuggers, strato tower bucket elevators; Hydralifts/Boom Trucks-over 10 tons; Loaders-elevating type, belt; Motor patrol grader-nonfinishing; Plant Oiler-Asphalt, Crusher; Pumps, Concrete; Roller, plant mix or multi-lift materials; Saws-concrete; Scrapers-Concrete and Carry all; Trenching machines; Truck Crane Oiler/Driver-under 100 tons; Tractor, backhoe-under 75 hp

GROUP 4 - Assistant Engineer; Bobcat; Brooms; Compressor; Concrete Finish Machine-laser screed; Crane-A-Frame, 10 tons and under; Elevator and manlift-permanent and shaft type; Forklifts-under 3000 lbs. with attachments; Gradechecker, stakehop; Hydralifts, boom trucks, 10 tons and under; Oil distributors, blower distribution and mulch seeding operator; Pavement breaker; Posthole Digger-mechanical; Power plant; Pumps-Water; Roller-other than Plant Mix; Wheel Tractors, Farmall type; Shotcrete/Gunite Equipment Operator

CATEGORY B PROJECTS - 95% of the basic hourly rate for each group plus full fringe benefits applicable to Category A projects shall apply to the following projects: Reduced rates may be paid on the following:

1. Projects involving work on structures such as buildings and structures whose total value is less than \$1.5 million excluding mechanical, electrical, and utility portions of the contract.
2. Projects of less than \$1 million where no building is involved. Surfacing and paving included, but utilities excluded.
3. Marine projects (docts, wharfs, etc.) less than \$150,000

WORK PERFORMED ON HYDRAULIC DREDGES:

Total Project cost \$300,000 and over

GROUP 1	26.85	8.38
GROUP 2	26.95	8.38
GROUP 3	27.29	8.38
GROUP 4	27.34	8.38
GROUP 5	28.73	8.38
GROUP 6	26.85	8.38

GROUP 1: Assistant Mate (Deckhand)

GROUP 2: Oiler

GROUP 3: Assistant Engineer (Electric, Diesel, Steam or Booster Pump); Mates and Boatmen

GROUP 4: Craneman, Engineer Welder

GROUP 5: Leverman, Hydraulic

GROUP 6: Maintenance

Total Project Cost under \$300,000

GROUP 1	25.51	8.38
GROUP 2	25.60	8.38
GROUP 3	25.93	8.38
GROUP 4	25.97	8.38
GROUP 5	27.29	8.38
GROUP 6	25.51	8.38

GROUP 1: Assistant Mate (Deckhand)

GROUP 2: Oiler  
 GROUP 3: Assistant Engineer (Electric, Diesel, Steam or  
 Booster Pump); Mates and Boatmen  
 GROUP 4: Craneman, Engineer Welder  
 GROUP 5: Leverman, Hydraulic  
 GROUP 6: Maintenance

HEAVY WAGE RATES APPLIES TO CLAM SHEEL DREDGE, HOE AND DIPPER,  
 SHOVELS AND SHOVEL ATTACHMENTS, CRANES AND BULLDOZERS

#### HANDLING OF HAZARDOUS WASTE MATERIALS

H-1 - When not outfitted with protective clothing of  
 level D equipment - Base wage rate  
 H-2 - Class "C" Suit - Base wage rate + \$.25 per hour  
 H-3 - Class "B" Suit - Base wage rate + \$.50 per hour  
 H-4 - Class "A" Suit - Base wage rate +\$.75 per hour  
 -----

\* ENGI0701D 01/01/2002

Rates Fringes  
 CLARK, COWLITZ, KLICKITAT, PACIFIC (SOUTH), SKAMANIA, AND  
 WAHIAKUM COUNTIES

#### POWER EQUIPMENT OPERATORS (See Footnote A)

##### ZONE 1:

GROUP 1	28.55	8.95
GROUP 1A	29.98	8.95
GROUP 1B	31.41	8.95
GROUP 2	27.34	8.95
GROUP 3	27.60	8.95
GROUP 4	26.09	8.95
GROUP 5	25.50	8.95
GROUP 6	23.20	8.95

Zone Differential (add to Zone 1 rates):

Zone 2 - \$1.50

Zone 3 - 3.00

For the following metropolitan counties: MULTNOMAH; CLACKAMAS;  
 MARION; WASHINGTON; YAMHILL; AND COLUMBIA; CLARK; AND COWLITZ  
 COUNTY, WASHINGTON WITH MODIFICATIONS AS INDICATED:

All jobs or projects located in Multnomah, Clackamas and Marion  
 Counties, West of the western boundary of Mt. Hood National  
 Forest and West of Mile Post 30 on Interstate 84 and West of Mile  
 Post 30 on State Highway 26 and West of Mile Post 30 on Highway  
 22 and all jobs or projects located in Yamhill County, Washington  
 County and Columbia County and all jobs or projects located in  
 Clark & Cowlitz County, Washington except that portion of Cowlitz  
 County in the Mt. St. Helens "Blast Zone" shall receive Zone I  
 pay for all classifications.

All jobs or projects located in the area outside the identified  
 boundary above, but less than 50 miles from the Portland City  
 Hall shall receive Zone II pay for all classifications.

All jobs or projects located more than 50 miles from the Portland City Hall, but outside the identified border above, shall receive Zone III pay for all classifications.

For the following cities: ALBANY; BEND; COOS BAY; EUGENE; GRANTS PASS; KLAMATH FALLS; MEDFORD; ROSEBURG

All jobs or projects located within 30 miles of the respective city hall of the above mentioned cities shall receive Zone I pay for all classifications.

All jobs or projects located more than 30 miles and less than 50 miles from the respective city hall of the above mentioned cities shall receive Zone II pay for all classifications.

All jobs or projects located more than 50 miles from the respective city hall of the above mentioned cities shall receive Zone III pay for all classifications.

#### POWER EQUIPMENT OPERATORS CLASSIFICATIONS

GROUP 1: CONCRETE: Batch Plant and/or Wet Mix Operator, three units or more; CRANE: Helicopter Operator, when used in erecting work; Whirley Operator, 90 ton and over; LATTICE BOOM CRANE: Operator 200 tons through 299 tons, and/or over 200 feet boom; HYDRAULIC CRANE: Hydraulic Crane Operator 90 tons through 199 tons with luffing or tower attachments; FLOATING EQUIPMENT: Floating Crane, 150 ton but less than 250 ton

GROUP 1A: CRANE: Hydraulic Operator, 200 tons and over (with luffing or tower attachment); LATTICE BOOM CRANE: Operator, 200 tons through 299 tons, with over 200 feet boom; FLOATING EQUIPMENT: Floating Crane 250 ton and over

GROUP 1B: LATTICE BOOM CRANE: Operator, 300 tons through 399 tons with over 200 feet boom; Operator 400 tons and over; FLOATING

EQUIPMENT: Floating Crane 350 ton and over

GROUP 2: ASPHALT: Asphalt Plant Operator (any type); Roto Mill, pavement profiler, operator, 6 foot lateral cut and over; BLADE: Auto Grader or "Trimmer" (Grade Checker required); Blade Operator, Robotic; BULLDOZERS: Bulldozer operator over 120,000 lbs and above; Bulldozer operator, twin engine; Bulldozer Operator, tandem, quadnine, D10, D11, and similar type); Bulldozere Robotic Equipment (any type; CONCRETE: Batch Plant and/or Wet Mix Operator, one and two drum; Automatic Concrete Slip Form Paver Operator; Concrete Canal Line Operator; Concrete Profiler, Diamond Head; CRANE: Cableway Operator, 25 tons and over; HYDRAULIC CRANE: Hydraulic crane Operator 50 tons through 89 tons (with luffing or tower attachment); hydraulic crane operator 90 tons through 199 tons (with luffing or tower attachment); TOWER/WHIRLEY OPERATOR: Tower Crane Operator; Whirley Operator, under 90 tons; LATTICE BOOM CRANE: 90 through 199 tons and/or 150 to 200 feet boom; CRUSHER: Crusher Plant Operator; FLOATING EQUIPMENT: Floating Clamshell,

etc.operator, 3 cu. yds. and over; Floating Crane (derrick barge) Operator, 30 tons but less than 150 tons; LOADERS: Loader Operator, 6 cu. yds. but less than 12 cu. yds.; Loader Operator, 12 cu. yds. and over; Loader 120,000 lbs. and above; REMOTE CONTROL: Remote controlled earth-moving equipment (no one operator shall operate more than two pieces of earth-moving equipment at one time); RUBBER-TIRED SCRAPERS: Rubber-tired Scraper Operator, with tandem scrapers, multi-engine; SHOVEL, DRAGLINE, CLAMSHELL, BACKHOE, SKOOPER OPERATOR: Shovel, etc., 3 cu. yds., but less than 5 cu. yds.; Shovel, etc., 5 cu. yds. and over; TRENCH MACHINE: Wheel Excavator, under 750 cu. yds. per hour (Grade Oiler required); Canal Trimmer (Grade Oiler required); Wheel Excavator, over 750 cu. yds. per hour (two Operators and at least one Grade Oiler required); Band Wagon (in conjunction with wheel excavator); UNDERWATER EQUIPMENT: Underwater Equipment Operator, remote or otherwise; HYDRAULIC HOES EXCAVATOR: Excavator over 130,000 lbs.

GROUP 3: LATTICE BOOM CRANES: Lattice Boom Crane-50 through 89 tons (and less than 150 feet boom); FORKLIFT: Rock Hound Operator; HYDRAULIC HOES EXCAVATOR: excavator over 80,000 lbs. through 130,000 lbs.; LOADERS: Loader operator 60,000 and less than 120,000; RUBBER-TIRED SCRAPERS: Scraper Operator, with tandem scrapers; SHOVEL, DRAGLINE, CLAMSHELL, SKOOPER OPERATOR: Shovel, Dragline, Clamshell operators 3 cu. yds. but less than 5 cu yds.; Self Loading, paddle wheel, auger type, finish and/or 2 or more units; BULLDOZERS: Bulldozer operator over 70,000 lbs. up to and including 120,000

GROUP 4: ASPHALT: Blade Operator; Blade Operator, finish; Screed Operator; Asphalt Paver Operator (Screed man required); Diesel-Electric engineer, Plant; Roto-Mill, pavement profiler, operator, under six foot lateral cut; BLADE: Blade Operator, externally controlled by electronic, mechanical hydraulic means; Blade operator, multi-engine; BULLDOZERS: Bulldozer Operator over 20,000 lbs and more than 100 horse up to 70,000 lbs; Drill Cat Operator; Side-boom Operator; Cable-Plow Operator (any

type); CLEARING: Log Skidders; Chippers; Incinerator; Stump Splitter (loader mounted or similar type); Stump Grinder (loader mounted or similar type; Tub Grinder; Land Clearing Machine (Track mounted forestry mowing & Grinding machine); Hydro Axe (loader mounted or similar type); COMPACTORS SELF PROPELLED: Compactor Operator, with blade; Compactor Operator, multi-engine; Compactor Operator, robotic; CONCRETE: Mixer Mobile Operator; Screed Operator; Concrete Cooling Machine Operator; Concrete Paving Road Mixer; Concrete Breaker; Reinforced Tank Banding Machine (K-17 or similar types); Laser Screed; CRANE: Chicago boom and similar types; Lift Slab Machine Operator; Boom type lifting device, 5 ton capacity or less; Hoist Operator, two (2) drum; Hoist Operator, three (3) or more drums; Derrick Operator, under 100 ton; Hoist Operator, stiff leg, guy derrick or similar type, 50 ton and over; Cableway Operator up to twenty (25) ton; Bridge Crane Operator, Locomotive, Gantry, Overhead; Cherry Picker or similar type crane hoist five (5) ton capacity or less; Hydraulic Crane Operator, under 50 tons; LATTICE BOOM CRANE OPERATOR: Lattice Boom Crane Operator, under 50 tons;

CRUSHER: Generator Operator; Diesel-Electric Engineer; Grizzley Operator; DRILLING: Drill Doctor; Boring Machine Operator; Driller-Percussion, Diamond, Core, Cable, Rotary and similar type; Cat Drill (John Henry); Directional Drill Operator over 20,000 lbs pullback; FLOATING EQUIPMENT: Diesel-electric Engineer; Jack Operator, elevating barges, Barge Operator, self-unloading; Piledriver Operator (not crane type) (Deckhand required); Floating Clamshell, etc. Operator, under 3 cu. yds. (Fireman or Diesel-Electric Engineer required); Floating Crane (derrick barge) Operator, less than 30 tons; GENERATORS: Generator Operator; Diesel-electric Engineer; GUARDRAIL EQUIPMENT: Guardrail Punch Operator (all types); Guardrail Auger Operator (all types); Combination Guardrail machines, i.e., punch auger, etc.; HEATING PLANT: Surface Heater and Planer Operator; HYDRAULIC HOES EXCAVATOR: Robotic Hydraulic backhoe operator, track and wheel type to up to including 20,000 lbs. with any or all attachments; Excavator Operator over 20,000 lbs through 80,000 lbs.; LOADERS: Belt Loaders, Kolman and Ko Cal types; Loaders Operator, front end and overhead, 25,000 lbs and less than 60,000 lbs; Elevating Grader Operator by Tractor operator, Sierra, Euclid or similar types; PILEDRIVERS: Hammer Operator; Piledriver Operator (not crane type); PIPELINE, SEWER WATER: Pipe Cleaning Machine Operator; Pipe Doping Machine Operator; Pipe Bending Machine Operator; Pipe Wrapping Machine Operator; Boring Machine Operator; Back Filling Machine Operator; REMOTE CONTROL: Concrete Cleaning Decontamination Machine Operator; Ultra High Pressure Water Jet Cutting Tool System Operator/Mechanic; Vacuum Blasting Machine Operator/mechanic; REPAIRMEN, HEAVY DUTY: Diesel Electric Engineer (Plant or Floating); Bolt Threading Machine operator; Drill Doctor (Bit Grinder); H.D. Mechanic; H.D. Welder; Machine Tool Operator; Combination H.D. Mechanic-Welder, when dispatched and/or when required to do both; Welder-Certified, when dispatched and/or required; RUBBER-TIRED SCRAPERS: Rubber-tired Scraper Operator, single engine, single scraper; Self-loading, paddle wheel, auger type under 15 cu. yds.; Rubber-tired Scraper Operator, twin engine; Rubber-tired Scraper Operator, with push-pull

attachments; Self Loading, paddle wheel, auger type 15 cu. yds. and over, single engine; Water pulls, water wagons; SHOVEL, DRAGLINE, CLAMSHELL, BACKHOE, SKOOPER OPERATOR: Diesel Electric Engineer; Stationary Drag Scraper Operator; Shovel, Dragline, Clamshell, Operator under 3 cu yds.; Grade-all Operator; Shovel, Dragline, Clamshell, Operator 3 cu yds, but less than 5 cu yds.

GROUP 5: ASPHALT: Extrusion Machine Operator; Roller Operator (any asphalt mix); Asphalt Burner and Reconditioner Operator (any type), 84; Roto-Mill, pavement profiler, ground man BULLDOZERS: Bulldozer operator, 20,000 lbs. or less or 100 horse or less; COMPRESSORS: Compressor Operator any power), over 1,250 cu. ft. total capacity; COMPACTORS: Compactor Operator, including vibratory; Wagner Pactor Operator or similar type (without blade); CONCRETE: Combination mixer and Compressor Operator, gunite work; Concrete Batch Plant Quality Control Operator; Belcrete Operator; Pumpcrete Operator (any type); Pavement Grinder and/or Grooving Machine Operator (riding type); Cement Pump Operator, Fuller-Kenyon and similar; Concrete Pump Operator;

Grouting Machine Operator; Concrete mixer operator, single drum, under five (5) bag capacity; Concrete Mixer Operator, single drum, under 5 bag capacity and over; Cast place pipe laying machine; Maginnis Internal Full Slab Vibrator Operator; Concrete Finishing machine Operator, Clary, Johnson, Bidwell, Burgess bridge deck or similar type; Curb Machine Operator, mechanical Berm, Curb and/or Curb and Gutter; Concrete Joint Machine Operator; Concrete Planer Operator; Tower Mobile Operator; Power Jumbo Operator setting slip forms; Slip Form Pumps, power driven hydraulic lighting device for concrete forms; Concrete Paving Machine Operator; Concrete Finishing Machine Operator; Concrete Spreader Operator; CRANE: Helicopter Hoist Operator; Hoist Operator, single drum; Elevator Operator; A-frame Truck Operator, Double drum; Boom Truck Operator; HYDRAULIC CRANE OPERATOR: Hydraulic Boom Truck, Pittman; DRILLING: Churm Drill and Earth Boring Machine Operator; Directional Drill Operator over 20,000 lbs pullback; FLOATING EQUIPMENT: Fireman; FORKLIFT: Lull Hi-Lift Operator or similar type; Fork Lift, over 5 ton and/or robotic; HYDRAULIC HOES EXCAVATORS: Hydraulic Backhoe Operator, wheel type (Ford, John Deere, Case type); Hydraulic Backhoe Operator track type up to and including WHEEL 20,000 lbs.; LOADERS: Loaders, rubber-tired type, less than 25,000 lbs; Elevating Grader Operator, Tractor Towed requiring Operator or Grader; OILERS: Service Oiler (Greaser); PIPELINE, SEWER WATER: Hydraulic Pipe Press Operator; Hydra Hammer or similar types; Pavement Breaker Operator; PUMPS: Pump Operator, more than 5 (any size); Pot Rammer Operator; RAILROAD EQUIPMENT: Locomotive Operator, under 40 tons; Ballast Regulator Operator; Ballast Tamper Multi-Purpose Operator; Track Liner Operator; Tie Spacer Operator; Shuttle Car Operator; Locomotive Operator, 40 tons and over; SWEEPERS: Sweeper operator (Wayne type) self propelled

GROUP 6: ASPHALT: Plant Oiler; Plant Fireman; Pugmill Operator (any type); Truck mounted asphalt spreader, with screed; COMPRESSORS: Compressor Operator (any power), under 1,250 cu. ft. total capacity; CONCRETE: Plant Oiler, Assistant Conveyor

Operator; Conveyor Operator; Mixer Box Operator (C.T.B., dry batch, etc.); Cement Hog Operator; Concrete Saw Operator; Concrete Curing Machine Operator (riding type); Wire Mat or Brooming Machine Operator; CRANE: Oiler; Fireman, all equipment; Truck Crane Oiler Driver; A-frame Truck Operator, single drum; Tugger or Coffin Type Hoist Operator; CRUSHER: Crusher Oiler; Crusher Feeder; DRILLING: Drill Tender; Auger Oiler; FLOATING EQUIPMENT: Deckhand; Boatman; FORKLIFT: Self-propelled Scaffolding Operator, construction job site (exclduing working platform); Fork Lift or Lumber Stacker Operator, construction job site; Ross Carrier Operator, construction job site; GUARDRAIL EQUIPMENT: Oiler; Auger Oiler; Oiler, combination guardrail machines; Guardrail Punch Oiler; HEATING PLANT: Temporary Heating Plant Operator; LOADERS: Bobcat, skid steer (less than 1 cu yd.); Bucket Elevator Loader Operator, BarberGreene and similar types; OILERS: Oiler; Guardrail Punch Oiler; Truck Crane Oiler-Driver; Auger Oiler; Grade Oiler, required to check grade; Grade Checker; PIPELINE SEWER WATER: Tar Pot Fireman; Tar Pot Fireman (power agitated); PUMPS: Pump Operator (any power); Hydrostatic



Pump Operator; RAILROAD EQUIPMENT: Brakeman; Oiler; Switchman; Motorman; Ballast Jack Tamper Operator; SHOVEL, DRAGLINE, CLAMSHELL, SKOOPER, ETC. OPERATOR: Oiler, Grade Oiler (required to check grade); Grade Checker; Fireman; SWEEPER: Broom operator, self propelled, construction job site

-----

ENGI0701E 06/01/2001

	Rates	Fringes
CLARK, COWLITZ, KLINKITAT, PACIFIC (SOUTH), SKAMANIA, AND WAHIAKUM COUNTIES		

DREDGING:

ZONE A		
LEVERMAN, HYDRAULIC	31.80	7.75
LEVERMAN, DIPPER, FLOATING CLAMSHELL	31.80	7.75
ASSISTANT ENGINEER	29.69	7.75
TENDERMAN	28.72	7.75
ASSISTANT MATE	26.15	7.75
ZONE B		
LEVERMAN, HYDRAULIC	33.80	7.75
LEVERMAN, DIPPER, FLOATING CLAMSHELL	33.80	7.75
ASSISTANT ENGINEER	31.69	7.75
TENDERMAN	30.72	7.75
ASSISTANT MATE	28.15	7.75
ZONE C		
LEVERMAN, HYDRAULIC	34.80	7.75
LEVERMAN, DIPPER, FLOATING CLAMSHELL	34.80	7.75
ASSISTANT ENGINEER	32.69	7.75
TENDERMAN	31.72	7.75
ASSISTANT MATE	29.15	7.75

ZONE DESCRIPTION FOR DREDGING:

ZONE A - All jobs or projects located within 30 road miles of Portland City Hall.

ZONE B - Over 30-50 road miles from Portland City Hall.

ZONE C - Over 50 road miles from Portland City Hall.

\*All jobs or projects shall be computed from the city hall by the shortest route to the geographical center of the project.

-----

IRON0014F 07/01/2001

	Rates	Fringes
ADAMS, ASOTIN, BENTON, COLUMBIA, DOUGLAS, FERRY, FRANKLIN, GARFIELD, GRANT, LINCOLN, OKANOGAN, PEND ORELLE, SPOKANE, STEVENS, WALLA WALLA AND WHITMAN COUNTIES		

IRONWORKERS	24.52	11.35
-------------	-------	-------

-----

IRON0029I 07/01/2001

	Rates	Fringes
CLARK, CLALLAM, CHELAN, COWLITZ, GRAYS HARBOR, ISLAND, JEFFERSON, KING, KITTITAS, KLUCKITAT, KITSAP, LEWIS, MASON, PACIFIC, PIERCE, SKAGIT, SKAMANIA, SNOHOMISH, THURSTON, WAHKAIAKUM, WHATCOM AND YAKIMA COUNTIES		

IRONWORKERS	25.82	11.35
-------------	-------	-------

-----

LAB00001D 06/01/2001

	Rates	Fringes
CHELAN, DOUGLAS (WEST OF THE 120TH MERIDIAN), KITTITAS AND YAKIMA COUNTIES		

LABORERS:

ZONE 1:

GROUP 1	14.46	5.80
GROUP 2	16.78	5.80
GROUP 3	18.50	5.80
GROUP 4	18.98	5.80
GROUP 5	19.34	5.80

ZONE DIFFERENTIAL (ADD TO ZONE 1 RATES):

ZONE 2 - \$ .70

ZONE 3 - \$1.00

BASE POINTS: CHELAN, SUNNYSIDE, WENATCHEE,  
AND YAKIMA

ZONE 1 - Projects within 25 radius miles of the respective city hall

ZONE 2 - More than 25 but less than 45 radius miles from the respective city hall

ZONE 3 - More than 45 radius miles from the respective city hall

CALLAM, GRAYS HARBOR, ISLAND, JEFFERSON, KING, KITSAP, LEWIS, MASON, PACIFIC (NORTH OF STRAIGHT LINE MADE BY EXTENDING THE NORTH BOUNDARY WAHKAIAKUM COUNTY WEST TO THE PACIFIC OCEAN), PIERCE, SAN JUAN, SKAGIT, SNOHOMISH, THURSTON AND WHATCOM COUNTIES

LABORERS:

ZONE 1:

GROUP 1	16.92	5.80
GROUP 2	19.24	5.80
GROUP 3	23.92	5.80
GROUP 4	24.40	5.80
GROUP 5	24.76	5.80

ZONE DIFFERENTIAL (ADD TO ZONE 1 RATES):

ZONE 2 - \$ .70

ZONE 3 - \$1.00

BASE POINTS: BELLINGHAM, MT. VERNON, EVERETT,

SEATTLE, KENT, TACOMA, OLYMPIA,  
CENTRALIA, ABERDEEN, SHELTON, PT.  
TOWNSEND, PT. ANGELES, AND BREMERTON

- ZONE 1 - Projects within 25 radius miles of the respective city hall  
ZONE 2 - More than 25 but less than 45 radius miles from the respective city hall  
ZONE 3 - More than 45 radius miles from the respective city hall

#### LABORERS CLASSIFICATIONS

GROUP 1: Landscaping and Planting; Watchman; Window Washer/Cleaner (detail clean-up, such as but not limited to cleaning floors, ceilings, walls, windows, etc., prior to final acceptance by the owner)

GROUP 2: Batch Weighman; Crusher Feeder; Fence Laborer; Flagman; Pilot Car

GROUP 3: General Laborer; Air, Gas, or Electric Vibrating Screed; Asbestos Abatement Laborer; Ballast Regulator Machine; Brush Cutter; Brush Hog Feeder; Burner; Carpenter Tender; Cement Finisher Tender; Change House or Dry Shack; Chipping Gun (under 30 lbs.); Choker Setter; Chuck Tender; Clean-up Laborer; Concrete Form Stripper; Curing Laborer; Demolition (wrecking and moving including charred material); Ditch Digger; Dump Person; Fine Graders; Firewatch; Form Setter; Gabian Basket Builders; Grout Machine Tender; Grinders; Guardrail Erector; Hazardous Waste Worker (Level C); Maintenance Person; Material Yard Person; Pot Tender; Rip Rap Person; Riggers; Scale Person; Sloper Sprayer; Signal Person; Stock Piler; Stake Hopper; Toolroom Man (at job site); Topper-Tailer; Track Laborer; Truck Spotter; Vinyl Seamer

GROUP 4: Cement Dumper-Paving; Chipping Gun (over 30 lbs.);

Clary Power Spreader; Concrete Dumper/Chute Operator; Concrete Saw Operator; Drill Operator (hydraulic, diamond, aiartrac); Faller and Bucker Chain Saw; Grade Checker and Transit Person; Groutmen (pressure) including post tension beams; Hazardous Waste Worker (Level B); High Scaler; Jackhammer; Laserbeam Operator; Manhole Builder-Mudman; Mortarman and Hodcarrier; Nozzleman (concrete pump, green cutter when using combination of high pressure air and water on concrete and rock, sandblast, gunite, shotcrete, water blaster, vacuum blaster); Pavement Breaker; Pipe Layer and Caulker; Pipe Pot Tender; Pipe Reliner (not insert type); Pipe Wrapper; Power Jacks; Railroad Spike Puller-Power; Raker-Asphalt; Rivet Buster; Rodder; Sloper (over 20'); Spreader (concrete); Tamper and Similar electric, air and glas operated tool; Timber Person-sewer (lagger shorer and cribber); Track Liner Power; Tugger Operator; Vibrator; Well Point Laborer

GROUP 5: Caisson Worker; Miner; Powderman; Re-Timberman; Hazardous Waste Worker (Level A).

-----  
LAB00238E 06/01/2001

Rates                      Fringes

ADAMS, ASOTIN, BENTON, COLUMBIA, DOUGLAS (EAST OF THE 120TH  
MERIDIAN), FERRY, FRANKLIN, GARFIELD, GRANT, LINCOLN,  
OKANOGAN, PEND OREILLE, STEVENS, SPOKANE, WALLA WALLA AND  
WHITMAN COUNTIES

LABORERS:

ZONE 1:

GROUP 1	17.66	5.00
GROUP 2	19.76	5.00
GROUP 3	20.03	5.00
GROUP 4	20.30	5.00
GROUP 5	20.58	5.00
GROUP 6	21.95	5.00

Zone Differential (Add to Zone 1  
rate): \$2.00

BASE POINTS: Spokane, Moses Lake, Pasco, Lewiston

Zone 1: 0-45 radius miles from the main post office.

Zone 2: 45 radius miles and over from the main post office.

LABORERS CLASSIFICATIONS

GROUP 1: Flagman; Landscape Laborer; Scaleman; Traffic Control  
Maintenance Laborer (to include erection and maintenance of  
barricades, signs and relief of flagperson); Window  
Washer/Cleaner (detail cleanup, such as, but not limited to  
cleaning floors, ceilings, walls, windows, etc. prior to final  
acceptance by the owner)

GROUP 2: Asbestos Abatement Worker; Brush Hog Feeder; Carpenter  
Tender; Cement Handler; Clean-up Laborer; Concrete Crewman (to  
include stripping of forms, hand operating jacks on slip form

construction, application of concrete curing compounds, pumpcrete  
machine, signaling, handling the nozzle of squeezcrete or similar  
machine, 6 inches and smaller); Confined Space Attendant; Concrete  
Signalman; Crusher Feeder; Demolition (to include clean-up,  
burning, loading, wrecking and salvage of all material); Dumpman;  
Fence Erector; Firewatch; Form Cleaning Machine Feeder, Stacker;  
General Laborer; Grout Machine Header Tender; Guard Rail (to  
include guard rails, guide and reference posts, sign posts, and  
right-of-way markers); Hazardous Waste Worker, Level D (no  
respirator is used and skin protection is minimal); Miner, Class  
"A" (to include all bull gang, concrete crewman, dumpman and  
pumpcrete crewman, including distributing pipe, assembly &  
dismantle, and nipper); Nipper; Riprap Man; Sandblast  
Tailhoesman; Scaffold Erector (wood or steel); Stake Jumper;  
Structural Mover (to include separating foundation, preparation,  
cribbing, shoring, jacking and unloading of structures);  
Tailhoesman (water nozzle); Timber Bucker and Faller (by hand);  
Track Laborer (RR); Truck Loader; Well-Point Man; All Other Work  
Classifications Not Specially Listed Shall Be Classified As  
General Laborer

GROUP 3: Asphalt Raker; Asphalt Roller, walking; Cement Finisher Tender; Concrete Saw, walking; Demolition Torch; Dope Pot Firemen, non-mechanical; Driller Tender (when required to move and position machine); Form Setter, Paving; Grade Checker using level; Hazardous Waste Worker, Level C (uses a chemical "splash suit" and air purifying respirator); Jackhammer Operator; Miner, Class "B" (to include brakeman, finisher, vibrator, form setter); Nozzlemán (to include squeeze and flo-crete nozzle); Nozzlemán, water, air or steam; Pavement Breaker (under 90 lbs.); Pipelayer, corrugated metal culvert; Pipelayer, multi-plate; Pot Tender; Power Buggy Operator; Power Tool Operator, gas, electric, pneumatic; Railroad Equipment, power driven, except dual mobile power spiker or puller; Railroad Power Spiker or Puller, dual mobile; Rodder and Spreader; Tamper (to include operation of Barco, Essex and similar tampers); Trencher, Shawnee; Tugger Operator; Wagon Drills; Water Pipe Liner; Wheelbarrow (power driven)

GROUP 4: Air and Hydraulic Track Drill; Brush Machine (to include horizontal construction joint cleanup brush machine, power propelled); Caisson Worker, free air; Chain Saw Operator and Faller; Concrete Stack (to include laborers when laborers working on free standing concrete stacks for smoke or fume control above 40 feet high); Gunite (to include operation of machine and nozzle); Hazardous Waste Worker, Level B (uses same respirator protection as Level A. A supplied air line is provided in conjunction with a chemical "splash suit"); High Scaler; Laser Beam Operator (to include grade checker and elevation control); Miner, Class C (to include miner, nozzlemán for concrete, laser beam operator and rigger on tunnels); Monitor Operator (air track or similar mounting); Mortar Mixer; Nozzlemán (to include jet blasting nozzlemán, over 1,200 lbs., jet blast machine power propelled, sandblast nozzle); Pavement Breaker (90 lbs. and over); Pipelayer (to include working topman, caulker, collarman, jointer, mortarman, rigger, jacker, shorer, valve or meter installer); Pipewrapper; Plasterer Tender; Vibrators (all)

GROUP 5 - Drills with Dual Masts; Hazardous Waste Worker, Level A (utilizes a fully encapsulated suit with a self-contained breathing apparatus or a supplied air line); Miner Class "D", (to include raise and shaft miner, laser beam operator on riases and shafts)

GROUP 6 - Powderman

LAB00238G 06/01/2001		
	Rates	Fringes
COUNTIES EAST OF THE 120TH MERIDIAN:	ADAMS, ASOTIN, BENTON,	
	COLUMBIA, DOUGLAS, FERRY, FRANKLIN, GARFIELD, GRANT, LINCOLN,	
	OKANOGAN, PEND OREILLE, STEVENS, SPOKANE, WALLA WALLA, WHITMAN	
HOD CARRIERS	21.35	5.00

LAB00335A 06/01/2001

Rates                      Fringes

CLARK, COWLITZ, KLUCKITAT, PACIFIC (SOUTH OF A STRAIGHT LINE MADE BY EXTENDING THE NORTH BOUNDARY LINE OF WAHIAKUM COUNTY WEST TO THE PACIFIC OCEAN), SKAMANIA AND WAHIAKUM COUNTIES

ZONE 1:

LABORERS:

GROUP 1	22.27	6.75
GROUP 2	22.77	6.75
GROUP 3	23.15	6.75
GROUP 4	23.47	6.75
GROUP 5	20.12	6.75
GROUP 6	18.06	6.75
GROUP 7	15.36	6.75

Zone Differential (Add to Zone 1 rates):

Zone 2 \$ 0.65

Zone 3 - 1.15

Zone 4 - 1.70

Zone 5 - 2.75

BASE POINTS: GOLDENDALE, LONGVIEW, AND VANCOUVER

ZONE 1: Projects within 30 miles of the respective city all.

ZONE 2: More than 30 miles but less than 40 miles from the respective city hall.

ZONE 3: More than 40 miles but less than 50 miles from the respective city hall.

ZONE 4: More than 50 miles but less than 80 miles from the respective city hall.

ZONE 5: More than 80 miles from the respective city hall.

LABORERS CLASSIFICATIONS

GROUP 1: Asphalt Plant Laborers; Asphalt Spreaders; Batch

Weighman; Broomers; Brush Burners and Cutters; Car and Truck Loaders; Carpenter Tender; Change-House Man or Dry Shack Man; Choker Setter; Clean-up Laborers; Curing, Concrete; Demolition, Wrecking and Moving Laborers; Dumpers, road oiling crew; Dumpmen (for grading crew); Elevator Feeders; Guard Rail, Median Rail Reference Post, Guide Post, Right of Way Marker; Fine Graders; Fire Watch; Form Strippers (not swinging stages); General Laborers; Hazardous Waste Worker; Leverman or Aggregate Spreader (Flaherty and similar types); Loading Spotters; Material Yard Man (including electrical); Pittsburgh Chipper Operator or Similar Types; Railroad Track Laborers; Ribbon Setters (including steel forms); Rip Rap Man (hand placed); Road Pump Tender; Sewer Labor; Signalman; Skipman; Slopers; Spraymen; Stake Chaser; Stockpiler; Tie Back Shoring; Timber Faller and Bucker (hand labor); Toolroom Man (at job site); Tunnel Bullgang (above ground); Weight-Man-Crusher (aggregate when used)

GROUP 2: Applicator (including pot power tender for same), applying protective material by hand or nozzle on utility lines or storage tanks on project; Brush Cutters (power saw); Burners; Choker Splicer; Clary Power Spreader and similar types; Clean-

up Nozzleman-Green Cutter (concrete, rock, etc.); Concrete Power Buggyman; Concrete Laborer; Crusher Feeder; Demolition and Wrecking Charred Materials; Guniting Nozzleman Tender; Guniting or Sand Blasting Pot Tender; Handlers or Mixers of all Materials of an irritating nature (including cement and lime); Tool Operators (includes but not limited to: Dry Pack Machine; Jackhammer; Chipping Guns; Paving Breakers); Pipe Doping and Wrapping; Post Hole Digger, air, gas or electric; Vibrating Screed; Tampers; Sand Blasting (Wet); Stake-Setter; Tunnel-Muckers, Brakemen, Concrete Crew, Bullgang (underground)

GROUP 3: Asbestos Removal; Bit Grinder; Drill Doctor; Drill Operators, air tracks, cat drills, wagon drills, rubber-mounted drills, and other similar types including at crusher plants; Guniting Nozzleman; High Scalars, Strippers and Drillers (covers work in swinging stages, chairs or belts, under extreme conditions unusual to normal drilling, blasting, barring-down, or sloping and stripping); Manhole Builder; Powdermen; Concrete Saw Operator; Powdermen; Power Saw Operators (Bucking and Falling); Pumpcrete Nozzlemen; Sand Blasting (Dry); Sewer Timberman; Track Liners, Anchor Machines, Ballast Regulators, Multiple Tampers, Power Jacks, Tugger Operator; Tunnel-Chuck Tenders, Nippers and Timberman; Vibrator; Water Blaster

GROUP 4: Asphalt Raker; Concrete Saw Operator (walls); Concrete Nozzelman; Grade Checker; Pipelayer; Laser Beam (pipelaying)-applicable when employee assigned to move, set up, align; Laser Beam; Tunnel Miners; Motorman-Dinky Locomotive-Tunnel; Powderman-Tunnel; Shield Operator-Tunnel

GROUP 5: Traffic Flaggers

GROUP 6: Fence Builders

GROUP 7: Landscaping or Planting Laborers

-----  
LAB00335L 06/01/2001  
Rates Fringes  
CLARK, COWLITZ, KLINKITAT, PACIFIC (SOUTH OF A STRAIGHT LINE MADE BY EXTENDING THE NORTH BOUNDARY LINE OF WAHIAKUM COUNTY WEST TO THE PACIFIC OCEAN), SKAMANIA AND WAHIAKUM COUNTIES

HOD CARRIERS	24.61	5.75
--------------	-------	------

-----

PAIN0005B 06/01/2000  
Rates Fringes  
STATEWIDE EXCEPT CLARK, COWLITZ, KLINKITAT, PACIFIC (SOUTH), SKAMANIA, AND WAHIAKUM COUNTIES

STRIPERS	20.65	5.85
----------	-------	------

-----

PAIN0005D 03/01/2000  
Rates Fringes

CLALLAM, GRAYS HARBOR, ISLAND, JEFFERSON, KING, KITSAP, LEWIS,  
MASON, PIERCE, SKAGIT, SNOHOMISH, THURSTON AND WHATCOM COUNTIES

PAINTERS	22.94	3.73
----------	-------	------

---

PAIN0005G 07/01/2001

	Rates	Fringes
--	-------	---------

ADAMS, ASOTIN; BENTON AND FRANKLIN (EXCEPT HANFORD SITE); CHELAN,  
COLUMBIA, DOUGLAS, FERRY, GARFIELD, GRANT, KITTITAS, LINCOLN,  
OKANOGAN, PEND OREILLE, SPOKANE, STEVENS, WALLA WALLA,  
WHITMAN AND YAKIMA COUNTIES

PAINTERS\*:

Brush, Roller, Striping, Steam-cleaning and Spray	19.17	4.24
Application of Cold Tar Products, Epoxies, Polyure thanes, Acids, Radiation Resistant Material, Water and Sandblasting, Bridges, Towers, Tanks, Stacks, Steeples	20.17	4.24
TV Radio, Electrical Transmission Towers	20.92	4.24
Lead Abatement, Asbestos Abatement	20.17	4.24

\*\$.70 shall be paid over and above the basic wage rates listed  
for work on swing stages and high work of over 30 feet.

---

PAIN0055C 11/01/1999

	Rates	Fringes
--	-------	---------

CLARK, COWLITZ, KLUCKITAT, PACIFIC, SKAMANIA, AND WAHIAKUM  
COUNTIES

PAINTERS:

Brush & Roller	17.10	3.48
Spray and Sandblasting	17.70	3.48
High work - All work 60 ft. or higher	17.60	3.48

---

PAIN0055L 06/01/2000

	Rates	Fringes
--	-------	---------

CLARK, COWLITZ, KLUCKITAT, SKAMANIA and WAHIAKUM COUNTIES

PAINTERS:

HIGHWAY AND PARKING LOT STRIPER	21.88	4.76
------------------------------------	-------	------

---

PLAS0072E 06/01/1999

	Rates	Fringes
--	-------	---------

ADAMS, ASOTIN, BENTON, CHELAN, COLUMBIA, DOUGLAS, FERRY,  
FRANKLIN, GARFIELD, GRANT, KITTITAS, LINCOLN, OKANOGAN, PEND



OREILLE, SPOKANE, STEVENS, WALLA WALLA, WHITMAN, AND  
YAKIMA COUNTIES

ZONE 1:  
CEMENT MASONS 21.57 5.24

Zone Differential (Add to Zone 1  
rate): Zone 2 - \$2.00

BASE POINTS: Spokane, Pasco, Moses Lake, Lewiston

Zone 1: 0 - 45 radius miles from the main post office  
Zone 2: Over 45 radius miles from the main post office

-----  
PLAS0528A

PLAS0528A 12/01/2001

Rates Fringes  
CLALLAM, GRAYS HARBOR, ISLAND, JEFFERSON, KING, KITSAP, LEWIS,  
MASON, PACIFIC (NORTH), PIERCE, SAN JUAN, SKAGIT, SNOHOMISH,  
THURSTON, AND WHATCOM COUNTIES

CEMENT MASON 27.16 8.99  
COMPOSITION, COLOR MASTIC,  
TROWEL MACHINE, GRINDER,  
POWER TOOLS, GUNNITE NOZZLE 26.41 8.99  
-----

PLAS0555B 06/01/2001

Rates Fringes  
CLARK, COWLITZ, KLUCKITAT, PACIFIC (SOUTH), SKAMANIA, AND  
WAHIAKUM COUNTIES

ZONE 1:  
CEMENT MASONS 24.04 9.00  
COMPOSITION WORKERS AND  
POWER MACHINERY OPERATORS 24.48 9.00  
CEMENT MASONS ON SUSPENDED,  
SWINGING AND/OR HANGING  
SCAFFOLD 24.48 9.00  
CEMENT MASONS DOING BOTH  
COMPOSITION/POWER MACHINERY  
AND SUSPENDED/HANGING  
SCAFFOLD 24.93 9.00

Zone Differential (Add To Zone 1 Rates):

Zone 2 - \$0.65  
Zone 3 - 1.15  
Zone 4 - 1.70  
Zone 5 - 2.75

BASE POINTS: BEND, CORVALLIS, EUGENE, LONGVIEW, MEDFORD,  
PORTLAND, SALEM, THE DALLIES, VANCOUVER

ZONE 1: Projects within 30 miles of the respective city hall  
ZONE 2: More than 30 miles but less than 40 miles from the

respective city hall.  
 ZONE 3: More than 40 miles but less than 50 miles from the  
 respective city hall.  
 ZONE 4: More than 50 miles but less than 80 miles from the  
 respective city hall.  
 ZONE 5: More than 80 miles from the respective city hall

-----

PLUM0032B 06/01/2001		
	Rates	Fringes
CLALLAM, KING AND JEFFERSON COUNTIES		
PLUMBERS AND PIPEFITTERS	31.38	11.23

-----

PLUM0032D 06/01/1999		
	Rates	Fringes
CHELAN, KITTITAS (NORTHERN TIP), DOUGLAS (NORTH), AND OKANOGAN (NORTH) COUNTIES		
PLUMBERS AND PIPEFITTERS	23.47	8.67

-----

PLUM0044C 06/01/2001		
	Rates	Fringes
ADAMS (NORTHERN PART), ASOTIN (CLARKSTON ONLY), FERRY (EASTERN PART), LINCOLN (EASTERN PART), PEND ORIELLE, STEVENS, SPOKANE, AND WHITMAN COUNTIES		
PLUMBERS AND PIPEFITTERS	26.21	9.14

-----

PLUM0082A 06/01/2001		
	Rates	Fringes
CLARK (NORTHERN TIP INCLUDING WOODLAND), COWLITZ, GRAYS HARBOR, LEWIS, MASON (EXCLUDING NE SECTION), PACIFIC, PIERCE SKAMANIA, THURSTON AND WAHAKIUM COUNTIES		
PLUMBERS AND PIPEFITTERS	24.57	14.72

-----

PLUM0265C 06/01/2001		
	Rates	Fringes
ISLAND, SKAGIT, SNOHOMISH, SAN JUAN AND WHATCOM COUNTIES		
PLUMBERS AND PIPEFITTERS	28.37	10.24

-----

PLUM0290K 10/01/2001		
	Rates	Fringes
CLARK (ALL EXCLUDING NORTHERN TIP INCLUDING CITY OF WOODLAND)		
PLUMBERS AND PIPEFITTERS	31.52	10.80

-----

PLUM0598E 06/01/2001

	Rates	Fringes
ADAMS (SOUTHERN PART), ASOTIN (EXCLUDING THE CITY OF CLARKSTON), BENTON, COLUMBIA, DOUGLAS (EASTERN HALF), FERRY (WESTERN PART), FRANKLIN, GARFIELD, GRANT, KITTITAS (ALL BUT NORTHERN TIP), KLICKITAT, LINCOLN (WESTERN PART), OKANOGAN (EASTERN), WALLA WALLA AND YAKIMA COUNTIES		

PLUMBERS	28.85	11.55
----------	-------	-------

---

PLUM0631A 06/01/2001

	Rates	Fringes
MASON (NE SECTION), AND KITSAP COUNTIES		

PLUMBERS/PIPEFITTERS:

All new construction, additions,  
and remodeling of commercial  
building projects such as:  
cocktail lounges and taverns,  
professional buildings, medical  
clinics, retail stores, hotels  
and motels, restaurants and fast  
food types, gasoline service  
stations, and car washes where  
the plumbing and mechanical cost  
of the project is less than  
\$100,000

14.55	7.98
-------	------

All other work where the plumbing  
and mechanical cost of the project  
is \$100,000 and over

24.65	13.41
-------	-------

---

TEAM0037C 06/01/2001

	Rates	Fringes
CLARK, COWLITZ, KLICKITAT, PACIFIC (South of a straight line made by extending the north boundary line of Wahkiakum County west to the Pacific Ocean), SKAMANIA, AND WAHIAKUM COUNTIES		

TRUCK DRIVERS

ZONE 1:

GROUP 1	23.40	8.30
GROUP 2	23.52	8.30
GROUP 3	23.65	8.30
GROUP 4	23.91	8.30
GROUP 5	24.13	8.30
GROUP 6	24.29	8.30
GROUP 7	24.49	8.30

Zone Differential (Add to Zone 1 Rates):

Zone 2 - \$0.65  
Zone 3 - 1.15  
Zone 4 - 1.70  
Zone 5 - 2.75

BASE POINTS: ASTORIA, THE DALLES, LONGVIEW AND VANCOUVER

ZONE 1: Projects within 30 miles of the respective city hall.

ZONE 2: More than 30 miles but less than 40 miles from the respective city hall.

ZONE 3: More than 40 miles but less than 50 miles from the respective city hall.

ZONE 4: More than 50 miles but less than 80 miles from the respective city hall.

ZONE 5: More than 80 miles from the respective city hall.

#### TRUCK DRIVERS CLASSIFICATIONS

GROUP 1: A Frame or Hydra lift truck w/load bearing surface; Articulated dump truck; Battery Rebuilders; Bus or Manhaul Driver; Concrete Buggies (power operated); Concrete pump truck; Dump Trucks, side, end and bottom dumps, including Semi Trucks and Trains or combinations there of: up to and including 10 cu. yds.; Lift Jitneys, Fork Lifts (all sizes in loading, unloading and transporting material on job site); Loader and/or Leverman on Concrete Dry Batch Plant (manually operated); Pilot Car; Pickup truck; Solo Flat Bed and misc. Body Trucks, 0-10 tons; Truck Tender; Truck Mechanic Tender; Water Wagons (rated capacity) up to 3,000 gallons; Transit Mix and Wet or Dry Mix - 5 cu. yds. and under; Lubrication Man, Fuel Truck Driver, Tireman, Wash Rack, Steam Cleaner or combinations; Team Driver; Slurry Truck Driver or Leverman; Tireman

GROUP 2: Boom truck/hydra lift or retracting crane; Challenger; Dumpsters or similar equipment all sizes; Dump Trucks/articulated dumps 6 cu to 10 cu.; Flaherty Spreader Driver or Leverman; Lowbed Equipment, Flat Bed Semi-trailer or doubles transporting equipment or wet or dry materials; Lumber Carrier,

Driver-Straddle Carrier (used in loading, unloading and transporting of materials on job site); Oil Distributor Driver or Leverman; Transit mix and wet or dry mix trucks: over 5 cu. yds. and including 7 cu. yds.; Vacuum trucks; Water truck/Wagons (rated capacity) over 3,000 to 5,000 gallons

GROUP 3: Ammonia nitrate distributor driver; Dump trucks, side, end and bottom dumps, including Semi Trucks and Trains or combinations thereof: over 10 cu. yds. and including 30 cu. yds. includes Articulated dump trucks; Selfpropelled street sweeper; Transit mix and wet or dry mix truck: over 7 cu yds. and including 11 cu yds.; Truck Mechanic Welder Body Repairman; Utility and cleanup truck; Water Wagons (rated capacity) over 5,000 to 10,000 gallons

GROUP 4: Asphalt burner; Dump Trucks, side, end and bottom dumps, including Semi-Trucks and Trains or combinations thereof: over 30 cu. yds. and including 50 cu. yds. includes articulated dump trucks; Fire guard; Transit Mix and Wet or Dry Mix Trucks, over 11 cu. yds. and including 15 cu. yds.; Water Wagon (rated capacity) over 10,000 gallons to 15,000 gallons

GROUP 5: Dump Trucks, side, end and bottom dumps, including

Semi Trucks and Trains or combinations thereof: over 50 cu. yds.  
and including 60 cu. yds. includes articulated dump trucks

GROUP 6: Bulk cement spreader w/o auger; Dry prebatch concrete  
mix trucks; Dump trucks, side, end and bottom dumps, including  
Semi Trucks and Trains of combinations thereof: over 60 cu. yds.  
and including 80 cu. yds., and includes articulated dump trucks;  
Skid truck

GROUP 7: Dump Trucks, side, end and bottom dumps, including  
Semi Trucks and Trains or combinations thereof: over 80 cu. yds.  
and including 100 cu. yds., includes articulated dump trucks;  
Industrial lift truck (mechanical tailgate)

-----

TEAM0174A 06/01/2001

	Rates	Fringes
CLALLAM, GRAYS HARBOR, ISLAND, JEFFERSON, KING, KITSAP, LEWIS, MASON, PACIFIC (North of a straight line made by extending the north boundary line of Wahkiakum County west to the Pacific Ocean), PIERCE, SAN JUAN, SKAGIT, SNOHOMISH, THURSTON AND WHATCOM COUNTIES		

TRUCK DRIVERS;

GROUP 1:	24.94	9.12
GROUP 2:	24.36	9.12
GROUP 3:	22.08	9.12
GROUP 4:	18.00	9.12
GROUP 5:	24.70	9.12

TRUCK DRIVERS CLASSIFICATIONS

GROUP 1 -"A-frame or Hydralift" trucks and Boom trucks or

similar equipment when "A" frame or "Hydralift" and Boom truck or  
similar equipment is used; Buggymobile; Bulk Cement Tanker;  
Dumpsters and similar equipment, Tournorockers, Tournowagon,  
Turnotrailer, Cat DW series, Terra Cobra, Le Tourneau,  
Westinghouse, Athye Wagon, Euclid Two and Four-Wheeled power  
tractor with trailer and similar top-loaded equipment  
transporting material: Dump Trucks, side, end and bottom dump,  
including semi-trucks and trains or combinations thereof with 16  
yards to 30 yards capacity: Over 30 yards \$.15 per hour  
additional for each 10 yard increment; Explosive Truck (field  
mix) and similar equipment; Hyster Operators (handling bulk loose  
aggregates); Lowbed and Heavy Duty Trailer; Road Oil Distributor  
Driver; Spreader, Flaherty Transit mix used exclusively in heavy  
construction; Water Wagon and Tank Truck-3,000 gallons and  
over capacity

GROUP 2 - Bulllifts, or similar equipment used in loading or  
unloading trucks, transporting materials on job site; Dumpsters,  
and similar equipment, Tournorockers, Tournowagon, Turnotrailer,  
Cat. D.W. Series, Terra Cobra, Le Tourneau, Westinghouse, Athye  
wagon, Euclid two and four-wheeled power tractor with trailer and  
similar top-loaded equipment transporting material: Dump trucks,  
side, end and bottom dump, including semi-trucks and trains or

combinations thereof with less than 16 yards capacity; Flatbed (Dual Rear Axle); Grease Truck, Fuel Truck, Greaser, Battery Service Man and/or Tire Service Man; Leverman and loader at bunkers and batch plants; Oil tank transport; Scissor truck; Slurry Truck; Sno-Go and similar equipment; Swampers; Straddler Carrier (Ross, Hyster) and similar equipment; Team Driver; Tractor (small, rubber-tired)(when used within Teamster jurisdiction); Vacuum truck; Water Wagon and Tank trucks-less than 3,000 gallons capacity; Winch Truck; Wrecker, Tow truck and similar equipment

GROUP 3 - Flatbed (single rear axle); Pickup Sweeper; Pickup Truck. (Adjust Group 3 upward by \$2.00 per hour for onsite work only)

GROUP 4 - Escort or Pilot Car

GROUP 5 - Mechanic

#### HAZMAT PROJECTS

Anyone working on a HAZMAT job, where HAZMAT certification is required, shall be compensated as a premium, in addition to the classification working in as follows:

LEVEL C: +\$.25 per hour - This level uses an air purifying respirator or additional protective clothing.

LEVEL B: +\$.50 per hour - Uses same respirator protection as Level A. Supplied air line is provided in conjunction with a chemical "splash suit."

LEVEL A: +\$.75 per hour - This level utilizes a fully-encapsulated suit with a self-contained breathing apparatus or a supplied air line.

#### ZONE DIFFERENTIALS

Zone pay will be calculated from the city center of the following listed cities:

BELLINGHAM	CENTRALIA	RAYMOND	OLYMPIA
EVERETT	SHELTON	ANACORTES	BELLEVUE
SEATTLE	PORT ANGELES	MT. VERNON	KENT
TACOMA	PORT TOWNSEND	ABERDEEN	BREMERTON

TRAVEL - Zone A - 0 - 25 miles - Free Zone  
Zone B - 25 - 45 miles - \$ .70 per hour.  
Zone C - Over 45 miles - \$1.00 per hour.

-----  
TEAM0760C 06/01/1999

	Rates	Fringes
ADAMS, ASOTIN, BENTON, CHELAN, COLUMBIA, DOUGLAS, FERRY, FRANKLIN, GARFIELD, GRANT KITTITAS, LINCOLN, OKANOGAN, PEND OREILLE, SPOKANE, STEVENS, WALLA WALLA, AND WHITMAN COUNTIES		

#### TRUCK DRIVERS

(ANYONE WORKING ON HAZMAT JOBS SEE FOOTNOTE A BELOW)

ZONE 1: (INCLUDES ALL OF YAKIMA COUNTY)

GROUP 1	17.42	7.31
GROUP 2	19.69	7.31
GROUP 3	20.19	7.31
GROUP 4	20.52	7.31
GROUP 5	20.63	7.31
GROUP 6	20.80	7.31
GROUP 7	21.33	7.31
GROUP 8	21.66	7.31

Zone Differential (Add to Zone 1  
rate: Zone 2 - \$2.00)

BASE POINTS: Spokane, Moses Lake, Pasco, Lewiston

Zone 1: 0-45 radius miles from the main post office.

Zone 2: 45 radius miles and over from the main post office

#### TRUCK DRIVERS CLASSIFICATIONS

GROUP 1: Escort Driver or Pilot Car; Employee Haul; Power Boat  
Hauling Employees or Material

GROUP 2: Fish Truck; Flat Bed Truck; Fork Lift (3000 lbs. and  
under); Leverperson (loading trucks at bunkers); Trailer Mounted  
Hydro Seeder and Mulcher; Seeder & Mulcher; Stationary Fuel  
Operator; Tractor (small, rubber-tired, pulling trailer or  
similar equipment)

GROUP 3: Auto Crane (2000 lbs. capacity); Buggy Mobile &  
Similar; Bulk Cement Tanks & Spreader; Dumptor (6 yds. & under);

Flat Bed Truck with Hydraulic System; Fork Lift (3001-16,000  
lbs.); Fuel Truck Driver, Steamcleaner & Washer; Power Operated  
Sweeper; Rubber-tired Tunnel Jumbo; Scissors Truck; Slurry Truck  
Driver; Straddle Carrier (Ross, Hyster, & similar); Tireperson;  
Transit Mixers & Truck Hauling Concrete (3 yd. to & including 6  
yds.); Trucks, side, end, bottom & articulated end dump (3 yards  
to and including 6 yds.); Warehouseperson (to include shipping &  
receiving); Wrecker & Tow Truck

GROUP 4: A-Frame; Burner, Cutter, & Welder; Service Greaser;  
Trucks, side, end, bottom & articulated end dump (over 6 yards to  
and including 12 yds.); Truck Mounted Hydro Seeder;  
Warehouseperson; Water Tank truck (0-8,000 gallons)

GROUP 5: Dumptor (over 6 yds.); Lowboy (50 tons & under); Self-  
loading Roll Off; Semi-Truck & Trailer; Tractor with Steer  
Trailer; Transit Mixers and Trucks Hauling Concrete (over 6 yds.  
to and including 10 yds.); Trucks, side, end, bottom and end  
dump (over 12 yds. to & including 20 yds.); Truck-Mounted Crane  
(with load bearing surface either mounted or pulled, up to 14  
ton); Vacuum Truck (super sucker, guzzler, etc.)

GROUP 6: Flaherty Spreader Box Driver; Flowboys; Fork Lift  
(over 16,000 lbs.); Dumps (Semi-end); Mechanic (Field); Semi-  
end Dumps; Transfer Truck & Trailer; Transit Mixers & Trucks  
Hauling Concrete (over 10 yds. to & including 20 yds.); Trucks,  
side, end, bottom and articulated end dump (over 20 yds. to &

including 40 yds.); Truck and Pup; Tournarocker, DW's & similar with 2 or more 4 wheel-power tractor with trailer, gallonage or yardage scale, whichever is greater Water Tank Truck (8,001-14,000 gallons)

GROUP 7: Oil Distributor Driver; Stringer Truck (cable operated trailer); Transit Mixers & Trucks Hauling Concrete (over 20 yds.); Truck, side, end, bottom end dump (over 40 yds. to & including 100 yds.); Truck Mounted Crane (with load bearing surface either mounted or pulled (16 through 25 tons);

GROUP 8: Prime Movers and Stinger Truck; Trucks, side, end, bottom and articulated end dump (over 100 yds.); Helicopter Pilot Hauling Employees or Materials

Footnote A - Anyone working on a HAZMAT job, where HAZMAT certification is required, shall be compensated as a premium, in addition to the classification working in as follows:

LEVEL C-D: - \$.50 PER HOUR (This is the lowest level of protection. This level may use an air purifying respirator or additional protective clothing.

LEVEL A-B: - \$1.00 PER HOUR (Uses supplied air in conjunction with a chemical splash suit or fully encapsulated suit with a self-contained breathing apparatus.

NOTE: Trucks Pulling Equipment Trailers: shall receive \$.15/hour over applicable truck rate

-----  
-----

WELDERS - Receive rate prescribed for craft performing operation to which welding is incidental.

=====

Unlisted classifications needed for work not included within the scope of the classifications listed may be added after award only as provided in the labor standards contract clauses (29 CFR 5.5(a)(1)(v)).

-----

In the listing above, the "SU" designation means that rates listed under that identifier do not reflect collectively bargained wage and fringe benefit rates. Other designations indicate unions whose rates have been determined to be prevailing.

#### WAGE DETERMINATION APPEALS PROCESS

1.) Has there been an initial decision in the matter? This can be:

- \* an existing published wage determination
- \* a survey underlying a wage determination
- \* a Wage and Hour Division letter setting forth a position on a wage determination matter



\* a conformance (additional classification and rate)  
ruling

On survey related matters, initial contact, including requests for summaries of surveys, should be with the Wage and Hour Regional Office for the area in which the survey was conducted because those Regional Offices have responsibility for the Davis-Bacon survey program. If the response from this initial contact is not satisfactory, then the process described in 2.) and 3.) should be followed.

With regard to any other matter not yet ripe for the formal process described here, initial contact should be with the Branch of Construction Wage Determinations. Write to:

Branch of Construction Wage Determinations  
Wage and Hour Division  
U. S. Department of Labor  
200 Constitution Avenue, N. W.  
Washington, D. C. 20210

2.) If the answer to the question in 1.) is yes, then an interested party (those affected by the action) can request review and reconsideration from the Wage and Hour Administrator (See 29 CFR Part 1.8 and 29 CFR Part 7). Write to:

Wage and Hour Administrator  
U.S. Department of Labor  
200 Constitution Avenue, N. W.  
Washington, D. C. 20210

The request should be accompanied by a full statement of the interested party's position and by any information (wage payment data, project description, area practice material, etc.) that the requestor considers relevant to the issue.

3.) If the decision of the Administrator is not favorable, an interested party may appeal directly to the Administrative Review Board (formerly the Wage Appeals Board). Write to:

Administrative Review Board  
U. S. Department of Labor  
200 Constitution Avenue, N. W.  
Washington, D. C. 20210

4.) All decisions by the Administrative Review Board are final.  
END OF GENERAL DECISION

**This page was intentionally left blank for duplex printing.**

GENERAL DECISION **WA010002** 01/04/2002 WA2

Date: January 4, 2002

General Decision Number **WA010002**

Superseded General Decision No. WA000002

State: Washington

Construction Type:  
BUILDING

County(ies):

CHELAN	KITSAP	PIERCE
CLALLAM	KITTITAS	SNOHOMISH
GRAYS HARBOR	LEWIS	THURSTON
JEFFERSON	MASON	
KING	PACIFIC	

BUILDING CONSTRUCTION PROJECTS (does not include residential construction consisting of single family homes and apartments up to and including 4 stories)

Modification Number	Publication Date
0	03/02/2001
1	03/09/2001
2	03/16/2001
3	03/30/2001
4	04/06/2001
5	04/20/2001
6	05/11/2001
7	06/01/2001
8	06/15/2001
9	06/22/2001
10	07/06/2001
11	08/03/2001
12	08/31/2001
13	09/28/2001
14	10/19/2001
15	11/02/2001
16	11/16/2001
17	12/14/2001
18	12/28/2001
19	01/04/2002

COUNTY(ies):

CHELAN	KITSAP	PIERCE
CLALLAM	KITTITAS	SNOHOMISH
GRAYS HARBOR	LEWIS	THURSTON
JEFFERSON	MASON	
KING	PACIFIC	

ASBE0007A 08/01/2000

ASBESTOS WORKERS/INSULATORS: (Includes application of all insulating materials, protective coverings, coating and finishes to all types of mechanical systems)	Rates	Fringes
	28.54	5.97
-----		
BOIL0242B 10/01/2000		
CHELAN AND KITTITAS COUNTIES	Rates	Fringes
BOILERMAKERS	25.32	9.81
-----		
* BOIL0502B 01/01/2002		
CLALLAM, GRAYS HARBOR, JEFFERSON, KING, KITSAP, LEWIS, MASON, PACIFIC, PIERCE, SNOHOMISH AND THURSTON COUNTIES	Rates	Fringes
BOILERMAKERS	26.27	12.20
-----		
BRWA0001A 06/01/2000		
CLALLAM, GRAYS HARBOR, JEFFERSON, KING, KITSAP, LEWIS, MASON, PACIFIC (northern part), PIERCE, SNOHOMISH AND THURSTON COUNTIES	Rates	Fringes
BRICKLAYERS	29.13	6.74
-----		
BRWA0001F 05/01/2000		
PACIFIC COUNTY (SOUTHERN PART)	Rates	Fringes
BRICKLAYERS	24.94	8.03
MARBLE MASONS	25.94	8.03
-----		
BRWA0001G 05/01/1997		
PACIFIC (SOUTHERN PORTION) COUNTY	Rates	Fringes
TILE SETTER AND TERRAZZO WORKERS	22.18	5.82
TILE AND TERRAZZO FINISHERS	16.77	4.27
-----		
BRWA0001H 06/01/1999		
CLALLAM, GRAYS HARBOR, JEFFERSON, KING, KITSAP, LEWIS, MASON, PACIFIC (NORTHERN HALF), PIERCE, THURSTON AND SNOHOMISH COUNTIES	Rates	Fringes
TILE AND TERRAZZO WORKERS	24.92	6.06
TILE AND TERRAZZO FINISHERS	19.55	5.56
-----		

BRWA0003A 06/01/1999		
	Rates	Fringes
CHELAN AND KITTITAS COUNTIES		
BRICKLAYERS	22.36	7.06
-----		
BRWA0003E 07/01/2000		
	Rates	Fringes
CHELAN AND KITTITAS		
TILE AND TERRAZZO FINISHERS	14.70	5.83
-----		
BRWA0003F 07/01/2000		
	Rates	Fringes
CHELAN AND KITTITAS		
TERRAZZO WORKERS & TILE LAYER	18.50	5.83
-----		
CARP0770E 12/01/2001		
	Rates	Fringes
WESTERN WASHINGTON: CLALLAM, GRAYS HARBOR, JEFFERSON, KING, KITSAP, LEWIS, MASON, PACIFIC (NORTH), PIERCE, SNOHOMISH AND THURSTON COUNTIES		
CARPENTERS AND DRYWALL APPLICATORS	27.54	7.61
CARPENTERS ON CREOSOTE MATERIAL	27.64	7.61
INSULATION APPLICATORS	25.09	7.61
SAWFILERS, STATIONARY POWER SAW OPERATORS, FLOOR FINISHER, FLOOR LAYER, SHINGLER, FLOOR SANDER OPERATORS OF OTHER STATIONARY WOOD WORKING TOOLS	27.67	7.61
MILLWRIGHT AND MACHINE ERECTORS	28.54	7.61
ACOUSTICAL WORKERS	27.70	7.61
PILEDRIER, DRIVING, PULLING, CUTTING, PLACING COLLARS, SETTING, WELDING OR CREOSOTE TREATED MATERIAL, ALL PILING	27.74	7.61
PILEDRIER, BRIDGE DOCK &		
WHARF CARPENTERS	27.54	7.61
DIVERS	67.96	7.61
DIVERS TENDER	30.24	7.61

(HOURLY ZONE PAY APPLICABLE TO ALL CLASSIFICATIONS EXCEPT  
MILLWRIGHT AND PILEDRIER)

Hourly Zone Pay shall be paid on jobs located outside  
of the free zone computed from the city center of the  
following listed cities:

Seattle	Olympia	Bellingham
Auburn	Bremerton	Anacortes

Renton	Shelton	Yakima
Aberdeen-Hoquiam	Tacoma	Wenatchee
Ellensburg	Everett	Port Angeles
Centralia	Mount Vernon	Sunnyside
Chelan	Pt. Townsend	

Zone Pay		
0 -25	radius miles	Free
25-35	radius miles	\$1.00/hour
35-45	radius miles	\$1.15/hour
45-55	radius miles	\$1.35/hour
Over 55	radius miles	\$1.55/hour

(HOURLY ZONE PAY - MILLWRIGHTS AND PILEDRIVERS ONLY)

Hour Zone Pay shall be computed from Seattle Union Hall, Tacoma City center, and Everett City center

Zone Pay		
0 -25	radius miles	Free
25-45	radius miles	\$ .70/hour
Over 45	radius miles	\$1.50/hour

Millwrights and Piledrivers who reside in Aberdeen, Bellingham, Port Angeles, Mount Vernon, Olympia, Wenatchee, or Yakima Local Union jurisdiction areas, working on jobs in their respective area, shall have their Zone Pay measured from their respective city center

CENTRAL WASHINGTON: CHELAN AND KITTITAS COUNTIES

CARPENTERS AND DRYWALL APPLICATORS	20.72	7.47
CARPENTERS ON CREOSOTED MATERIALS	20.82	7.47
INSULATION APPLICATORS	20.72	7.47
SAWFILER, STATIONARY POWER SAW OPERATORS, FLOOR FINISHER, FLOOR LAYER, SHINGLERS, FLOOR SANDER OPERATOR AND OPERATORS OF OTHER STATIONARY WOOD WORKING TOOLS	20.85	7.47
MILLWRIGHTS AND MACHINE ERECTORS	28.22	7.47
ACCOUSTICAL WORKERS	20.98	7.47
PILDRIVER, DRIVING, PULLING, CUTTING, PLACING COLLARS, SETTING, WELDING, OR CREOSOTE TREATED MATERIAL, ALL PILING	27.22	7.47
PILEDRIVER, BRIDGE DOCK & WHARF CARPENTERS	27.42	7.47
DIVERS	67.18	7.47
DIVERS TENDER	29.89	7.47

CARP9003A 06/01/2000

	Rates	Fringes
PACIFIC COUNTY (South of a straight line made by extending the		

north boundary line of Wahkiakum County west to Willapa Bay to the Pacific Ocean, and thence north through the natural waterway to the Pacific Ocean (this will include the entire peninsula west of Willapa Bay)

SEE ZONE DESCRIPTION FOR CITIES BASE POINTS

ZONE 1:

CARPENTERS	25.61	7.08
DRYWALL, ACOUSTICAL & LATHERS	25.61	7.08
FLOOR LAYERS & FLOOR FINISHERS (the laying of all hardwood floors nailed and mastic set, parquet and wood-type tiles, and block floors, the sanding and finishing of floors, the prepara- tion of old and new floors when the materials mentioned above are to be installed; INSULATORS (fiberglass and similar irritating material)	25.76	7.08
MILLWRIGHTS	26.11	7.08
PILEDRIVERS	26.11	7.08
DIVERS	60.81	7.08
DIVERS TENDERS	28.02	7.08

Zone Differential (Add to Zone 1 rates):

Zone 2 -	\$0.85
Zone 3 -	1.25
Zone 4 -	1.70
Zone 5 -	2.00
Zone 6 -	3.00

BASEPOINTS: GOLDENDALE, LONGVIEW, AND VANCOUVER

- ZONE 1: Projects located within 30 miles of the respective city hall of the above mentioned cities
- ZONE 2: Projects located more than 30 miles and less than 40 miles of the respective city of the above mentioned cities
- ZONE 3: Projects located more than 40 miles and less than 50 miles of the respective city of the above mentioned cities
- ZONE 4: Projects located more than 50 miles and less than 60 miles of the respective city of the above mentioned cities.
- ZONE 5: Projects located more than 60 miles and less than 70 miles of the respective city of the above mentioned cities
- ZONE 6: Projects located more than 70 miles of the respected city of the above mentioned cities

-----

\* ELEC0046B 12/31/2001

	Rates	Fringes
CALLAM, JEFFERSON, KING AND KITSAP COUNTIES		

ELECTRICIANS	31.50	3%+8.88
CABLE SPLICERS	34.65	3%+8.88

---

ELEC0046C 06/01/2001		
	Rates	Fringes
CALLAM, JEFFERSON, KING, KITSAP COUNTIES		
SOUND AND COMMUNICATION TECHNICIAN	20.11	4.59

#### SCOPE OF WORK

Includes the installation, testing, service and maintenance, of the following systems which utilize the transmission and/or transference of voice, sound vision and digital for commercial, education, security and entertainment purposes for the following: TV monitoring and surveillance, background-foreground music, intercom and telephone interconnect, inventory control systems, microwave transmission, multi-media, multiplex, nurse call system, radio page, school intercom and sound, burglar alarms, fire alarms and life safety systems (hang, terminate devices and panels and to conduct functional and systems tests), and low voltage master clock systems.

#### WORK EXCLUDED

Raceway systems are not covered (excluding Ladder-Rack for the purpose of the above listed systems). Chases and/or nipples (not to exceed 10 feet) may be installed on open wiring systems.

Energy management systems.

SCADA (Supervisory Control and Data Acquisition) when not intrinsic to the above listed systems (in the scope).

---

ELEC0076A 07/01/2001		
	Rates	Fringes
GRAYS HARBOR, LEWIS, MASON, PACIFIC, PIERCE, THURSTON COUNTIES		
ELECTRICIANS	28.29	3%+10.32
CABLE SPLICERS	31.12	3%+10.32

---

ELEC0076D 06/01/2000		
	Rates	Fringes
GRAYS HARBOR, LEWIS, MASON, PACIFIC, PIERCE AND THURSTON COUNTIES		
SOUND AND COMMUNICATIONS TECHNICIAN	18.59	5.24

#### SCOPE OF WORK

Includes the installation, testing, service and maintenance, of the following systems which utilize the transmission and/or



transference of voice, sound, vision and digital for commercial, education, security and entertainment purposes for the following: TV monitoring and surveillance, background-foreground music, intercom and telephone interconnect, inventory control systems, microwave transmission, multi-media, multiplex, nurse call system, radio page, school intercom and sound, burglar alarms and low voltage master clock systems.

A. Communication systems that transmit or receive information and/or control systems that are intrinsic to the above listed systems

SCADA (Supervisory control/data acquisition

PCM (Pulse code modulation)

Inventory control systems

Digital data systems

Broadband & baseband and carriers

Point of sale systems

VSAT data systems

Data communication systems

RF and remote control systems

Fiber optic data systems

B. Sound and Voice Transmission/Transference Systems

Background-Foreground Music

Intercom and Telephone Interconnect Systems

Sound and Musical Entertainment Systems

Nurse Call Systems

Radio Page Systems

School Intercom and Sound Systems

Burglar Alarm Systems

Low-Voltage Master Clock Systems

Multi-Media/Multiplex Systems

Telephone Systems

RF Systems and Antennas and Wave Guide

C. \*Fire Alarm Systems-installation, wire pulling and testing.

D. Television and Video Systems

Television Monitoring and Surveillance Systems

Video Security Systems

Video Entertainment Systems

Video Educational Systems

Microwave Transmission Systems

CATV and CCTV

E. Security Systems

Perimeter Security Systems

Vibration Sensor Systems

Sonar/Infrared Monitoring Equipment

Access Control Systems

Card Access Systems

\*Fire Alarm Systems

1. Fire Alarms-In Raceways

a. Wire and cable pulling, in raceways, performed

- at the current electrician wage rate and fringe benefits.
- b. Installation and termination of devices, panels, startup, testing and programming performed by the technician.
- 2. Fire Alarms-Open Wire Systems
  - a. Open wire systems installed by the technician.

---

ELEC0112B 12/01/2000		
	Rates	Fringes
KITTITAS COUNTY		
ELECTRICIANS	27.75	3%+6.93
CABLE SPLICERS	29.14	3%+6.93

---

ELEC0112G 06/01/2000		
	Rates	Fringes
KITTTITAS COUNTY		
COMMUNICATION & SOUND TECHNICIANS	19.00	4.80

#### SCOPE OF WORK

The work covered shall include the installation, testing, service and maintenance, of the following systems that utilize the transmission and/or transference of voice, sound, vision and digital for commercial, education, security and entertainment purposes for TV monitoring and surveillance, background foreground music, intercom and telephone interconnect, inventory control systems, microwave transmission, multi-media, multiplex, nurse call system, radio page, school intercom and sound, burglar alarms and low voltage master clock systems.

A. Communication systems that transmit or receive information and/or control systems that are intrinsic to the above listed systems

- SCADA (Supervisory control/data acquisition
- PCM (Pulse code modulation)
- Inventory control systems
- Digital data systems

- Broadband & baseband and carriers
- Point of sale systems
- VSAT data systems
- Data communication systems
- RF and remote control systems
- Fiber optic data systems

B. Sound and Voice Transmission/Transference Systems

- Background-Foreground Music
- Intercom and Telephone Interconnect Systems
- Sound and Musical Entertainment Systems
- Nurse Call Systems
- Radio Page Systems

School Intercom and Sound Systems  
 Burglar Alarm Systems  
 Low-Voltage Master Clock Systems  
 Multi-Media/Multiplex Systems  
 Telephone Systems  
 RF Systems and Antennas and Wave Guide

C. \*Fire Alarm Systems-installation, wire pulling and testing.

D. Television and Video Systems  
 Television Monitoring and Surveillance Systems  
 Video Security Systems  
 Video Entertainment Systems  
 Video Educational Systems  
 Microwave Transmission Systems  
 CATV and CCTV

E. Security Systems  
 Perimeter Security Systems  
 Vibration Sensor Systems  
 Sonar/Infrared Monitoring Equipment  
 Access Control Systems  
 Card Access Systems

\*Fire Alarm Systems  
 1. Fire Alarms-In Raceways  
 a. Wire and cable pulling, in raceways, performed at the current electrician wage rate and fringe benefits.  
 b. Installation and termination of devices, panels, startup, testing and programing performed by the technician.  
 2. Fire Alarms-Open Wire Systems  
 a. Open wire systems installed by the technician.

---

ELEC0191A 08/31/2001		
	Rates	Fringes
CHELAN COUNTY		
ELECTRICIANS	26.66	3%+8.03
CABLE SPLICERS	29.33	3%+8.03

---

ELEC0191E 10/01/2001		
	Rates	Fringes
CHELAN AND SNOHOMISH COUNTIES		
SOUND AND COMMUNICATIONS		
TECHNICIANS	20.50	4.82

#### SCOPE OF WORK

The work covered shall include the installation, testing, service and maintenance, of the following systems that utilize the transmission and/or transference of voice, sound, vision and

digital for commercial, education, security and entertainment purposes for TV monitoring and surveillance, background foreground music, intercom and telephone interconnect, inventory control systems, microwave transmission, multi-media, multiplex, nurse call system, radio page, school intercom and sound, burglar alarms and low voltage master clock systems.

A. Communication systems that transmit or receive information and/or control systems that are intrinsic to the above listed systems

SCADA (Supervisory control/data acquisition

PCM (Pulse code modulation)

Inventory control systems

Digital data systems

Broadband & baseband and carriers

Point of sale systems

VSAT data systems

Data communication systems

RF and remote control systems

Fiber optic data systems

B. Sound and Voice Transmission/Transference Systems

Background-Foreground Music

Intercom and Telephone Interconnect Systems

Sound and Musical Entertainment Systems

Nurse Call Systems

Radio Page Systems

School Intercom and Sound Systems

Burglar Alarm Systems

Low-Voltage Master Clock Systems

Multi-Media/Multiplex Systems

Telephone Systems

RF Systems and Antennas and Wave Guide

C. \*Fire Alarm Systems-installation, wire pulling and testing.

D. Television and Video Systems

Television Monitoring and Surveillance Systems

Video Security Systems

Video Entertainment Systems

Video Educational Systems

Microwave Transmission Systems

CATV and CCTV

E. Security Systems

Perimeter Security Systems

Vibration Sensor Systems

Sonar/Infrared Monitoring Equipment

Access Control Systems

Card Access Systems

\*Fire Alarm Systems

1. Fire Alarms-In Raceways

a. Wire and cable pulling, in raceways, performed at the current electrician wage rate and fringe

- benefits.
- b. Installation and termination of devices, panels, startup, testing and programming performed by the technician.
2. Fire Alarms-Open Wire Systems
- a. Open wire systems installed by the technician.

---

ELEC0191L 08/31/2000		
	Rates	Fringes
SNOHOMISH COUNTY		
ELECTRICIANS	28.21	3%+7.23
CABLE SPLICERS	31.03	3%+7.23

---

ELEV0019B 10/30/2001		
	Rates	Fringes
CHELAN, CLALLAM, GRAYS HARBOR, JEFFERSON, KING, KITSAP, KITTITAS, LEWIS, MASON, PIERCE, SNOHOMISH AND THURSTON COUNTIES		

ELEVATOR MECHANICS	24.925	7.455+a
--------------------	--------	---------

FOOTNOTE a: Vacation Pay: 8% with 5 or more years of service, 6% for 6 months to 5 years service. Paid Holidays: New Years Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day and Friday after, and Christmas Day.

---

ELEV0023B 04/01/2001		
	Rates	Fringes
PACIFIC COUNTY		
ELEVATOR MECHANIC	31.845	7.195+a

FOOTNOTE a: Vacation Pay: 8% with 5 or more years of service, 6% for 6 months to 5 years service. Paid Holidays: Memorial Day, Independence Day, Labor Day, Thanksgiving Day and Friday after, and Christmas Day, and New Years Day.

---

ENGI0302B 06/01/2001		
	Rates	Fringes
CHELAN (WEST OF THE 120TH MERIDIAN), CLALLAM, GRAYS HARBOR, JEFFERSON, KING, KITSAP, KITTITAS, MASON AND SNOHOMISH COUNTIES		

ON PROJECTS DESCRIBED IN FOOTNOTE A BELOW, THE RATE FOR EACH GROUP SHALL BE 95% OF THE BASE RATE PLUS FULL FRINGE BENEFITS. ON ALL OTHER WORK, THE FOLLOWING RATES APPLY.

POWER EQUIPMENT OPERATORS:  
Zone 1 (0-25 radius miles):

GROUP 1AAA	29.61	8.38
GROUP 1AA	29.11	8.38
GROUP 1A	28.61	8.38
GROUP 1	28.11	8.38
GROUP 2	27.67	8.38

GROUP 3	27.31	8.38
GROUP 4	25.21	8.38

Zone Differential (Add to Zone 1 rates):

Zone 2 (26-45 radius miles) - \$ .70

Zone 3 (Over 45 radius miles) - \$1.00

BASEPOINTS: Aberdeen, Bellingham, Bremerton, Everett, Kent, Mount Vernon, Port Angeles, Port Townsend, Seattle, Shelton, Wenatchee, Yakima

#### POWER EQUIPMENT OPERATORS CLASSIFICATIONS

GROUP 1AAA - Cranes-over 300 tons, or 300 ft of boom (including jib with attachments)

GROUP 1AA - Cranes 200 to 300 tons, or 250 ft of boom (including jib with attachments); Tower crane over 175 ft in height, base to boom

GROUP 1A - Cranes, 100 tons thru 199 tons, or 150 ft of boom (including jib with attachments); Crane-overhead, bridge type, 100 tons and over; Tower crane up to 175 ft in height base to boom; Loaders-overhead, 8 yards and over; Shovels, excavator, backhoes-6 yards and over with attachments

GROUP 1 - Cableway; Cranes 45 tons thru 99 tons, under 150 ft of boom (including jib with attachments); Crane-overhead, bridge type, 45 tons thru 99 tons; Derricks on building work; Excavator, shovel, backhoes over 3 yards and under 6 yards; Hard tail end dump articulating off-road equipment 45 yards and over; Loader-overhead 6 yards to, but not including 8 yards; Mucking machine, mole, tunnel, drill and/or shield; Quad 9, HD 41, D-10; Remote control operator on rubber tired earth moving equipment; Rollagon; Scrapers-self propelled 45 yards and over; Slipform pavers; Transporters, all truck or track type

GROUP 2 - Barrier machine (zipper); Batch Plant Operaor-Concrete; Bump Cutter; Cranes, 20 tons thru 44 tons with attachments; Crane-overhead, bridge type-20 tons through 44 tons; Chipper; Concrete Pump-truck mount with boom attachment; Crusher; Deck Engineer/Deck Winches(power); Drilling machine; Excavator,

shovel, backhoe-3 yards and under; Finishing Machine, Bidwell, Gamaco and similar equipment; Guardrail punch; Horizontal/directional drill operator; Loaders-overhead under 6 yards; Loaders-plant feed; Locomotives-all; Mechanics-all; Mixers-asphalt plant; Motor patrol graders-finishing; Piledriver (other than crane mount); Roto-mill, roto-grinder; Screedman, spreader, topside operator-Blaw Knox, Cedar Rapids, Jaeger, Caterpillar, Barbar Green; Scraper-self propelled, hard tail end dump, articulating off-road equipment-under 45 yards; Subgrade trimmer; Tractors, backhoes-over 75 hp; Transfer material service machine-shuttle buggy, blaw knox-roadtec; Truck crane oiler/driver-100 tons and over; Truck Mount portable conveyor; Yo Yo Pay dozer

GROUP 3 - Conveyors; Cranes-thru 19 tons with attachments; A-frame crane over 10 tons; Drill oilers-auger type, truck or crane mount; Dozers-D-9 and under; Forklift-3000 lbs. and over with attachments; Horizontal/directional drill locator; Outside hoists-(elevators and manlifts), air tuggers, strato tower bucket elevators; Hydralifts/boom trucks over 10 tons; Loader-elevating type, belt; Motor patrol grader-nonfinishing; Plant oiler-asphalt, crusher; Pumps-concrete; Roller, plant mix or multi-lift materials; Saws-concrete; Scrpers-concrete and carry-all; Service engineer-equipment; Trenching machines; Truck Crane Oiler/Driver under 100 tons; Tractors, backhoe 75 hp and under

GROUP 4 - Assistant Engineer; Bobcat; Brooms; Compressor; Concrete finish mahine-laser screed; Cranes-A frame-10 tons and under; Elevator and Manlift-permanent or shaft type; Gradechecker, Stakehop; Forklifts under 3000 lbs. with attachments; Hydralifts/boom trucks, 10 tons and under; Oil distributors, blower distribution and mulch seeding operator; Pavement breaker; Posthole digger, mechanical; Power plant; Pumps, water; Rigger and Bellman; Roller-other than plant mix; Wheel Tractors, farmall type; Shotcrete/gunite equipment operator

FOOTNOTE A- Reduced rates may be paid on the following:

1. Projects involving work on structures such as buildings and bridges whose total value is less than \$1.5 million excluding mechanical, electrical, and utility portions of the contract.
2. Projects of less than \$1 million where no building is involved. Surfacing and paving included, but utilities excluded.
3. Marine projects (docks, wharfs, etc.) less than \$150,000.

HANDLING OF HAZARDOUS WASTE MATERIALS: Personnel in all craft classifications subject to working inside a federally designated hazardous perimeter shall be elgible for compensation in accordance with the following group schedule relative to the level of hazardous waste as outlined in the specific hazardous waste project site safety plan.

H-1 Base wage rate when on a hazardous waste site when not

outfitted with protective clothing

H-2 Class "C" Suit - Base wage rate plus \$ .25 per hour.

H-3 Class "B" Suit - Base wage rate plus \$ .50 per hour.

H-4 Class "A" Suit - Base wage rate plus \$ .75 per hour.

-----  
ENGI0370I 06/01/2000

	Rates	Fringes
CHELAN (EAST OF THE 120TH MERIDIAN) COUNTY		
ZONE 1:		
POWER EQUIPMENT OPERATORS:		
GROUP 1A	20.18	5.77
GROUP 1	20.74	5.77
GROUP 2	21.06	5.77

GROUP 3	21.67	5.77
GROUP 4	21.83	5.77
GROUP 5	21.99	5.77
GROUP 6	22.27	5.77
GROUP 7	22.54	5.77
GROUP 8	23.64	5.77

ZONE DIFFERENTIAL (Add to Zone 1  
rate): Zone 2 - \$2.00

Zone 1: Within 45 mile radius of Spokane, Moses Lake, Pasco,  
Washington; Lewiston, Idaho

Zone 2: Outside 45 mile radius of Spokane, Moses Lake, Pasco,  
Washington; Lewiston, Idaho

#### POWER EQUIPMENT OPERATORS CLASSIFICATIONS

GROUP 1A: Boat Operator; Crush Feeder; Oiler; Steam Cleaner

GROUP 1: Bit Grinders; Bolt Threading Machine; Compressors (under 2000 CFM, gas, diesel, or electric power); Deck Hand; Drillers Helper (assist driller in making drill rod connections, service drill engine and air compressor, repair drill rig and drill tools; drive drill support truck to and on the job site, remove drill cuttings from around bore hole and inspect drill rig while in operation); Fireman & Heat Tender; Grade Checker; Hydro-seeder, Mulcher, Nozzleman; Oiler Driver, & Cable Tender, Mucking Machine; Pumpman; Rollers, all types on subgrade, including seal and chip coatings (farm type, Case, John Deere & similar, or Compacting Vibrator), except when pulled by Dozer with operable blade; Welding Machine

GROUP 2: A-frame Truck (single drum); Assistant Refrigeration Plant (under 1000 ton); Assistant Plant Operator, Fireman or Pugmixer (asphalt); Bagley or Stationary Scraper; Belt Finishing Machine; Blower Operator (cement); Cement Hog; Compressor (2000 CFM or over, 2 or more, gas diesel or electric power); Concrete Saw (multiple cut); Distributor Leverman; Ditch Witch or similar; Elevator Hoisting Materials; Dope Pots (power agitated); Fork Lift or Lumber Stacker, hydra-lift & similar; Gin Trucks

(pipeline); Hoist, single drum; Loaders (bucket elevators and conveyors); Longitudinal Float; Mixer (portable-concrete); Pavement Breaker, Hydra-Hammer & similar; Power Broom; Railroad Ballast Regulation Operator (self-propelled); Railroad Power Tamper Operator (self-propelled); Railroad Tamper Jack Operator (self-propelled); Spray Curing Machine (concrete); Spreader Box (self-propelled); Straddle Buggy (Ross & similar on construction job only); Tractor (Farm type R/T with attachment, except Backhoe); Tugger Operator

GROUP 3: A-frame Truck (2 or more drums); Assistant Refrigeration Plant & Chiller Operator (over 1000 ton); Backfillers (Cleveland & similar); Batch Plant & Wet Mix Operator, single unit (concrete); Belt-Crete Conveyors with power pack or similar; Belt Loader (Kocal or similar); Bending Machine; Bob Cat; Boring Machine (earth); Boring Machine (rock under 8"



bit) (Quarry Master, Joy or similar); Bump Cutter (Wayne, Saginaw or similar); Canal Lining Machine (concrete); Chipper (without crane); Cleaning & Doping Machine (pipeline); Deck Engineer; Elevating Belt-type Loader (Euclid, Barber Green & similar); Elevating Grader-type Loader (Dumort, Adams or similar); Generator Plant Engineers (diesel or electric); Gunnite Combination Mixer & Compressor; Locomotive Engineer; Mixermobile; Mucking Machine; Posthole Auger or Punch; Pump (grout or jet); Soil Stabilizer (P & H or similar); Spreader Machine; Tractor (to D-6 or equivalent) and Traxcavator; Traverse Finish Machine; Turnhead Operator

GROUP 4: Concrete Pumps (squeeze-crete, flow-crete, pump-crete, Whitman & similar); Curb Extruder (asphalt or concrete); Drills (churn, core, calyx or diamond)(Operate drilling machine, drive or transport drill rig to and on job site and weld well casing); Equipment Serviceman, Greaser & Oiler; Hoist (2 or more drums or Tower Hoist); Loaders (overhead & front-end, under 4 yds. R/T); Refrigeration Plant Engineer (under 1000 ton); Rubber-tired Skidders (R/T with or without attachments); Surface Heater & Planer Machine; Trenching Machines (under 7 ft. depth capacity); Turnhead (with re-screening); Vacuum Drill (reverse circulation drill under 8" bit)

GROUP 5: Backhoe (under 45,000 gw); Backhoe and Hoe Ram (under 3/4 yd.); Carrydeck & boom truck (under 25 tons); Cranes (25 tons & under), all attachments including clamshell, dragline; Derricks & Stifflegs (under 65 tons); Drilling Equipment (8" bit & over) (Robbins, reverse circulation & similar)(operates drill machine, drive or transport drill rig to and on job site and weld well casing); Hoe Ram; Piledriving Engineers; Paving (dual drum); Railroad Track Liner Operator(self-propelled); Refrigeration Plant Engineer (1000 tons & over); Signaller (Whirleys, Highline Hammerheads or similar)

GROUP 6: Asphalt Plant Operator; Automatic Subgrader (Ditches & Trimmers) (Autograde, ABC, R.A. Hansen & similar on grade wire); Backhoe (45,000 gw and over to 110,000 gw); Backhoes & Hoe Ram (3/4 yd. to 3 yd.); Batch Plant (over 4 units); Batch & Wet Mix Operator (multiple units, 2 & incl. 4); Blade Operator (Motor Patrol & Attachments, Athey & Huber); Boom Cats (side); Cableway

Controller (dispatcher); Clamshell Operator (under 3 yds.); Compactor (self-propelled with blade); Concrete Pump Boom Truck; Concrete Slip Form Paver; Cranes (over 25 tons including 45 tons), all attachments including clamshell, dragline; Crusher, Grizzle & Screening Plant Operator; Dozer, 834 R/T & similar; Draglines (under 3 yds.); Drill Doctor; H.D.Mechanic; H.D. Welder; Loader Operator (front-end & overhead, 4 yds. incl. 8 yds.), Multiple Dozer Units with single blade; Paving Machine (asphalt and concrete); Quad-Track or similar equipment; Roller (finishing asphalt pavement); Roto Mill (pavement grinder); Scrapers, all rubber-tired; Screed Operator; Shovel (under 3 yds.); Tractors (D-6 & equivalent & over); Trenching Machines (7 ft. depth & over); Tug Boat Operator; Vactor Guzzler, super sucker

GROUP 7: Backhoe (over 110,000 gw); Backhoes & Hoe Ram (3 yds.

& over ); Blade (finish & bluetop), Automatic, CMI, ABC, Finish  
 Athey & Huber & similar when used as automatic; Cableway  
 Operators; Clamshell Operator (3 yds. & over); Cranes (over 45  
 tons to but not including 85 tons), all attachments including  
 clamshell and dragline; Derricks & Stifflegs (65 tons  
 & over); Draglines (3 yds. & over); Elevating Belt (Holland  
 type); Heavy Equipment Robotics Operator; Loader (360 degrees  
 revolving Koehring Scooper or similar); Loaders (overhead &  
 front-end, over 8 yds. to 10 yds.); Rubber-tired Scrapers  
 (multiple engine with three or more scrapers); Shovels (3 yds. &  
 over); Ultra High Pressure Waterjet Cutting Tool System Operator  
 (30,000 psi); Vacuum Blasting Machine Operator; Whirleys &  
 Hammerheads, ALL

GROUP 8: Cranes (85 tons and over, and all climbing, overhead,  
 rail and tower); Loaders (overhead and front-end, 10 yards and  
 over); Helicopter Pilot

BOOM PAY: (All Cranes, Including Tower)  
 180' to 250' \$.30 over scale  
 Over 250' \$.60 over scale

NOTE: In computing the length of the boom on Tower Cranes, they  
 shall be measured from the base of the tower to the point  
 of the boom.

HAZMAT: Anyone working on HAZMAT jobs, working with supplied air  
 shall receive \$1.00 an hour above classification.

-----  
 ENGI0612B 06/01/2001

	Rates	Fringes
LEWIS, PIERCE, PACIFIC (portion lying north of a parallel line extending west from the northern boundary of Wahkaikum County to the sea) AND THURSTON COUNTIES		

ON PROJECTS DESCRIBED IN FOOTNOTE A BELOW, THE RATE FOR EACH  
 GROUP SHALL BE 90% OF THE BASE RATE PLUS FULL FRINGE BENEFITS.  
 ON ALL OTHER WORK, THE FOLLOWING RATES APPLY.

POWER EQUIPMENT OPERATORS:

Zone 1 (0-25 radius miles):

GROUP 1AAA	29.16	8.38
GROUP 1AA	29.11	8.38
GROUP 1A	28.61	8.38
GROUP 1	28.11	8.38
GROUP 2	27.67	8.38
GROUP 3	27.31	8.38
GROUP 4	25.21	8.38

Zone Differential (Add to Zone 1 rates):

Zone 2 (26-45 radius miles) = \$ .70

Zone 3 (Over 45 radius miles) - \$1.00

BASEPOINTS: CENTRALIA, OLYMPIA, TACOMA

POWER EQUIPMENT OPERATORS CLASSIFICATIONS

GROUP 1 AAA - Cranes-over 300 tons or 300 ft of boom (including jib with attachments)

GROUP 1AA - Cranes- 200 tons to 300 tons, or 250 ft of boom (including jib with attachments; Tower crane over 175 ft in height, base to boom)

GROUP 1A - Cranes, 100 tons thru 199 tons, or 150 ft of boom (including jib with attachments); Crane-overhead, bridge type, 100 tons and over; Tower crane up to 175 ft in height base to boom; Loaders-overhead, 8 yards and over; Shovels, excavator, backhoes-6 yards and over with attachments

GROUP 1 - Cableway; Cranes 45 tons thru 99 tons under 150 ft of boom (including jib with attachments); Crane-overhead, bridge type, 45 tons thru 99 tons; Derricks on building work; Excavator, shovel, backhoes over 3 yards and under 6 yards; Hard tail end dump articulating off-road equipment 45 yards and over; Loader-overhead, 6 yards to, but not including, 8 yards; Mucking machine, mole, tunnel, drill and/or shield; Quad 9 HD 41, D-10; Remote control operator on rubber tired earth moving equipment; Rollagons; Scrapers-self-propelled 45 yards and over; Slipform pavers; Transporters, all track or truck type

GROUP 2 - Barrier machine (zipper); Batch Plant Operator-concrete; Bump Cutter; Cranes, 20 tons thru 44 tons with attachments; Crane-Overhead, bridge type, 20 tons through 44 tons; Chipper; Concrete pump-truck mount with boom attachment; Crusher; Deck engineer/deck winches (power); Drilling machine; Excavator, shovel, backhoe-3 yards and under; Finishing machine, Bidwell, Gamaco and similar equipment; Guardrail punch; Loaders, overhead under 6 yards; Loaders-plant feed; Locomotives-all; Mechanics- all; Mixers, asphalt plant; Motor patrol graders, finishing; Piledriver (other than crane mount); Roto-mill, roto-grinder; Screedman, spreader, topside operator-Blaw Knox, Cedar Rapids, Jaeger, Caterpillar, Barber Green; Scraper-self-propelled, hard tail end dump, articulating off-road equipment-under 45 yards; Subgrader trimmer; Tractors, backhoe over 75

hp; Transfer material service machine-shuttle buggy, Blaw Knox-Roadtec; Truck Crane oiler/driver-100 tons and over; Truck Mount Portable Conveyor; Yo Yo pay

GROUP 3 - Conveyors; Cranes through 19 tons with attachments; Crane-A-frame over 10 tons; Drill oilers-auger type, truck or crane mount; Dozer-D-9 and under; Forklift-3000 lbs. and over with attachments; Horizontal/directional drill locator; Outside Hoists-(elevators and manlifts), air tuggers, strato tower bucket elevators; Hydralifts/boom trucks over 10 tons; Loaders-elevating type, belt; Motor patrol grader-nonfinishing; Plant oiler-asphalt, crusher; Pump-Concrete; Roller, plant mix or multi-lift materials; Saws-concrete; Scrapers, concrete and carry all; Service engineers-equipment; Trenching machines; Truck crane oiler/driver under 100 tons; Tractors, backhoe under 75 hp

GROUP 4 - Assistant Engineer; Bobcat; Brooms; Compressor;

Concrete Finish Machine-laser screed; Cranes A-frame 10 tons and under; Elevator and manlift (permanent and shaft type); Forklifts-under 3000 lbs. with attachments; Gradechecker, stakehop; Hydralifts/boom trucks, 10 tons and under; Oil distributors, blower distribution and mulch seeding operator; Pavement breaker; Posthole digger-mechanical; Power plant; Pumps-water; Rigger and Bellman; Roller-other than plant mix; Wheel Tractors, farmall type; Shotcrete/gunite equipment operator

FOOTNOTE A- Reduced rates may be paid on the following:

1. Projects involving work on structures such as buildings and bridges whose total value is less than \$1.5 million excluding mechanical, electrical, and utility portions of the contract.
2. Projects of less than \$1 million where no building is involved. Surfacing and paving included, but utilities excluded.
3. Marine projects (docks, wharfs, etc.) less than \$150,000.

HANDLING OF HAZARDOUS WASTE MATERIALS: Personnel in all craft classifications subject to working inside a federally designated hazardous perimeter shall be eligible for compensation in accordance with the following group schedule relative to the level of hazardous waste as outlined in the specific hazardous waste project site safety plan.

H-1 Base wage rate when on a hazardous waste site when not outfitted with protective clothing

H-2 Class "C" Suit - Base wage rate plus \$ .25 per hour.

H-3 Class "B" Suit - Base wage rate plus \$ .50 per hour.

H-4 Class "A" Suit - Base wage rate plus \$ .75 per hour.

\* ENGI0701H 01/01/2002

Rates                      Fringes

CLARK, COWLITZ, KLICKITAT, PACIFIC (SOUTH), SKAMANIA, AND  
WAHIAKUM COUNTIES

POWER EQUIPMENT OPERATORS (See Footnote A)

ZONE 1:

GROUP 1	28.55	8.95
GROUP 1A	29.98	8.95
GROUP 1B	31.41	8.95
GROUP 2	27.34	8.95
GROUP 3	27.60	8.95
GROUP 4	26.09	8.95
GROUP 5	25.50	8.95
GROUP 6	23.20	8.95

Zone Differential (add to Zone 1 rates):

Zone 2 - \$1.50

Zone 3 - 3.00

For the following metropolitan counties: MULTNOMAH; CLACKAMAS; MARION; WASHINGTON; YAMHILL; AND COLUMBIA; CLARK; AND COWLITZ COUNTY, WASHINGTON WITH MODIFICATIONS AS INDICATED:

All jobs or projects located in Multnomah, Clackamas and Marion Counties, West of the western boundary of Mt. Hood National Forest and West of Mile Post 30 on Interstate 84 and West of Mile Post 30 on State Highway 26 and West of Mile Post 30 on Highway 22 and all jobs or projects located in Yamhill County, Washington County and Columbia County and all jobs or projects located in Clark & Cowlitz County, Washington except that portion of Cowlitz County in the Mt. St. Helens "Blast Zone" shall receive Zone I pay for all classifications.

All jobs or projects located in the area outside the identified boundary above, but less than 50 miles from the Portland City Hall shall receive Zone II pay for all classifications.

All jobs or projects located more than 50 miles from the Portland City Hall, but outside the identified border above, shall receive Zone III pay for all classifications.

For the following cities: ALBANY; BEND; COOS BAY; EUGENE; GRANTS PASS; KLAMATH FALLS; MEDFORD; ROSEBURG

All jobs or projects located within 30 miles of the respective city hall of the above mentioned cities shall receive Zone I pay for all classifications.

All jobs or projects located more than 30 miles and less than 50 miles from the respective city hall of the above mentioned cities shall receive Zone II pay for all classifications.

All jobs or projects located more than 50 miles from the respective city hall of the above mentioned cities shall receive Zone III pay for all classifications.

#### POWER EQUIPMENT OPERATORS CLASSIFICATIONS

GROUP 1: CONCRETE: Batch Plant and/or Wet Mix Operator, three units or more; CRANE: Helicopter Operator, when used in erecting work; Whirley Operator, 90 ton and over; LATTICE BOOM CRANE: Operator 200 tons through 299 tons, and/or over 200 feet boom; HYDRAULIC CRANE: Hydraulic Crane Operator 90 tons through 199 tons with luffing or tower attachments; FLOATING EQUIPMENT: Floating Crane, 150 ton but less than 250 ton

GROUP 1A: CRANE: Hydraulic Operator, 200 tons and over (with luffing or tower attachment); LATTICE BOOM CRANE: Operator, 200 tons through 299 tons, with over 200 feet boom; FLOATING EQUIPMENT: Floating Crane 250 ton and over

GROUP 1B: LATTICE BOOM CRANE: Operator, 300 tons through 399 tons with over 200 feet boom; Operator 400 tons and over; FLOATING EQUIPMENT: Floating Crane 350 ton and over

GROUP 2: ASPHALT: Asphalt Plant Operator (any type); Roto Mill, pavement profiler, operator, 6 foot lateral cut and over; BLADE: Auto Grader or "Trimmer" (Grade Checker required); Blade Operator, Robotic; BULLDOZERS: Bulldozer operator over

120,000 lbs and above; Bulldozer operator, twin engine; Bulldozer Operator, tandem, quadnine, D10, D11, and similar type); Bulldozere Robotic Equipment (any type; CONCRETE: Batch Plant and/or Wet Mix Operator, one and two drum; Automatic Concrete Slip Form Paver Operator; Concrete Canal Line Operator; Concrete Profiler, Diamond Head; CRANE: Cableway Operator, 25 tons and over; HYDRAULIC CRANE: Hydraulic crane Operator 50 tons through 89 tons (with luffing or tower attachment); hydraulic crane operator 90 tons through 199 tons (with luffing or tower attachment); TOWER/WHIRLEY OPERATOR: Tower Crane Operator; Whirley Operator, under 90 tons; LATTICE BOOM CRANE: 90 through 199 tons and/or 150 to 200 feet boom; CRUSHER: Crusher Plant Operator; FLOATING EQUIPMENT: Floating Clamshell, etc.operator, 3 cu. yds. and over; Floating Crane (derrick barge) Operator, 30 tons but less than 150 tons; LOADERS: Loader Operator, 6 cu. yds. but less than 12 cu. yds.; Loader Operator, 12 cu. yds. and over; Loader 120,000 lbs. and above; REMOTE CONTROL: Remote controlled earth-moving equipment (no one operator shall operate more than two pieces of earth-moving equipment at one time); RUBBER-TIRED SCRAPERS: Rubber-tired Scraper Operator, with tandem scrapers, multi-engine; SHOVEL, DRAGLINE, CLAMSHELL, BACKHOE, SKOOPER OPERATOR: Shovel, etc., 3 cu. yds., but less than 5 cu. yds.; Shovel, etc., 5 cu. yds. and over; TRENCH MACHINE: Wheel Excavator, under 750 cu. yds. per hour (Grade Oiler required); Canal Trimmer (Grade Oiler required); Wheel Excavator, over 750 cu. yds. per hour (two Operators and at least one Grade Oiler required); Band Wagon (in conjunction with wheel excavator); UNDERWATER EQUIPMENT: Underwater Equipment Operator, remote or otherwise; HYDRAULIC HOES EXCAVATOR: Excavator over 130,000 lbs.

GROUP 3: LATTICE BOOM CRANES: Lattice Boom Crane-50 through 89 tons (and less than 150 feet boom); FORKLIFT: Rock Hound Operator; HYDRAULIC HOES EXCAVATOR: excavator over 80,000 lbs. through 130,000 lbs.; LOADERS: Loader operator 60,000 and less

than 120,000; RUBBER-TIRED SCRAPERS: Scraper Operator, with tandem scrapers; SHOVEL, DRAGLINE, CLAMSHELL, SKOOPER OPERATOR: Shovel, Dragline, Clamshell operators 3 cu. yds. but less than 5 cu yds.; Self Loading, paddle wheel, auger type, finish and/or 2 or more units; BULLDOZERS: Bulldozer operator over 70,000 lbs. up to and including 120,000

GROUP 4: ASPHALT: Blade Operator; Blade Operator, finish; Screed Operator; Asphalt Paver Operator (Screed man required); Diesel-Electric engineer, Plant; Roto-Mill, pavement profiler, operator, under six foot lateral cut; BLADE: Blade Operator, externally controlled by electronic, mechanical hydraulic means; Blade operator, multi-engine; BULLDOZERS: Bulldozer Operator over 20,000 lbs and more than 100 horse up to 70,000 lbs; Drill Cat Operator; Side-boom Operator; Cable-Plow Operator (any type); CLEARING: Log Skidders; Chippers; Incinerator; Stump Splitter (loader mounted or similar type); Stump Grinder (loader mounted or similar type); Tub Grinder; Land Clearing Machine (Track mounted forestry mowing & Grinding machine); Hydro Axe (loader mounted or similar type); COMPACTORS SELF PROPELLED: Compactor Operator, with blade; Compactor Operator, multi-engine;

Compactor Operator, robotic; CONCRETE: Mixer Mobile Operator; Screed Operator; Concrete Cooling Machine Operator; Concrete Paving Road Mixer; Concrete Breaker; Reinforced Tank Banding Machine (K-17 or similar types); Laser Screed; CRANE: Chicago boom and similar types; Lift Slab Machine Operator; Boom type lifting device, 5 ton capacity or less; Hoist Operator, two (2) drum; Hoist Operator, three (3) or more drums; Derrick Operator, under 100 ton; Hoist Operator, stiff leg, guy derrick or similar type, 50 ton and over; Cableway Operator up to twenty (25) ton; Bridge Crane Operator, Locomotive, Gantry, Overhead; Cherry Picker or similar type crane hoist five (5) ton capacity or less; Hydraulic Crane Operator, under 50 tons; LATTICE BOOM CRANE OPERATOR: Lattice Boom Crane Operator, under 50 tons; CRUSHER: Generator Operator; Diesel-Electric Engineer; Grizzly Operator; DRILLING: Drill Doctor; Boring Machine Operator; Driller-Percussion, Diamond, Core, Cable, Rotary and similar type; Cat Drill (John Henry); Directional Drill Operator over 20,000 lbs pullback; FLOATING EQUIPMENT: Diesel-electric Engineer; Jack Operator, elevating barges, Barge Operator, self-unloading; Piledriver Operator (not crane type) (Deckhand required); Floating Clamshell, etc. Operator, under 3 cu. yds. (Fireman or Diesel-Electric Engineer required); Floating Crane (derrick barge) Operator, less than 30 tons; GENERATORS: Generator Operator; Diesel-electric Engineer; GUARDRAIL EQUIPMENT: Guardrail Punch Operator (all types); Guardrail Auger Operator (all types); Combination Guardrail machines, i.e., punch auger, etc.; HEATING PLANT: Surface Heater and Planer Operator; HYDRAULIC HOES EXCAVATOR: Robotic Hydraulic backhoe operator, track and wheel type to up to including 20,000 lbs. with any or all attachments; Excavator Operator over 20,000 lbs through 80,000 lbs.; LOADERS: Belt Loaders, Kolman and Ko Cal types; Loaders Operator, front end and overhead, 25,000 lbs and less than 60,000 lbs; Elevating Grader Operator by Tractor operator, Sierra, Euclid or similar types; PILEDRIVERS: Hammer Operator; Piledriver Operator (not crane type); PIPELINE, SEWER

WATER: Pipe Cleaning Machine Operator; Pipe Doping Machine Operator; Pipe Bending Machine Operator; Pipe Wrapping Machine Operator; Boring Machine Operator; Back Filling Machine Operator; REMOTE CONTROL: Concrete Cleaning Decontamination Machine Operator; Ultra High Pressure Water Jet Cutting Tool System Operator/Mechanic; Vacuum Blasting Machine Operator/mechanic; REPAIRMEN, HEAVY DUTY: Diesel Electric Engineer (Plant or Flating Floating; Bolt Threading Machine operator; Drill Doctor (Bit Grinder); H.D. Mechanic; H.D. Welder; Machine Tool Operator; Combination H.D. Mechanic-Welder, when dispatched and/or when required to do both; Welder-Certified, when dispatched and/or required; RUBBER-TIRED SCRAPERS: Rubber-tired Scraper Operator, single engine, single scraper; Self-loading, paddle wheel, auger type under 15 cu. yds.; Rubber-tired Scraper Operator, twin engine; Rubber-tired Scraper Operator, with push-pull attachments; Self Loading, paddle wheel, auger type 15 cu. yds. and over, single engine; Water pulls, water wagons; SHOVEL, DRAGLINE, CLAMSHELL, BACKHOE, SKOOPER OPERATOR: Diesel Electric Engineer; Stationary Drag Scraper Operator; Shovel, Dragline, Clamshell, Operator under 3 cu yds.; Grade-all Operator; Shovel, Dragline, Clamshell, Operator 3 cu yds, but less than 5 cu yds.

GROUP 5: ASPHALT: Extrusion Machine Operator; Roller Operator (any asphalt mix); Asphalt Burner and Reconditioner Operator (any type), 84; Roto-Mill, pavement profiler, ground man BULLDOZERS: Bulldozer operator, 20,000 lbs. or less or 100 horse or less; COMPRESSORS: Compressor Operator any power), over 1,250 cu. ft. total capacity; COMPACTORS: Compactor Operator, including vibratory; Wagner Pactor Operator or similar type (without blade); CONCRETE: Combination mixer and Compressor Operator, gunite work; Concrete Batch Plant Quality Control Operator; Beltcrete Operator; Pumpcrete Operator (any type); Pavement Grinder and/or Grooving Machine Operator (riding type); Cement Pump Operator, Fuller-Kenyon and similar; Concrete Pump Operator; Grouting Machine Operator; Concrete mixer operator, single drum, under five (5) bag capacity; Concrete Mixer Operator, single drum, under 5 bag capacity and over; Cast place pipe laying machine; Maginnis Internal Full Slab Vibrator Operator; Concrete Finishing machine Operator, Clary, Johnson, Bidwell, Burgess bridge deck or similar type; Curb Machine Operator, mechanical Berm, Curb and/or Curb and Gutter; Concrete Joint Machine Operator; Concrete Planer Operator; Tower Mobile Operator; Power Jumbo Operator setting slip forms; Slip Form Pumps, power driven hydraulic lighting device for concrete forms; Concrete Paving Machine Operator; Concrete Finishing Machine Operator; Concrete Spreader Operator; CRANE: Helicopter Hoist Operator; Hoist Operator, single drum; Elevator Operator; A-frame Truck Operator, Double drum; Boom Truck Operator; HYDRAULIC CRANE OPERATOR: Hydraulic Boom Truck, Pittman; DRILLING: Churm Drill and Earth Boring Machine Operator; Directional Drill Operator over 20,000 lbs pullback; FLOATING EQUIPMENT: Fireman; FORKLIFT: Lull Hi-Lift Operator or similar type; Fork Lift, over 5 ton and/or robotic; HYDRAULIC HOES EXCAVATORS: Hydraulic Backhoe Operator, wheel type (Ford, John Deere, Case type); Hydraulic Backhoe Operator track type up to and including WHEEL 20,000 lbs.; LOADERS: Loaders, rubber-tired type, less than

25,000 lbs; Elevating Grader Operator, Tractor Towed requiring Operator or Grader; OILERS: Service Oiler (Greaser); PIPELINE, SEWER WATER: Hydraulic Pipe Press Operator; Hydra Hammer or similar types; Pavement Breaker Operator; PUMPS: Pump Operator, more than 5 (any size); Pot Rammer Operator; RAILROAD EQUIPMENT: Locomotive Operator, under 40 tons; Ballast Regulator Operator; Ballast Tamper Multi-Purpose Operator; Track Liner Operator; Tie Spacer Operator; Shuttle Car Operator; Locomotive Operator, 40 tons and over; SWEEPER: Sweeper operator (Wayne type) self propelled

GROUP 6: ASPHALT: Plant Oiler; Plant Fireman; Pugmill Operator (any type); Truck mounted asphalt spreader, with screed; COMPRESSORS: Compressor Operator (any power), under 1,250 cu. ft. total capacity; CONCRETE: Plant Oiler, Assistant Conveyor Operator; Conveyor Operator; Mixer Box Operator (C.T.B., dry batch, etc.); Cement Hog Operator; Concrete Saw Operator; Concrete Curing Machine Operator (riding type); Wire Mat or Brooming Machine Operator; CRANE: Oiler; Fireman, all equipment; Truck Crane Oiler Driver; A-frame Truck Operator, single drum; Tugger or Coffin Type Hoist Operator; CRUSHER: Crusher



Oiler; Crusher Feeder; DRILLING: Drill Tender; Auger Oiler; FLOATING EQUIPMENT: Deckhand; Boatman; FORKLIFT: Self-propelled Scaffolding Operator, construction job site (excluding working platform); Fork Lift or Lumber Stacker Operator, construction job site; Ross Carrier Operator, construction job site; GUARDRAIL EQUIPMENT: Oiler; Auger Oiler; Oiler, combination guardrail machines; Guardrail Punch Oiler; HEATING PLANT: Temporary Heating Plant Operator; LOADERS: Bobcat, skid steer (less than 1 cu yd.); Bucket Elevator Loader Operator, BarberGreene and similar types; OILERS: Oiler; Guardrail Punch Oiler; Truck Crane Oiler-Driver; Auger Oiler; Grade Oiler, required to check grade; Grade Checker; PIPELINE SEWER WATER: Tar Pot Fireman; Tar Pot Fireman (power agitated); PUMPS: Pump Operator (any power); Hydrostatic Pump Operator; RAILROAD EQUIPMENT: Brakeman; Oiler; Switchman; Motorman; Ballast Jack Tamper Operator; SHOVEL, DRAGLINE, CLAMSHELL, SKOOPER, ETC. OPERATOR: Oiler, Grade Oiler (required to check grade); Grade Checker; Fireman; SWEEPER: Broom operator, self propelled, construction job site

FOOTNOTE A: HANDLING OF HAZARDOUS WASTE MATERIALS: Personnel in all craft classifications subject to working inside a federally designated hazardous perimeter shall be eligible for compensation in accordance with the following group schedule relative to the level of hazardous waste as outline in the specific hazardous waste project site safety plan.

H 1 Base wage rate when on a hazardous waste site when not outfitted with protective clothing.

H 2 Class "C" Suit Basic hourly wage rate plus \$1.00 per hour, fringes plus \$0.15.

H 3 Class "B" Suit Basic hourly wage rate plus \$1.50 per hour, fringes plus \$0.15

H 4 Class "A" Suite Basic hourly wage rate plus \$2.00

\  
`per hour, fringes plus \$0.15

IRON0086A 07/01/2001		
	Rates	Fringes
IRONWORKERS	25.82	11.35

LAB00001I 06/01/2001		
	Rates	Fringes
CHELAN AND KITTITAS COUNTIES		

LABORERS:

ZONE 1:

GROUP 1	14.46	5.80
GROUP 2	16.78	5.80
GROUP 3	18.50	5.80
GROUP 4	18.98	5.80
GROUP 5	19.34	5.80

ZONE DIFFERENTIAL (ADD TO ZONE 1 RATES):

ZONE 2 - \$ .70

ZONE 3 - \$1.00

BASE POINTS: CHELAN, SUNNYSIDE, WENATCHEE,  
AND YAKIMA

ZONE 1 - Projects within 25 radius miles of the respective city  
hall  
ZONE 2 - More than 25 but less than 45 radius miles from the  
respective city hall  
ZONE 3 - More than 45 radius miles from the respective city hall

CALLAM, GRAYS HARBOR, JEFFERSON, KING, KITSAP, LEWIS, MASON,  
PACIFIC (North of a straight line made by extending the north  
boundary of Wahkiakum County west to the Pacific Ocean), PIERCE,  
SNOHOMISH AND THURSTON COUNTIES

LABORERS:

ZONE 1:

GROUP 1	16.92	5.80
GROUP 2	19.24	5.80
GROUP 3	23.92	5.80
GROUP 4	24.40	5.80
GROUP 5	24.76	5.80

ZONE DIFFERENTIAL (ADD TO ZONE 1 RATES):

ZONE 2 - \$ .70

ZONE 3 - \$1.00

BASE POINTS: BELLINGHAM, MT. VERNON, EVERETT,  
SEATTLE, KENT, TACOMA, OLYMPIA,  
CENTRALIA, ABERDEEN, SHELTON, PT.  
TOWNSEND, PT. ANGELES, AND BREMERTON

ZONE 1 - Projects within 25 radius miles of the respective city  
hall  
ZONE 2 - More than 25 but less than 45 radius miles from the  
respective city hall  
ZONE 3 - More than 45 radius miles from the respective city hall

LABORERS CLASSIFICATIONS

GROUP 1: Landscaping and Planting; Watchman; Window  
Washer/Cleaner (detail clean-up, such as but not limited to  
cleaning floors, ceilings, walls, windows, etc., prior to final  
acceptance by the owner)

GROUP 2: Batch Weighman; Crusher Feeder; Fence Laborer;  
Flagman; Pilot Car

GROUP 3: General Laborer; Air, Gas, or Electric Vibrating  
Screed; Asbestos Abatement Laborer; Ballast Regulator Machine;  
Brush Cutter; Brush Hog Feeder; Burner; Carpenter Tender; Cement  
Finisher Tender; Change House or Dry Shack; Chipping Gun (under  
30 lbs.); Choker Setter; Chuck Tender; Clean-up Laborer; Concrete  
Form Stripper; Curing Laborer; Demolition (wrecking and moving  
including charred material); Ditch Digger; Dump Person; Fine  
Graders; Firewatch; Form Setter; Gabian Basket Builders; Grout  
Machine Tender; Grinders; Guardrail Erector; Hazardous Waste

Worker (Level C); Maintenance Person; Material Yard Person; Pot Tender; Rip Rap Person; Riggers; Scale Person; Sloper Sprayer; Signal Person; Stock Piler; Stake Hopper; Toolroom Man (at job site); Topper-Tailer; Track Laborer; Truck Spotter; Vinyl Seamer

GROUP 4: Cement Dumper-Paving; Chipping Gun (over 30 lbs.); Clary Power Spreader; Concrete Dumper/Chute Operator; Concrete Saw Operator; Drill Operator (hydraulic, diamond, aiartrac); Faller and Bucker Chain Saw; Grade Checker and Transit Person; Groutmen (pressure) including post tension beams; Hazardous Waste Worker (Level B); High Scaler; Jackhammer; Laserbeam Operator; Manhole Builder-Mudman; Mortarman and Hodcarrier; Nozzleman (concrete pump, green cutter when using combination of high pressure air and water on concrete and rock, sandblast, gunite, shotcrete, water blaster, vacuum blaster); Pavement Breaker; Pipe Layer and Caulker; Pipe Pot Tender; Pipe Reliner (not insert type); Pipe Wrapper; Power Jacks; Railroad Spike Puller-Power; Raker-Asphalt; Rivet Buster; Rodder; Sloper (over 20'); Spreader (concrete); Tamper and Similar electric, air and glas operated tool; Timber Person-sewer (lagger shorer and cribber); Track Liner Power; Tugger Operator; Vibrator; Well Point Laborer

GROUP 5: Caisson Worker; Miner; Powderman; Re-Timberman; Hazardous Waste Worker (Level A).

-----  
 LAB00238I 06/01/2001  

	Rates	Fringes
CHELAN COUNTY		
HOD CARRIERS	21.35	5.00

 -----

LAB00335C 06/01/2001  

	Rates	Fringes
PACIFIC (South of a straight line made by extending the north boundary line of Wahkiakum County west to the Pacific Ocean)		
COUNTY		

ZONE 1:

LABORERS:

GROUP 1	22.27	6.75
GROUP 2	22.77	6.75
GROUP 3	23.15	6.75
GROUP 4	23.47	6.75
GROUP 5	20.12	6.75
GROUP 6	18.06	6.75
GROUP 7	15.36	6.75

LABORERS CLASSIFICATIONS

GROUP 1: Asphalt Plant Laborers; Asphalt Spreaders; Batch Weighman; Broomers; Brush Burners and Cutters; Car and Truck Loaders; Carpenter Tender; Change-House Man or Dry Shack Man; Choker Setter; Clean-up Laborers; Curing-concrete; Demolition, Wrecking, and Moving Laborers; Dumpers, road oiling crew; Dumpmen (for grading crew); Elevator Feeders;

Guard Rail, Median Rail, Reference Post, Guide Post, Right-of-way Marker; Fine Graders; Fire Watch; Form Strippers (not swinging stages); General Laborers; Hazardous Waste Worker; Leverman or Aggregate Spreader (Flaherty and similar types); Loading Spotters; Material Yard Man (including electrical); Pittsburgh Chipper Operator or similar types; Railroad Track Laborers; Ribbon Setters (including steel forms); Rip Rap Man (hand placed); Road Pump Tender; Sewer Laborer; Signalman; Skipman; Slopers; Spraymen; Stake Chaser; Stockpiler; Tie Back Shoring; Timber Faller and Bucker (hand labor); Toolroom Man (at job site); Tunnel Bullgang (above ground); Weight-Man-Crusher (aggregate when used)

GROUP 2: Applicator (including pot power tender for same), applying protective material by hand or nozzle on utility lines or storage tanks on project; Brush (power saw); Burners; Choker Splicer; Clary Power Spreader and similar types; Clean up-nozzleman-Green cutter (concrete, rock, etc.); Concrete Laborer; Concrete Power Buggyman; Crusher Feeder; Demolition and Wrecking Charred Materials; Gunitite Nozzleman Tender; Gunitite or Sand Blasting Pot Tender; Handlers or Mixers of all Materials of an irritating nature (including cement and lime); Pipe Doping & Wrapping; Tool Operators (includes but not limited to: Dry pack machine, Jackhammer, Chipping guns, Paving breakers); Post Hole Digger, air, gas or electric; Vibrating Screed; Tampers; Sand Blasting (wet); Stake-Setter; Tunnel-Muckers, Brakemen, Concrete Crew, Bull gang (Underground)

GROUP 3: Asbestos Removal (structural removal only); Bit Grinder; Drill Doctor; Drill Operators, air tracks cat drills, wagon drills, rubber-mounted drills, and other similar types; Concrete Saw Operator; Gunitite Nozzleman; High scalers, strippers

and drillers (covers work in swinging stages, chairs or belts, under extreme conditions unusual to normal drilling, blasting, barring-down, or sloping and stripping); Manhole Builder; Powdermen; Power Saw Operators (Bucking and Falling); Pumpcrete Nozzlemen; Sand Blasting (dry); Sewer Timberman; Track Liners; Anchor Machines; Ballast Regulators; Multiple Tampers; Power Jacks; Tugger Operator; Tunnel-Chuck Tenders, Nippers and Timbermen; Vibrator; Water Blaster

GROUP 4: Asphalt Raker; Concrete Saw Operator (walls); Concrete Nozzelman; Grade Checker; Pipelayer; Laser Beam (Tunnel) applicable when assigned to move, set up, align laser beam; Miner-Tunnel; Motorman-dinky Locomotive-Tunnel; Powderman-Tunnel; Shield Operator-Tunnel

GROUP 5: Traffic Flaggers

GROUP 6: Fence Builders

GROUP 7: Landscaping and Planting Laborers

ZONE DIFFERENTIAL (ADD TO ZONE 1 RATES):

ZONE 2 - \$0.65

ZONE 3 - 1.15  
 ZONE 4 - 1.70  
 ZONE 5 - 2.75

#### ZONE DEFINITIONS

BASE POINTS: GOLDENDALE, LONGVIEW, AND VANCOUVER

ZONE 1: Projects within 30 miles of the respective city hall  
 ZONE 2: More than 30 miles but less than 40 miles from the  
 respective city hall.  
 ZONE 3: More than 40 miles but less than 50 miles from the  
 respective city hall.  
 ZONE 4: More than 50 miles but less than 80 miles from the  
 respective city hall.  
 ZONE 5: More than 80 miles from the respective city hall.

-----  
 LAB00335K 06/01/2001  

	Rates	Fringes
PACIFIC(south of a straight line made by extending the north boundary of Wahkiakum County west to the Pacific Ocean)		
HOD CARRIERS	24.64	5.61

 -----

PAIN0005A 03/01/2000  

	Rates	Fringes
CLALLAM, GRAYS HARBOR, JEFFERSON, KING, KITSAP, LEWIS, MASON, PIERCE, SNOHOMISH AND THURSTON COUNTIES		
PAINTERS	22.94	3.73

 -----

PAIN0005C 06/10/2000  

	Rates	Fringes
CLALLAM, GRAYS HARBOR, JEFFERSON, KING, KITSAP, LEWIS, MASON, PIERCE, SNOHOMISH AND THURSTON COUNTIES		
DRYWALL FINISHERS	25.50	7.82

 -----

PAIN0005H 07/01/2001  

	Rates	Fringes
CHELAN AND KITTITAS COUNTIES		
PAINTERS:		
BRUSH, PAPERHANGER, STEAM-CLEANING, STRIPING and SPRAY	19.17	4.24
TV, RADIO, ELECTRICAL TRANSMISSION TOWERS	20.92	4.24

 -----

PAIN0054G 09/01/2001  

	Rates	Fringes
--	-------	---------

CHELAN AND KITTITAS COUNTIES

GLAZIERS	17.32	3.17
----------	-------	------

---

PAIN0054I 06/01/1999		
	Rates	Fringes
CHELAN AND KITTITAS COUNTIES		

DRYWALL FINISHER (TAPER)	19.98	4.25
--------------------------	-------	------

---

PAIN0055M 01/01/2000		
	Rates	Fringes
PACIFIC COUNTY		

DRYWALL FINSIHERS	24.00	7.60
-------------------	-------	------

---

PAIN0055N 11/01/1999		
	Rates	Fringes
PACIFIC COUNTY		

PAINTERS:		
Brush & Roller	17.10	3.48
Spray and Sandblasting	17.70	3.48
High work - All work		
60 ft. or higher	17.60	3.48

---

PAIN0188A 07/01/2001		
	Rates	Fringes
CLALLAM, JEFFERSON, KING, KITSAP, LEWIS, MASON, PIERCE, SNOHOMISH AND THURSTON COUNTIES		

GLAZIERS	28.73	6.48
----------	-------	------

---

PAIN0188B 07/01/2001		
	Rates	Fringes
GRAYS HARBOR AND PACIFIC COUNTIES		

GLAZIERS	14.58	4.69
----------	-------	------

---

PAIN1238A 06/01/2001		
	Rates	Fringes
CALLAM, GRAYS HARBOR, JEFFERSON, LEWIS, MASON, PACIFIC (NORTHERN PORTION), PIERCE AND THURSTON COUNTIES		

SOFT FLOOR LAYERS	21.77	6.63
-------------------	-------	------

---

PAIN1238D 06/01/2001		
	Rates	Fringes
KING, KITSAP AND SNOHOMISH COUNTIES		

SOFT FLOOR LAYERS	23.69	6.91
-------------------	-------	------

---

PLAS0072C 06/01/1999		
	Rates	Fringes
CHELAN AND KITTITAS COUNTIES		
Zone 1:		
CEMENT MASONS	20.75	5.24
Zone Differential (Add to Zone 1 rates): Zone 2 - \$2.00		

BASE POINTS: Spokane, Pasco, Moses Lake, and Lewiston

Zone 1: 0 - 45 radius miles from the main post office  
 Zone 2: 45 radius miles from the main post office

---

PLAS0082D 06/01/1999		
	Rates	Fringes
PACIFIC (South of a straight line made by extending the north boundary line of Wahkiakum County west to the Pacific Ocean) COUNTY		

PLASTERERS	23.91	6.36
------------	-------	------

---

PLAS0528B 12/01/2001		
	Rates	Fringes
CLALLAM, GRAYS HARBOR, JEFFERSON, KING, KITSAP, LEWIS, MASON, PACIFIC (North of a straight line made by extending the north boundary line of Wahkiakum Count, west to the Pacific Ocean), PIERCE, SNOHOMISH AND THURSTON COUNTIES		

CEMENT MASONS	27.16	8.99
---------------	-------	------

---

PLUM0032A 06/01/1999		
	Rates	Fringes
CHELAN AND KITTITAS (NORTHERN TIP) COUNTIES		

PLUMBERS AND PIPEFITTERS	23.47	8.67
--------------------------	-------	------

---

PLUM0032B 06/01/2001		
	Rates	Fringes
CLALLAM, KING AND JEFFERSON COUNTIES		

PLUMBERS AND PIPEFITTERS	31.38	11.23
--------------------------	-------	-------

---

PLUM0082D 06/01/2001		
	Rates	Fringes
GRAYS HARBOR, LEWIS, MASON (EXCLUDING NE SECTION), PACIFIC, PIERCE AND THURSTON COUNTIES		

PLUMBERS AND PIPEFITTERS	24.57	14.72
-----		
PLUM0265A 06/01/2001		
	Rates	Fringes
SNOHOMISH COUNTY		
PLUMBERS AND PIPEFITTERS:	28.37	10.24
-----		
PLUM0598B 06/01/2001		
	Rates	Fringes
KITTITAS (ALL BUT NORTHERN TIP)		
PLUMBERS AND PIPEFITTERS	28.85	11.55
-----		
PLUM0631A 06/01/2001		
	Rates	Fringes
MASON (NE SECTION), AND KITSAP COUNTIES		
PLUMBERS/PIPEFITTERS:		
All new construction, additions, and remodeling of commercial building projects such as:		
cocktail lounges and taverns, professional buildings, medical clinics, retail stores, hotels and motels, restaurants and fast food types, gasoline service stations, and car washes where the plumbing and mechanical cost of the project is less than \$100,000	14.55	7.98
All other work where the plumbing and mechanical cost of the project is \$100,000 and over	24.65	13.41
-----		
ROOF0054A 06/20/2000		
	Rates	Fringes
CLALLAM, JEFFERSON, KING, KITSAP, MASON AND SNOHOMISH COUNTIES		
ROOFERS	24.30	6.73
-----		
* ROOF0153A 01/01/2002		
	Rates	Fringes
GRAYS HARBOR, LEWIS, PACIFIC, PIERCE AND THURSTON COUNTIES		
ROOFERS	23.60	5.84
-----		



ROOF0189A 07/01/2001		
	Rates	Fringes
CHELAN COUNTY		
ROOFERS	19.05	6.05

---

ROOF0189E 07/01/2001		
	Rates	Fringes
KITTITAS COUNTY		
ROOFERS	17.48	5.60

---

SFWA0699B 07/01/2001		
	Rates	Fringes
KING, KITSAP, PIERCE, SNOHOMISH AND THURSTON COUNTIES		
SPRINKLER FITTERS	31.48	10.95

---

**WA010002 - 1**

SHEE0066D 06/01/2000		
	Rates	Fringes
CHELAN COUNTY		
SHEET METAL WORKERS	23.77	6.48

---

SHEE0066F 06/01/2001		
	Rates	Fringes
CLALLAM, GRAYS HARBOR, JEFFERSON, KING, KITSAP, LEWIS, MASON, PACIFIC, PIERCE, SNOHOMISH AND THURSTON COUNTIES		
SHEET METAL WORKERS	30.26	9.14

---

SHEE0066M 06/01/2000		
	Rates	Fringes
KITTITAS COUNTY		
SHEET METAL WORKERS	25.43	7.30

---

TEAM0174B 06/01/2001		
	Rates	Fringes
CLALLAM, GRAYS HARBOR, JEFFERSON, KING, KITSAP, LEWIS, MASON, PACIFIC (North of a straight line made by extending the north boundary line of Wahkiakum County west to the Pacific Ocean), PIERCE, SNOHOMISH AND THURSTON COUNTIES		
TRUCK DRIVERS:		
GROUP 1:	24.94	9.12
GROUP 2:	24.36	9.12
GROUP 3:	22.08	9.12

GROUP 4:	18.00	9.12
GROUP 5:	24.70	9.12

#### TRUCK DRIVERS CLASSIFICATIONS

GROUP 1 - "A-frame or Hydralift" trucks and Boom trucks or similar equipment when "A" frame or "Hydralift" and Boom truck or similar equipment is used; Buggymobile; Bulk Cement Tanker; Dumpsters and similar equipment, Tournorockers, Tournowagon, Tournotrailer, Cat DW series, Terra Cobra, Le Tourneau, Westinghouse, Athye Wagon, Euclid Two and Four-Wheeled power tractor with trailer and similar top-loaded equipment transporting material: Dump Trucks, side, end and bottom dump, including semi-trucks and trains or combinations thereof with 16 yards to 30 yards capacity: Over 30 yards \$.15 per hour additional for each 10 yard increment; Explosive Truck (field mix) and similar equipment; Hyster Operators (handling bulk loose aggregates); Lowbed and Heavy Duty Trailer; Road Oil Distributor Driver; Spreader, Flaherty Transit mix used exclusively in heavy construction; Water Wagon and Tank Truck-3,000 gallons and over capacity

GROUP 2 - Bulllifts, or similar equipment used in loading or unloading trucks, transporting materials on job site; Dumpsters, and similar equipment, Tournorockers, Tournowagon, Turnotrailer, Cat. D.W. Series, Terra Cobra, Le Tourneau, Westinghous, Athye wagon, Euclid two and four-wheeled power tractor with trailer and similar top-loaded equipment transporting material, Dump trucks,

side, end and bottom dump, including semi-trucks and trains or combinations thereof with less than 16 yards capacity; Flatbed: (Dual Rear Axle); Grease Truck, Fuel Truck, Greaser, Battery Service Man and/or Tire Service Man; Leverman and loader at bunkers and batch plants; Oil tank transport; Scissor, Slurry Truck; Sno-Go and similar equipment; Swampers; Straddler Carrier (Ross, Hyster) and similar equipment; Team Driver; Tractor (small rubber-tired (when used within Teamster jurisdiction); Vacuum truck; Water Wagon and Tank trucks-less than 3,000 gallons capacity; Winch truck; Wrecker, tow truck and similar equipment

GROUP 3 - Flatbed: single rear axle; Pickup sweeper, Pickup Truck (Adjust upward by \$2.00 per hour for onsite work)

GROUP 4 - Escort or pilot driver

GROUP 5 - Mechanic

#### HAZMAT PROJECTS

Anyone working on a HAZMAT job, where HAZMAT certification is required, shall be compensated as a premium, in addition to the classification working in as follows:

LEVEL C: +\$.25 per hour - This level uses an air purifying respirator or additional protective clothing.

LEVEL B: +\$.50 per hour - Uses same respirator protection as Level A. Supplied air line is provided in conjunction with a chemical "splash suit."

LEVEL A: +\$.75 per hour - This level utilizes a fully-encapsulated suit with a self-contained breathing apparatus or a supplied air line.

#### ZONE DIFFERENTIAL

Zone pay will be calculated from the city center of the following listed cities:

BELLINGHAM	CENTRALIA	RAYMOND	OLYMPIA
EVERETT	SHELTON	ANACORTES	BELLEVUE
SEATTLE	PORT ANGELES	MT. VERNON	KENT
TACOMA	PORT TOWNSEND	ABERDEEN	BREMERTON

Zone A - 0 - 25 miles - Free Zone  
Zone B - 25 - 45 miles - \$ .70 per hour  
Zone C - Over 45 miles - \$1.00 per hour

-----

TEAM0760F 06/01/2000

	Rates	Fringes
CHELAN AND KITTITAS COUNTIES		
(ANYONE WORKING ON HAZMAT JOBS SEE FOOTNOTE A BELOW)		

#### TRUCK DRIVERS:

GROUP 1	19.33	7.50
GROUP 2	21.97	7.50
GROUP 3	22.08	7.50
GROUP 4	22.41	7.50
GROUP 5	22.52	7.50
GROUP 6	22.68	7.50
GROUP 7	23.22	7.50
GROUP 8	23.64	7.50

#### TRUCK DRIVERS CLASSIFICATIONS

GROUP 1: Escort Driver or Pilot Car; Employee Haul; Power Boat Hauling Employees or Material

GROUP 2: Fish Truck; Flat Bed Truck; Fork Lift (3000 lbs. and under); Trailer Mounted Hydro Seeder and Mulcher; Leverperson (loading trucks at bunkers); Seeder & Mulcher; Stationary Fuel Operator; Tractor (small, rubber-tired, pulling trailer or similar equipment)

GROUP 3: Auto Crane (2000 lbs. capacity); Buggy Mobile & Similar; Bulk Cement Tanks & Spreader; Dumptor (6 yds. & under); Flat Bed Truck with Hydraulic System; Fork Lift (3001-16,000 lbs.); Fuel Truck Driver; Steamcleaner & Washer; Power Operated Sweeper; Rubber-tired Tunnel Jumbo; Scissors Truck; Slurry Truck Driver; Straddle Carrier (Ross, Hyster, & similar); Tireperson; Transit Mixers & Truck Hauling Concrete (3 yd. to & including 6 yds.); Trucks, side, end, bottom and articulated end dump (3 yards to and including 6 yds.); Warehouseperson (to include

shipping & receiving); Wrecker & Tow Truck

GROUP 4: A-Frame; Burner, Cutter, & Welder; Service Greaser; Trucks, side, end, bottom and articulated end dump (over 6 yds. to & including 12 yds.); Truck Mounted Hydro Seeder; Warehouseperson; Water Tank truck (0-8000 gallons)

GROUP 5: Dumpster (over 6 yds.); Lowboy (50 tons & under); Self-Loading Roll Off; Semi-Truck & Trailer; Tractor with Steer Trailer; Transit Mixers and Trucks Hauling Concrete (over 6 yds. to and including 10 yds.); Trucks, side, end, bottom and articulated end dump (over 12 yds. to & including 20 yds.); Truck-Mounted Crane (with load bearing surface either mounted or pulled)(up to 14 ton); Vacuum Truck (super sucker, guzzler, etc.)

GROUP 6: Flaherty Spreader Box Driver; Flowboys; Fork Lift (over 16,000 lbs.); Dumps (Semi-end); Lowboy (over 50 tons); Mechanic (Field); Transfer Truck and Trailer; Transit Mixers & Trucks Hauling Concrete (over 10 yds. to & including 20 yds.); Trucks, side, end, bottom and end dump (over 20 yds. to & including 40 yds.); Truck and Pup; Tournarocker, DW's & similar with 2 or more 4 wheel-power tractor with trailer, gallonage or yardage scale, whichever is greater; Water Tank Truck (8,001-14,000 gallons)

GROUP 7: Oil Distributor Driver; Stringer Truck (cable operated trailer); Transit Mixers & Hauling Concrete (over 20 yds.); Truck, side, end, bottom and articulated end dump (over 40 yds.

to & including 100 yds.); Truck Mounted Crane (with load bearing surface either mounted or pulled (16 through 25 tons)

GROUP 8: Prime Movers and Stinger Truck; Trucks, side, end, bottom and articulated end dump (over 100 yds.); Helicopter Pilot Hauling Employees or Materials

Footnote A- Anyone working on a HAZMAT job, where HAZMAT certification is required, shall be compensated as a premium, in additon to the classification working in as follows:

LEVEL D: - \$.25 PER HOUR (This is the lowest level of protection.

No respirator is used and skin protection is minimal.

LEVEL C: - \$.50 PER HOUR (This level uses an air purifying respirator or additional protective clothing.

LEVEL B: - \$.75 PER HOUR (Uses same respirator protection as Level A. Supplied air line is provided in conjunction with a chemical "spash suit."

LEVEL A: - \$1.00 PER HOUR (this level utilizes a fully-encapsulated suit with a self-contained breathing apparatus or a supplied air line.

-----  
WELDERS - Receive rate prescribed for craft performing operation to which welding is incidental.  
=====

Unlisted classifications needed for work not included within

the scope of the classifications listed may be added after award only as provided in the labor standards contract clauses (29 CFR 5.5(a)(1)(v)).

-----  
In the listing above, the "SU" designation means that rates listed under that identifier do not reflect collectively bargained wage and fringe benefit rates. Other designations indicate unions whose rates have been determined to be prevailing.

#### WAGE DETERMINATION APPEALS PROCESS

1.) Has there been an initial decision in the matter? This can be:

- \* an existing published wage determination
- \* a survey underlying a wage determination
- \* a Wage and Hour Division letter setting forth a position on a wage determination matter
- \* a conformance (additional classification and rate) ruling

On survey related matters, initial contact, including requests for summaries of surveys, should be with the Wage and Hour

Regional Office for the area in which the survey was conducted because those Regional Offices have responsibility for the Davis-Bacon survey program. If the response from this initial contact is not satisfactory, then the process described in 2.) and 3.) should be followed.

With regard to any other matter not yet ripe for the formal process described here, initial contact should be with the Branch of Construction Wage Determinations. Write to:

Branch of Construction Wage Determinations  
Wage and Hour Division  
U. S. Department of Labor  
200 Constitution Avenue, N. W.  
Washington, D. C. 20210

2.) If the answer to the question in 1.) is yes, then an interested party (those affected by the action) can request review and reconsideration from the Wage and Hour Administrator (See 29 CFR Part 1.8 and 29 CFR Part 7). Write to:

Wage and Hour Administrator  
U.S. Department of Labor  
200 Constitution Avenue, N. W.  
Washington, D. C. 20210

The request should be accompanied by a full statement of the interested party's position and by any information (wage payment data, project description, area practice material, etc.) that the requestor considers relevant to the issue.

3.) If the decision of the Administrator is not favorable, an

interested party may appeal directly to the Administrative Review Board (formerly the Wage Appeals Board). Write to:

Administrative Review Board  
U. S. Department of Labor  
200 Constitution Avenue, N. W.  
Washington, D. C. 20210

4.) All decisions by the Administrative Review Board are final.  
END OF GENERAL DECISION

## TABLE OF CONTENTS

### TECHNICAL SPECIFICATIONS

<u>Section No.</u>	<u>Section Title</u>
<u>DIVISION 1 - GENERAL REQUIREMENTS</u>	
01001	Supplementary Requirements
01005	Site Specific Supplementary Requirements
01025	Payment
01035	Modification Procedures
01320	Project Schedule
01330	Submittal Procedures
01410	Environmental Protection
01415	Metric Measurements
01451	Contractor Quality Control
01501	Construction Facilities and Temporary Controls
01701	Operations and Maintenance Manuals
01702	As Built Records and Drawings
01703	Warranty of Construction
01704	Form 1354 Checklist
01705	Equipment-in-Place List
<u>DIVISION 2 - SITEWORK</u>	
02230	Clearing and Grubbing
02300	Earthwork
02315	Excavation, Filling and Backfilling for Buildings
02316	Excavation, Trenching, and Backfilling for Utilities Systems
02510	Water Distribution System
02531	Sanitary Sewers
02630	Storm-Drainage System
02722	Aggregate and/or Graded-Crushed Aggregate Base Course
02741	Hot Mix Asphalt (HMA) for Road and Drive Areas
02763	Pavement Markings
02770	Concrete Sidewalks and Curbs
02821	Fencing
02921	Seeding
02930	Exterior Planting
<u>DIVISION 3 - CONCRETE</u>	
03100	Structural Concrete Formwork
03150	Expansion Joints, Contraction Joints, and Waterstops
03200	Concrete Reinforcement
03300	Cast-In-Place Structural Concrete

TABLE OF CONTENTS (con.)

Section  
No

Section Title

DIVISION 4 - MASONRY

04200 Masonry

DIVISION 5 - METALS

05090 Welding, Structural  
05120 Structural Steel  
05210 Steel Joists  
05300 Steel Decking  
05400 Cold-Formed Steel Framing  
05500 Miscellaneous Metal

DIVISION 6 - WOOD AND PLASTICS

06200 Finish Carpentry

DIVISION 7 - THERMAL AND MOISTURE PROTECTION

07190 Water Repellents  
07212 Building Insulation  
07261 Moisture Barriers  
07412 Non-Structural Metal Roofing  
07413 Metal Siding  
07600 Sheet Metalwork, General  
07840 Firestopping  
07900 Joint Sealing

DIVISION 8 - DOORS AND WINDOWS

08110 Steel Doors and Frames  
08330 Overhead Rolling Doors  
08331 Metal Rolling Counter Doors  
08520 Aluminum Windows  
08700 Builders' Hardware  
08810 Glass and Glazing

DIVISION 9 - FINISHES

09250 Gypsum Wallboard  
09310 Ceramic Tile  
09510 Acoustical Ceilings  
09650 Resilient Flooring  
09680 Carpet  
09900 Painting, General



09915 Color Schedule

TABLE OF CONTENTS (con.)

Section  
No

Section Title

DIVISION 10 - SPECIALTIES

10100 Visual Display Boards  
10160 Toilet Partitions  
10260 Wall and Corner Protection  
10523 Fire Extinguishers  
10800 Toilet Accessories

DIVISION 11 – EQUIPMENT

11019 Miscellaneous Equipment  
11020 Security Vault Door  
11162 Loading Dock Levelers

DIVISION 12 - FURNISHINGS

12320 Cabinets and Countertops  
12490 Window Treatment

DIVISION 13 - SPECIAL CONSTRUCTION

13720 Electrical Security System  
13851 Fire Detection and Alarm System, Addressable  
13920 Fire Pumps  
13930 Wet Pipe Sprinkler System, Fire Protection

DIVISION 14 CONVEYING SYSTEM

14602 Cranes, Single-Girder Bridge

DIVISION 15 - MECHANICAL

15080 Thermal Insulation For Mechanical Systems  
15190 Gas Piping Systems  
15400 Plumbing, General Purpose  
15556 Forced Hot Water Heating Systems Using Duct Coils  
15565 Heating System; Gas-Fired Heaters  
15566 Warm Air Heating Systems  
15653 Air Conditioning System (Unitary Type)  
15895 Air Supply, Distribution, Ventilation, and Exhaust System  
15950 Heating, Ventilating, and Air Conditioning (HVAC) Control System  
15951 Direct Digital Control for HVAC  
15990 Testing, Adjusting and Balancing of HVAC Systems

15995            Commissioning of HVAC Systems

TABLE OF CONTENTS (con.)

Section

No

Section Title

DIVISION 16 - ELECTRICAL

16070	Seismic Protection for Electrical Equipment
16375	Electrical Distribution System, Underground
16415	Electrical Work, Interior
16710	Premises Distribution System
16711	Telephone System, Outside Plant

## SECTION 01001

### SUPPLEMENTARY REQUIREMENTS

#### PART 1 GENERAL

##### 1.1 DEFINITIONS

The references listed below are to be defined as indicated wherever they may be used in the TECHNICAL SPECIFICATIONS.

"SUPPLEMENTARY REQUIREMENTS " shall be read to pertain to any of the sections of the DIVISION 1 as required by the content of the section or paragraph containing the reference.

Specification "SECTION 01300 – SUBMITTALS" shall be read as a specification "SECTION 01330 – SUBMITTAL PROCEDURES."

Specification "SECTION 01400 – CONTRACTOR QUALITY CONTROL" shall be read as specification "SECTION 01451 – CONTRACTOR QUALITY CONTROL."

##### 1.2 CONSTRUCTION SCHEDULING

The instructions for preparation and submittal of the Contractor-prepared Network Analysis System are found in SECTION 01320, PROJECT SCHEDULE.

##### 1.3 CORRESPONDENCE

1.3.1 All correspondence shall be addressed to the Administrative Contracting Officer, shall be serially numbered commencing with Number 1, with no numbers missing or duplicated and shall be furnished with an original and one copy. Enclosures attached or transmitted with the correspondence shall also be furnished with an original and one copy. Each serial letter shall make reference to the contract name, contract number and shall have only one subject.

1.3.2 All correspondence from the Contracting Officer will be also serially numbered with no numbers missing or duplicated. Letters to the Contractor will be forwarded in duplicate.

1.3.3 In the event there is more than one project within a contract, correspondence shall contain separate and distinct submittals to identify each project by name.

1.3.4 For submission of Contractor payment requests, See Section 01025, PAYMENT.

##### 1.4 ADVANCED NOTICE OF CONTRACTOR PERFORMED ACCEPTANCE TESTING

The Contractor shall notify the Contracting Officer a minimum of 20 days prior to performing any acceptance or "buy off" testing of the following systems, (1) EMCS, (2) Fire Detection/Protection, (3)

Intrusion Detection System, (4) Uninterruptible Power Supply, and (5) HVAC. Advance notification is not required for testing performed as part of fabrication or installation.

## 1.5 CONTRACTOR'S FILES

Contractor shall maintain "Approved (Action Code "A") and "Approved Except as Noted (Action Code "B") shop drawing files in fabrication shops and at project sites for government use.

## 1.6 PROJECT PHOTOGRAPHS

### 1.6.1 General

The Contractor shall furnish photographs depicting construction as specified herein. The photographs shall be in digital JPEG format, with a resolution of 1024 x 768 pixels or better, size limited to less than 300KB. Photos shall be submitted in a Word document, with a caption under each photo showing date taken, project location, contract title and number, and a brief description of what the photo depicts. The photos shall be submitted on a 133 mm ISO-9660 CD-ROM.

### 1.6.2 Progress Photographs

Construction progress photographs shall be taken between the 1st and 15th of each month and delivered to the Contracting Officer with the payment request for the month taken. Photos shall be taken from 3 positions. Location of positions shall be coordinated with or may be selected by the Contracting Officer. They shall show, inasmuch as practicable, work accomplished during the previous month. Photographic quality and composition of photos shall be such that they can be used for briefings and/or to illustrate articles on the construction progress of the project.

### 1.6.3 Completion Photographs

Construction completion photographs (35 mm color slides) shall be taken upon completion of construction and delivered to the Contracting Officer not later than 15 days prior to project completion. It is the intention of the Government to obtain slides whose color, clarity, and composition are such that they can be used for briefings and/or to illustrate articles on the completed project. Slides shall be taken from 10 positions. Location of positions shall be coordinated with or may be selected by the Contracting Officer. Slides shall show the completed project to the best advantage, and shall include overall site photos as well as photos of major features.

## 1.7 AUDIO-VIDEO RECORDINGS

### 1.7.1 General

The Contractor shall provide all equipment, materials, and trained personnel to visually and audibly record (video tape) all on site operations and maintenance (O&M) training sessions for this contract. The video technician shall be employed by a video production company that has been in business for a minimum of 2 years. The Contractor shall submit the resume of the technician and video production company. Also the Contractor shall submit for approval an agenda or an outline breakdown of the proposed presentation.

Video tapes shall be produced in the VHS format. Audio shall be adjusted, filtered or otherwise controlled to ensure that the trainer can be understood at all times. Each system or piece of equipment shall be covered in a single tape or set of tapes which shall be correlated with the O&M manuals provided. Video tapes and their individual storage cases shall be identified with a typewritten label showing the project, equipment or system, and contract number; this same information shall be provided as an introduction on each video tape. When two or more tapes are provided, they shall be submitted as a set in an appropriate storage container.

### 1.7.2 Submittals

Prior to conducting the training sessions the following shall be submitted for approval:

- 1) A training plan consisting of the agenda or an outline breakdown of the proposed presentation and
- 2) The qualifications of the trainer and the video recording technician

Two copies of the video taped material shall be submitted to the Contracting Officer within 10 days after completion of video taping the training sessions.

## 1.8 MECHANICAL AND ELECTRICAL LAYOUT DRAWINGS

The Contractor shall submit, for Contracting Officer's approval, scaled layout drawings, including appropriate elevations and sections, as required, showing the room arrangement the Contractor proposes for all pieces of mechanical and electrical equipment and appurtenances thereto, such as but not limited to: air conditioning equipment, boilers, compressors, hot water tanks, pumps, electrical control panels, ducts and piping, that are to be located in the room. Mechanical and electrical layouts shall be coordinated to eliminate any conflicts of installed equipment. No payments will be made to the Contractor for furnishing or installing equipment until the layout drawings have been approved by the Contracting Officer. Mechanical and electrical equipment layout drawings shall be identified and submitted as specified herein. Equipment rooms shown on the drawings are of adequate size to accommodate equipment of required capacities as available from several manufacturers with sufficient space left for access, servicing, and removal. The use of equipment items with dimensions such as "to crowd the space" will not be permitted.

## 1.9 COLOR BOARDS

Three sets of color boards shall be submitted within 60 calendar days after receipt of Notice to Proceed. The board shall include samples of colors and finishes of every finish such as on walls, floors, and ceilings. This would include, but not be limited to, paint, floor and wall tile, acoustical panels, carpet, wall base, plastic laminate, etc. Where special finishes such as architectural concrete or prefinished metal panels are required, samples of not less than 305 mm (12 inches) square shall be submitted with the board. Boards shall include, where applicable, color samples of integrally colored block, brick, and prefinished metal roofing and siding. The board shall be 610 mm by 610 mm (24 inches by 24 inches). If more space is needed, more than one board per set may be submitted. This is not meant to replace the samples called for in other portions of the specifications. The Contractor shall certify that he has reviewed the color

boards in detail and that they are in strict accordance with the contract drawings and specifications, except as may be otherwise explicitly stated.

#### 1.10 IDENTIFICATION OF EMPLOYEES AND MILITARY REGULATIONS:

(a) The Contractor shall be responsible for compliance with all regulations and orders of the Commanding Officer of the Military Installation, respecting identification of employees, movements on installation, parking, truck entry, and all other military regulations which may affect the work.

(b) The work under this Contract is to be performed at an operating Military Installation with consequent restrictions on entry and movement of nonmilitary personnel and equipment.

(c) The Commanding Officer of Fort Lewis, Washington, has initiated the following specific requirement regarding vehicle registration for this contract.

Contractors performing work on Fort Lewis shall, after award, register all vehicles to be used on the installation with the Vehicle Registration Section of the Law Enforcement Command. Contractor employees entering the installation in privately owned vehicles (POVs) shall also register their vehicles. A copy of contract award, proof of liability insurance, current driver's license and state vehicle registration shall be required to register Contractor, subcontractor, and employee vehicles.

Upon completion of the contract, it shall be the prime contractor's responsibility to collect all vehicle decals issued under the contract including those issued to employees and subcontractors. Decals are to be carefully removed from the vehicle, placed in an envelope and attached to the original documentation (i.e., post vehicle registration document) received with the decal. Decals, with documentation, must be returned to Vehicle Registration, Building 2140. Proof of decal clearance for all vehicles registered under this contract will be issued to the prime contractor and shall be returned to the Contracting Officer prior to final payment.

In the event of contract extension, it shall be the prime contractor's responsibility to report time extension to Vehicle Registration, with evidence of same. For further information, contact Vehicle Registration at Waller Hall, Building 2140 (Telephone: ~~(206)253~~ 967-5065), Fort Lewis, Washington 98433-9500.

(d) Employee Access and Identification: The employee who requires access to Fort Lewis to perform work under this contract shall obtain a Government issued identification badge.

1. Employee Access: The contractor shall, prior to the contract start date, provide the sponsoring agency the name of the employee who shall require access to Fort Lewis to perform work. This notification shall include the employee's last name, first name and middle initial and the employee's Social Security Number. The contractor shall ensure that the employee obtains a badge prior to beginning performance. Contractor employees hired during the term of the contract must obtain the badge before beginning work under the contract. If an employee no longer needs a badge for any reason (e.g., quits his/her job or is no longer performs work under the contract), the Contractor shall return the badge to the Contracting Officer's Representative (COR) within two (2) calendar days of such change. If the badge cannot be returned within the required time

frame for any reason, the contractor shall immediately notify the COR verbally, followed up in writing the next work day. An employee's inability to obtain entrance to a Government installation because he/she does not have the required Government provided ID badge shall not excuse timely performance of the requirements of this contract. The Government may change the location(s) at which badges are issued or returned, with or without advance notice to the Contractor, at no additional cost to the Government as a result thereof.

2. Contractor Request for Government Identification Badge. The required information shall be submitted to the Sponsoring Agency on the form entitled *CONTRACTOR REQUEST FOR GOVERNMENT IDENTIFICATION BADGE (S)*. The form is on the Directorate of Contracting web page and may be accessed at web address <http://150.192.40.37:82> . After approval by a Contracting Officer, contractor shall be directed to have employee(s) report to a specified building to obtain their badges.

3. Lost or Stolen Badges. Government provided ID badges shall not be reproduced or copied by the Contractor, its subcontractors, or their employees. If an employee's badge is lost or stolen the Contractor shall verbally report the loss or theft to the COR on the day such loss or theft is discovered; followed by a written report of the circumstances to the Contracting Officer. The within report shall be completed one (1) calendar day after the loss or theft is discovered.

4. Use and Wear of Badge. Each contractor employee shall wear Government furnished identification badge while performing work under the contract. The badge shall be worn on the upper front of the outer garment unless precluded by OSHA regulation(s). The badge shall not be used for access to any Government installation except for performance of work under the contract for which it was issued.

5. Expiration/Termination. The contractor shall, upon expiration or termination of the contract, collect all badges and turn them in to the COR. The final invoice will not be considered proper for purposes of the Prompt Payment Act (FAR 52.232-25, in Section I) until all badges have been accounted for.

6. Entrance Denial by Military Police. Contractor employees may be denied entry to the Installation by Military Police if it is determined that such entry may be contrary to good order, discipline, or the security of the Installation.

#### 1.11 SPECIAL SAFETY REQUIREMENTS:

All construction activities shall be conducted in strict compliance with the Corps of Engineers Safety and Health Requirements Manual EM 385-1-1, and Occupational Safety and Health Administration regulations, as applicable. The manual is available on line at:  
<http://www.usace.army.mil/inet/usace-docs/eng-manuals/em385-1-1/toc.htm>

1.11.1 In addition to Safety and Health Requirements Manual EM 385-1-1, and all applicable OSHA standards, the Contractor shall comply with the requirements listed below. Paragraph numbers refer to EM 385-1-1 or are added thereto.

(a) Paragraph 01.A.12: Add new paragraph: Safety Engineer (1985 JAN OCE) (DAM 52.236/103):

(1) The Contractor shall employ at the project site to cover all hours of work at least one Safety and Occupational Health person to manage the Contractor's accident program. Duties which are not germane to the safety program shall not be assigned to the Safety and Health person(s). The principal safety person shall report to and work directly for the Contractor's on-site top manager, higher level official, or corporate safety office. The Safety and Health person(s) shall have the authority to take immediate steps to correct unsafe or unhealthful conditions. The presence of a Safety and Health person will not abrogate safety responsibilities of other personnel.

(2) Qualifications for Safety and Health person(s).

(A) Shall have a degree in engineering or safety in at least a four-year program from an accredited school; or

(B) Shall have legal registration as a Professional Engineer or a Certified Safety Professional and, in addition, shall have been engaged in safety and occupational health for at least one (1) year of experience, no time being credited to this one (1) year unless at least fifty (50) percent of the time each year was devoted to safety and occupational health; or

(C) Shall have a degree other than that specified in (A) above and, in addition, shall have been engaged in safety and occupational health for at least three (3) years' no time being credited to these three (3) years unless fifty (50) percent of the time each year was devoted to safety and occupational health; or

(D) In lieu of a degree, shall have been engaged in safety and occupational health for at least five (5) years, no time being credited to these (5) years unless at least fifty (50) percent of the time each year was devoted to safety and occupational health;

(E) First aid work is not a creditable experience.

(3) The name and qualifications of the nominated safety person(s) shall be furnished to the Contracting Officer for acceptability and a functional description of duties shall be provided prior to the pre-work conference.

1.12 TIME EXTENSIONS FOR UNUSUALLY SEVERE WEATHER (ER 415-1-15 31 OCT 89)

This Paragraph specifies the procedure for the determination of time extensions for unusually severe weather in accordance with the CONTRACT CLAUSE entitled "Default (Fixed Price Construction)". In order for the Contracting Officer to award a time extension under this clause, the following conditions must be satisfied:

1.12.1 The weather experienced at the project site during the contract period must be found to be unusually severe, that is, more severe than the adverse weather anticipated for the project location during any given month.



1.12.2 The unusually severe weather must actually cause a delay to the completion of the project. The delay must be beyond the control and without the fault or negligence of the contractor.

1.12.3 The following schedule of monthly anticipated adverse weather delays is based on National Oceanic and Atmospheric Administration (NOAA) or similar data for the project location and will constitute the base line for monthly weather time evaluations. The contractor's progress schedule must reflect these anticipated adverse weather delays in all weather dependent activities.

**MONTHLY ANTICIPATED ADVERSE WEATHER DELAY  
WORK DAYS BASED ON (5) DAY WORK WEEK**

<u>JAN</u>	<u>FEB</u>	<u>MAR</u>	<u>APR</u>	<u>MAY</u>	<u>JUN</u>	<u>JUL</u>	<u>AUG</u>	<u>SEP</u>	<u>OCT</u>	<u>NOV</u>	<u>DEC</u>
		R									
9	8	8	4	2	3	1	2	4	7	10	10

1.12.4 Upon acknowledgment of the notice to proceed (NTP) and continuing throughout the contract, the contractor will record on the daily QCQ report, the occurrence of adverse weather and resultant impact to normally scheduled work. Actual adverse weather delays must prevent work on critical activities for 50 percent or more of the contractor's scheduled work day.

1.12.5 The number of actual adverse weather delay days shall include days impacted by actual adverse weather (even if adverse weather occurred in previous month), be calculated chronologically from the first to the last day of each month, and be recorded as full days. If the number of actual adverse weather delay days exceeds the number of days anticipated in paragraph 1.12.3, above, the Contracting Officer will convert any qualifying delays to calendar days, giving full consideration for equivalent fair weather work days, and issue a modification in accordance with the contract clause entitled " Default (Fixed Price Construction)".

### 1.13 COMPLIANCE WITH DAVIS-BACON ACT

#### 1.13.1 Contractor POC

Within 14 days after award of the contract, the Contractor shall designate a point of contact (POC) within their organization who will be responsible for the Davis-Bacon Act Labor Program for the Contractor and all subcontractors under this contract as required by the Contract Clauses and FAR 52.222.

#### 1.13.2 Responsibilities

The designated Contractor POC shall be responsible for Davis-Bacon Act Labor Program activities including, but not limited to:

- Documentation and record keeping
- Submittal and accuracy of certified payrolls
- Submittal of required labor forms including requests for additional classifications and rates, Statements and Acknowledgement, etc.

Posting of the wage determination, approved additional classifications and rates, labor and EEO posters

Coordination with the Contracting Officer's Labor Program POC

Prior to submittal to the Government, payrolls shall be reviewed for compliance to all applicable labor standards, to include, but not be limited to the following items: correct wage rates, correct overtime classification and pay, misclassification of workers for work actually performed, apprentice to journeyman ratios, and registration of apprentice. Corrective actions shall be taken as necessary to ensure Contractor compliance with applicable contract and FAR clauses.

#### 1.13.3 Certification

The Contractor POC shall provide a signed certification stating the following: "I certify that the submitted items being forwarded have been reviewed in detail and are correct and in strict conformance with the Labor Standards of the contract except as otherwise stated."

PARTS 2 AND 3 NOT USED

END OF SECTION

This page intentionally blank.

**This page was intentionally left blank for duplex printing.**

## SECTION 01005

### SITE SPECIFIC SUPPLEMENTARY REQUIREMENTS

#### 1. CONDUCT OF WORK

##### 1.1 COORDINATION AND ACCESS TO SITE

1.1.1 Coordination with using agencies shall be made through the Contracting Officer to assist the Contractor in completing the work with a minimum of interference and inconvenience.

##### 1.1.2 Vehicle Access:

1.1.2.1 All Contractor-owned and privately-owned vehicles require an access pass/vehicle decal. This pass is obtained from the Fort Lewis Vehicle Registrar, Building 5236 by showing proof of insurance; the vehicle registration; Washington State driver's license; and a letter with original signature of prime Contractor or his superintendent stating the contract name and number, the contract period for which the pass is required, and the employee's name. See Paragraph IDENTIFICATION OF EMPLOYEES AND MILITARY REGULATIONS in SECTION 01001 for specific requirements.

1.1.2.2 Commercial vehicle access to Fort Lewis will be allowed at the Logistic Center Gate (Exit 123 from I-5) ~~and the Dupont Gate (Exit 119 from I-5)~~. The Logistics Center Gate ~~(primary access point for commercial traffic)~~ is open for inbound commercial vehicle access and inspection from 0530 hours to 2000 hours, Monday through Friday. ~~The Dupont Gate (secondary access point for commercial access) is open for inbound commercial vehicle access and inspection from 0530 hours to 2000 hours 7 days per week.~~  
**All commercial vehicles will be searched.** Drivers should anticipate delays.

1.1.2.3 Procedures for commercial vehicle access to Fort Lewis are subject to change without prior notice.

1.1.3 When keys are required for access to facilities on this contract, they shall be obtained through the Contracting Officer.

1.1.3.1 The Contractor shall be responsible for Government-owned keys issued for access to facilities or areas pertinent to this contract.

1.1.3.2 Upon completion of the work in an area, or upon request of the Contracting Officer, the key or keys relevant to the completed areas shall be returned.

1.1.3.3 Should the Contractor lose a key:

a. the Contracting Officer shall be notified, in writing, within three (3) working days after the loss is discovered and

b. should the key not be found before final acceptance, the final contract payment shall be reduced by \$100 for each key not returned.

1.1.4 Work hours in the construction area will be restricted to 7:30 a.m. to 4 p.m. daily, Monday through Friday, excluding Federal holidays. Work hours other than as specified above shall be coordinated with and approved by the Contracting Officer.

1.1.5 Contractor's workmen shall wear a Government-issued identification badge, as specified in SECTION 01001.

## 1.2 UTILITY OUTAGES

Contractor shall coordinate utility outages with the Contracting Officer at least 7 days in advance. Outages shall be kept to a minimum and any one outage shall not last more than 2 hours.

## 1.3 PROTECTION OF GOVERNMENT PROPERTY

In addition to requirements of the CONTRACT CLAUSES, Contractor shall protect all Government property within the buildings in which he is working, except for such property as is required to be demolished. Property which is to be demolished shall be protected until its scheduled demolition time. Protection shall include, but not be limited to, protection from construction generated dust, debris, water, and vibration.

END OF SECTION

## SECTION 01025

### PAYMENT

#### PART 1 GENERAL

##### 1.1 GENERAL

The contract price for each item shall constitute full compensation for furnishing all plant, labor, materials, appurtenances, and incidentals and performing all operations necessary to construct and complete the items in accordance with these specifications and the applicable drawings, including surveying performed by the Contractor. Payment for each item shall be considered as full compensation, notwithstanding that minor features may not be mentioned herein. Work paid for under one item will not be paid for under any other item. No separate payment will be made for the work, services, or operations required by the Contractor, as specified in DIVISION 1, GENERAL REQUIREMENTS, to complete the project in accordance with these specifications; all costs thereof shall be considered as incidental to the work.

##### 1.2 PAYMENT

###### 1.2.1 ITEM 0001

Payment will be made at the contract lump sum price for Item No. 0001, All Work for Arms/EM Communications and Electronics Maintenance (ACE) Building Within a Line Five Feet Beyond the Building Wall Lines, Except Items Separately Listed, payment of which shall constitute full compensation for Item No. 0001, complete.

###### 1.2.2 ITEM 0002

Payment will be made at the contract lump sum price for Item No. 0002, All Work for Property Book Officer Warehouse/Pallet Storage (PBO) Building Within a Line Five Feet Beyond the Building Wall Lines, Except Items Separately Listed, payment of which shall constitute full compensation for Item No. 0002, complete.

###### 1.2.3 ITEM 0003

Payment will be made at the contract lump sum price for Item No. 0003, All Work for Ranger Motor Pool (RMP) Building Within a Line Five Feet Beyond the Building Wall Lines, Except Items Separately Listed, payment of which shall constitute full compensation for Item No. 0003, complete.

###### 1.2.4 ITEM 0004

Payment will be made at the contract lump sum price for Item No. 0004, All Work for Ranger Special Operations Vehicle/Boat/Bike Storage (VBB) Building Within a Line Five Feet Beyond the Building Wall Lines, Except Items Separately Listed, payment of which shall constitute full compensation for Item No. 0004, complete.

### 1.2.5 ITEM 0005

Payment will be made at the contract lump sum price for Item No. 0005, All Sitework and Utilities Outside the Line Five feet Beyond Each Building's Wall Lines, Except Items Separately Listed, payment of which shall constitute full compensation for Item No. 0005, complete.

### 1.2.6 ITEM 0006

Payment will be made at the contract lump sum price for Item No. 0006, All Work for As-Built Drawings, payment of which shall constitute full compensation for Item No. 0006, complete, as specified in Section 01702 from preparation to final approval. No partial or total payment will be made for this item until the as-built drawings, both marked up blue prints and electronic files are fully approved by the Government (A or B action) and all copies of approved drawings and electronic media received by the Government.

### 1.2.7 ITEM 0007

Payment will be made at the contract lump sum price for Item No. 0007, All Work for O&M Manuals; payment of which shall constitute full compensation for Item No. 0007, complete, as specified in Section 01701 from preparation to final approval. No partial or total payment will be made for this item until all O&M manuals are fully approved by the Government (A or B action) and all copies of final manuals are received by the Government in their final binders.

### 1.2.8 ITEM 0008

Payment will be made at the contract lump sum price for Item No. 0008, All Work for Form 1354 Checklist and Equipment in Place List; payment of which shall constitute full compensation of Item No. 0008, complete, as specified in Sections 01704 and 01705 from preparation to final approval. No partial or total payment will be made for this item until both the 1354 Checklist and Equipment in Place List are fully approved by the Government (A or B action) and all copies of approved lists received by the Government.

## 1.3 PROGRESS PAYMENT INVOICE

Requests for payment shall be submitted in accordance with Federal Acquisition Regulations (FAR) Subpart 32.9, entitled "PROMPT PAYMENT", and Paragraphs 52.232-5 and 52.232-27, entitled "Payments Under Fixed-Price Construction Contracts", and "Prompt Payment for Construction Contracts", respectively. In addition each request shall be submitted in the number of copies and to the designated billing office as shown in the Contract.

1.3.1 When submitting payment requests, the Contractor shall complete Blocks 1 through 12 of the "PROGRESS PAYMENT INVOICE" Form as directed by the Contracting Officer. (A sample form is attached at the end of this Technical Specification Section.) The completed form shall then become the cover document to which all other support data shall be attached.



1.3.2 One additional copy of the entire request for payment, to include the "PROGRESS PAYMENT INVOICE" cover document, shall be forwarded to a separate address as designated by the Contracting Officer.

1.3.3 The Contractor shall submit with each pay request, a list of subcontractors that have worked during that pay period. The listing shall be broken down into weeks, identifying each subcontractor that has worked during a particular week, and indicate the total number of employees that have worked on site for each subcontractor for each week. The prime Contractor shall also indicate the total number of employees for its on site staff for each week.

PARTS 2 and 3 NOT USED

# **PROGRESS PAYMENT INVOICE**

See Federal Acquisition Regulations (FAR) 32.900, 52.232-5, & 52.232-27

1. PROJECT AND LOCATION		2. DATE	
3. CONTRACTOR NAME AND ADDRESS (Must be the same as in the Contract)		4. CONTRACT NO. -----	
		5. INVOICE NO. -----	
6. DESCRIPTION OF WORK		7. PERIOD OF PERFORMANCE  From:  To:	
8. DISCOUNT TERMS			
9. OFFICIAL TO WHOM PAYMENT IS TO BE FORWARDED Name: Title: Phone: ( ) -		10. OFFICIAL TO BE NOTIFIED OF DEFECTIVE INVOICE Name: Title: Phone ( ) -	
<b>11. CERTIFICATION: I hereby certify, to the best of my knowledge and belief, that</b> <b>(1) The amounts requested are only for the performance in accordance with the specifications, terms, and conditions of this contract;</b> <b>(2) Payments to subcontractors and suppliers have been made from previous payments received under the contract, and timely payments will be made from the proceeds of the payment covered by this certification, in accordance with subcontract agreements and the requirements of Chapter 39 of Title 31, United States Code; and</b> <b>(3) This request for progress payment does not include any amounts which the prime contractor intends to withhold or retain from a subcontractor or supplier in accordance with the terms and conditions of the subcontract.</b>			
_____ (Signature)		_____ (Title)	
		_____ (Date)	
12. OTHER INFORMATION OR DOCUMENTATION required by Contract. Provide two (2) copies of each (check and attach if applicable):  _____ Updated Progress Chart/Schedule _____ Progress Narrative _____ Certified Payrolls (submitted weekly) _____ Safety Exposure Report _____ Updated Submittal \register _____ Progress Photos _____ Subcontractor/Employee Listings		(FOR GOVERNMENT USE ONLY)  Retainage: _____% Amt.: \$ _____  Withholdings: \$ _____  Reason: _____ _____ _____  Following items are current: As-Built _____ Yes _____ No O & M Manuals _____ Yes _____ No 1354 Data _____ Yes _____ No Submittal Register _____ Yes _____ No	

END OF SECTION

## SECTION 01035

### MODIFICATION PROCEDURES

#### PART 1 GENERAL

##### 1.1 PROPOSED PROJECT MODIFICATIONS:

Price proposals for proposed modifications shall be submitted in accordance with the requirements of the Contract Clause **MODIFICATION PROPOSALS - PRICE BREAKDOWNS**. If change order work impacts or delays other unchanged contract work, the costs of such impacts or delays shall be included in the proposals and separately identified. Additional instructions for submitting price proposals can be found in NPSP-415-1-1, **INSTRUCTION AND INFORMATION FOR CONTRACTORS**, a copy of which will be furnished to the Contractor at the Preconstruction Conference. For information applicable to equipment rates used in contract modifications, refer to 00800 - **SPECIAL CLAUSES**, clause "EQUIPMENT OWNERSHIP AND OPERATING EXPENSE SCHEDULE".

#### PART 2 PRODUCTS (NOT USED)

#### PART 3 EXECUTION (NOT USED)

END OF SECTION

This page intentionally blank.

SECTION 01320  
PROJECT SCHEDULE

PART 1 GENERAL

1.1 SUBMITTALS

Government approval is required for submittals with a "GA" designation; submittals having an "FIO" designation are for information only. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

SD-01 Preconstruction Submittals

GA Preliminary project schedule, two (2) copies.

GA initial project schedule, two (2) copies  
Activity No. Sort  
Predecessor/successor listing  
Cost Schedule  
Floppy Disk with schedule data in Standard Data Exchange Format (SDEF).  
Activity Code Dictionary.

FIO Periodic schedules updates, monthly updates two (2) copies.  
Floppy Disks with schedule data in Standard Data Exchange Format (SDEF).  
Narrative  
Activity No. Sort  
Cost Schedule  
Cash Flow Report (S-Curve)

SD-07 Certificates

Qualifications; GA.

Documentation showing qualifications of personnel preparing schedule reports.

1.2 QUALIFICATIONS

The Contractor shall designate an authorized representative who shall be responsible for the preparation of all required project schedule reports. This person shall have previously created and reviewed computerized schedules. Qualifications of this individual shall be submitted to the Contracting Officer for review with the Preliminary Project Schedule submission.

## PART 2 PRODUCTS (Not Applicable)

## PART 3 EXECUTION

### 3.1 GENERAL

Pursuant to the Contract Clause, SCHEDULE FOR CONSTRUCTION CONTRACTS a Project Schedule as described below shall be prepared. The scheduling of construction shall be the responsibility of the Contractor. Contractor management personnel shall actively participate in its development. Subcontractors and suppliers working on the project should also contribute in developing and maintaining an accurate Project Schedule. The approved Project Schedule shall be used to measure the progress of the work, to aid in evaluating time extensions, and to provide the basis of all progress payments.

### 3.2 BASIS FOR PAYMENT

The schedule shall be the basis for measuring Contractor progress. Lack of an approved schedule or scheduling personnel will result in an inability of the Contracting Officer to evaluate Contractor progress for the purposes of payment. Failure of the Contractor to provide all information, as specified below, shall result in the disapproval of the entire Project Schedule submission and the inability of the Contracting Officer to evaluate Contractor progress for payment purposes. In the case where Project Schedule revisions have been directed by the Contracting Officer and those revisions have not been included in the Project Schedule, then the Contracting Officer may hold retainage up to the maximum allowed by contract, each payment period, until revisions to the Project Schedule have been made.

### 3.3 PROJECT SCHEDULE

The computer software system utilized by the Contractor to produce the Project Schedule shall be capable of providing all requirements of this specification including the SDEF (Standard Data Exchange Format). Failure of the Contractor to meet the requirements of this specification shall result in the disapproval of the schedule. Manual methods used to produce any required information shall require approval by the Contracting Officer.

#### 3.3.1 Use of the Critical Path Method

The Critical Path Method (CPM) of network calculation shall be used to generate the Project Schedule. The Contractor shall provide the Project Schedule in Precedence Diagram Method (PDM)

#### 3.3.2 Level of Detail Required

With the exception of the initial and preliminary schedule submission, the Project Schedule shall include an appropriate level of detail. Failure to develop or update the Project Schedule or provide data to the Contracting Officer at the appropriate level of detail, as specified by the Contracting Officer, shall result in the disapproval of the schedule. The Contracting Officer will use, but is not limited to, the following conditions to determine the appropriate level of detail to be used in the Project Schedule.

### 3.3.2.1 Activity Durations

Contractor submissions shall be required to follow the direction of the Contracting Officer regarding reasonable activity durations. Reasonable durations are those that allow the progress of activities to be accurately determined between payment periods. A rule of thumb, that the Contractor should use, is that less than 2 percent of all non-procurement activities' Original Durations shall be greater than 20 days.

### 3.3.2.2 Procurement Activities

Tasks related to the procurement of long lead materials or equipment shall be included as separate activities in the project schedule. Long lead materials and equipment are those materials that have a procurement cycle of over 90 days. Examples of procurement process activities include, but are not limited to: submittals, approvals, procurement, fabrication, delivery, installation, start-up, and testing.

### 3.3.2.3 Government Activities

Government and other agencies activities that could impact progress shall be shown. These activities include, but are not limited to: approvals, inspections, utility tie-in, Government Furnished Equipment (GFE) and notice to proceed for phasing requirements.

### 3.3.2.4 Responsibility

All activities shall be identified in the project schedule by the party responsible to perform the work. Responsibility includes, but is not limited to, the subcontracting firm, (at the lowest tier), Contractor work force, or Government agency performing a given task. Activities shall not belong to more than one responsible party. The responsible party for each activity shall be identified by the Responsibility Code.

### 3.3.2.5 Work Areas

All activities shall be identified in the project schedule by the work area in which the activity occurs. Activities shall not be allowed to cover more than one work area. The work area of each activity shall be identified by the Work Area Code.

### 3.3.2.6 Modification or Claim Number

Any activity that is added or changed by contract modification or used to justify claimed time shall be identified by a mod or claim code that changed the activity. Activities shall not belong to more than one modification or claim item. The modification or claim number of each activity shall be identified by the Mod or Claim Number. Whenever possible, changes shall be added to the schedule by adding new activities. Existing activities shall not normally be changed to reflect modifications.

### 3.3.2.7 Bid Item

All activities shall be identified in the project schedule by the Bid Item to which the activity belongs. An activity shall not contain work in more than one bid item. The bid item for each appropriate activity shall be identified by the Bid Item Code.

### 3.3.2.8 Phase of Work

All activities shall be identified in project schedule by phases of work in which the activity occurs. Activities shall not contain work in more than one phase of work. The project phase of each activity shall be by the unique Phase of Work Code.

### 3.3.2.9 Category of Work

All Activities shall be identified in the project schedule according to the category of work which best describes the activity. Category of work refers, but is not limited , to the procurement chain of activities including such items as submittals, approvals, procurement, fabrication, delivery, installation, start-up, and testing. The category of work for each activity shall be identified by the Category of Work Code.

### 3.3.2.10 Feature of Work

All activities shall be identified in the project schedule according to the feature of work to which the activity belongs. Feature of work refers, but is not limited to a work breakdown structure for the project. The feature of work for each activity shall be identified by the Feature of Work Code.

### 3.3.2.11 Critical Activities

The following activities shall be listed as separate line activities on a Contractor's project schedule:

- submission and approval of mechanical/electric layout drawings
- submission and approval of O&M manuals
- submission and approval of as-built drawings
- submission and approval of 1354 data and installed equipment lists
- submission and approval of testing and air balance (TAB) firm
- submission of TAB specialist design review report
- submission and approval of fire protection specialist
- submission and approval of testing and balancing and HVAC commissioning plans and data
- air and water balance dates
- HVAC commissioning dates
- any other systems testing
- prefinal inspection correction of punchlist from prefinal inspection
- final inspection

### 3.3.3 Scheduled Project Completion

The schedule interval shall extend from notice-to-proceed to the contract completion date.

#### 3.3.3.1 Project Start Date

The schedule shall start no earlier than the date that the Notice to Proceed (NTP) was acknowledged. The Contractor shall include as the first activity in the project schedule an activity called "Start Project."



The "Start Project" activity shall have: a "ES" constraint, a constraint date equal to the date that the NTP was acknowledged, and a zero day duration.

#### 3.3.3.2 Constraint of Last Activity

Completion of the last activity in the schedule shall be constrained by the contract completion date. Calculation on project updates shall be such that if the early finish of the last activity falls after the contract completion date, then the float calculation shall reflect a negative float on the critical path. The Contractor shall include as the last activity in the project schedule an activity call "End Project". The "End Project" activity shall have: a "LF" constraint, a constraint date equal to the completion date for the project, and a zero day duration.

#### 3.3.3.3 Early Project Completion

In the event the project schedule shows completion of the project prior to the contract completion date, the Contractor shall identify those activities that have been accelerated and/or those activities that are scheduled in parallel to support the Contractor's "early" completion. Contractor shall specifically address each of the activities noted at every project schedule update period to assist the Contracting Officer to evaluate the Contractor's ability to actually complete prior to the contract period.

#### 3.3.4 Interim Completion Dates

Contractually specified interim completion dates shall also be constrained to show negative float if the early finish date of the last activity in that phase falls after the interim completion date.

##### 3.3.4.1 Start Phase

The Contractor shall include as the first activity for a project phase an activity called "Start Phase X" where "X" refers to the phase of work. "Start Phase X" activity shall have an "ES" constraint date equal to the date on which the NTP was acknowledged, and a zero day duration.

##### 3.3.4.2 End Phase

The Contractor shall include as the last activity in a project phase an activity called "End Phase X" where "X" refers to the phase of work. The "End Phase X" activity shall have an "LF" constraint date equal to the completion date for the project, and a zero day duration.

##### 3.3.4.3 Phase X

The Contractor shall include a hammock type activity for each project phase called "Phase X" where "X" refers to the phase of work. The "Phase X" activity shall be logically tied to the earliest and latest activities in the phase.

### 3.3.5 Default Progress Data Disallowed

Actual Start and Finish dates shall not be automatically updated by default mechanisms that may be included in CPM scheduling software systems. Actual Start and Finish dates on the CPM schedule shall match those dates provided from Contractor Quality Control Reports. Failure of the Contractor to document the Actual Start and Finish dates on the Daily Quality Control report for every in progress or completed activity and ensure that the data contained on the Daily Quality Control reports is the sole basis for schedule updating shall result in the disapproval of the Contractor's schedule and the inability of the Contracting Officer to evaluate Contractor progress for payment purposes.

### 3.3.6 Out-of-Sequence Progress

Activities that have posted progress without predecessors being completed (Out-of-Sequence Progress) shall be allowed only by the case-by-case approval of the Contracting Officer. The Contracting Officer may direct that changes in schedule logic be made to correct any or all out-of-sequence work.

### 3.3.7 Negative Lags

Lag durations contained in the project schedule shall not have a negative value.

## 3.4 PROJECT SCHEDULE SUBMISSIONS

The Contractor shall provide the submissions as described below. The data disk, reports, and network diagrams required for each submission are contained in paragraph SUBMISSION REQUIREMENTS.

### 3.4.1 Preliminary Project Schedule Submission

The Preliminary Project Schedule, defining the Contractor's planned operations for the first 60 calendar days shall be submitted for approval within 10 calendar days after Notice to Proceed is acknowledged. The approved preliminary schedule shall be used for payment purposes not to exceed 60 calendar days after Notice to Proceed.

### 3.4.2 Initial Project Schedule Submission

The Initial Project Schedule shall be submitted for approval within 40 calendar days after Notice to Proceed. The schedule shall provide a reasonable sequence of activities which represent work through the entire project and shall be at a reasonable level of detail.

### 3.4.3 Periodic Schedule Updates

Based on the result of progress meetings, specified in "Periodic Progress Meetings," the Contractor shall submit periodic schedule updates. These submissions shall enable the Contracting Officer or to assess Contractor's progress. If the Contractor fails or refuses to furnish the information and project schedule data, which in the judgment of the Contracting Officer or authorized representative, is necessary for verifying the contractor's progress, the Contractor shall be deemed not to have provided an estimate upon which progress payment may be made.

### 3.4.4 Standard Activity Coding Dictionary

The Contractor shall submit, with the Initial Project Schedule, a coding scheme that shall be used throughout the project for all activity codes contained in the schedule. The coding scheme submitted shall list the values for each activity code category and translate those values into project specific designations. For example, a Responsibility Code Value, "ELE", may be identified as "Electrical Subcontractor." Activity code values shall represent the same information throughout the duration of the contract. Once approved with the Initial Project Schedule submission, changes to the activity coding scheme must be approved by the Contracting Officer.

## 3.5 SUBMISSION REQUIREMENTS

The as noted in paragraph 1.1 items shall be submitted by the Contractor for the preliminary submission, initial submission, and every periodic project schedule update throughout the life of the project:

### 3.5.1 Data Disks

Two data disks containing the project schedule shall be provided. Data on the disks adhere to the SDEF format specified in ER 1-1-11, Appendix A.

#### 3.5.1.1 File Medium

Required data shall be submitted on 89 mm (3.5 inch) disks, formatted to hold 1.44 MB of data.

#### 3.5.1.2 Disk Label

A permanent exterior label shall be affixed to each disk submitted. The label shall indicate the type of schedule (Initial, Update, or Change), full contract number, project name, project location, data date, name and telephone number or person responsible for the schedule, and the version used to prepare the C.P.M.

#### 3.5.1.3 File Name

Each file submitted shall have a name related to either the schedule data date, project name, or contract number. The Contractor shall develop a naming convention that will ensure that the names of the files submitted are unique. The Contractor shall submit the file naming convention to the Contracting Officer for approval.

### 3.5.2 Narrative Report

A Narrative Report shall be provided with each update of the project schedule. This report shall be provided as the basis of the Contractor's progress payment request. The Narrative Report shall include: a description of activities along the critical path, a description of current and anticipated problem areas or delaying factors and their impact, and an explanation of corrective actions taken or required to be taken. The narrative report is expected to relay to the Government, the Contractor's thorough analysis of the schedule output and its plans to compensate for any problems, either current or potential, which are revealed through that analysis.

### 3.5.3 Approved Changes Verification

Only project schedule changes that have been previously approved by the Contracting Officer shall be included in the schedule submission. The Narrative Report shall specifically reference, on an activity by activity basis, all changes made since the previous period and relate each change to documented, approved schedule changes.

### 3.5.4 Schedule Reports

The format for each activity for the schedule reports listed below shall contain: Activity Numbers, Activity Description, Original Duration, Remaining Duration, Early Start Date, Early Finish Date, Late Start Date, Late Finish Date, Total Float. Actual Start and Actual Finish Dates shall be printed for those activities in-progress or completed.

#### 3.5.4.1 Activity Report

A list of all activities sorted according to activity number. For completed activities the Actual Start Date shall be used as the secondary sort.

#### 3.5.4.2 Logic Report

A list of Preceding and Succeeding activities for every activity in ascending order by activity number and then sorted according to Early Start Date. For completed activities the Actual Start Date shall be used as the secondary sort. Preceding and succeeding activities shall include all information listed above in paragraph Schedule Reports. A blank line shall be left between each activity grouping.

#### 3.5.4.3 Total Float Report

A list of all activities sorted in ascending order of total float. Activities which have the same amount of total float shall be listed in ascending order of Early Start Dates. Completed activities shall not be shown on this report.

#### 3.5.4.4 Earnings Report

A compilation of the Contractor's Total Earnings on the project from the Notice to Proceed until the most recent Monthly Progress Meeting. This report shall reflect the Earnings of specific activities based on the agreements made in the field and approved between the Contractor and Contracting Officer at the most recent Monthly Progress Meeting. Provided that the Contractor has provided a complete schedule update, this report shall serve as the basis of determining Contractor Payment. Activities shall be grouped by bid item and sorted by activity numbers. This report shall: sum all activities in a bid item and provide a bid item percent; complete and sum all bid items to provide a total project percent complete. The printed report shall contain, for each activity: Activity Number, Activity Description, Original Budgeted Amount, Total Quantity, Quantity to Date, Percent Complete (based on cost), Earnings to Date.

#### 3.5.4.5 Cash Flow Report

A report showing scheduled cost of work-in-place by week (tabular report) and a cash flow curve by week (S-curve plot), both based on early dates.

#### 3.5.5 Network Diagram

The time scaled network diagram shall be required on the initial schedule submission and on quarterly update submissions. The network diagram shall depict and display the order and interdependence of activities and the sequence in which the work is to be accomplished. The Contracting Officer will use, but is not limited to, the following conditions to review compliance with this paragraph:

##### 3.5.5.1 Continuous Flow

Diagrams shall show a continuous flow from left to right with no arrows from right to left. The activity or event number, description, duration, and estimated earned value shall be shown on the diagram.

##### 3.5.5.2 Project Milestone Dates

Dates shall be shown on the diagram for start of project, any contract required interim completion dates, and contract completion dates.

##### 3.5.5.3 Critical Path

The critical path shall be clearly shown.

##### 3.5.5.4 Banding

Activities shall be grouped to assist in the understanding of the activity sequence. Typically, this flow will group activities by category of work, work area and/or responsibility.

##### 3.5.5.5 S-Curves

Earnings curves shall be provided showing projected early and late earnings and earnings to date.

### 3.6 PERIODIC PROGRESS MEETINGS

Progress meetings to discuss payment shall include a monthly on-site meeting or other regular intervals mutually agreed to at the preconstruction conference. During this meeting the Contractor will describe, on an activity by activity basis, all proposed revisions and adjustments to the project schedule required to reflect the current status of the project. The Contracting Officer will approve activity progress, proposed revisions, and adjustments as appropriate.

#### 3.6.1 Meeting Attendance

The Contractor's Project Manager and Scheduler shall attend the regular progress meeting.

### 3.6.2 Update Submission Following Progress Meeting

A complete update of the project schedule containing all approved progress, revisions, and adjustments, based on the regular progress meeting, shall be submitted not later than 4 working days after the monthly progress meeting.

### 3.6.3 Progress Meeting Contents

Update information, including Actual Start Dates, Actual Finish Dates, Remaining Durations, and Cost to Date shall be subject to the approval of the Contracting Officer. The following minimum set of items which the Contractor shall address, on an activity by activity basis, during each progress meeting.

#### 3.6.3.1 Start and Finish Dates

The Actual Start and Actual Finish dates for each activity currently in-progress or completed activities.

#### 3.6.3.2 Time Completion

The estimated Remaining Duration for each activity in-progress. Time-based progress calculations must be based on Remaining Duration for each activity.

#### 3.6.3.3 Cost Completion

The earnings for each activity started. Payment shall be based on earnings for each in-progress or completed activity. Payment for individual activities shall not be made for work that contains quality defects. A portion of the overall project amount may be retained based on delays of activities.

#### 3.6.3.4 Logic Changes

All logic changes pertaining to Notice to Proceed on change orders, change orders to be incorporated into the schedule, contractor proposed changes in work sequence, corrections to schedule logic for out-of-sequence progress, lag durations, and other changes that have been made pursuant to contract provisions shall be specifically identified and discussed.

#### 3.6.3.5 Other Changes

Other changes required due to delays in completion of any activity or group of activities are those delays beyond the Contractors control such as strikes and unusual weather. Also included are delays encountered due to submittals, Government Activities, deliveries or work stoppage which makes re-planning the work necessary, and when the schedule does not represent the actual prosecution and progress of the work.

### 3.7 REQUESTS FOR TIME EXTENSIONS

In the event the Contractor requests an extension of the contract completion date, he shall furnish such justification, project schedule data and supporting evidence as the Contracting Officer may deem necessary for a determination as to whether or not the Contractor is entitled to an extension of time under the provisions of the contract. Submission of proof of delay, based on revised activity logic, duration, and costs (updated to the specific date that the delay occurred) is obligatory to any approvals.

#### 3.7.1 Justification of Delay

The project schedule must clearly display that the Contractor has used, in full, all the float time available for the work involved with this request. The Contracting Officer's determination as to the number of allowable days of contract extension, shall be based upon the project schedule updates in effect for the time period in question and other factual information. Actual delays that are found to be caused by the Contractor's own actions, which result in the extension of the schedule, shall not be a cause for a time extension to the contract completion date.

#### 3.7.2 Submission Requirements

The Contractor shall submit a justification for each request for a change in the contract completion date of under two weeks based upon the most recent schedule update at the time of the Notice to Proceed or constructive direction issued for the change. Such a request shall be in accordance with the requirements of other appropriate Contract Clauses and shall include, as a minimum:

- a. A list of affected activities, with their associated project schedule activity number.
- b. A brief explanation of the causes of the change.
- c. An analysis of the overall impact of the changes proposed.
- d. A sub-network of the affected area.

Activities impacted in each justification for change shall be identified by a unique activity code contained in the required data file.

#### 3.7.3 Additional Submission Requirements

For any request for time extension for over 2 weeks, the Contracting Officer may request an interim update with revised activities for a specific change request. The Contractor shall provide this disk within 4 days of the Contracting Officer's request.

### 3.8 DIRECTED CHANGES

If Notice to Proceed (NTP) is issued for changes prior to settlement of price and/or time, the Contractor shall submit proposed schedule revisions to the Contracting Officer within 2 weeks of the NTP being issued. The proposed revisions to the schedule will be approved by the Contracting Officer prior to

inclusion of those changes within the project schedule. If the Contractor fails to submit the proposed revisions, the Contracting Officer may furnish the Contractor suggested revisions to the project schedule. The Contractor shall include these revisions in the project schedule until the Contractor submits revisions, and final changes and impacts have been negotiated. If the Contractor has any objections to the revisions furnished by the Contracting Officer, then the Contractor shall advise the Contracting Officer within 2 weeks of receipt of the revisions. Regardless of the objections, the Contractor will continue to update their schedule with the Contracting Officer's revisions until a mutual agreement in the revisions may be made. If the Contractor fails to submit alternative revisions within 2 weeks of receipt of the Contracting Officer's proposed revisions, the Contractor will be deemed to have concurred with the Contracting Officer's proposed revisions. The proposed revisions will then be the basis for an equitable adjustment for performance of the work.

### 3.9 OWNERSHIP OF FLOAT

Float available in the schedule, at any time, shall not be considered for the exclusive use of either the Government or the Contractor.

### 3.10 NAS DATA

The Contractor shall provide the Government with the means to electronically transfer all required NAS data into the Resident Management System (RMS) program using the Standard Data Exchange Format (SDEF). The Contractor may use network analysis software different from that used by the Contracting Officer in the Resident Office, however, the Contractor shall also furnish the following:

NAS data that complies with the Standard Data Exchange Format (SDEF). This is a standard ASCII format for exchanging scheduling data and is compatible with our resident management system. Many software developers provide the capability to convert and export schedule data to the SDEF at no additional cost. The SDEF specifications are in a separate publication, available from the Internet <http://www.usace.army.mil/search.html> - Publications.

END OF SECTION



## SECTION 01330

### SUBMITTAL PROCEDURES

#### PART 1 GENERAL

##### 1.1 CONTROL AND SCHEDULING OF SUBMITTALS

###### 1.1.1 Submittal Coordination Meeting

After the preconstruction conference and before any submittals are sent to the Contracting Officer's Representative (COR), the Contractor shall meet with the COR and provide and further develop an approved preliminary submittal register, ENG Form 4288. During the meeting all required items will be identified and grouped into three categories:

- Government Approved (G)

Government approval is required for extensions of design, critical materials, variations/deviations, an "or equal" decision, equipment whose compatibility with the entire system must be checked, architectural items such as Color Charts/Patterns/Textures, and other items as designated by the COR. Within the terms of the Contract Clause entitled "Specifications and Drawings for Construction," these submittals will be acted on as "shop drawings."

- For Information Only

Submittals not requiring Government approval will be for information only. These are items such as Installation Procedures, Certificates of compliance, Samples, Qualifications, etc. Within the terms of the Contract Clause entitled "Specifications and Drawings for Construction," these submittals will not be acted on as "shop drawings."

- Those items that can be visually inspected by the Contractor's Quality Control Representative (CQC) on site or are provided to the Government other than with an ENG Form 4025: The items that fall into this category shall remain on the register but shall not be submitted to the COR. For these items, the "Classification" column on the submittal register shall remain blank.

###### 1.1.2 Final Submittal Register

The final submittal register shall be coordinated with the progress schedule and submitted within [40] days of Notice to Proceed. In preparing the final document, adequate time (minimum of 30 days) shall be allowed for review and approval, and possible resubmittal of each item on the register.

###### 1.1.3 Submittal Register Updates

The Contractor's quality control representative shall review the listing at least every 30 days and take appropriate action to maintain an effective system. Copies of updated or corrected listings shall be submitted to the COR at least every 30 days in the quantity specified.

## 1.2 SUBMITTAL TYPES

Throughout these specifications submittals may be identified with the prefix "SD" (submittal data) followed by a number (category, i.e., data, drawings, reports, etc.). This is for bookkeeping and record sorting in the system:

### SD-01 Preconstruction Submittals

Certificates of insurance.

Surety bonds.

List of proposed subcontractors.

List of proposed products.

Construction Progress Schedule.

Submittal schedule.

Schedule of values.

Health and safety plan.

Work plan.

Quality control plan.

Environmental protection plan.

### SD-02 Shop Drawings

Drawings, diagrams and schedules specifically prepared to illustrate some portion of the work.

Diagrams and instructions from a manufacturer or fabricator for use in producing the product and as aids to the contractor for integrating the product or system into the project.

Drawings prepared by or for the contractor to show how multiple systems and interdisciplinary work will be coordinated.

### SD-03 Product Data

Catalog cuts, illustrations, schedules, diagrams, performance charts, instructions and brochures illustrating size, physical appearance and other characteristics of materials or equipment for some portion of the work.

Samples of warranty language when the contract requires extended product warranties.

### SD-04 Samples

Physical examples of materials, equipment or workmanship that illustrate functional and aesthetic characteristics of a material or product and establish standards by which the work can be judged.

Color samples from the manufacturer's standard line (or custom color samples if specified) to be used in selecting or approving colors for the project.

Field samples and mock-ups constructed on the project site establish standards by which the ensuring work can be judged. Includes assemblies or portions of assemblies which are to be incorporated into the project and those which will be removed at conclusion of the work.

#### SD-05 Design Data

Calculations, mix designs, analyses or other data pertaining to a part of work.

#### SD-06 Test Reports

Report signed by authorized official of testing laboratory that a material, product or system identical to the material, product or system to be provided has been tested in accord with specified requirements. (Testing must have been within three years of date of contract award for the project.)

Report which includes findings of a test required to be performed by the contractor on an actual portion of the work or prototype prepared for the project before shipment to job site.

Report which includes finding of a test made at the job site or on sample taken from the job site, on portion of work during or after installation.

Investigation reports

Daily checklists

Final acceptance test and operational test procedure

#### SD-07 Certificates

Statements signed by responsible officials of manufacturer of product, system or material attesting that product, system or material meets specification requirements. Must be dated after award of project contract and clearly name the project.

Document required of Contractor, or of a supplier, installer or subcontractor through Contractor, the purpose of which is to further quality of orderly progression of a portion of the work by documenting procedures, acceptability of methods or personnel qualifications.

Confined space entry permits.

#### SD-08 Manufacturer's Instructions

Preprinted material describing installation of a product, system or material, including special notices and Material Safety Data sheets concerning impedances, hazards and safety precautions.

#### SD-09 Manufacturer's Field Reports

Documentation of the testing and verification actions taken by manufacturer's representative to confirm compliance with manufacturer's standards or instructions.

Factory test reports.

#### SD-10 Operation and Maintenance Data

Data intended to be incorporated in operations and maintenance manuals.

#### SD-11 Closeout Submittals

Documentation to record compliance with technical or administrative requirements or to establish an administrative mechanism.

As-built drawings.

Special warranties.

Posted operating instructions.

Training plan.

### 1.3 APPROVED SUBMITTALS

The approval of submittals by the COR shall not be construed as a complete check, but will indicate only that the general method of construction, materials, detailing and other information are satisfactory. Approval will not relieve the Contractor of the responsibility for any error which may exist. The Contractor, under the CQC requirements of this contract, is responsible for the dimensions and design of adequate connections, details, and satisfactory construction of all work. After submittals have been approved by the COR, no resubmittal for the purpose of substituting materials or equipment will be given consideration.

### 1.4 DISAPPROVED SUBMITTALS

The Contractor shall make all corrections required by the COR and promptly furnish a corrected submittal in the format and number of copies specified for the initial submittal. If the Contractor considers any correction indicated on the submittals to constitute a change to the contract, written notice, as required under the Contract Clause entitled "Changes," shall be given to the COR.

### 1.5 PAYMENT

Separate payment will not be made for submittals, and all costs associated therein shall be included in the applicable unit prices or lump sum prices contained in the schedule. Payment will not be made for any material or equipment which does not comply with contract requirements.

### PART 2 PRODUCTS (Not Applicable)

## PART 3 EXECUTION

### 3.1 GENERAL

Prior to submittal, all items shall be checked and approved by the Contractor's CQC and each item of the submittal shall be stamped, signed, and dated. Each respective transmittal form (ENG Form 4025) shall be signed and dated by the CQC certifying that the accompanying submittal complies with the contract requirements. This procedure applies to all submittals. Submittals shall include items such as: Contractor's, manufacturer's, or fabricator's drawings; descriptive literature including, but not limited to, catalog cuts, diagrams; operating charts or curves; test reports; test cylinders; samples; O&M manuals including parts lists; certifications; warranties and other such required items. Units of weights and measures used on all submittals shall be the same as the contract drawings. Each submittal shall be complete and in sufficient detail to allow ready determination of compliance with contract requirements. Government-approval submittals shall be scheduled and made prior to the acquisition of the material or equipment covered thereby. The COR may request submittals in addition to those listed when deemed necessary to adequately describe the work covered in the respective sections. The Contractor shall maintain a complete and up-to-date file of all submittals/items on site for use by both the Contractor and the Government.

### 3.2 SUBMITTAL REGISTER (ENG Form 4288)

The submittal register - ENG Form 4288 – for Divisions 1 through 16 shall be developed by the Contractor prior to the submittal coordination meeting and list each item of equipment and material for which submittals are required in the Technical Specifications. (See paragraph SUBMITTALS at the beginning of each specification section. A blank form ENG 4288 are attached at the end of this specification section.) The Contractor shall approve all items listed on the submittal register. During the submittal coordination meeting, a preliminary submittal register will be created by annotating this Form 4288. When the final submittal register is submitted for approval, the Contractor shall complete the column entitled "Item No." and all data under "Contractor Schedule Dates" and return five completed copies to the COR for approval. The Contractor shall review the list to ensure its completeness and may expand general category listings to show individual entries for each item. The numbers in column "Item No." are to be assigned sequentially starting with "1" for each specification section. DO NOT preassign transmittal numbers when preparing the submittal register. When a conflict exists between the submittal register and a submittal requirement in the technical sections, other than those submittals referenced in Paragraph 3.9: Field Test Reports, the approved submittal register shall govern. The preliminary, and then the final approved submittal register, will become the scheduling documents and will be updated monthly and used to control submittals throughout the life of the contract. Names and titles of individuals authorized by the Contractor to approve shop drawings shall be submitted to COR with the final 4288 form. Supplier or subcontractors certifications are not acceptable as meeting this requirement.

### 3.3 SCHEDULING

Submittals covering component items forming a system, or items that are interrelated, shall be coordinated and submitted concurrently. Certifications shall be submitted together with other pertinent information and/or drawings. Additional processing time beyond 30 days, or number of copies, may be shown by the COR on the submittal register attached in the "Remarks" column, or may be added by the COR during the

coordination meeting. No delays damages or time extensions will be allowed for time lost due to the Contractor not properly scheduling and providing submittals.

### 3.4 TRANSMITTAL FORM (ENG Form 4025)

Transmittal Form 4025 (sample at end of this section) shall be used for submitting both Government-approval and information-only submittals in accordance with the instructions on the reverse side of the form. Transmittal numbers shall be assigned sequentially. Electronic generated 4025 forms shall be printed on carbonless paper and be a reasonable facsimile of the original 4025. If electronic forms are not used, the original 4025 forms shall be used (do not photo copy) and will be furnished by the COR. These forms shall be filled in completely prior to submittal. Special care shall be exercised to ensure proper listing of the specification paragraph and/or sheet number of the contract drawings pertinent to the data submitted for each item.. Each submittal item shall be listed separately on the form, naming subcontractor, supplier, or manufacturer, applicable specification paragraph number(s), drawing/sheet number, pay item number, and any other information needed to identify the item, define its use, and locate it in the work. One or more 4025 forms may be used per specification section, however, DO NOT include more than one specification section per transmittal.

### 3.5 CROSS-REFERENCE (ENG FORM 4288/ENG FORM 4025)

To provide a cross-reference between the approved submittal register and transmittal forms, the Contractor shall record the "transmittal numbers" assigned when submitting items in column "Transmittal No." of the ENG FORM 4288. The item numbers in column "Item No." of submittal register shall correspond to the item numbers on ENG Form 4025.

### 3.6 SUBMITTAL PROCEDURE

#### 3.6.1 General

Shop drawings with 4025 forms shall be submitted in the number of copies specified in subparagraphs "Government Approved Submittals" and "Information Only Submittals," or as indicated on the submittal register in the "Remarks" column. Submit a complete collated "reviewers copy" with one 4025 form and attachments (not originals). The remaining copies (4 for Government-approval, 2 for information-only) of 4025 forms and attachments shall not be collated. This would not apply to a series of drawings.

#### 3.6.2 Approval of Submittals by the Contractor

Before submittal to the COR, the Contractor shall review and correct shop drawings prepared by subcontractors, suppliers, and itself, for completeness and compliance with plans and specifications. The Contractor shall not use red markings for correcting material to be submitted. Red markings are reserved for COR's use. Approval by the Contractor shall be indicated on each shop drawing by an approval stamp containing information as shown in this section. Submittals not conforming to the requirements of this section will be returned to the Contractor for correction and resubmittal.

#### 3.6.3 Variations

For submittals which include proposed variations requested by the Contractor, column "h" of ENG Form 4025 shall be checked and the submittal shall be classified as G, and submitted accordingly. The

Contractor shall set forth in writing the justification for any variations and annotate such variations on the transmittal form in the REMARKS block. Variations are not approved unless there is an advantage to the Government. The Government reserves the right to rescind inadvertent approval of submittals containing unnoted variations.

#### 3.6.4 Drawings

Each drawing shall be not larger than A1 size (841 mm wide by 594 mm high), with a title block in lower right hand corner and a 75 mm by 100 mm (3 by 4 inch) clear area adjacent. The title block shall contain the subcontractor's or fabricator's name, contract number, description of item(s), bid item number, and a revision block. Provide a blank margin of 20 mm (3/4 inch) at bottom, 50 mm (2 inches) at left, and 10 mm (1/2 inch) at top and right. Where drawings are submitted for assemblies of more than one piece of equipment or systems of components dependent on each other for compatible characteristics, complete information shall be submitted on all such related components at the same time. The Contractor shall ensure that information is complete and that sequence of drawing submittal is such that all information is available for reviewing each drawing. Drawings for all items and equipment, of special manufacture or fabrication, shall consist of complete assembly and detail drawings. All revisions after initial submittal shall be shown by number, date, and subject in revision block.

##### 3.6.4.1 Submittals Containing Drawings Larger than A3 size, (297 mm high by 420 mm wide)

For Government-approval submittals containing drawings larger than A3 size, one reproducible and one blue line copy will be required to be submitted with five copies of the ENG Form 4025. The marked-up reproducible (and/or any review comments contained on the page-size comment sheet(s) at the Government's option) will be returned to the Contractor upon review. The Contractor shall provide three copies of blue line drawings (generated from the reviewed reproducible) to the Government within 10 days of Contractor's receipt of the reviewed reproducible. The Contractor shall not incorporate approved work into the project until the Government has received the three blue line copies. The Contractor shall use the marked-up reproducible to make any additional copies as needed. For information-only submittals, one reproducible and two blue line copies shall be submitted with the appropriate number of copies of ENG Form 4025.

#### 3.6.5 Printed Material

All requirements for shop drawings shall apply to catalog cuts, illustrations, printed specifications, or other data submitted, except that the 75 mm by 100 mm (3 inch by 4 inch) clear area adjacent to the title block is not mandatory. Inapplicable portions shall be marked out and applicable items such as model numbers, sizes, and accessories shall be indicated by arrow or highlighted.

### 3.7 SAMPLES REQUIRING LABORATORY ANALYSIS

See Section 01451 CONTRACTOR QUALITY CONTROL for procedures and address for samples requiring Government testing.

### 3.8 SAMPLES REQUIRING VISUAL INSPECTION

Samples requiring only physical inspection for appearance and suitability shall be coordinated with the on-site Government quality assurance representative (QAR).

### 3.9 FIELD TEST REPORTS

Routine tests such as soil density, concrete deliveries, repetitive pressure testing shall be delivered to the QAR with the daily Quality Control reports. See SECTION: 01451 CONTRACTOR QUALITY CONTROL.

### 3.10 CONTROL OF SUBMITTALS

The Contractor shall carefully control his procurement operations to ensure that each individual submittal is made on or before the Contractor scheduled submittal date shown on the approved "Submittal Register."

### 3.11 GOVERNMENT APPROVED SUBMITTALS (G)

The Contractor shall submit 5 copies of G submittals with 5 corresponding 4025 forms. Upon completion of G submittal review, copies as specified below will be marked with an action code, dated, and returned to the Contractor. See "Drawings" above for special instructions if drawings larger than size A3 (11 inch by 17 inch) are used.

#### 3.11.1 Processing of G Submittals

Submittals will be reviewed and processed as follows:

a. Approved as Submitted (Action Code "A"): Shop drawings which can be approved without correction will be stamped "Approved" and two copies will be returned to the Contractor. No resubmittal required.

b. Approved Except as Noted (Action Code "B"): Shop drawings which have only minor discrepancies will be annotated in red to indicate necessary corrections. Marked material will be stamped "Approved Except as Noted" and two copies returned to the Contractor for correction. No resubmittal required.

c. Approved Except as Noted (Action Code "C"): Shop drawings which are incomplete or require more than minor corrections will be annotated in red to indicate necessary corrections. Marked material will be stamped "Approved Except as Noted - Resubmission Required" and two copies returned to the Contractor for correction. Resubmittal of only those items needing correction required.

d. Disapproved (Action Code "E"): Shop drawings which are fundamentally in error, cover wrong equipment or construction, or require extensive corrections, will be returned to the Contractor stamped "Disapproved." An explanation will be furnished on the submitted material or on ENG Form 4025 indicating reason for disapproval. Complete resubmittal required.



e. Resubmittal will not be required for shop drawings stamped "A" or "B" unless subsequent changes are made by Contractor or a contract modification. For shop drawings stamped "C" or "E," Contractor shall make corrections required, note any changes by dating the revisions to correspond with the change request date, and promptly resubmit the corrected material. Resubmittals shall be associated with the "parent" by use of sequential alpha characters (for example, resubmittal of transmittal 8 will be 8A, 8B, etc). Government costs incurred after the first resubmittal may be charged to the Contractor.

### 3.12 INFORMATION ONLY SUBMITTALS

The Contractor shall submit three copies of data and four copies of ENG Form 4025. Information-only submittals will not be returned. Government approval is not required on information-only submittals. These submittals will be used for information purposes. The Government reserves the right to require the Contractor to resubmit any item found not to comply with the Contract. This does not relieve the Contractor from the obligation to furnish material conforming to the plans and specifications and will not prevent the COR from requiring removal and replacement if nonconforming material is incorporated in the work. This does not relieve the Contractor of the requirement to furnish samples for testing by the Government laboratory or check testing by the Government in those instances where the technical specifications so prescribe.

### 3.12.1 Processing of Information-Only Submittals

Information-only submittals shall be submitted prior to delivery of the material or equipment to the job site. ENG Form 4025 shall be marked with the words "contractor approved - information copy only" in the REMARKS block of the form. Submittals will be monitored and spot checks made. When such checks indicate noncompliance, the Contractor will be notified by the same method used for Government-approval submittals. Resubmittal of nonconforming information-only submittals shall be reclassified Government-approval and shall be in five copies.

### 3.13 CONTRACTOR APPROVAL STAMP

The stamp used by the Contractor on the submittal data to certify that the submittal meets contract requirements shall be similar to the following:

CONTRACTOR:
CONTRACT NUMBER
TRANSMITTAL NUMBER _____
ITEM NUMBER _____
SPECIFICATION SECTION _____
PARAGRAPH NUMBER _____
_____ APPROVED AS SUBMITTED
_____ APPROVED WITH CORRECTIONS AS NOTED
SIGNATURE: _____
TITLE: _____
DATE _____

CONTRACTORS REVIEW STAMP

MAXIMUM SIZE:

3 INCHES BY 3 INCHES

TRANSMITTAL OF SHOP DRAWINGS, EQUIPMENT DATA, MATERIAL SAMPLES, OR MANUFACTURER'S CERTIFICATES OF COMPLIANCE (Read instructions on the reverse side prior to initiating this form)										DATE		TRANSMITTAL NO.	
SECTION I - REQUEST FOR APPROVAL OF THE FOLLOWING ITEMS (This section will be initiated by the contractor)													
TO:			FROM:			CONTRACT NO.				CHECK ONE: <input type="checkbox"/> THIS IS A NEW TRANSMITTAL <input type="checkbox"/> THIS IS A RESUBMITTAL OF TRANSMITTAL _____			
SPECIFICATION SEC. NO. (Cover only one section with each transmittal)			PROJECT TITLE AND LOCATION							CHECK ONE: THIS TRANSMITTAL IS FOR <input type="checkbox"/> FID <input type="checkbox"/> GOV'T. APPROVAL			
ITEM NO.	DESCRIPTION OF ITEM SUBMITTED (Type size, model number/etc.)	MFG OR CONTR. CAT. CURVE DRAWING OR BROCHURE NO. (See instruction no. 8)	NO. OF COPIES	CONTRACT REFERENCE DOCUMENT		FOR CONTRACTOR USE CODE	VARIATION (See instruction No. 8)	FOR CE USE CODE	FOR				
				SPEC. PARA. NO.	DRAWING SHEET NO.								
a.	b.	c.	d.	e.	f.	g.	h.	i.	j.				
REMARKS										I certify that the above submitted items have been reviewed in detail and are correct and in strict conformance with the contract drawings and specifications except as otherwise stated.			
										NAME AND SIGNATURE OF CONTRACTOR			
SECTION II - APPROVAL ACTION													
ENCLOSURES RETURNED (List by item No.)				NAME, TITLE AND SIGNATURE OF APPROVING AUTHORITY				DATE					
ENG FORM 4025-R, MAR 95 (See 415-R-10) EDITION OF SEP 93 IS OBSOLETE. SHEET OF													

## INSTRUCTIONS

1. Section I will be initiated by the Contractor in the required number of copies.
  2. Each transmittal shall be numbered consecutively in the space provided for "Transmittal No.". This number, in addition to the contract number, will form a serial number for identifying each submittal. For new submittals or resubmittals mark the appropriate box; on resubmittals, insert transmittal number of last submission as well as the new submittal number.
  3. The "Item No." will be the same "Item No." as indicated on ENG FORM 4 288-R for each entry on this form.
  4. Submittals requiring expeditious handling will be submitted on a separate form.
  5. Separate transmittal form will be used for submittals under separate sections of the specifications.
  6. A check shall be placed in the "Variation" column when a submittal is not in accordance with the plans and specifications--also, a written statement to that effect shall be included in the space provided for "Remarks".
  7. Form is self-transmittal, letter of transmittal is not required.
  8. When a sample of material or Manufacturer's Certificate of Compliance is transmitted, indicate "Sample" or "Certificate" in column c, Section I.
  9. U.S. Army Corps of Engineers approving authority will assign action codes as indicated below in space provided in Section I, column i to each item submitted. In addition they will ensure enclosures are indicated and attached to the form prior to return to the contractor. The Contractor will assign action codes as indicated below in Section I, column g, to each item submitted.
- |  |   |
|--|---|
| <p>A -- Approved as submitted.</p> <p>B -- Approved, except as noted on drawings.</p> <p>C -- Approved, except as noted on drawings.<br/>Refer to attached sheet resubmission required.</p> <p>D -- Will be returned by separate correspondence.</p> | <p>E -- Disapproved (See attached).</p> <p>F -- Receipt acknowledged.</p> <p>FX -- Receipt acknowledged, does not comply as noted with contract requirements.</p> <p>G -- Other (Specify)</p> |
|--|---|
10. Approval of items does not relieve the contractor from complying with all the requirements of the contract plans and specifications.

*(Reverse of ENG Form 4025-R)*

(ER415-1-10)

ENG FORM 4288, MAY 91

EDITION OF AUG 89 IS OBSOLETE

PAGE\_\_ OF \_\_ PAGES

This page intentionally blank.

## SECTION 01410

### ENVIRONMENTAL PROTECTION

#### PART 1 GENERAL

##### 1.1 GENERAL REQUIREMENTS

The contractor shall perform the work minimizing environmental pollution and damage as the result of construction operations under this contract. For the purpose of this specification, environmental pollution and damage is defined as the presence of chemical, physical, or biological elements or agents which adversely affect human health or welfare; unfavorably alter ecological balances of importance to human life; affect other species of importance to humankind; or degrade the utility of the environment for aesthetic, cultural, and/or historical purposes. The control of environmental pollution and damage requires consideration of air, water, and land, and includes management of visual esthetics, noise, solid waste, and erosion from stormwater, as well as pollutants.

##### 1.2 ABBREVIATIONS AND ACRONYMS:

BACT	Best Available Control Technology
BMP	Best Management Practice
CFR	Code of Federal Regulations
CO	Contracting Officer
COR	Contracting Officer's Representative
DOT	Department of Transportation
ECMD	Engineering & Contract Management Division
ECO	Environmental Compliance Officer
ENRD	Environmental and Natural Resources Division
EPA	Environmental Protection Agency
HM	Hazardous Material
HMTA	Hazardous Materials Transportation Act
HW	Hazardous Waste

HWT	Hazardous Waste Technician
HWMS	Hazardous Waste Management Section
ISCP	Installation Spill Contingency Plan
MSDS	Material Safety Data Sheets
NFPA	National Fire Protection Association
NPDES	National Pollutant Discharge Elimination System
NOI	Notice of Intent
OSHA	Occupational Safety and Health Act
PCB	Polychlorinated Biphenyls
PCS	Petroleum Contaminated Soil
PPE	Personnel Protective Equipment
PW	Public Works
PSCA	Puget Sound Clean Air Agency
RUL	Restricted Use List
SPCCP	Spill Prevention, Control and Countermeasures Plan
TPCHD	Tacoma Pierce County Health Department
WAC	Washington Administrative Code
WHPA	Well Head Protection Area
WISHA	Washington Industrial Safety and Health Act
YTC	Yakima Training Center

### 1.3 PROTECTION OF ENVIRONMENTAL RESOURCES

The environmental resources within the project boundaries and those affected outside the limits of work under this contract shall be protected during the entire period of this contract. The Contractor shall confine his activities to areas defined by the drawings and specifications.



## 1.4 SUBCONTRACTORS

The Contractor shall ensure compliance with this section by all subcontractors.

## 1.5 LAWS AND REGULATIONS

The Contractor shall comply with all applicable Federal, State, and Local environmental, natural and cultural resources, and historic preservation laws and regulations. Specific attention is directed to Fort Lewis Regulation No. 200-1 "Environmental Protection and Enhancement". These specifications supplement these laws and regulations.

## 1.6 COORDINATION

The Environmental and Natural Resources Division (ENRD) of PW coordinates most environmental concerns at Fort Lewis and its sub-installations. The Contractor shall make contact with them through PW, Engineering & Contract Management Division.

## 1.7 SUBMITTALS

Government approval is required for all submittals with a "GA" designation; submittals having an "FIO" designation are for information only. The following shall be submitted in accordance with section 01330 SUBMITTAL PROCEDURES.

The following is a summary of required submittals. Complete details and schedules are described in the rest of the section.

### Environmental Protection Plan, GA

The Contractor shall submit an environmental protection plan within 15 days after receipt of the notice to proceed. Approval of the Contractor's plan will not relieve the Contractor of responsibility for adequate and continuing control of pollutants and other environmental protection measures. The environmental protection plan shall include, but not be limited to, the following:

- a. list of Federal, State, and local laws, regulations, and permits concerning environmental protection, pollution control and abatement that are applicable to the Contractor's proposed operations and the requirements imposed by those laws, regulations, and permits.
- b. Methods for protection of features to be preserved within authorized work areas like trees, shrubs, vines, grasses and ground cover, landscape features, air and water quality, fish and wildlife, soil, historical, archaeological, and cultural resources.
- c. Procedures to be implemented to provide the required environmental protection, to comply with the applicable laws and regulations, and to correct pollution due to accident, natural causes, or failure to follow the procedures of the environmental protection plan.
- d. Location of the permitted solid waste disposal facility to be used.

- e. Drawings showing locations of any proposed temporary material storage areas, structures, sanitary facilities, and stockpiles of excess or spoil materials.
- f. Environmental monitoring plans for the job site, including land, water, air, and noise monitoring.
- g. Plan showing the proposed activity in each portion of the work area and identifying the areas of limited use or nonuse. Plan should include measures for marking the limits of use areas.
- h. Applicable environmental training (both formal and on the job) the Contractor's personnel have received prior to the construction period.

#### Hazardous Materials and Hazardous Wastes, FIO

Hazardous Materials Inventory Form (Initial and ongoing)  
 Material Safety Data Sheets (MSDS)  
 Hazardous Waste Profile Sheets  
 Hazardous Waste Accumulation Log  
 Hazardous Waste Manifest  
 PCB Transformer Certification and Information

#### Asbestos

Permits and any amendments, FIO  
 Management Plan, GA  
 Removal Summary, FIO  
 Bulk Sample Results, FIO  
 Air Monitoring Sample Results (Pre-abatement, area, clearance, and personnel), FIO  
 Jobsite Entry Logs, FIO  
 Waste Shipment Record, FIO  
 Summary of Asbestos Removed and Remaining, FIO  
 90-Day Waste Storage Facility Permits  
 (if applicable), FIO

#### Lead-based Paint, FIO

Test results  
 Summary of Paint Removed and Remaining

#### PART 2 PRODUCTS (Not Used)

#### PART 3 EXECUTION

##### 3.1 WORK AREA LIMITS

The Contractor shall confine all activities to areas defined by the design drawings and specifications. Prior to any construction, the Contractor shall mark the areas that will not be disturbed under this contract. Isolated areas within the general work area, which are to be saved and protected, shall also be marked or

fenced. Monuments and markers shall be protected before construction operations commence. Where construction operations are to be conducted during darkness, the markers shall be visible. The Contractor's personnel shall be knowledgeable of the purpose for marking and/or protecting particular objects.

### 3.1.1 Contractor Facilities and Work Areas

The Contractor's field offices, staging areas, stockpile storage, and temporary buildings shall be placed in areas designated on the drawings or as directed by the Contracting Officer or their representative. Temporary movement or relocation of Contractor facilities shall be made only when approved by the Contracting Officer or their representative.

## 3.2 MANAGEMENT OF HAZARDOUS MATERIALS AND HAZARDOUS WASTE

### 3.2.1 General

#### 3.2.1.1 Definitions

a. Hazardous material (HM): A useful product that requires special management because it has hazardous characteristics (ignitability, corrosivity, reactivity, or toxicity) that could pose dangers to human health or the environment. A HM becomes a Hazardous Waste when it can no longer be used for its intended purpose.

b. Hazardous waste (HW): A discarded material with properties that could pose dangers to human health or the environment. A HW either exhibits a hazardous characteristic (ignitability, corrosivity, reactivity, or toxicity) or is specifically listed as a HW by the EPA or by the State.

c. Material Safety Data Sheet (MSDS): A document containing information that manufacturers are required by law to provide on all products they manufacture and sell. The MSDS is useful in evaluating the product to determine if it has hazardous constituents and the type of medical treatment in case of an accident.

#### 3.2.1.2 Hazardous Waste Management Section (HWMS)

The Contractor shall contact the HWMS at (253) 967-4786 with any questions pertaining to the storage, use, and disposal of Hazardous Materials and/or Hazardous Waste during the execution of this contract.

#### 3.2.1.3 Restricted Use Materials

Certain chemicals are restricted from use on Fort Lewis. These chemicals are listed on the Restricted Use List (RUL). The RUL is maintained by the PW Environmental and Natural Resources Division (ENRD) and is updated semi-annually. A print out and/or an electronic copy of the entire RUL are available from ENRD, Building 1210. The Contractor shall receive authorization from the Contracting Officer or their representative prior to using any product that contains chemicals listed on the RUL. Only materials necessary for and associated with the execution of this Contract will be allowed on Government property.

#### 3.2.1.4 Contingency Planning and Spill Response

The Contractor shall comply with the provisions of the Fort Lewis Spill Prevention, Control and Countermeasures Plan (SPCCP) and the Installation Spill Contingency Plan (ISCP). The PW ENRD maintains these plans. The Contractor shall also maintain on site a written contingency plan for HW accumulation and HM storage areas if the work associated with this contract generates HW or require storage of HM.

#### 3.2.1.5 Transportation of HM and HW

The Contractor shall comply with all Department of Transportation (DOT) requirements associated with HM/HW, including proper container marking/labeling and vehicle placarding when transporting HM/HW on or off the installation. The Contractor shall obtain Government approval prior to removal of any HW from the installation. Removal shall only be done by an authorized HW transporter having an EPA Identification Number and with the HW recorded on a Uniform Hazardous Waste Manifest (EPA Form 8700-22).

#### 3.2.1.6 HM/HW Personnel and Training Requirements

The Contractor shall appoint an Environmental Compliance Officer (ECO) and a Hazardous Waste Technician (HWT) in writing, if the work associated with this contract causes the Contractor to generate, store, or handle HM/HW. The ECO/HWT shall be responsible for insuring the requirements of this specification are met.

The Contractor shall ensure that all personnel are trained in accordance with Washington Department of Ecology regulations before being assigned to any position handling HW/HM. This training shall include, but not be limited to:

- a. Hazardous Materials Use, Storage and Disposal Training Course for ECOs/HWTs. The 8-hour course is available weekly from the Fort Lewis ENRD Hazardous Waste Management Section (HWMS) and shall be taken prior to the Contractor generating, storing, or handling HM or HW on the installation. The Contractor shall contact the HWMS to schedule attendance.
- b. First Responder Awareness Level as specified in the ISCP.
- c. Quarterly contingency plan review and rehearsal.
- d. Hazard Communication training as stated in paragraph 3.2.2.5.

The Contractor shall maintain a record of all required training, and the date conducted, for each individual requiring training and shall make this record available to the Government at all times during the execution of this contract.

### 3.2.2 Hazardous Materials

#### 3.2.2.1 Notification

The Contractor shall provide an initial inventory and MSDS copies for all HM to be used during the execution of this contract, to the PW, Engineering & Contract Management Division. The inventory shall include the type of HM, proposed storage location and quantity to be stored and shall be provided before bringing any HM onto the installation. The Contractor shall use the Hazardous Material Inventory form (HFL Form 953-Enclosure No. 1) or a contractor-generated form providing the same information. An electronic version of the Hazardous Material Inventory form is available from the PW ENRD in Building 1210.

#### 3.2.2.2 Storage Facilities

Facilities shall meet all fire code requirements and provide adequate ventilation, containment, and protection from the elements. Provide warning signs, limit access to the facility, and lock it when it is unattended. Only HM shall be stored in the facility. Contractor vehicles are not considered a proper storage facility. No HM shall be stored in vehicles overnight or for any length of time.

#### 3.2.2.3 Storage and Use

The Contractor shall store HM according to product labels and MSDS requirements. Non-compatible materials shall not be stored together. All containers shall be properly labeled as to contents and kept in good condition with tight fitting lids. Unopened containers shall be segregated from opened containers. Personal protective equipment (PPE) required by the MSDS or product label shall be available and worn by all personnel who handle the product.

#### 3.2.2.4 Inspections, Record Keeping and Reporting

The Contractor shall perform weekly inspections of their HM storage facilities utilizing the HM Inspection Checklist (HFL Form 951-Enclosure No. 2). A current inventory of the HM storage facility shall be maintained on site and a copy forwarded to PW, Engineering & Contract Management Division quarterly using the Hazardous Material Inventory form. Additionally, a current MSDS for each product used or stored shall be present and on file at the site where the product is used or stored.

#### 3.2.2.5 Hazard Communication Program

The Contractor shall have a written Hazard Communication program, which explains how personnel are informed and trained concerning HM in the workplace as required by Federal, state and Fort Lewis regulations. The written program shall be located at a hazard communication station that is accessible to all Contractor personnel and shall contain the following sections:

- a. A current inventory of HM, who is responsible for classifying a product as a HM, and how the inventory is updated.

b. Labels and other forms of warning: This section shall describe the procedure for insuring that each HM container is clearly labeled and has the appropriate warnings. The section also states who is responsible for labeling requirements and how label information is updated.

c. MSDS file: The location of the MSDS file, who maintains the file, and how personnel may access the file, shall be described. This section shall also describe what is done when a product is received without the MSDS and how the MSDS file is updated.

d. Personnel training and information: This section shall describe initial and refresher training provided to personnel concerning the hazards of the HM in the workplace, the training provided, and who conducts the training.

e. Information to non-Contractor personnel: This section shall describe how non-Contractor personnel are informed about possible hazards, where MSDS copies can be obtained, and what PPE is required in the workplace.

### 3.2.3 Hazardous Waste

#### 3.2.3.1 Identification

The Contractor shall identify all HW generated during the execution of this contract. The Contractor shall completely characterize the waste stream to identify the waste constituents. Each waste stream identity shall be recorded on a Hazardous Waste Profile Sheet (HWPS) and submitted to PW, Engineering & Contract Management Division for approval prior to waste generation. Profile sheets are available from the HWMS or Contractor generated equivalent sheets may be used. The Contractor is responsible for any costs associated with laboratory analysis to verify the waste stream identity if it is not obviously evident.

#### 3.2.3.2 Accumulation

HW shall be accumulated in waste-compatible, sturdy, leak-proof, closed containers that are Department of Transportation (DOT) approved. If the waste is to be disposed of on Fort Lewis, the Contractor shall accumulate wastes only in Government issued HW containers. The Contractor shall contact the HWMS, phone (253) 967-4786 for drums at Fort Lewis.

Each HW container shall be clearly labeled with the words HAZARDOUS WASTE, a description of the waste, and the hazard associated description or label. Any container issued by the HWMS at Fort Lewis shall have a Bar-coded label that contains all necessary labeling information. This label can be obtained by contacting the HWMS.

#### 3.2.3.3 Container Management

HW shall be handled in a manner that prevents leaks, spills, fires, and explosions. Container tops and/or bungs shall be serviceable and tightly installed (wrench tight) at all times except when adding material to the container (material should not spill if the container tips over). Containers shall be properly grounded when transferring flammable materials. Containers holding flammable liquids (flash point less than 140

degrees F) shall be grounded. Reactive and ignitable waste containers shall be stored in a manner compatible with NFPA Fire Code requirements. Incompatible wastes shall not be accumulated in the same container or in the same area.

The container accumulation area shall be 50 feet from any other occupied building, shall have overhead cover, and shall be capable of being secured. Access to the area shall be restricted to trained personnel who need to be in and use the area. The site shall be locked when not in use. The container accumulation area shall have a secondary containment system capable of collecting and holding spills and leaks. It shall be sized to hold 110% of the volume of the largest container. A minimum of thirty inches of aisle space shall be maintained between container rows. Container markings and labels shall be clearly visible.

#### 3.2.3.4 Inspection, Record Keeping and Reporting

The Contractor shall inspect each accumulation point weekly, utilizing the attached Hazardous Waste Accumulation Areas checklist, (HFL Form 950-Enclosure No. 3) to verify compliance with the above requirements. The checklist shall be available on site for inspection.

#### 3.2.3.5 Transportation and Disposal

The Contractor shall be responsible for the transportation and disposal off site of all HW generated from the execution of this contract, unless stated otherwise in this specification.

The Contractor or his representative, who provides services that generate, prepare for shipment or transports hazardous waste or provides hazardous waste clean-up/disposal services, shall be responsible for preparing EPA Form 8700-22, Uniform Hazardous Waste Manifest, for the state to which the material is being transported. The Contractor shall comply with all manifest and record keeping and reporting requirements. Specific manifesting procedures include:

- a. The Uniform Hazardous Waste Manifest will only be signed by personnel in the HWMS at Building 1210 on Fort Lewis.
- b. The Contractor shall provide a copy of the Uniform Hazardous Waste Manifest and supporting documentation (i.e., waste profile and land ban as appropriate) no less than 72 hours in advance of the proposed transporter pick up date.
- c. The Contractor shall coordinate and schedule transportation pick up dates and times by contacting the HWMS at (253) 967-4786 or 3268. This will ensure qualified individuals are available for the certification/signature of the manifest and other related documentation. A waste profile (land ban when required) must accompany the manifest to verify description of material being transported.

The Contractor shall be responsible for verifying that the shipment is properly identified (profiled), packaged, marked, labeled, and not leaking. The Contractor shall apply appropriate placards to his vehicle while transporting hazardous materials/waste.

The Contractor shall ensure that the transporter and disposal facility have a valid Environmental Protection Agency identification number for the applicable hazardous waste services, i.e., transportation, treatment, storage, or disposal.

The Contractor shall ensure that the transporter drivers have current DOT combination licenses. The Contractor shall ensure that the carrier has instructed and trained personnel concerning the applicable Hazardous Materials Transportation Act (HMTA) regulations relevant to their job functions.

The Contractor or his representatives shall take appropriate action (including cleanup) in the event of a release/spill. If a release/spill occurs on Fort Lewis the Contractor shall immediately notify the Fort Lewis Fire Department (Dial 911). Secondary notification shall be made to (253) 967-4786 or 3268.

The Contractor shall ensure the transporter and disposal facility has liability insurance in effect for claims arising out of death or bodily injury and property damage from hazardous material/waste transport, treatment, storage, and disposal, including vehicle liability and legal defense costs in the amount of \$1,000,000.00, as evidenced by a certificate of insurance for General, Automobile, and Environmental Liability Coverage.

#### 3.2.3.6 Hazardous Waste Turn-In

The Contractor shall coordinate turn-in of small quantities of Hazardous Waste. Only HW generated on site as a result of the Contractor's execution of this contract will be accepted. At Fort Lewis, coordination for turn-in shall be made with the HWMS, phone (253) 967-4786.

Containers shall be turned in no later than 90 days after the accumulation start date (earlier if full). All HW that is turned in must be properly identified and characterized, contained, marked/labeled, and (if turned in from a site outside Fort Lewis) manifested. The HWMS will provide assistance to the Contractor at Fort Lewis. This assistance does not free the Contractor from the responsibility of insuring that the waste is identified and managed in accordance with all of the above requirements so that it is acceptable for turn-in. The following procedures shall be followed:

- a. Identify the HW. The HW should be one of the waste streams that the activity is permitted to generate and for which a HWPS has been submitted. HM that has become HW shall require the name of the product, the MSDS, the stock number if known, and manufacturer if known, or a completed waste profile analysis.
- b. List the type, size, and number of containers, or items (e.g., PCB transformers).
- c. Prepare the HW container(s) for turn-in as directed by the HWMS representative. If the container is closed, the HWMS representative may require the Contractor to open the container(s) to verify proper identification of the HW (not applicable to original, factory-sealed containers).
- d. Provide certification as to HW identity and container compliance with appropriate regulations. The Contractor's ECO shall sign the certificate.



### 3.3 POLYCHLORINATED BIPHENYLS (PCB)

#### 3.3.1 Transformers

The Contractor shall notify PW, Engineering & Contract Management Division on the day that any electrical transformer is delivered to Fort Lewis. All transformers brought on to Fort Lewis that are fluid filled must contain less than two parts/million (ppm) PCBs and be accompanied by a letter from the manufacturer that indicates that the level of PCBs in the transformer is below two ppm. Copies of all PCB letters and nameplate information shall be provided to PW, Engineering & Contract Management Division.

#### 3.3.2 Light Ballasts

The Contractor shall place all PCB light ballasts being removed into a DOT Specification 1A2 drum and turned in as specified for Hazardous Wastes above. All light ballasts removed which are marked, as non-PCB must be disposed of in accordance with Fort Lewis waste designations. This designation can be obtained from the HWMS.

### 3.4 RADIATION SAFETY

All aspects of the job relating to radiation safety, including transportation, use, storage or handling must be addressed by the Contractor through PW, Engineering & Contract Management Division to the Installation Radiation Safety Officer, Installation Safety Office, Building 6069, Fort Lewis, WA, phone: (253) 967-3079/6764.

### 3.5 DISPOSAL OF SOLID WASTE.

#### 3.5.1 General

The Contractor shall be responsible for the disposal off site of all refuse generated in the course of performance of this contract, to include containers, transport, handling, and dumping fees. All solid wastes shall be placed in containers that are emptied on a regular schedule. The Contractor will not be permitted to deposit refuse in existing garbage cans or refuse dumpsters. No burning of refuse is allowed. All vehicle loads of waste being transported shall be adequately secured to prevent spillage.

#### 3.5.2 Clean Fill Materials

Clean fill materials shall be disposed of on Fort Lewis at a site as directed by PW, Engineering & Contract Management Division. Clean fill shall not contain any items such as vegetative material, asphalt, concrete or metals.

### 3.6 PROTECTION OF LAND RESOURCES

Prior to the beginning of any construction, the Contractor shall identify the land resources to be preserved within the work area. Except in areas indicated on the drawings or specified to be cleared, the Contractor shall not remove, cut, deface, injure, or destroy land resources including trees, shrubs, vines, grasses,

topsoil, and land forms without special permission from the Contracting Officer or their representative. No ropes, cables, or guys shall be fastened to or attached to any trees for anchorage unless specifically authorized.

### 3.6.1 Landscape

Trees, shrubs, vines, grasses, land forms and other landscape features indicated and defined on the drawings to be preserved shall be clearly identified by marking, fencing, or wrapping with boards, or any other approved techniques.

### 3.6.2 Unprotected Erodible Soils

Earthwork brought to final grade shall be finished as indicated on the design drawings and specifications. Side slopes and back slopes shall be protected as soon as practicable upon completion of rough grading. All earthwork shall be planned and conducted to minimize the duration of exposure of unprotected soils. Except in cases where the constructed feature obscures borrow areas, quarries, and waste material areas, these areas shall not initially be totally cleared. Clearing of such areas shall progress in reasonably sized increments as needed to use the developed areas as approved by the Contracting Officer or their representative.

### 3.6.3 Disturbed Areas

The Contractor shall effectively prevent erosion and control sedimentation through approved methods including, but not limited to, the following:

a. Retardation and Control of Runoff. Runoff from the construction site or from storms shall be controlled, retarded, and diverted to protected drainage courses by means of diversion ditches, benches, berms, and by any measures required by area wide plans under the Clean Water Act.

b. Erosion and Sedimentation Control Devices. The Contractor shall construct or install temporary and permanent erosion and sedimentation control features as indicated on the drawings. Berms, dikes, drains, sedimentation basins, grassing, and mulching shall be maintained until permanent drainage and erosion control facilities are completed and operative.

c. Sediment Basins. Sediment from construction areas shall be trapped in temporary or permanent sediment basins in accordance with the drawings.

The basins shall accommodate the runoff of a local 5-year, 24-hour storm. After each storm, the basins shall be pumped dry and accumulated sediment shall be removed to maintain basin effectiveness. Overflow shall be controlled by paved weirs or by vertical overflow pipes. The collected topsoil sediment shall be reused for fill on the construction site, and/or stockpiled for use at another site. The Contractor shall institute effluent quality monitoring programs as required by State and local environmental agencies.

### 3.6.4 Tree Protection

The Contractor shall exercise care when excavating trenches in the vicinity of trees. Where roots are two inches in diameter or greater, the trench shall be excavated by hand or tunneled. When large roots are exposed, they shall be wrapped with heavy burlap for protection and to prevent drying. Trenches dug by machines adjacent to trees having roots less than two inches in diameter shall have the sides hand trimmed, making a clean cut of the roots. Trenches having exposed tree roots shall be backfilled within 24 hours unless adequately protected by moist burlap or canvas.

### 3.6.5 Trees Removed During Construction

Logs from trees removed during construction shall be decked for subsequent disposal by the Government. Decks shall be located so as not to interfere with the construction work and shall be located as directed by PW, Engineering & Contract Management Division. Logs shall be sorted by size and placed in separate decks for sawlogs and fuelwood. Trees shall be cut from the stump and limbed to the top before decking. Whenever possible logs shall be left in tree length. If trees are too large to be handled tree length, cut 40-foot logs plus 12 inches trim allowance from the butt. The minimum size for a sawlog is 6 diameter inches on the small end and 16 foot in length. All logs not suitable for sawlogs shall be placed in a fuelwood deck. The minimum size for a fuelwood log is 5 inches diameter on the large end and 8 feet in length.

### 3.6.6 Restoration of Landscape Damage

All landscape features (vegetation - such as trees, plants, and grass) damaged or destroyed during Contractor operations outside and within the work areas shall be restored by the Contractor to a condition similar to that which existed prior to construction activities unless otherwise indicated on the drawings or in the specifications. All vegetation that was removed or damaged consisting of native species shall be replaced with native species. If the area had been previously landscaped with non-native species then similar plants shall be used for replacement. Landscaping shall be maintained for a minimum of 60 days after planting, to include irrigation. The Contractor shall coordinate with ENRD prior to planting any non-native species.

Trees shall be replaced in kind with a minimum 4-inch caliper nursery stock. Shrubs, vines, and ground cover shall be replaced in kind; the Contracting Officer or their representative shall approve size. All plant material shall meet specifications outlined in ANSI Z60.1 - current publication, "American Standard for Nursery Stock."

Grass areas shall be replaced in kind by sodding or seeding as specified. Sod shall be required in all regularly maintained lawn areas.

Plant material damaged or destroyed within the historical district shall be replaced or repaired as directed by the Contracting Officer or their representative.

### 3.7 PROTECTION OF WATER RESOURCES

#### 3.7.1 General

The Contractor shall keep construction activities under surveillance, management, and control to avoid pollution of surface and ground waters. Toxic or hazardous chemicals shall not be applied to soil or vegetation when such application may cause contamination of the fresh water reserve. Monitoring of water areas affected by construction shall be the Contractor's responsibility. The Contractor shall monitor all water areas affected by construction activities. The Contractor shall observe all prescribed setbacks from streams and wetlands as specified in FL REG 200-1.

#### 3.7.2 Washing and Curing Water

Stormwaters from sites less than 5 acres, directly derived from construction activities shall not be allowed to enter water areas. Stormwaters shall be collected and placed in retention ponds where suspended material can be settled out or the water evaporates to separate pollutants from the water. Analysis shall be performed and results reviewed and approved before water in retention ponds is discharged.

#### 3.7.3 Cofferdam and Diversion Operations

Construction operations for dewatering, removal of cofferdams, tailrace excavation, and tunnel closure shall be controlled at all times to limit the impact of water turbidity on the habitat for wildlife and on water quality for downstream use.

#### 3.7.4 Stream Crossings

Stream crossings shall allow movement of materials or equipment without violating water pollution control standards of the Federal, State or local government.

#### 3.7.5 Fish and Wildlife

The Contractor shall minimize interference with, disturbance to, and damage of fish and wildlife. The Contractor prior to beginning of construction operations shall list species that require specific attention along with measures for their protection.

#### 3.7.6 Wellhead Protection Areas

Particular care shall be taken to prevent the introduction of any contaminant to the surface in a designated Wellhead Protection Area (WPA). Certain activities that may pose a danger to groundwater resources are prohibited within WPAs.

#### 3.7.7 Construction Stormwater Permit

The National Pollutant Discharge Elimination System (NPDES), requires general permits, a notice of intent, and a notice of discontinuation for construction sites greater than 5 acres discharging stormwater to any waters of the United States. The Contractor shall file a Notice of Intent with the EPA for coverage under the EPA's general permit for storm water discharges from construction activities. A copy of the NOI shall be submitted to PW, Engineering & Contract Management Division. The Contractor shall be

responsible for compliance with the terms of the permit, including the development of a storm water pollution prevention plan.

### 3.8 PROTECTION OF AIR RESOURCES

#### 3.8.1 General

Dust particles, aerosols, and gaseous byproducts from construction activities, processing, and preparation of materials shall be controlled at all times, including weekends, holidays, and hours when work is not in progress. Hydrocarbons and carbon monoxide emissions from equipment shall be controlled to Federal and state allowable limits at all times. The Contractor shall not conceal or mask the emission of an air pollutant which violates air pollution regulations or causes a detriment to the health, safety, or welfare of any person.

An air pollution source shall not emit air pollutants in such quantities and of such characteristics and duration which are likely to be injurious to human health, plant or animal life, property, or which unreasonably interfere with enjoyment of life and property.

#### 3.8.2 Fugitive Dust

Fugitive dust created as a result of construction activities shall be controlled with the BACT such as spraying with water. Contractor vehicles shall not enter public roadways with deposits of mud, dirt, or other debris or unsecured loads. Fugitive dust shall not be emitted from air pollution generating equipment such as boilers and incinerators.

#### 3.8.3 Painting Operations

Spray painting shall not be conducted except inside a paint booth, which utilizes a dry filter system and is approved by ENRD for use. This requirement does not apply to the use of hand-held aerosol cans, coating of buildings and similar type structures, and painting of other items that ENRD deems cannot be sprayed in a paint booth.

#### 3.8.4 Burning Natural Vegetation

All cantonment areas, housing areas and all of North Fort are designated as no burn areas. A burning permit is required for burning natural vegetation in all other areas on Fort Lewis. Burning permits may be obtained from the PW Forestry Section. A copy of the permit shall be submitted to PW, Engineering & Contract Management Division.

#### 3.8.5 Notice of Construction Permits

The Contractor shall be responsible for obtaining any necessary Puget Sound Air Pollution Control Agency "Notice of Construction" permits for the construction/installation of new air emission sources under this project. The Contractor is responsible for the associated fees.

The following process shall be followed when filing a Notice of Construction and Application for Approval. The Contractor shall complete the application including the Environmental Checklist (the proper forms can be obtained from the Puget Sound Air Pollution Control Agency (PSAPCA)). The Contractor shall then submit the application and a cashier's check addressed to PSAPCA for the associated plan examination fee to PW, Contract & Engineering Management Division. The application and check are to be submitted in a sealed envelope clearly marked with PSAPCA Notice of Construction Application and Associated Fee. The Government will review the application. If it is complete and accurate, the Application will be submitted by the Government to PSAPCA with check. If it is not complete or accurate, the Contractor will be requested to submit a revised Application. The Contractor shall allow 30 days for review and submission by the Government. After submission, the Contractor shall allow 75 days for review, negotiation, and approval by PSAPCA. This process time line applies to standard projects. If the project is a major air pollution source, which requires other environmental documentation and public comment, the process time should be adjusted accordingly.

The Contractor is responsible for assuring all the standards/limits included in the Order of Approval to the Notice of Construction and Application for Approval are implemented or met. This includes developing an Operations and Maintenance plan to assure compliance with all environmental requirements and any testing of the air pollution source, the control equipment, or the monitoring equipment required by the Order of Approval or other regulatory requirement (this may be a supplement to any O&M manuals required elsewhere in the technical specifications).

The address on the Notice of Construction and Application for Approval for the property owner as well as the applicant should be PUBLIC WORKS, ATTN: AFZH-PWE, MS 17E, BOX 339500, FORT LEWIS, WA, 98433-9500.

### 3.8.6 Best Available Control Technology (BACT)

The Contractor shall utilize the BACT as determined by the regulatory authority on all air pollution sources. The Contracting Officer or their representative shall be notified for resolution if this requires a change in the design.

## 3.9 PRESERVATION OF HISTORICAL, CULTURAL, AND ARCHEOLOGICAL RESOURCES

If, during construction activities, the Contractor observes items that might have historical or archeological significance, the Contractor shall immediately contact the Contracting Officer or their representative and shall cease all activities that may result in the destruction of these resources and shall prevent its employees from trespassing on, removing, or otherwise damaging such resources.

### 3.10 PROTECTION OF FISH AND WILDLIFE

The Contractor shall conduct their operations in a manner that will minimize impacts on surrounding fish and wildlife. If, during construction activities, the Contractor observes any Federal or State protected species, the Contractor shall immediately contact the Contracting Officer or their representative and cease all activities at the site.

END OF SECTION

## SECTION 01415

### METRIC MEASUREMENTS

#### 1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by basic designation only.

##### AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

- |            |   |
|------------|---|
| ASTM E 380 | (1993) Practice for Use of the International System of Units (SI)                   |
| ASTM E 621 | (1999 el) Practice for Use of Metric (SI) Units in Building Design and Construction |

#### 1.2 GENERAL

This project includes metric units of measurements. The metric units used are the International System of Units (SI) developed and maintained by the General Conference on Weights and Measures (CGPM); the name International System of Units and the international abbreviation SI were adopted by the 11th CGPM in 1960. A number of circumstances require that both metric SI units and English inch-pound (I-P) units be included in a section of the specifications. When both metric and I-P measurements are included, the section may contain measurements for products that are manufactured to I-P dimensions and then expressed in mathematically converted metric value (soft metric) or, it may contain measurements for products that are manufactured to an industry recognized rounded metric (hard metric) dimensions but are allowed to be substituted by I-P products to comply with the law. Dual measurements are also included to indicate industry and/or Government standards, test values or other controlling factors, such as the code requirements where I-P values are needed for clarity or to trace back to the referenced standards, test values or codes. For American Society for Testing and Materials (ASTM) references in the technical specifications, the Contractor shall use the metric publication, if one is available (For example: ASTM A 36, use ASTM A 36M). An acceptable substitute to hard Metric SI Concrete Masonry Units (CMU) and Recessed Lighting Fixtures (RLF) is English in-pound (soft metric) CMU and RLF. The Contractor shall be responsible for any adjustments required to accommodate these alternative English in-pound units at no additional cost to the Government.

#### 1.3 USE OF MEASUREMENTS

Measurements shall be either in SI or I-P units as indicated, except for soft metric measurements or as otherwise authorized. The Contractor shall be responsible for all associated labor and materials when authorized to substitute one system of units for another and for the final assembly and performance of the specified work and/or products.

### 1.3.1 Hard Metric

A hard metric measurement is indicated by an SI value with no expressed correlation to an I-P value, i.e., where an SI value is not an exact mathematical conversion of an I-P value, such as the use of 100 mm in lieu of 4 inches. Hard metric products are required when only metric dimensions are indicated, except for Contractor's options as outlined in paragraph GENERAL above. Hard metric measurements are often used for field data such as distance from one point to another or distance above the floor. Products are considered to be hard metric when they are manufactured to metric dimensions or have an industry recognized metric designation.

### 1.3.2 Soft Metric

a. A soft metric measurement is indicated by an SI value which is a mathematical conversion of the I-P value shown in parentheses e.g. 38.1 mm (1-1/2 inches). Soft metric measurements are used for measurements pertaining to products, test values, and other situations where the I-P units are the standard for manufacture, verification, or other controlling factor. The I-P value shall govern while the metric measurement is provided for information.

b. A soft metric measurement is also indicated for products that are manufactured in industry designated metric dimensions but are required by law to allow substitute I-P products. These measurements are indicated by a manufacturing hard metric product dimension followed by the substitute I-P equivalent value in parentheses e.g., 190 x 190 x 390 mm (7-5/8 x 7-5/8 x 15-5/8 inches).

### 1.3.3 Neutral

A neutral measurement is indicated by an identifier which has no expressed relation to either an SI or an I-P value (e.g., American Wire Gage (AWG) which indicates thickness but in itself is neither SI nor I-P).

## 1.4 COORDINATION

Discrepancies, such as mismatches or product unavailability, arising from use of both metric and non-metric measurements and discrepancies between the measurements in the specifications and the measurements in the drawings shall be brought to the attention of the Contracting Officer for resolution.

## 1.5 RELATIONSHIP TO SUBMITTALS

Submittals for Government approval or for information only shall cover the SI or I-P products actually being furnished for the project. The Contractor shall submit the required drawings and calculations in the same units used in the contract documents describing the product or requirement unless otherwise instructed or approved. The Contractor shall use ASTM E 380 and ASTM E 621 as the basis for establishing metric measurements required to be used in submittals.

END OF SECTION



## SECTION 01451

### CONTRACTOR QUALITY CONTROL

#### PART 1 GENERAL

##### 1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by basic designation only.

#### AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM D 3740	(1999b) Minimum Requirements for Agencies Engaged in the Testing and/or Inspection of Soil and Rock as Used in Engineering Design and Construction
ASTM E 329	(1998a) Agencies Engaged in the Testing and/or Inspection of Materials Used in Construction

##### 1.2 PAYMENT

Separate payment will not be made for providing and maintaining an effective Quality Control program, and all costs associated therewith shall be included in the applicable unit prices or lump-sum prices contained in the Bidding Schedule.

##### 1.3 LABORATORY VALIDATION

The testing laboratory shall be validated by Corps of Engineers Material Testing Center (MTC) for all tests required by contract. See paragraph 3.7 TESTS.

#### PART 2 PRODUCTS (NOT APPLICABLE)

#### PART 3 EXECUTION

##### 3.1 GENERAL REQUIREMENTS

The Contractor is responsible for quality control and shall establish and maintain an effective quality control system in compliance with the Contract Clause titled "Inspection of Construction." The quality control system shall consist of plans, procedures, and organization necessary to produce an end product that complies with the contract requirements. The system shall cover all construction operations, both onsite and offsite, and shall be keyed to the proposed construction sequence. The site project superintendent will be held responsible for the quality of work on the job and is subject to removal by the Contracting Officer for non-compliance with quality requirements specified in the contract. The site project superintendent in this context shall be the highest-level manager responsible for overall

construction activities at the site, including quality and production. The site project superintendent shall maintain a physical presence at the site at all times, except as otherwise acceptable to the Contracting Officer, and shall be responsible for all construction and construction related activities at the site.

### 3.2 QUALITY CONTROL PLAN

#### 3.2.1 General

The Contractor shall furnish for review by the Government, not later than 10 days after receipt of notice to proceed, the Contractor Quality Control (CQC) Plan proposed to implement the requirements of the Contract Clause titled "Inspection of Construction." The plan shall identify personnel, procedures, control, instructions, test, records, and forms to be used. The Government will consider an interim plan for the first 60 days of operation. Construction will be permitted to begin only after acceptance of the CQC Plan or acceptance of an interim plan applicable to the particular feature of work to be started. Work outside of the features of work included in an accepted interim plan will not be permitted to begin until acceptance of a CQC Plan or another interim plan containing the additional features of work to be started.

#### 3.2.2 Content of the CQC Plan

The CQC Plan shall include, as a minimum, the following to cover all construction operations, both onsite and offsite, including work by subcontractors, fabricators, suppliers, and purchasing agents:

- a. A description of the quality control organization, including a chart showing lines of authority and acknowledgment that the CQC staff shall implement the three phase control system for all aspects of the work specified. The staff shall include a CQC System Manager who shall report to the project manager. If the project manager and project superintendent is the same person, the CQC System Manager shall report to someone higher in the Contractor's organization than the project manager.
- b. The name, qualifications (in resume format), duties, responsibilities, and authorities of each person assigned a CQC function.
- c. A copy of the letter to the CQC System Manager signed by an authorized official of the firm which describes the responsibilities and delegates sufficient authorities to adequately perform the functions of the CQC System Manager, including authority to stop work which is not in compliance with the contract. The CQC System Manager shall issue letters of direction to all other various quality control representatives outlining duties, authorities, and responsibilities. Copies of these letters shall also be furnished to the Government.
- d. Procedures for scheduling, reviewing, certifying, and managing submittals, including those of subcontractors, offsite fabricators, suppliers, and purchasing agents. These procedures shall be in accordance with Section 01330 SUBMITTAL PROCEDURES.
- e. Control, verification, and acceptance testing procedures for each specific test to include the test name, specification paragraph requiring test, feature of work to be tested, test

frequency, and person responsible for each test. Laboratory facilities will be validated by the Corps of Engineers Material Testing Center and approved by the Contracting Officer.

- f. Procedures for tracking preparatory, initial, and follow-up control phases and control, verification, and acceptance tests including documentation.
- g. Procedures for tracking construction deficiencies from identification through acceptable corrective action. These procedures shall establish verification that identified deficiencies have been corrected.
- h. Reporting procedures, including proposed reporting formats.
- i. A list of the definable features of work. A definable feature of work is a task which is separate and distinct from other tasks, has separate control requirements, and may be identified by different trades or disciplines, or it may be work by the same trade in a different environment. Although each section of the specifications may generally be considered as a definable feature of work, there are frequently more than one definable features under a particular section. This list will be agreed upon during the coordination meeting.

### 3.2.3 Acceptance of Plan

Acceptance of the Contractor's plan is required prior to the start of construction. Acceptance is conditional and will be predicated on satisfactory performance during the construction. The Government reserves the right to require the Contractor to make changes in his CQC Plan and operations including removal of personnel, as necessary, to obtain the quality specified.

### 3.2.4 Notification of Changes

After acceptance of the CQC Plan, the Contractor shall notify the Contracting Officer in writing of any proposed change. Proposed changes are subject to acceptance by the Contracting Officer.

## 3.3 COORDINATION MEETING

After the Preconstruction Conference, before start of construction, and prior to acceptance by the Government of the CQC Plan, the Contractor shall meet with the Contracting Officer or Authorized Representative and discuss the Contractor's quality control system. The CQC Plan shall be submitted for review a minimum of 5 calendar days prior to the Coordination Meeting. During the meeting, a mutual understanding of the system details shall be developed, including the forms for recording the CQC operations, control activities, testing, administration of the system for both onsite and offsite work, and the interrelationship of Contractor's Management and control with the Government's Quality Assurance. Minutes of the meeting shall be prepared by the Government and signed by both the Contractor and the Contracting Officer. The minutes shall become a part of the contract file. There may be occasions when subsequent conferences will be called by either party to reconfirm mutual understandings and/or address deficiencies in the CQC system or procedures which may require corrective action by the Contractor.

### 3.4 QUALITY CONTROL ORGANIZATION

#### 3.4.1 Personnel Requirements

The requirements for the CQC organization are a CQC System Manager and sufficient number of additional qualified personnel to ensure safety and contract compliance. The Safety and Health manager shall receive direction and authority from the CQC System manager and shall serve as a member of the CQC staff. The Contractor shall provide a CQC organization which shall be at the site at all times during progress of the work and with complete authority to take any action necessary to ensure compliance with the contract. All CQC staff members shall be subject to acceptance by the Contracting Officer. The Contractor shall provide adequate office space, filing systems and other resources as necessary to maintain an effective and fully functional CQC organization. Complete records of all letters, material submittals, shop drawings submittals, schedules and all other project documentation shall be promptly furnished to the CQC organization by the Contractor. The CQC organization shall be responsible to maintain these documents and records at the site at all times, except as otherwise acceptable to the Contracting Officer.

#### 3.4.2 CQC System Manager

The Contractor shall identify as CQC System Manager an individual within the onsite work organization who shall be responsible for overall management of CQC and have the authority to act in all CQC matters for the Contractor. The CQC System Manager shall be a graduate engineer, graduate architect, or a graduate of construction management, with a minimum of 5 years construction experience on construction similar to this contract or a construction person with a minimum of 10 years in related work. This CQC System Manager shall be on the site at all times during construction and shall be employed by the prime Contractor. The CQC System Manager shall be assigned no other duties. An alternate for the CQC System Manager shall be identified in the plan to serve in the event of the System Manager's absence. The requirements for the alternate shall be the same as for the designated CQC System Manager.

#### 3.4.3 Additional Requirement

In addition to the above experience education requirements the CQC System Manager shall have completed the course entitled "Construction Quality Management For Contractors". This course is periodically offered at AGC offices throughout the state of Washington and Oregon.

#### 3.4.4 Organizational Changes

The Contractor shall maintain the CQC staff at full strength at all times. When it is necessary to make changes to the CQC staff, the Contractor shall revise the CQC Plan to reflect the changes and submit the changes to the Contracting Officer for acceptance.

### 3.5 SUBMITTALS AND DELIVERABLES

Submittals shall be made as specified in Section 01330 SUBMITTAL PROCEDURES. The CQC organization shall be responsible for certifying that all submittals are in compliance with the contract requirements. All Contractor forms for submitting test results are subject to Contracting Officer approval.

### 3.6 CONTROL

Contractor Quality Control is the means by which the Contractor ensures that the construction, to include that of subcontractors and suppliers, complies with the requirements of the contract. At least three phases of control shall be conducted by the CQC System Manager for each definable feature of work as follows:

#### 3.6.1 Preparatory Phase

This phase shall be performed prior to beginning work on each definable feature of work, after all required plans/documents/materials are approved/accepted, and after copies are at the work site. This phase shall include:

- a. A review of each paragraph of applicable specifications, reference codes, and standards. A copy of those sections of referenced codes and standards applicable to that portion of the work to be accomplished in the field shall be made available by the Contractor at the preparatory inspection. These copies shall be maintained in the field and available for use by Government personnel until final acceptance of the work.
- b. A review of the contract drawings.
- c. A check to assure that all materials and/or equipment have been tested, submitted, and approved.
- d. Review of provisions that have been made to provide required control inspection and testing.
- e. Examination of the work area to assure that all required preliminary work has been completed and is in compliance with the contract.
- f. A physical examination of required materials, equipment, and sample work to assure that they are on hand, conform to approved shop drawings or submitted data, and are properly stored.
- g. A review of the appropriate activity hazard analysis to assure safety requirements are met.
- h. Discussion of procedures for controlling quality of the work including repetitive deficiencies. Document construction tolerances and workmanship standards for that feature of work.

- i. A check to ensure that the portion of the plan for the work to be performed has been accepted by the Contracting Officer.
- j. Discussion of the initial control phase.
- k. The Government shall be notified at least 48 hours in advance of beginning the preparatory control phase. This phase shall include a meeting conducted by the CQC System Manager and attended by the superintendent, other CQC personnel (as applicable), and the foreman responsible for the definable feature. The results of the preparatory phase actions shall be documented by separate minutes prepared by the CQC System Manager and attached to the daily CQC report. The Contractor shall instruct applicable workers as to the acceptable level of workmanship required in order to meet contract specifications.

### 3.6.2 Initial Phase

This phase shall be accomplished at the beginning of a definable feature of work. The following shall be accomplished:

- a. A check of work to ensure that it is in full compliance with contract requirements. Review minutes of the preparatory meeting.
- b. Verify adequacy of controls to ensure full contract compliance. Verify required control inspection and testing.
- c. Establish level of workmanship and verify that it meets minimum acceptable workmanship standards. Compare with required sample panels as appropriate.
- d. Resolve all differences.
- e. Check safety to include compliance with and upgrading of the safety plan and activity hazard analysis. Review the activity analysis with each worker.
- f. The Government shall be notified at least 24 hours in advance of beginning the initial phase. Separate minutes of this phase shall be prepared by the CQC System Manager and attached to the daily CQC report. Exact location of initial phase shall be indicated for future reference and comparison with follow-up phases.
- g. The initial phase should be repeated for each new crew to work onsite, or any time acceptable specified quality standards are not being met.

### 3.6.3 Follow-up Phase

Daily checks shall be performed to assure control activities, including control testing, are providing continued compliance with contract requirements, until completion of the particular feature of work. The checks shall be made a matter of record in the CQC documentation. Final follow-up checks shall be conducted and all deficiencies corrected prior to the start of additional features of work which may

be affected by the deficient work. The Contractor shall not build upon nor conceal non-conforming work.

### 3.6.4 Additional Preparatory and Initial Phases

Additional preparatory and initial phases shall be conducted on the same definable features of work if the quality of on-going work is unacceptable, if there are changes in the applicable CQC staff, onsite production supervision or work crew, if work on a definable feature is resumed after a substantial period of inactivity, or if other problems develop.

## 3.7 TESTS

### 3.7.1 Testing Procedure

The Contractor shall perform specified or required tests to verify that control measures are adequate to provide a product which conforms to contract requirements, see Table 1 – Minimum Testing, attached at the end of this specification section. Contractor shall submit all materials test reports on forms standard to industry standards such as ACI, ASTM and AASHTO or with laboratory accreditation forms such as AALA, NIST or NVLAP. Upon request, the Contractor shall furnish to the Government duplicate samples of test specimens for possible testing by the Government. Testing includes operation and/or acceptance tests when specified. The Contractor shall procure the services of a Corps of Engineers validated testing laboratory or establish a testing laboratory at the project site which can be validated by the Corps of Engineers in advance of any and all required testing; and in addition, submit proof of validation for approval. The Contractor shall perform the following activities and record and provide the following data:

- a. Verify that testing procedures comply with contract requirements.
- b. Verify that facilities and testing equipment are available and comply with testing standards.
- c. Check test instrument calibration data against certified standards.
- d. Verify that recording forms and test identification control number system, including all of the test documentation requirements, have been prepared.
- e. Results of all tests taken, both passing and failing tests, shall be recorded on the CQC report for the date taken. Specification paragraph reference, location where tests were taken, and the sequential control number identifying the test shall be given. If approved by the Contracting Officer, actual test reports may be submitted later with a reference to the test number and date taken. An information copy of tests performed by an offsite or commercial test facility shall be provided directly to the Contracting Officer. Failure to submit timely test reports as stated may result in nonpayment for related work performed and disapproval of the test facility for this contract.

### 3.7.2 Testing Laboratories

#### a. Validation

The testing laboratory shall be validated by the Corps of Engineers Materials Testing Center (MTC) for all tests required by the contract prior to the performance of any such testing. The validation of a laboratory is site specific and cannot be transferred or carried over to a facility at a different location. Any and all costs associated with this Government laboratory validation shall be borne by the laboratory and/or the Contractor. Validation of a laboratory is not granted for the entire laboratory activity, but only for the specific procedures requested by the inspected laboratory. The inspected laboratory has full choice of the procedures to be inspected except that the Quality Assurance portion of ASTM E 329 is mandatory to be inspected.

##### (1) Validation Procedures

Validation of a laboratory may consist of either an inspection or audit as defined herein. Validation of all material testing laboratories shall be performed by the MTC. Validation may be accomplished by one of the following processes:

(a) Inspection. Inspection shall be performed by the MTC in accordance with American Society for Testing and Materials (ASTM) standards E329 and D3740.

(b) Audit. A laboratory may be validated by auditing if it has been accredited by the Concrete and Cement Reference Laboratory (CCRL) or AASHTO Materials Reference Laboratory (AMRL) within the past two years in accordance with ASTM E329. Audit shall be performed by the MTC. Inspection by MTC may be required after auditing if one or more of the critical testing procedures required in the project specification were not included in the CCRL or AMRL inspection report or if there is any concern that the laboratory may not be able to provide required services.

#### b. Standards of Acceptability

( 1 ) Aggregate, concrete, bituminous materials, soil, and rock. Laboratories for testing aggregate, concrete, bituminous materials, soil, and rock shall be validated for compliance with ASTM E 329, Engineer Manual (EM) 1110-2-1906, or project specifications, as applicable.

(2) Water, sediment, and other samples. Laboratories engaged in analysis of water, sediment, and other samples for chemical analysis shall be inspected to assure that they have the capability to perform analyses and quality control procedures described in references in Appendix A as appropriate. The use of analytical methods for procedures not addressed in these references will be evaluated by the CQAB for conformance with project or program requirements.



(3) Steel and other construction materials, Laboratories testing steel and other construction materials shall be validated for capabilities to perform tests required by project requirements and for compliance with ASTM E329.

c. Validation Schedule

(1) For all contracted laboratories and project Quality Assurance (QA) laboratories testing aggregate, concrete, bituminous materials, soils, rock, and other construction materials, an initial validation shall be performed prior to performance of testing and at least every two (2) years thereafter.

(2) Laboratories performing water quality, wastewater, sludge, and sediment testing shall be approved at an interval not to exceed eighteen (18) months.

(3) All laboratories shall be revalidated at any time at the discretion of the Corps of Engineers when conditions are judged to differ substantially from the conditions when last validated.

d. Validation Process

If a validated laboratory is unavailable or the Contractor selects to use a laboratory which has not been previously validated, Contractor shall coordinate with Corps of Engineers Material Testing Center (MTC) to obtain validation and pay all associated costs. Point of contact at MTC is Daniel Leavell, telephone (601) 634-2496, fax (601) 634-4656, email [daniel.a.leavell@erdc.usace.army.mil](mailto:daniel.a.leavell@erdc.usace.army.mil), at the following address:

U.S. Army Corps of Engineers  
Materials Testing Center  
Waterways Experiment Station  
3909 Hall Ferry Road  
Vicksburg, MS 39180-6199

Procedure for Corps of Engineers validation, including qualifications and inspection/audit request forms are available at the MTC web site:

<http://www.wes.army.mil/SL/MTC/mtc.htm>

Contractor shall coordinate directly with the MTC to obtain validation. Contractor is cautioned the validation process is complicated and lengthy, may require an onsite inspection by MTC staff, correction of identified deficiencies, and the submittal and approval of significant documentation. Estimate a minimum of 60 days to schedule an inspection/submittal and receive a validation. Cost of onsite inspections is \$2500 plus travel time and cost from Vicksburg MS. Cost of audits is \$1500. If an onsite inspection is required following an audit, the cost of the inspection shall be \$1500 plus travel time and cost. The Contractor will be invoiced for actual travel costs and shall submit payment direct to the MTC made payable to the ERDC Finance and Accounting Officer prior to the scheduling of the inspection and/or audit. The Contractor shall copy the Contracting Officer of all correspondence and submittals to the MTC for purposes of laboratory validation.

### 3.7.3 Onsite Laboratory

The Government reserves the right to utilize the Contractor's control testing laboratory and equipment to make assurance tests and to check the Contractor's testing procedures, techniques, and test results at no additional cost to the Government.

### 3.7.4 Furnishing or Transportation of Samples for Testing

Costs incidental to the transportation of samples or materials will be borne by the Contractor. Samples of materials for test verification and acceptance testing by the Government shall be delivered to the Corps of Engineers Division Laboratory, f.o.b., at the following address:

U.S. Army Corps of Engineers  
Materials Testing Center  
Waterways Experiment Station  
3909 Hall Ferry Road  
Vicksburg, MS 39180-6199  
Phone: (601) 634-2496 or (601) 634-3261

ATTN: Project \_\_\_\_\_, Contract Number \_\_\_\_\_

Coordination for each specific test, exact delivery location and dates will be made through the Area Office. If samples are scheduled to arrive at the laboratory on a weekend (after 1700 Friday through Sunday) notify the laboratory at least 24 hours in advance at (601) 634-2496 to arrange for delivery.

## 3.8 COMPLETION INSPECTION

### 3.8.1 Punch-Out Inspection

Near the completion of all work or any increment thereof established by a completion time stated in the Special Clause entitled "Commencement, Prosecution, and Completion of Work," or stated elsewhere in the specifications, the CQC System Manager shall conduct an inspection of the work and develop a punch list of items which do not conform to the approved drawings and specifications. Such a list of deficiencies shall be included in the CQC documentation, as required by paragraph DOCUMENTATION below, and shall include the estimated date by which the deficiencies will be corrected. The CQC System Manager or staff shall make a second inspection to ascertain that all deficiencies have been corrected. Once this is accomplished, the Contractor shall notify the Government that the facility is ready for the Government Pre-Final inspection.

### 3.8.2 Pre-Final Inspection

The Government will perform this inspection to verify that the facility is complete and ready to be occupied. A Government Pre-Final Punch List may be developed as a result of this inspection. The Contractor's CQC System Manager shall ensure that all items on this list have been corrected before notifying the Government so that a Final inspection with the customer can be scheduled. Any items noted on the Pre-Final inspection shall be corrected in a timely manner. These inspections and any

deficiency corrections required by this paragraph shall be accomplished within the time slated for completion of the entire work or any particular increment thereof if the project is divided into increments by separate completion dates.

### 3.8.3 Final Acceptance Inspection

The Contractor's Quality Control Inspection personnel, plus the superintendent or other primary management person, and the Contracting Officer's Representative shall be in attendance at this inspection. Additional Government personnel including, but not limited to, those from Base/Post Civil Facility Engineer user groups, and major commands may also be in attendance. The final acceptance inspection will be formally scheduled by the Contracting Officer based upon results of the Pre-Final inspection. Notice shall be given to the Contracting Officer at least 14 days prior to the final acceptance inspection and shall include the Contractor's assurance that all specific items previously identified to the Contractor as being unacceptable, along with all remaining work performed under the contract, will be complete and acceptable by the date scheduled for the final acceptance inspection. Failure of the Contractor to have all contract work acceptably complete for this inspection will be cause for the Contracting Officer to bill the Contractor for the Government's additional inspection cost in accordance with the contract clause titled "Inspection of Construction".

## 3.9 DOCUMENTATION

The Contractor shall maintain current records providing factual evidence that required quality control activities and/or tests have been performed. These records shall include the work of subcontractors and suppliers and shall be on an acceptable form that includes, as a minimum, the following information:

- a. Contractor/subcontractor and their area of responsibility.
- b. Operating plant/equipment with hours worked, idle, or down for repair.
- c. Work performed each day, giving location, description, and by whom. When Network Analysis (NAS) is used, identify each phase of work performed each day by NAS activity number.
- d. Test and/or control activities performed with results and references to specifications/drawings requirements. The control phase should be identified (Preparatory, Initial, Follow-up). List deficiencies noted along with corrective action.
- e. Quantity of materials received at the site with statement as to acceptability, storage, and reference to specifications/drawings requirements.
- f. Submittals reviewed, with contract reference, by whom, and action taken.
- g. Off-site surveillance activities, including actions taken.
- h. Job safety evaluations stating what was checked, results, and instructions or corrective actions.

- i. Instructions given/received and conflicts in plans and/or specifications.
- j. Contractor's verification statement.

These records shall indicate a description of trades working on the project; the number of personnel working; weather conditions encountered; and any delays encountered. These records shall cover both conforming and deficient features and shall include a statement that equipment and materials incorporated in the work and workmanship comply with the contract. The original and one copy of these records in report form shall be furnished to the Government daily within 24 hours after the date covered by the report, except that reports need not be submitted for days on which no work is performed. As a minimum, one report shall be prepared and submitted for every 7 days of no work and on the last day of a no work period. All calendar days shall be accounted for throughout the life of the contract. The first report following a day of no work shall be for that day only. Reports shall be signed and dated by the CQC System Manager. The report from the CQC System Manager shall include copies of test reports and copies of reports prepared by all subordinate quality control personnel.

### 3.10 SAMPLE FORMS

Sample forms are attached at the end of this specification section.

### 3.11 NOTIFICATION OF NONCOMPLIANCE

The Contracting Officer will notify the Contractor of any detected noncompliance with the foregoing requirements. The Contractor shall take immediate corrective action after receipt of such notice. Such notice, when delivered to the Contractor at the work site, shall be deemed sufficient for the purpose of notification. If the Contractor fails or refuses to comply promptly, the Contracting Officer may issue an order stopping all or part of the work until satisfactory corrective action has been taken. No part of the time lost due to such stop orders shall be made the subject of claim for extension of time or for excess costs or damages by the Contractor.

TABLE 1

## MINIMUM SAMPLING AND TESTING FREQUENCY

<u>Materials</u>	<u>Test</u>	<u>Minimum Sampling and Testing Frequency</u>
<u>Fills, Embankments, Backfills, Subgrade, Subbase, and Base Course Material</u>		
Fill and Embankment	Field Density <sup>2/12/</sup>	Two tests per lift for each increment or fraction of 1,672 square meters (2000 sy) and any time material type changes.
	Lab Density <sup>3/</sup>	One test initially per each type of materials or blended material and any time material type changes, and one every 10 field density tests.
	Gradation <sup>1/</sup>	One test every 153 cubic meters (200 cubic yards) of fill for each type of materials or blended material and any time material type changes.
Subgrade	Field Density <sup>2/12/</sup>	One test per each increment or fraction of 1,672 square meters (2000 sy.)
	Lab Density <sup>3/</sup>	One test every 10 field density tests.
Backfill for Culverts, Trenches, Buildings and Walls, Pavements, and Other Structures	Field Density <sup>2/12/</sup>	Culverts: One test per each lift.
		Trenches: One test per lift for each increment or fraction of 152 lineal meters (500 linear feet) for backfill. Under pavements, one test every lift and at every crossing.
		Walls and Buildings Perimeters, Including Footings: One test per lift for each increment or fraction of 61 lineal meters (200 linear feet) of backfill.
		Buildings Slabs on Grade: One test per lift for each increment or fraction of 93 square meters (1000 s.f.)

<u>Materials</u>	<u>Test</u>	<u>Minimum Sampling and Testing Frequency</u>
Backfill for Culverts, Trenches, Buildings and Walls, Pavements, and Other Structures (Con.)		Areas enclosed by grade beams, compacted with power driven hand operated compactors: One test per lift for each increment or fraction of 46 square meters (500 s.f.)
		Pavements: Two tests per lift for each increment or fraction of 1,672 square meters (2000 sy.)
		Other Structures: One test per lift for each increment or fraction of 61 lineal meters (200 linear feet) of backfill.
	Lab Density <sup>3/</sup>	One test initially per each type of material or blended material and one every 10 field density tests.
Subbase and Base	Gradation <sup>1/</sup>	One test per each type of material or blended material and one every 10 field density tests.
	Gradation <sup>1/</sup> (including .02 mm particles size limits.	1 sample for every 3,345 square meters (4,000 sy.)
	In-Place Density <sup>2/</sup> <sup>12/</sup>	1 sample every 1,672 square meters (2,000 sy.)
	Moisture-Density Relationship <sup>3/</sup>	1 initially and every 20 density tests.
<u>Portland Cement Concrete</u> (Non airfield)		
Coarse and Fine Aggregate <sup>7/</sup>	Moisture, specific gravity and absorption <sup>8/</sup>	1 initially.
	Gradation and fineness modules	1 every 191 cubic meters (250 cy) of concrete.
	Moisture, specific gravity and absorption <sup>8/</sup>	(same as coarse aggregate).

<u>Materials</u>	<u>Test</u>	<u>Minimum Sampling and Testing Frequency</u>
Concrete	Slump	Conduct test every day of placement and for every 19 cubic meters (25 cy) and more frequently if batching appears inconsistent. Conduct with strength tests.
	Entrained Air	Conduct with slump test.
	Ambient and concrete temperatures	Conduct with slump tests.
	Unit weight, yield, and water cement ratio	Conduct with strength tests. Check unit weight and adjust aggregate weights to ensure proper yield.
	Flexural strength and evaluation	When specified for slabs on grade or for concrete pavements, take one set of 6 beams every 76 cubic meters (100 cy) of concrete with a minimum of 1 set per day. Two beams shall be tested at 7 days, two at 28 days, and two at 90 days.
	Compressive strength	One set of 3 cylinders per day and every 76 cubic meters (100 cy) for each class of structural concrete. Test one cylinder at 7 days and two at 28 days. Additional field cure cylinders shall be made when insitu strengths are required to be known.
Vibrators	Frequency and amplitude	Check frequency and amplitude initially and any time vibration is questionable.
	Masonry	
Concrete Masonry Units <sup>9/</sup>	Dry shrinkage <sup>10/</sup>	1 set of 3 per 10,000 units and manufacturers certification and test report.
	Airdry condition <sup>11/</sup>	Same as dry shrinkage.
	Absorption	" " " "
	Compressive strength	" " " "

<u>Materials</u>	<u>Test</u>	<u>Minimum Sampling and Testing Frequency</u>
	Masonry (Con.)	
Concrete Masonry Units <sup>9/</sup>		
	Unit Weight	" " " "
Mortar and grout	Compressive Strength	1 set of 3, every 2,000 units (1 test at 7 days and 2 tests at 28 days).



## NOTES:

- 1/ All acceptance tests shall be conducted from in-place samples.
- 2/ Additional tests shall be conducted when variations occur due to the contractors operations, weather conditions, site conditions, etc.
- 3/ Classification (ASTM D-2487), moisture contents, Atterberg limits and specific gravity tests shall be conducted for each compaction test if applicable.
- 4/ Materials to be submitted only upon request by the Contracting Officer.
- 5/ Tests can substitute for same tests required under "Aggregates" (from bins or source), although gradations will be required when blending aggregates.
- 6/ Increase quantities by 50 percent for Paving mixes and by 100 percent for Government testing of admixtures. Include standard deviation for similar mixes from the intended batch plant and data from a minimum of 30 tests, if available. Refer to ACI 214.
- 7/ A petrographic report for aggregate is required with the sample for source approval. If the total amount of all types of concrete is less than 153 cubic meters (200 c.y.) service records from three separate structures in similar environments which used the aggregates may substitute for the petrographic report.
- 8/ Aggregate moisture tests are to be conducted in conjunction with concrete strength tests for w/c calculations.
- 9/ For less than 1,000 units, the above test may be waived at the discretion of the Contracting Officer and acceptance based on manufacturers certification and test report.
- 10/ Additional tests shall be performed when changes are made either in the manufacturing processes or in materials used in the production of the masonry units.
- 11/ If adequate storage protection is not provided at the jobsite, additional tests shall be made to determine that the allowable moisture condition has not been exceeded before the blocks can be placed in the structure.
- 12/ The nuclear densometer, if properly calibrated, may be used but only in addition to the required testing frequency and procedures using sandcones. The densometer shall be calibrated and is recommended for use when the time for complete results becomes critical.

This page intentionally blank.

Contract Number: \_\_\_\_\_ Date: \_\_\_\_\_ Rpt. No. \_\_\_\_\_

Weather: Clear \_\_ P. Cloudy \_\_ Cloudy \_\_ Rainfall \_\_ (\_\_% of workday)

Temperature during workday: High \_\_\_\_ degrees F. Low \_\_\_\_ degrees F.

<u>Contractor Name</u>	<u>No. of Workers</u>	<u>Crafts/Hours</u>	<u>Work performed</u>
------------------------	-----------------------	---------------------	-----------------------

This image shows a blank sheet of white paper with ten sets of horizontal ruling lines. Each set consists of three lines: a solid top line, a dashed middle line, and a solid bottom line, providing a guide for letter height and placement. The lines are evenly spaced across the entire page.[illegible]

---

---

---

---

---

3. QUALITY CONTROL INSPECTIONS AND RESULTS: (Include a description of preparatory, initial, and/or follow up inspections or meetings; check of subcontractors work and materials delivered to the site compared to submittals and/or specifications; comments on the proper storage of materials; include comments on corrective actions to be taken):

---

---

---

---

4. QUALITY CONTROL TESTING AND RESULTS (comment on tests and attach test reports):

---

---

---

5. DAILY SAFETY INSPECTIONS (Include comments on new hazards to be added to the Hazard Analysis and corrective action of any safety issues):

---

---

6. REMARKS (Include conversations with or instructions from the Government representatives; delays of any kind that are impacting the job; conflicts in the contract documents; comments on change orders; environmental considerations; etc.):

---

---

---

---

---

CONTRACTOR'S VERIFICATION: The above report is complete and correct. All material, equipment used, and work performed during this reporting period are in compliance with the contract documents except as noted above.

---

CONTRACTOR QC REPRESENTATIVE

(Sample of Typical Contractor's Test Report)

TEST REPORT

STRUCTURE OR BUILDING \_\_\_\_\_

CONTRACT NO. \_\_\_\_\_

DESCRIPTION OF ITEM, SYSTEM, OR PART OF SYSTEM TESTED:

---

---

DESCRIPTION OF TEST: \_\_\_\_\_

---

---

NAME AND TITLE OF PERSON IN CHARGE OF PERFORMING TESTS FOR THE CONTRACTOR:

NAME \_\_\_\_\_

TITLE \_\_\_\_\_

SIGNATURE \_\_\_\_\_

I HEREBY CERTIFY THAT THE ABOVE DESCRIBED ITEM, SYSTEM, OR PART OF SYSTEM HAS BEEN TESTED AS INDICATED ABOVE AND FOUND TO BE ENTIRELY SATISFACTORY AS REQUIRED IN THE CONTRACT SPECIFICATIONS.

SIGNATURE OF CONTRACTOR  
QUALITY CONTROL INSPECTOR \_\_\_\_\_

DATE \_\_\_\_\_

REMARKS

---

---

---

01062

Tactical Equipment Complex, Fort Lewis, Washington

END OF SECTION

## SECTION 01501

### CONSTRUCTION FACILITIES AND TEMPORARY CONTROLS

#### PART 1 GENERAL

##### 1.1 AVAILABILITY OF UTILITY SERVICES

###### 1.1.1 Water

The Government will make available to Contractor, from existing outlets and supplies, reasonable amounts of potable water without charge. Contractor shall reasonably conserve potable water furnished. Contractor, at its own expense, shall install and maintain necessary temporary connections and distribution lines and shall remove the connections and lines prior to final acceptance of construction.

###### 1.1.2 Electricity

Electric power will be made available by the Government, without charge, to the Contractor for performing work at the work area. The Contractor shall carefully conserve electricity furnished. The Contractor, at its own expense and in a workmanlike manner satisfactory to the Contracting Officer, shall extend the existing electrical distribution system (overhead and underground) for temporary electrical service to the worksite, shall install and maintain necessary temporary connections, and shall remove the same prior to final acceptance of the construction.

##### 1.2 SANITARY PROVISIONS

Contractor shall provide sanitary accommodations for the use of employees as may be necessary and shall maintain accommodations approved by the Contracting Officer and shall comply with the requirements and regulations of the State Health Department, County Sanitarian, or other authorities having jurisdiction.

##### 1.3 TEMPORARY ELECTRIC WIRING

###### 1.3.1 Temporary Power and Lighting

The Contractor shall provide construction power facilities in accordance with the safety requirements of the National Electric Code NFPA No. 70 and the SAFETY AND HEALTH REQUIREMENTS MANUAL EM 385-1-1. The Contractor, or its delegated subcontractor, shall enforce the safety requirements of electrical extensions for the work of subcontractors. Work shall be accomplished by journeyman electricians.

###### 1.3.2 Construction Equipment

In addition to the requirements of SAFETY AND HEALTH REQUIREMENTS MANUAL, EM 385-1-1, temporary wiring conductors installed for operation of construction tools and equipment shall be either Type TW or THW contained in metal raceways, or shall be hard usage or extra hard usage

multiconductor cord. Temporary wiring shall be secured above the ground or floor in a workmanlike manner and shall not present an obstacle to persons or equipment. Open wiring may only be used outside of buildings, and then only in accordance with the provisions of the National Electric Code.

### 1.3.3 Submittals

Submit detailed drawings of temporary power connections. Drawings shall include, but not be limited to, main disconnect, grounding, service drops, service entrance conductors, feeders, GFCI'S, and all site trailer connections.

## 1.4 FIRE PROTECTION

During the construction period, the Contractor shall provide fire extinguishers in accordance with the safety requirements of the SAFETY AND HEALTH REQUIREMENTS MANUAL, EM 385-1-1. The Contractor shall remove the fire extinguishers at the completion of construction.

## 1.5 UTILITY LOCATOR/IDENTIFICATION TAPE

Unless specified otherwise elsewhere in the Contract, all installed utility lines shall have a plastic marker tape (minimum 150 mm wide and 0.125 mm thick, installed 200 mm to 260 mm below grade. The plastic marker tape shall include a metallic wire or metal foil backing for detection purposes, and shall bear a continuous printed inscription describing the type of utility line buried below. All underground exterior gas lines shall be provided with a continuous tracer wire (#12 wire) taped to the pipe. Utility line monument markers (concrete with brass identification plugs) shall be installed every 60 meters along straight runs and at each change of direction. Any existing marker tapes or tracer wires damaged during construction shall be repaired to original condition.

## 1.6 STAGING AREA

Contractor will be provided adequate open staging area as directed by the Contracting Officer. Area is unsecured, and Contractor shall make provisions for its own security.

Contractor shall be responsible for keeping staging area, and office area clean and free of weeds and uncontrolled vegetation growth. Weeds shall be removed by pulling or cutting to within 1-inch of ground level. Lawn areas shall be mown to keep growth to less than 2-inches. All loose debris and material subject to being moved by prevailing winds in the area shall be picked up or secured at all times.

If the area is not maintained in a safe and clean condition as defined above the Contracting Officer may have the area cleaned by others with the costs being deducted from the Contractor's payment.

## 1.7 HOUSEKEEPING AND CLEANUP

Pursuant to the requirements of Clause CLEANING UP and Clause ACCIDENT PREVENTION, of the CONTRACT CLAUSES, the Contractor shall assign sufficient personnel to ensure compliance. The Contractor shall submit a detailed written plan for implementation of this requirement. The plan will be presented as part of the preconstruction safety plan and will provide for keeping the total construction site,



structures, and accessways free of debris and obstructions at all times. Work will not be allowed in those areas that, in the opinion of the Contracting Officer, have unsatisfactory cleanup and housekeeping at the end of the preceding day's normal work shift. At least once each day all areas shall be checked by the Quality Control person of the Contractor and the findings recorded on the Quality Control Daily Report. In addition, the Quality Control person shall take immediate action to ensure compliance with this requirement. Housekeeping and cleanup shall be assigned by the Contractor to specific personnel. The name(s) of the personnel shall be available at the project site.

## 1.8 DIGGING PERMIT

Before performing any onsite excavation, Contractor shall obtain a digging permit. The digging permit can be obtained at Directorate of Public Works, Building 2012, room 110, telephone 253-967-5237, on weekdays between 8 a.m. and 3:30 p.m. Typically it will take a Contractor 3-5 working days to collect all signatures necessary for clearances prior to the permit being issued.

## 1.9 CONSTRUCTION NEAR COMMUNICATIONS CABLES

### 1.9.1 Excavation Near Communication Cables

Digging within .9144 meters (3 feet) of communication cables (including fiber optic cables) shall be performed by hand digging until the cable is exposed. The Contracting Officer shall be notified a minimum 3 days prior to digging within a .9144 meter (3-foot) area near cable. The cable route will be marked by the Government prior to excavation in the area. A digging permit shall be obtained by the Contractor before performing any excavation. The Contractor shall be held responsible for any damage to the cable by excavation procedures. Once the cable is exposed, mechanical excavation may be used if there is no chance of damage occurring to the cable.

### 1.9.2 Reburial of Exposed Utilities

When existing utility lines are reburied a locator/identification tape, detectable by pipe detector systems, shall be installed above the uncovered length of the utility. See paragraph UTILITY LOCATOR/IDENTIFICATION TAPE above for detailed tape and installation requirements.

### 1.9.3 Access to Communications Manhole or Handhole

No communications manhole or handhole shall be entered without first obtaining a fiber optic cable briefing. Coordinate through the Contracting Officer with DOIM (Directorate of Information Management), Fort Lewis, Information Services Center, Bldg. 2003.

### 1.9.4 Cable Cuts or Damage

If a communications cable is cut or damaged the Contractor shall immediately notify the Contracting Officer (CO) and begin gathering personnel and equipment necessary to repair the cut, or damage. Contractor shall begin repairs within one hour of the cut or damage, unless notified otherwise, and continue repairs without interruption until full service is restored.

#### 1.10 PROJECT SIGN

Contractor shall furnish and install one project sign in accordance with conditions hereinafter specified and layout shown on drawing No. 49s-40-05-15, Sheets 1 and 2, except Corps of Engineers' castle and Department of Army seal will be Government furnished. All letters shall be block type, upper case. Letters shall be painted as indicated using exterior-type paint. Sign shall be maintained in excellent condition throughout the life of job. Project sign shall be located as directed. Upon completion of project, sign shall be removed and shall remain the property of Contractor.

#### 1.11 CONCEALED WORK

All items of work to be concealed shall be Government inspected prior to concealment.

#### 1.12 REPAIR OF ROAD CUTS

Asphaltic surface shall be completely in place within 48 hours after placement of base gravel. Between placement of base gravel and pavement, road shall be kept in drivable and passable condition.

#### 1.13 ELEVATED WORK AREAS

Workers in elevated work areas in excess of 2 meters (6 feet) above an adjoining surface require special safety attention. In addition to the provisions of SAFETY AND HEALTH REQUIREMENTS MANUAL, EM 385-1-1, the following safety measures are required to be submitted to the Contracting Officer's Representative. Prior to commencement of work in elevated work areas, the Contractor shall submit drawings depicting all provisions of his positive fall protection system including, but not limited to, all details of guardrails. Positive protection for workmen engaged in the installation of structural steel and steel joist shall be provided by safety nets, tie-offs, hydraulic man lifts, scaffolds, or other required means. Decking crews must be tied-off or work over nets or platforms not over 2 meters (6 feet) below the work area. Walking on beams and/or girders and the climbing of columns is prohibited without positive protection. Perimeter guardrails shall be installed at floor, roof, or wall openings more than 2 meters (6 feet) above an adjoining surface and on roof perimeters. Rails shall be designed to protect all phases of elevated work including, but not limited to, roofing operations and installation of gutters and flashing. Rails around roofs may not be removed until all work on the roof is complete and all traffic on or across the roof ceases. Rails shall be designed by a licensed engineer to provide adequate stability under any anticipated impact loading. As a minimum, the rails shall consist of a top rail at a height of 1067 mm (42 inches), a mid-rail, and a toe board. Use of tie-offs, hydraulic man lifts, scaffolds, or other means of roof edge protection methods may be utilized on small structures such as family housing, prefabricated metal buildings, etc. If safety belts and harnesses are used, the positive fall protection plan will address fall restraint versus fall arrest. Body belts will ONLY be used for fall restraint, they will not be used for fall arrest.

#### 1.14 TRAFFIC CONTROL PLAN

The Contractor shall submit a Traffic Control Plan for moving traffic through and around the construction zone in a manner that is conducive to the safety of motorists, pedestrians, and workers. This plan shall indicate scheduling, placement, and maintenance of traffic control devices in accordance with the U.S.

Department of Transportation, Federal Highway Administration publication, Manual on Uniform Traffic Control Devices. The Contractor shall obtain, in writing, from the Directorate of Public Works (PW) Traffic Engineer, through the Contracting Officer, approval of the Traffic Control Plan. The Contractor shall submit the Traffic Control Plan at least 15 working days prior to commencement of street or road work. Streets (except dead end) may be closed to traffic temporarily (except at least one access lane shall be kept open to traffic) by approved written request to the Contracting Officer at least 10 working days prior to street closure. Excavations shall not remain open for more than 1 working day without approval. The Contractor shall identify by site inspection and indicate on the plan all roads and trails used by military or civilian wheeled and tracked vehicular traffic and, by traffic control devices, prevent this traffic from entering the construction zone.

### 1.15 UTILITIES NOT SHOWN

The Contractor can expect to encounter, within the construction limits of the entire project, utilities not shown on the drawings and not visible as to the date of this contract. The Contractor shall scan the construction site with electromagnetic or sonic equipment, and mark the surface of the ground where existing utilities are discovered. The Contractor shall verify the elevations of existing utilities, piping and any type of underground obstruction not indicated, or indicated and not specified to be removed. If such utilities interfere with construction operations, he shall immediately notify the Contracting Officer verbally and then in writing to enable a determination by the Contracting Officer as to the necessity for removal or relocation. If such utilities are removed or relocated as directed, the Contractor shall be entitled to equitable adjustment for any additional work or delay. The types of utilities the Contractor may encounter are waterlines, sewer lines (storm and sanitary), gas lines, fueling lines, steam lines, buried fuel tanks, septic tanks, other buried tanks, communication lines, cathodic protection cabling, and power lines. These utilities may be active or abandoned utilities.

### 1.16 GOVERNMENT WITNESSING AND SCHEDULING OF TESTING


The Contractor shall notify the Contracting Officer, by serial letter, of dates and agenda of all performance testing of the following systems: mechanical (including fire protection and EMCS), electrical (including fire protection) medical and food service systems a minimum of 10 calendar days prior to start of such testing. In this notification, the Contractor shall certify that all equipment, materials, and personnel necessary to conduct such testing will be available on the scheduled date and that the systems have been prechecked by him and are ready for performance and/or acceptance testing. Contractor shall also confirm that all operations and maintenance manuals have been submitted and approved. **NO PERFORMANCE AND/OR ACCEPTANCE TESTING WILL BE PERMITTED UNTIL THE OPERATIONS AND MAINTENANCE MANUALS HAVE BEEN APPROVED.**

Government personnel, at the option of the Government, will travel to the site to witness testing. If the testing must be postponed or canceled for whatever reason not the fault of the government, the Contractor shall provide the Government not less than 3 working days advance notice (notice may be faxed) of this postponement or cancellation. Should this 3 working day notice not be given, the Contractor shall reimburse the Government for any and all out of pocket expenses incurred for making arrangements to witness such testing including, but not limited to airline, rental car, meal, and lodging expenses. Should testing be conducted, but fail and have to be rescheduled for any reason not the fault of the Government, the Contractor shall similarly reimburse the Government for all expenses incurred.


#### 1.17 HARD HAT SIGNS

The Contractor shall provide 610 mm by 610 mm (24 by 24 inch) square Hard Hat Area signs at each entry to the project or work area as directed by the Contracting Officer. A minimum of two signs will be required. Signs shall be in accordance with the sketch at the end of this section.

PART 2 PRODUCTS AND PART 3 EXECUTION (NOT APPLICABLE)

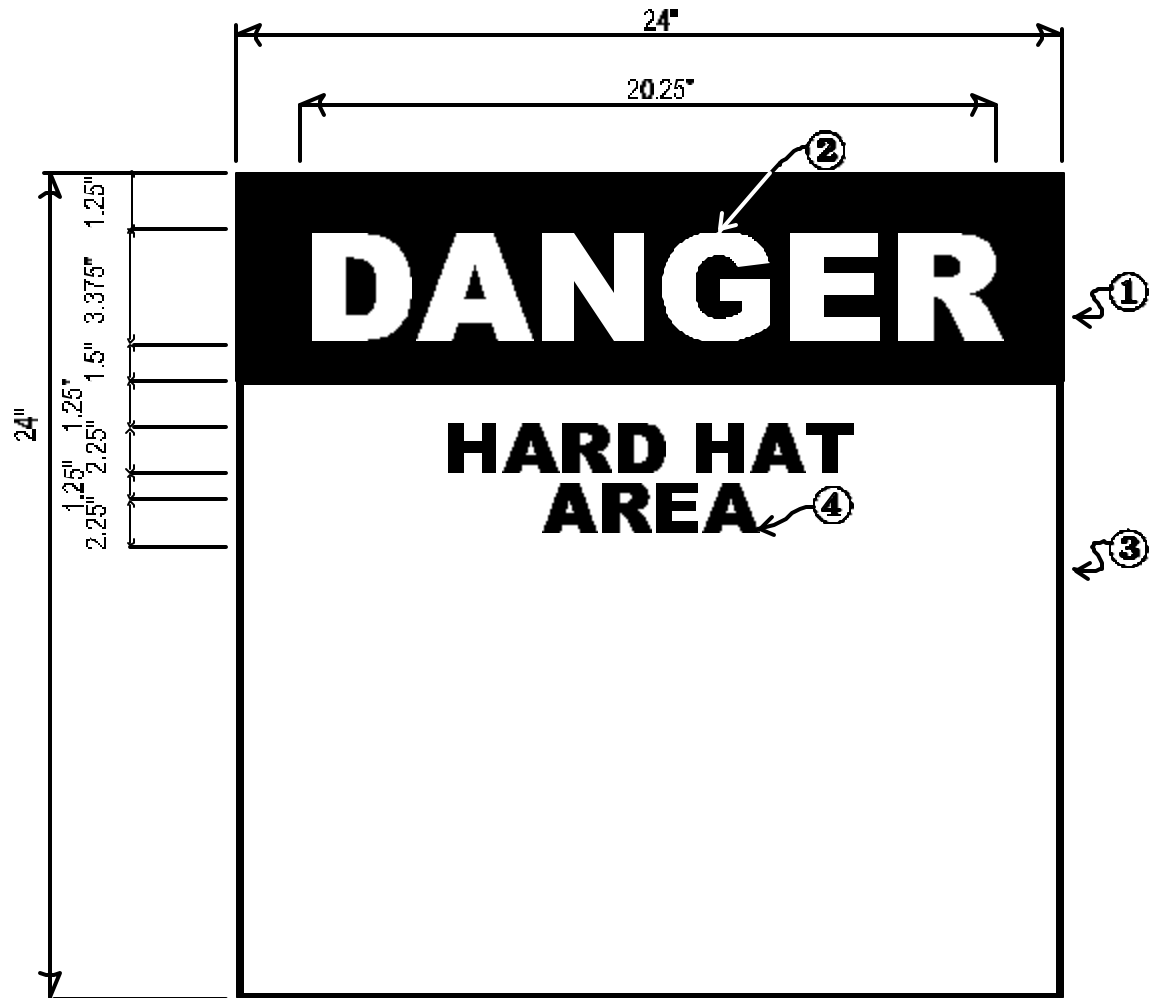

- SIGN SHALL BE FABRICATED FROM .125 THICK 6061-T6 ALUMINUM PANEL
- COLOR
  1. SAFETY RED (SR)
  2. WHITE
  3. WHITE
  4. BLACK
- LETTERING SHALL BE HELVETICA BOLD TYPOGRAPHY.
- LETTERS AND BACKGROUND SHALL BE REFLECTIVE SHEETING MATERIAL.
- SIGNS SHALL BE POSTED AT 6' -6" (BOTTOM SIGN TO GRADE) OR AS DIRECTED BY THE CONTRACTING OFFICER.
- LETTERING TO BE CENTERED ON PANEL.

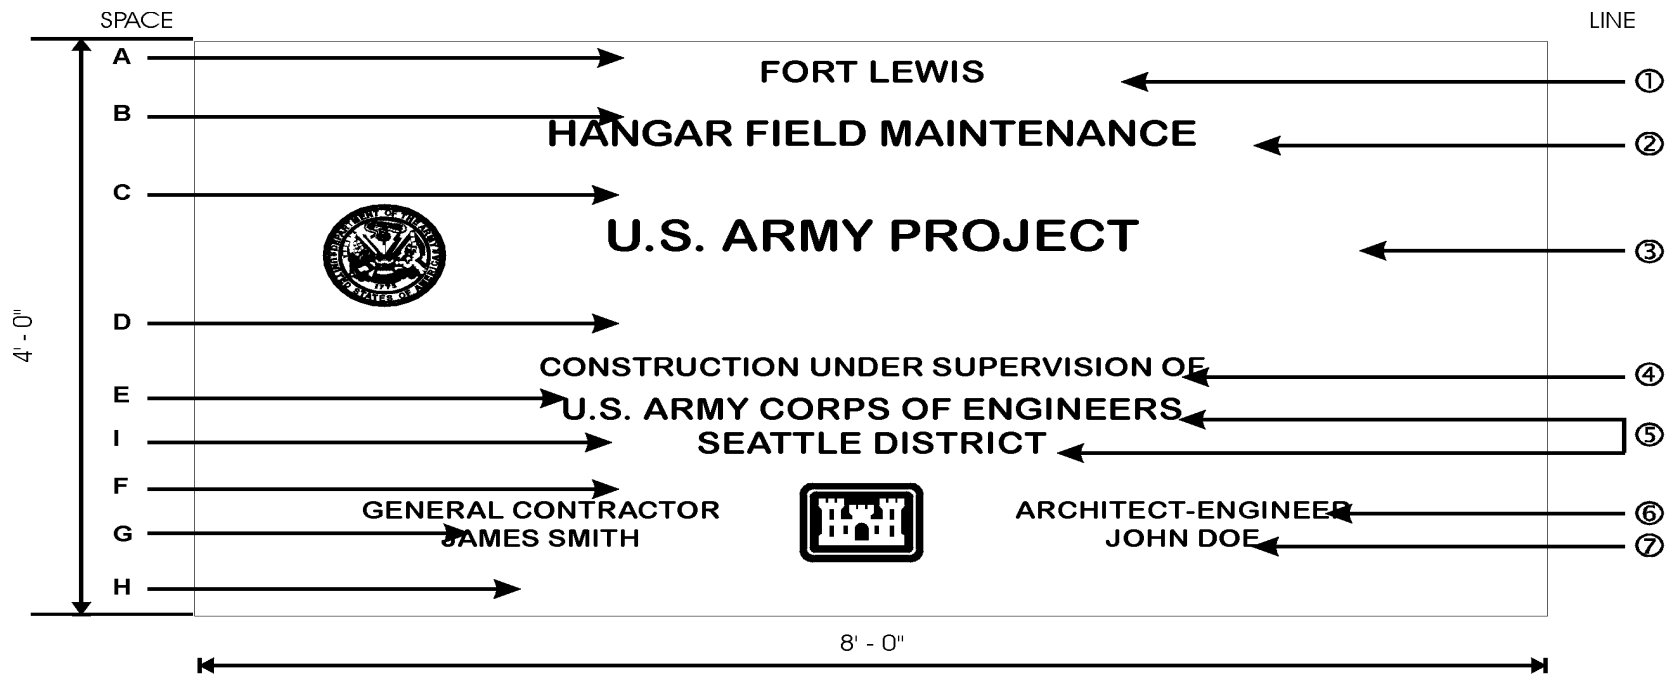

SPACE	HT.	LINE	DESCRIPTION	LETTER HT.	STROKE
A	2"	1	LOCATION	2 3/8"	1/4"
B	2 5/8"	2	PROJECT NOMENCLATURE *	2 3/4"	3/8"
C	5 3/4"	3	U.S. ARMY PROJECT	4"	1/2"
D	8"	4	CONSTRUCTION UNDER SUP.	1 1/2"	1/8"
E	4"	5	CONSTRUCTION AGENCY *	2 3/8"	1/4"
F	4"	6	GENERAL CONTRACTOR *	1 3/8"	3/16"
G	1"	7	GENERAL CONTRACTOR*	1 3/8"	3/16"
H	2 7/8"	*	WILL VARY TO SUIT PROJECT REQUIREMENTS		
I	2		SEATTLE DISTRICT		

**U.S. ARMY**


**PROJECT**

**CONSTRUCTION SIGN**

Sheet 1 of 2 Scales As shown  
U.S. Army Engr. Dist. Seattle, WA.

Dr: R.L.W. Transmitted with report  
Tr: R.L.W. DATED: 20 JUNE 84  
Ck: R.L.W. File No. 49s/40-05-15

# U.S. ARMY PROJECT SIGN

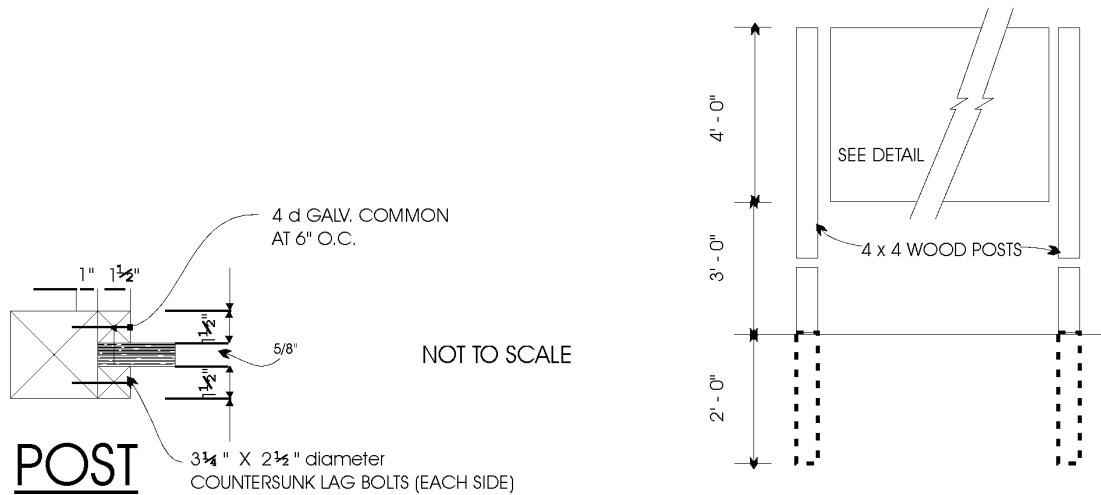

## NOTES:

1. Signboard 4' x 8' x 5/8" grade A-C exterior type plywood with medium density overlay on both sides.
2. Paint both sides and edges with one prime coat and two coats of paint, color white exterior type enamel. Lettering shall be as shown on drawing and shall be black gloss exterior type enamel.
3. Lettering shall be Helvetica medium.
4. Acceptable abbreviations may be used for Contractor's name.
5. Department of Air Force Seal and Corps of Engineers' Castle to be Government furnished.
6. No company logo shall be used.
7. Sign posts and 1 1/2" wood trim shall be painted white.
8. Upon completion of work under this contract, the project sign shall be removed from the job site and shall remain the property of the Contractor.

NOTE: The Contractor shall verify the colors to be used with the Contracting Officer prior to constructing the sign.

SHEET 2 OF 2

END OF SECTION

**This page was intentionally left blank for duplex printing.**



## SECTION 01701

### OPERATIONS AND MAINTENANCE MANUALS

#### PART 1 GENERAL

##### 1.1 SUBMITTALS

Submittals shall be in accordance with SECTION 01330: SUBMITTAL PROCEDURES.

##### 1.2 PAYMENT

No partial or total payment will be made for this work until all O&M manuals are fully approved by the Government (A or B action) and all copies of final manuals are received by the Government in their final binders.

#### PART 2 PRODUCTS (NOT APPLICABLE)

#### PART 3 EXECUTION

##### 3.1 GENERAL

The Contractor shall provide Operation and Maintenance (O&M) manuals for the complete project as applicable under this contract, including all Contractor furnished and installed equipment, systems and materials, and all Government furnished-Contractor installed equipment, systems and materials. Included herein are requirements for compiling and submitting the O&M data. Additional O&M data requirements are specified in the individual sections of the technical specifications. O & M Manual requirements shall be coordinated with the requirements as stated in the other technical specification sections and shall include listings for spare parts, framed instructions, etc.

###### 3.1.1 Preparation

Manual preparation shall be under the direction of an individual or organization that has demonstrated expertise and a minimum of 3 years experience in the preparation of comprehensive and complete O&M manuals. Qualifications shall be submitted for Contracting Officer approval.

###### 3.1.2 Format

3.1.2.1 O&M data shall be separated into distinct systems. O&M manuals for any particular system shall include narrative and technical descriptions of the interrelations with other systems. This narrative shall include a description on how the system works with notable features of the system, including normal and abnormal operating conditions. The explanation of the system is to be short and concise with reference to specific manufacturer's equipment manuals for details (see paragraph CONTENT, subparagraph b). If the quantity of material is such that it will not fit within one binder then it shall be divided into volumes, as required (see paragraph Binders).

3.1.2.2 Six copies of the complete set of manuals shall be provided for each building (as identified by a building number or building description) for multi-building projects. For those multi-building projects where the work is identical in each building, one copy of the manual is required for each building plus six additional copies. For those projects that do not have work in specific buildings, six copies of the manuals are required for the complete project. Any project may have a combination of these requirements to determine the total number of copies required.

3.1.2.3 The requirement for six copies of the O&M manual shall supersede and replace any requirements for a lesser amount of manuals which may be indicated in some specifications. Each set of manuals shall be tailored for its respective building or facility.

### 3.2 PRELIMINARY O&M MANUAL AND DATA SUBMITTAL

To establish and assure uniform O&M manual format, the Contractor shall submit two copies of complete set of O & M data without the binders and receive Contracting Officer approval on one (1) of the sets prior to submission of the final bound manuals. Initial O & M Manual data submittal shall be a minimum of 30 days prior to 90 percent project completion.

The Contractor shall also provide two typewritten pages representing the proposed binder marking format as required under Paragraph: Marking and Binding. One page will represent the front cover/spine and the other page will represent the inside of the front cover.

3.2.1 Data submitted for the manual are to be for the specific equipment furnished, and are in addition to that furnished as shop drawings.

3.2.2 The Contracting Officer will require thirty (30) days for review of submitted O&M manual(s) or data. The Contracting Officer will retain one copy of unacceptable O&M manual submittal and return remainder of copies to the Contractor marked "Returned for Correction." If "Returned for Correction." the Contractor shall resubmit the required number of copies of the manual(s) incorporating all comments, prior to substantial completion and/or use and possession. The Contractor may, at his option, update the copy retained by the Government in lieu of providing the added copy.

3.2.3 For equipment or systems requiring personnel training and/or acceptance testing, all O&M data needed for testing shall be approved by the Contracting Officer prior to the scheduling of the training and/or testing. O&Ms in final bound format shall be submitted in a timely manner so all manuals will be approved in the required quantity, prior to the final inspection. Failure to furnish approved, bound manuals in the required quantity by the final inspection may delay the final inspection and will be cause for the Contracting Officer to hold or adjust the retained percentage in accordance with CONTRACT CLAUSE, PAYMENTS UNDER FIXED PRICE CONSTRUCTION CONTRACTS.

3.2.4 Three of the six completed copies of the final O&M manuals (for each building) shall contain original manufacturer's data. Data in the remaining manuals may be duplicated copies of original data. All data furnished must be of such quality to reproduce clear, legible copies.

### 3.3 BINDERS

#### 3.3.1 Construction and Assembly

Manuals shall be sliding posts or screw-type aluminum binding posts (three screws) with spine, but only one type shall be used for all manuals. The manuals shall be hardback plastic-covered, cleanable, not over 76 mm (3 inches) thick and designed for 216 mm by 279 mm (8-1/2 by 11 inch) paper. The hard cover shall be of minimum stiffness equal to 2.03 mm (0.080 inch) display board or double weight illustration board.

#### 3.3.2 Marking and Binding

As appropriate, systems shall be grouped into four separate categories and bound into four volumes as follows: Mechanical, Electrical, Fire Alarm/Security, and Architectural/General.

Each binder shall have the following information, as a minimum, inscribed on both the spine and cover using an offset or silk screen printing process; "EQUIPMENT OPERATION, MAINTENANCE, AND REPAIR MANUAL;" BUILDING NAME, IDENTIFICATION NUMBER (Building No.), LOCATION, AND DISCIPLINE (MECHANICAL, ELECTRICAL, FIRE ALARM/SECURITY, ARCHITECTURAL/GENERAL). Contractor's name and address as well as the contract title and contract number shall be printed on the inside of the front cover.

#### 3.3.3 Color

Color of binder and printing shall be the option of the Contractor except that; (a) printing color shall contrast with binder color, and (b) colors shall be the same for all manuals.

#### 3.3.4 Content

The O&M manuals shall be structured to address each of the following topics in order for each system. When the topic does not apply to a particular system the topic name will be included in the manual with the words "DOES NOT APPLY."

a. Warning Page: A warning page shall be provided to warn of potential dangers (if they exist), such as high voltage, toxic chemicals, flammable liquids, explosive materials, carcinogens, or high pressures. The warning page shall be placed inside the front cover, in front of the title page.

b. Index: Each manual shall have a master index at the front identifying all manuals and volumes and subject matter by system name for each. Following the master index, each manual shall have an index of its enclosures listing each volume, tab numbers, etc., as necessary to readily refer to a particular operating or maintenance instruction. Rigid tabbed fly leaf sheets shall be provided for each separate product and/or piece of equipment under each system in the manual. For example, if a system includes Air Handling Units 1 through 5, there shall be tab sheets AHU-1, AHU-2, AHU-3, AHU-4 and AHU-5. When a manual is divided into volumes, each volume shall have a master index at its front, followed by an index for the specific volume listing in detail all enclosed instructions for materials, individual pieces of equipment, and systems. All pages shall be numbered with the referenced number included in the index.

c. Description: Narrative and technical descriptions of the system and of the interrelations with other systems.

d. Check List Prior to Start Up: Precautions and prechecks prior to start up of equipment and/or system, including safety devices, monitoring devices and control sequence shall be provided.

e. Start Up and Operation: Step-by-step sequential procedures for start up and normal operation checks for satisfactory operation shall be provided. Safety precautions and instructions that should be followed during these procedures shall be incorporated into the operating instructions and flagged for the attention of the operator. Procedures shall include test, manual or normal, and automatic modes.

f. Shutdown: Procedures for normal and emergency shutdown of equipment and/or systems shall be provided. The instructions shall include any procedures necessary for placing the equipment and/or system on standby or preparing the equipment and/or system for start up at a later time. Procedures shall include test, manual or normal, and automatic modes.

g. Operator Preventive Maintenance, Major Maintenance, and Adjustments: The instructions shall include recommended operator preventive maintenance which would normally be performed by operating personnel and adjustment procedures necessary for normal operation. Schedules shall be provided indicating time frames or operating hours for initiating operator maintenance and adjustments, and including manufacturer's recommended major maintenance requirements. Emergency adjustments shall be included and flagged for operator's attention; the instructions shall also include procedures for emergency repairs that could be performed by operating personnel. These emergency repairs or "trouble-shooting guides" shall be outlined in three columns with the following headings:

Column 1 - Trouble

Column 2 - Probable Cause(s)

Column 3 - Correction

h. Operator Data: The instructions shall include equipment and/or system layouts showing all piping, wiring, breakers, valves, dampers, controls, etc., complete with diagrams, schematics, isometrics, and data to explain the detailed operation and control of each individual piece of equipment and/or system, including system components. Layouts shall show the location within the facility of controls, valves, switches, dampers, etc., by reference to site location, wing designation, floor, room number, or other clear and concise directions for locating the item. Operator data may be identical to posted data and framed instructions but shall be prepared as part of the O&M manuals. All control systems operations data shall include the following:

(1) A fully labeled control schematic which details all set points, throttling ranges, actions, spans, proportional bands, and any other adjustment.

(2) A fully labeled elementary diagram (ladder diagram).

(3) A sequence of control on the diagrams cross-referenced to the control schematic and elementary diagram.

(4) A generic, functional description of each control component shown on the drawings.

(5) Catalog data of every control device.

i. Electrical Layout Drawings: The Electrical O&M's shall include complete layout drawings and one-line diagrams of exterior and interior electrical with reference to the buildings and site layout. Drawings shall include layout of interior lighting, interior power, intrusion detection systems, communication systems and fire protection systems. Exterior layout drawings shall show where fed from, pad-mount transformer, metering, main distribution panel and communication lines. Layout drawings shall show the location within the facility or reference to the building and the site plan. Layout drawings shall be half size contract as-built drawings and shall be inserted into plastic pockets and installed at the back of the O&M's that pertain to that particular drawing.

j. Maintenance Procedures: Recommended procedures shall indicate preventive maintenance, lubrication, and good housekeeping practices which should be performed by operating personnel as well as more complex maintenance procedures which would normally be performed by trained maintenance personnel only. The procedures shall be presented with a schedule indicating time frames or operating hours for specific maintenance to be accomplished. Safety precautions and instructions that should be followed during these procedures shall be incorporated into the maintenance procedures and flagged for the attention of personnel. The procedures shall include necessary operating instructions for taking equipment off line, putting equipment on line, or putting equipment on standby. The instructions shall include all necessary material, equipment, and system data to perform maintenance work and shall include, but not be limited to, manufacturers/bulletins, catalogs, and descriptive data; certified performance curves, copies of approved test plans, including logs and records of performance acceptance test results, and actual adjustments made during final acceptance and inspection; system layouts, including block diagrams, wiring, control, and isometric diagrams: schematic items within the facility; and interrelationships with other items of system.

k. Repairs: Repair procedures shall be presented with a step-by-step procedure for locating and correcting the trouble. A "shop manual" may be used for this purpose. Repair procedures shall be keyed to a troubleshooting guide outlined in three columns with the following headings:

Column 1 - Trouble

Column 2 - Probable Cause(s)

Column 3 - Correction

The procedures shall clearly indicate a major repair activity which should only be performed in a shop or factory versus normal repair work that may be performed onsite or with equipment online. The procedures shall also clearly indicate the limit of repair work that may be performed by Government personnel during the warranty period without voiding warranty provisions. Safety precautions and instructions that should be followed during these procedures shall be incorporated into the repair procedures and flagged for the attention of personnel.

l. Tools: The Contractor shall provide one of each nonstandard tool, test instrument, and gauge necessary for performing maintenance and repair work. A nonstandard tool, test instrument, or gauge is

defined as an item normally supplied by the manufacturer for the equipment operation or maintenance. The Contractor shall prepare a master list of such items for all equipment and systems and shall key maintenance and repair procedures to this list. The above referenced items for performing maintenance and repair work shall be provided for each individual facility of multifacility projects.

m. Parts and Supplies: A complete list of parts and supplies shall be provided with the maintenance instructions. The list shall include all parts and components of individual pieces of equipment, and all parts and components of each system and shall identify such items as description of part, model number, circuit or component identification, etc. Parts and supplies lists shall be included within each volume of maintenance instructions. Further, a master list of spare parts and supplies recommended from each manufacturer for 1 year of operation, including source of supply, shall be sublisted with each instruction.

(1) Availability: The Contractor shall list the sources of supply for all parts and supplies, including name of supplier/manufacturer, address, and telephone number. If the parts and supplies are not normally stocked locally, (within 6 hours travel time, round trip by surface transportation) necessary procurement time shall also be a part of the listing.

(2) Spare Parts: The Contractor shall provide those spare parts and supplies that are specified in the TECHNICAL SPECIFICATIONS and those which are normally provided with the equipment or material item. A separate master list shall be provided for these items upon turnover to the Government of the parts and supplies.

n. Maintenance Schedule: A separate schedule of all required periodic maintenance shall be included. This schedule shall list by frequency of occurrence all lubricants and special adjustments required. The types and amounts of lubrication must be specified. The Contractor shall verify that the furnished maintenance schedule agrees with the published manufacturer's data.

#### 3.3.4.1 Architectural/General O&M:

(1) Building Products, Applied Materials, and Finishes: Include product data, with catalog number, size, composition, and color and texture designations. Provide information for re-ordering custom manufactured products. Data shall include, but not be limited to, information on carpet, floor tile, vinyl wall finishes, builder's hardware, etc.

(2) Instructions for Care and Maintenance: Include manufacturer's recommendations for cleaning agents and methods, precautions against detrimental agents and methods, and recommended schedule for cleaning and maintenance.

(3) Moisture-protection and Weather-exposed Products: Include product data listing applicable reference standards, chemical composition, and details of installation. Provide recommendations for inspections, maintenance, and repair.

(4) Additional Requirements: As specified in individual specifications sections.

### 3.3.4.2 Warranties:

In addition to the general warranty required by the contract, the O&M manuals shall include any specific warranties required by other sections of the TECHNICAL SPECIFICATIONS and other warranties normally provided with the particular piece of equipment or system. Extended warranties normally provided by manufacturers that are beyond the warranty of construction shall be specifically noted. The O&M manuals shall also include a specific warranty section itemizing all standard and extended warranty items. The warranty list shall be as indicated below. Warranties will not begin until the facility is accepted by the Contracting Officer. Copy of warranty shall be included in the manual.

#### WARRANTY INFORMATION

Project Title  
Contract Number

General Contractors Name, Phone Number

<u>ITEM DESCRIPTION</u>	<u>START DATE</u>	<u>END DATE</u>	<u>O &amp; M REFERENCE LOCATION</u>
-------------------------	-------------------	-----------------	-------------------------------------

(in alphabetical order)

Descriptive Name,  
Manufactures/  
Warrantors Name  
Address & Phone No.

### 3.3.4.3 Installed Equipment Lists:

A copy of the completed Equipment in Place forms required in Section 01705 EQUIPMENT-IN-PLACE -LIST shall be included in the manual. The completed forms shall be located at the front of the catalog and O&M data for the equipment listed on the form.

### 3.3.4.4 Data Layout:

(1) Data Identification: Catalog data shall be marked to clearly identify pertinent data by highlighting the data with pointers or crossing out all nonpertinent data.

(2) Drawings: All drawings bound in the manuals shall be of such size that will require only one fold made right to left. All larger size drawings shall be inserted into a separate pocket in the required location in the manual. All drawings shall be of microfilm quality.

(3) Posted Data: The Contractor shall provide posted data for equipment or systems, in addition to O&M manuals, and as required by other Technical Specifications sections. The data shall consist of as-built schematics of all wiring, controls, piping, etc., as necessary for the operation of the equipment or system, and a condensed typewritten description of the system. The posted data may include approved shop drawings, layout drawings, riser, and block diagrams and shall indicate all necessary interrelation with

other equipment and systems. The data may be presented in one or several frames, under glass or sheet acrylic glazing, for clarity and convenience of location. The framed data presentation and outline shall be acceptable to and posted at locations designated by the Contracting Officer. The data shall be posted before personnel training or performance testing acceptance for the related items of equipment or system.

(4) Framed Instructions: Typewritten instructions, framed under glass or sheet acrylic glazing, explaining equipment or system prestart checkout, startup, operations and shutdown procedures, safety precautions, preventive maintenance procedures, and normal operation checks for satisfactory performance of the equipment of systems shall be posted in conjunction with the posted data. The framed instructions may be presented in one or several frames for clarity and convenience of location. The instruction presentation and outline shall be acceptable to the Contracting Officer prior to posting, and shall be posted at locations designated by the Contracting Officer. All framed instructions shall be posted before personnel training or performance testing acceptance commences for the related item of equipment or system.

### 3.3.5 Checklist

Contractor shall complete and initial a copy of the O&M Manual Check List which is provided at the end of this section, and forwarded along with ENG form 4025 as part of the O&M Manual submittal to the Contracting Officer for approval.



## O&amp;M MANUAL - REVIEW CHECKLIST

- ☐ Does the manual cover all equipment furnished under the contract? (Review against equipment schedules on the drawings and/or equipment submittals.)
- ☐ Does the manual clearly highlight all relevant portions or cross out all irrelevant portions of catalog data?
- ☐ Does the manual contain operations data for the equipment? (Step-by-step operating instructions, start up procedures, sequences of operation, precautions.)
- ☐ Does the manual contain maintenance and repair data for the equipment? (Lubrication, dismantling, assembly, adjustment, troubleshooting.)
- ☐ Does the manual contain a separate maintenance schedule listed by frequency of occurrence?
- ☐ Does the manual contain parts lists or parts catalogs for the equipment? Parts catalog or list shall contain identification, part numbers, recommended parts to be stocked, and local source of parts.
- ☐ Does the manual contain electrical connection diagrams?
- ☐ Does the manual contain control and interlock system diagrams where applicable?
- ☐ Is every page in the manual numbered and an index provided for ready reference to the data?
- ☐ Is the cover hard (nonflexible) with the facility name, identification number, location, and system embossed on both the spine and cover? Is the Contractor's name and address, and the contract title and contract number embossed on the inside of the manual cover?
- ☐ Is the binding screw posts or sliding post?
- ☐ Is any of the data in the manual under the binding where it cannot be seen?
- ☐ Do three sets of manuals contain all original data sheets and are others clearly legible?
- ☐ Are system layout drawings provided? (Simplified diagrams for the system as installed.)
- ☐ Are all drawings in the manual of such a size that requires one fold right to left, or if a larger size drawing, then inserted into a pocket in the manual?

Note that the above are common requirements to all contracts. Check the specific contract for additional information.

END OF SECTION

This page intentionally blank.

## SECTION 01702

### AS BUILT RECORDS AND DRAWINGS

#### PART 1 GENERAL

##### 1.1 SUBMITTALS

Data listed in PART 3 of this section shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES. Due dates shall be as indicated in applicable paragraphs and all submittals shall be completed before final payment will be made.

##### 1.2 PAYMENT

No partial or total payment will be made for this item until the as-built drawings, both marked up blue prints and electronic files are fully approved by the Government (A or B action) and all copies of approved drawings and electronic media received by the Government.

#### PART 2 PRODUCTS (NOT APPLICABLE)

#### PART 3 EXECUTION

##### 3.1 AS-BUILT FIELD DATA

###### 3.1.1 General

The Contractor shall keep at the construction site two complete sets of full size prints of the contract drawings, reproduced at Contractor expense, one for the Contractor's use, one for the Government. During construction, both sets of prints shall be marked to show all deviations in actual construction from the contract drawings. The color red shall be used to indicate all additions and green to indicate all deletions. The drawings shall show the following information but not be limited thereto:

- a. The locations and description of any utility lines and other installations of any kind or description known to exist within the construction area. The location includes dimensions and/or survey coordinates to permanent features.
- b. The locations and dimension of any changes within the building or structure, and the accurate location and dimension of all underground utilities and facilities.
- c. Correct grade or alignment of roads, structures, and utilities if any changes were made from contract plans.
- d. Correct elevations if changes were made in site grading from the contract plans.
- e. Changes in details of design or additional information obtained from working drawings specified to be prepared and/or furnished by the Contractor including, but not limited to, fabrication erection, installation, and placing details, pipe sizes, insulation material, dimensions of equipment foundations, etc.

- f. The topography and grades of all drainage installed or affected as part of the project construction.
- g. All changes or modifications from the original design and from the final inspection.
- h. Where contract drawings or specifications allow options, only the option actually used in the construction shall be shown on the as-built drawings. The option not used shall be deleted.

These deviations shall be shown in the same general detail utilized in the contract drawings. Marking of the prints shall be pursued continuously during construction to keep them up to date. In addition, the Contractor shall maintain full size marked-up drawings, survey notes, sketches, nameplate data, pricing information, description, and serial numbers of all installed equipment. This information shall be maintained in a current condition at all times until the completion of the work. The resulting field-marked prints and data shall be referred to and marked as "As-Built Field Data," and shall be used for no other purpose. They shall be made available for inspection by the Contracting Officer's representative whenever requested during construction and shall be jointly inspected for accuracy and completeness by the Contracting Officer's representative and a responsible representative of the Contractor prior to submission of each monthly pay estimate. Failure to keep the As-Built Field Data (including Equipment-in-Place lists) current shall be sufficient justification to withhold a retained percentage from the monthly pay estimate.

### 3.1.2 Submittal of the As-Built Field Data

Two sets of the full size As-Built Field Data shall be submitted to the Contracting Officer for review and approval a minimum of 20 calendar days prior to the date of final inspection. If review of the preliminary as-built drawings reveals errors and/or omissions, the drawings will be returned to the Contractor for corrections. The Contractor shall make all corrections and return the drawings for backcheck to the Contracting Officer within 10 calendar days of receipt. When submitted drawings are accepted, one set of marked drawings will be returned to the Contractor for the completion of the as-built drawings.

### 3.1.3 Additional Drawing Sets for System Acceptance Testing

One set of marked-up as-built prints shall be furnished at the time of system acceptance testing. These as-built prints shall be in addition to the submittals of marked-up as-built prints specified under paragraph 3.1.2.

## 3.2 AS-BUILT ELECTRONIC FILE DRAWINGS

3.2.1 No earlier than 30 days after award the Government will have available for the Contractor one set of AutoCAD electronic file format contract drawings, to be used for preparation of as-built drawings. The electronic file drawings will be available on either 89 mm (3-1/2 inch) 1.44 MB floppy disks or ISO-9660 CD-ROM, as directed by the Contracting Officer. The Contractor has 30 days after the receipt of the electronic file to verify the usability of the AutoCAD files, and bring any discrepancies to the attention of the Contracting Officer. Any discrepancies will be corrected within 15 days and files returned to the Contractor. The Contractor shall incorporate all deviations from the original contract drawings as recorded in the approved 'As-built Field Data' (see paragraph 3.1.2). The Contractor shall also incorporate all the written modifications to the contract drawings that were issued by amendment or contract modification. All revisions and changes shall be incorporated, i.e. items marked "deleted" shall be deleted, clouds around new items shall be removed, etc.

3.2.2 No later than 30 days after final acceptance a complete set of as-built drawings shall be submitted in AutoCAD electronic file format. The electronic file format, layering standards and submittal requirements are specified in paragraphs below. The as-built drawings shall be done in a quality equal to that of the originals. Line work, line weights, lettering, and use of symbols shall be the same as the original line work, line weights, and lettering, and symbols. If additional drawings are required they shall be prepared in electronic file format under the same guidance. When final revisions have been completed, each drawings shall be identified with the words "AS-BUILT" in block letters at least 3/8-inch high placed above the title block if space permits, or if not, below the title block between the border and the trim line. The date of completion and the words "REVISED AS-BUILT" shall be placed in the revision block above the latest revision notation.

### 3.2.3 Electronic File Submittal Requirements

3.2.3.1 The AutoCAD electronic file(s) deliverable shall be in AutoCAD release 14 'DWG' binary format. All support files required to display or plot the file(s) in the same manner as they were developed shall be delivered along with the files. These files include but are not limited to Font files, Menu files, Plotter Setup, and Referenced files. The AutoCAD files shall be "bound" (merged).

3.2.3.2 Leveling shall remain as provided in the electronic files. An explanatory list of which levels are used in each drawing, including any additional levels needed to complete incorporation of the As-Built data, shall be provided with each submittal.

3.2.3.3 Electronic File Deliverable Media: All electronic files shall be submitted in ISO 9660 format CD-ROM (CD). Zip drive disks shall not be provided. Two complete sets of CD(s) shall be submitted along with one complete set of 1/2size prints taken from the CD(s). See paragraph 3.2.4 below. Each CD shall have a clearly marked label stating the Contractor's firm name, project name and location, submittal type (AS-BUILT), and date the CD was made. Each submittal shall be accompanied by a hard copy transmittal sheet that contains the above information along with tabulated information about all files submitted, as shown below:

<u>Electronic File Name</u>	<u>Plate Number</u>	<u>Drawing Title</u>
-----------------------------	---------------------	----------------------

Electronic version of the table shall be included with each submittal set of disks.

### 3.2.4 Submittal of the Final As-Built Drawings

The final as-built record drawings shall be completed and returned together with the approved preliminary as-built drawings to the COE, Seattle District Office, Technical Branch, Records and Information Section, within 30 calendar days of final acceptance. All drawings from the original contract drawings set shall be included, including the drawings where no changes were made. The Government will review all final as-built record drawings for accuracy and conformance to the drafting standards and other requirements contained in DIVISION 1 GENERAL REQUIREMENTS. The drawings will be returned to the Contractor if corrections are necessary. The Contractor shall make all corrections and shall return the drawings to the same office within 7 calendar days of receipt.

01062

Tactical Equipment Complex, Fort Lewis, Washington

END OF SECTION

## SECTION 01703

### WARRANTY OF CONSTRUCTION

#### PART 1 GENERAL

##### 1.1 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

Warranty Management Plan; G

One set of the warranty management plan containing information relevant to the warranty of materials and equipment incorporated into the construction project, including the starting date of warranty of construction. The Contractor shall furnish with each warranty the name, address, and telephone number of each of the guarantor's representatives nearest to the project location.

Warranty Tags; G

Two record copies of the warranty tags showing the layout and design.

##### 1.2 WARRANTY MANAGEMENT

###### 1.2.1 Warranty Management Plan

The Contractor shall develop a warranty management plan which shall contain information relevant to the clause Warranty of Construction in SECTION 00700, CONTRACT CLAUSES. At least 30 days before the planned pre-warranty conference, the Contractor shall submit the warranty management plan for Government approval. The warranty management plan shall include all required actions and documents to assure that the Government receives all warranties to which it is entitled. The plan shall be in narrative form and contain sufficient detail to render it suitable for use by future maintenance and repair personnel, whether tradesmen, or of engineering background, not necessarily familiar with this contract. The term "status" as indicated below shall include due date and whether item has been submitted or was accomplished. Warranty information made available during the construction phase shall be submitted to the Contracting Officer for approval prior to each monthly pay estimate. Approved information shall be assembled in a binder and shall be turned over to the Government upon acceptance of the work. The construction warranty period shall begin on the date of project acceptance and shall continue for the full product warranty period. A joint 4 month and 9 month warranty inspection shall be conducted, measured from time of acceptance, by the Contractor, Contracting Officer and the Customer Representative. Information contained in the warranty management plan shall include, but shall not be limited to, the following:

- a. Roles and responsibilities of all personnel associated with the warranty process, including points of contact and telephone numbers within the organizations of the Contractors, subcontractors, manufacturers or suppliers involved.
- b. Listing and status of delivery of all Certificates of Warranty for extended warranty items, to include roofs, HVAC balancing, pumps, motors, transformers, and for all commissioned systems such as fire protection and alarm systems, sprinkler systems, lightning protection systems, etc.
- c. A list for each warranted equipment, item, feature of construction or system indicating:
  - 1. Name of item.
  - 2. Model and serial numbers.
  - 3. Location where installed.
  - 4. Name and phone numbers of manufacturers or suppliers.
  - 5. Names, addresses and telephone numbers of sources of spare parts.
  - 6. Warranties and terms of warranty. This shall include one-year overall warranty of construction. Items which have extended warranties shall be indicated with separate warranty expiration dates.
  - 7. Cross-reference to warranty certificates as applicable.
  - 8. Starting point and duration of warranty period.
  - 9. Summary of maintenance procedures required to continue the warranty in force.
  - 10. Cross-reference to specific pertinent Operation and Maintenance manuals.
  - 11. Organization, names and phone numbers of persons to call for warranty service.
  - 12. Typical response time and repair time expected for various warranted equipment.
- d. The Contractor's plans for attendance at the 4 and 9 month post-construction warranty inspections conducted by the Government.
- e. Procedure and status of tagging of all equipment covered by extended warranties.
- f. Copies of instructions to be posted near selected pieces of equipment where operation is critical for warranty and/or safety reasons.

### 1.2.2 Performance Bond

The Contractor's Performance Bond shall remain effective throughout the construction period.

- a. In the event the Contractor fails to commence and diligently pursue any construction warranty work required, the Contracting Officer will have the work performed by others, and after completion of the work, will charge the remaining construction warranty funds of expenses incurred by the Government while performing the work, including, but not limited to administrative expenses.
- b. In the event sufficient funds are not available to cover the construction warranty work performed by the Government at the Contractor's expense, the Contracting Officer will have the right to recoup expenses from the bonding company.



c. Following oral or written notification of required construction warranty repair work, the Contractor shall respond in a timely manner. Written verification will follow oral instructions. Failure of the Contractor to respond will be cause for the Contracting Officer to proceed against the Contractor.

### 1.2.3 Pre-Warranty Conference

Prior to contract completion, and at a time designated by the Contracting Officer, the Contractor shall meet with the Contracting Officer to develop a mutual understanding with respect to the requirements of this section. Communication procedures for Contractor notification of construction warranty defects, priorities with respect to the type of defect, reasonable time required for Contractor response, and other details deemed necessary by the Contracting Officer for the execution of the construction warranty shall be established/reviewed at this meeting. In connection with these requirements and at the time of the Contractor's quality control completion inspection, the Contractor shall furnish the name, telephone number and address of a licensed and bonded company which is authorized to initiate and pursue construction warranty work action on behalf of the Contractor. This point of contact will be located within the local service area of the warranted construction, shall be continuously available, and shall be responsive to Government inquiry on warranty work action and status. This requirement does not relieve the Contractor of any of its responsibilities in connection with other portions of this provision.

### 1.2.4 Contractor's Response to Construction Warranty Service Requirements

Following oral or written notification by the Contracting Officer, the Contractor shall respond to construction warranty service requirements in accordance with the "Construction Warranty Service Priority List" and the three categories of priorities listed below. The Contractor shall submit a report on any warranty item that has been repaired during the warranty period. The report shall include the cause of the problem, date reported, corrective action taken, and when the repair was completed. If the Contractor does not perform the construction warranty within the timeframes specified, the Government will perform the work and backcharge the construction warranty payment item established.

- a. First Priority Code 1. Perform onsite inspection to evaluate situation, and determine course of action within 4 hours, initiate work within 6 hours and work continuously to completion or relief.
- b. Second Priority Code 2. Perform onsite inspection to evaluate situation, and determine course of action within 8 hours, initiate work within 24 hours and work continuously to completion or relief.
- c. Third Priority Code 3. All other work to be initiated within 3 work days and work continuously to completion or relief.
- d. The "Construction Warranty Service Priority List" is as follows:

#### Code 1-Air Conditioning Systems

- (1) Recreational support.
- (2) Air conditioning leak in part of building, if causing damage.
- (3) Air conditioning system not cooling properly.

Code 1-Doors

- (1) Overhead doors not operational, causing a security, fire, or safety problem.
- (2) Interior, exterior personnel doors or hardware, not functioning properly, causing a security, fire, or safety problem.

Code 3-Doors

- (1) Overhead doors not operational.
- (2) Interior/exterior personnel doors or hardware not functioning properly.

Code 1-Electrical

- (1) Power failure (entire area or any building operational after 1600 hours).
- (2) Security lights
- (3) Smoke detectors

Code 2-Electrical

- (1) Power failure (no power to a room or part of building).
- (2) Receptacle and lights (in a room or part of building).

Code 3-Electrical

Street lights.

Code 1-Gas

- (1) Leaks and breaks.
- (2) No gas to family housing unit or cantonment area.

Code 1-Heat

- (1). Area power failure affecting heat.
- (2). Heater in unit not working.

Code 2-Kitchen Equipment

- (1) Dishwasher not operating properly.
- (2) All other equipment hampering preparation of a meal.

Code 1-Plumbing

- (1) Hot water heater failure.
- (2) Leaking water supply pipes.

Code 2-Plumbing

- (1) Flush valves not operating properly.
- (2) Fixture drain, supply line to commode, or any water pipe leaking.
- (3) Commode leaking at base.

Code 3 -Plumbing

Leaky faucets.

**Code 3-Interior**

- (1) Floors damaged.
- (2) Paint chipping or peeling.
- (3) Casework.

**Code 1-Roof Leaks**

Temporary repairs will be made where major damage to property is occurring.

**Code 2-Roof Leaks**

Where major damage to property is not occurring, check for location of leak during rain and complete repairs on a Code 2 basis.

**Code 2-Water (Exterior)**

No water to facility.

**Code 2-Water (Hot)**

No hot water in portion of building listed.

**Code 3-All other work not listed above.****1.2.5 Warranty Tags**

At the time of installation, each warranted item shall be tagged with a durable, oil and water resistant tag approved by the Contracting Officer. Each tag shall be attached with a copper wire and shall be sprayed with a silicone waterproof coating. The date of acceptance and the QC signature shall remain blank until project is accepted for beneficial occupancy. The tag shall show the following information.

- a. Type of product/material \_\_\_\_\_.
- b. Model number \_\_\_\_\_.
- c. Serial number \_\_\_\_\_.
- d. Contract number \_\_\_\_\_.
- e. Warranty period \_\_\_\_\_ from \_\_\_\_\_ to \_\_\_\_\_.
- f. Inspector's signature \_\_\_\_\_.
- g. Construction Contractor \_\_\_\_\_.
- Address \_\_\_\_\_.
- Telephone number \_\_\_\_\_.

h. Warranty contact \_\_\_\_\_.

Address \_\_\_\_\_.

Telephone number \_\_\_\_\_.

i. Warranty response time priority code \_\_\_\_\_.

j. WARNING - PROJECT PERSONNEL TO PERFORM ONLY OPERATIONAL  
MAINTENANCE DURING THE WARRANTY PERIOD.

END OF SECTION

SECTION 01704

FORM 1354 CHECKLIST

PART 1 GENERAL

1.1 Procedures

The form, which is a part of this specification section, shall be completed for any project having revisions to real property. The following page contains the basic instructions applicable to the form.

1.2 Submittal

This form shall be submitted for approval, and be approved a minimum of 30 days before final inspection of the project. Failure to have this form completed and approved in time for the final inspection will result in delay of the inspection until the checklist is completed.

PARTS 2 AND 3 NOT USED

## **INSTRUCTIONS FOR DD FORM 1354 CHECKLIST**

The following checklist is only a guide to describe various parts of new and modified construction. Alter this form as necessary or create your own document to give complete accounting of the real property added or deleted for this contract. All items added, deleted, replaced, or relocated within the building 1.5 meter (5 foot line), or on site 1.5 meters (5 feet) beyond the building perimeter must be accounted for completely. Only a few of the most common items beyond the 1.5 meter (5 foot) line are included on the checklist under UTILITIES/SURFACE CONSTRUCTION, add additional items as required by the construction accomplished.. Attach a continuation sheet and use the checklist format to describe other work related to this particular project. Listed on the last page are additional items with units of measure and descriptive terms.

Costs for each item must include material, tax, installation, overhead and profit, bond and insurance costs. This form should be filled out as each item is installed or each phase of work is completed.

TOTAL FOR ALL ITEMS INCLUDING CONTRACT MODIFICATION COSTS ADDED TOGETHER SHOULD EQUAL THE TOTAL CONTRACT PRICE.

NOTE: USE METRIC UNITS OF MEASURE INSTEAD OF ENGLISH UNITS SHOWN.

### **KEY TO ABBREVIATIONS**

AC - Acres  
BL - Barrels, Capacity  
BTU - British Thermal Unit  
CY - Cubic Yards  
EA - Each  
GA - Gallons, Capacity  
HD - Head  
kV - Kilovolt-Amperes, Capacity (kVA)  
kW - Kilowatts, Capacity  
SE - Seats  
SF - Square Feet  
SY - Square Yard  
MB - Million British Thermal Units  
MI - Miles  
LF - Linear Feet  
KG - Thousand Gallons Per Day, Capacity  
TN - Ton  
# - Number; How Many

## Transfer of Real Property

**NUMBER:** \_\_\_\_\_

**TITLE:**\_\_\_\_\_

**LOCATION:**\_\_\_\_\_

1. **DEMOLITION** (Describe each item removed and the cost of removal.)\*
2. **RELOCATION** (Describe each item relocated and the cost of relocation.)\*
3. **REPLACEMENTS** (Describe each item replaced and replacement cost.)\*

01704 - 3

**4. NEW CONSTRUCTION OVERVIEW: BUILDING(S)/ADDITION(S) TO A BUILDING -**

Use a separate checklist for each building and/or addition.

**(1) Outside Dimensions: Length x Width**

- (a) Main Building\_\_\_\_\_
- (b) Offsets\_\_\_\_\_
- (c) Wings\_\_\_\_\_
- (d) Basement\_\_\_\_\_
- (e) Attic\_\_\_\_\_

**(2) Number of Usable Floors :** \_\_\_\_\_**(3) Construction: Exterior Materials Used**

- (a) Foundation (such as concrete)\_\_\_\_\_
- (b) Floors (such as wood, concrete)\_\_\_\_\_
- (c) Walls (such as wood siding, metal, CMU)\_\_\_\_\_
- (d) Roof (such as metal, comp., built-up)\_\_\_\_\_

**(4) Utilities ENTERING Building:** Measure lineal meters (LF) from building entry to next larger size of pipe

- (a) Water (size & type of pipe; number of lineal meters (LF))\_\_\_\_\_
- (b) Gas (size & type of pipe; number of lineal meters (LF))\_\_\_\_\_
- (c) Sewer (size & type of pipe; number of lineal meters (LF))\_\_\_\_\_
- (d) Electric (phase, voltage, size & type of wire, connected load  
in amps)\_\_\_\_\_

**(5) Air Conditioning:**

- (a) Type\_\_\_\_\_
- (b) Capacity Kilograms (TONS)\_\_\_\_\_
- (c) SQ METERS (SQ YDS) covered by  
system\_\_\_\_\_

**(6) Heating:**

- (a) Source\_\_\_\_\_
- (b) Fuel\_\_\_\_\_



(7) **Hot Water Facilities:**

- (a) Capacity Liters (GAL) \_\_\_\_\_  
(b) Temperature Rise \_\_\_\_\_

BUILDING COST: \_\_\_\_\_

**5. BUILDING SYSTEMS (INTERIOR)**

**A. FIRE PROTECTION:**

Property Code

- (1) (880 50/880-211) CLOSED HEAD AUTO SPRINKLERS - Square Meters (SF) & HD (wet or dry pipe; # of Lineal Meters (LF) of service pipe; type of pipe & # of heads; # of Square Meters (SF) covered by system)

DESCRIPTION:

---

---

COST: \_\_\_\_\_

- (2) (880 50/880-212) OPEN HEAD DELUGE SYSTEM - Square Meters (SF) & HD (# of Lineal Meters (LF) of service pipe; type of pipe; # of heads; # of Square Meters (SF) covered)

DESCRIPTION:

---

---

COST: \_\_\_\_\_

- (3) (880 10/880-221) AUTO FIRE DETECTION SYSTEM - Square Meters (SF) & EA (# of alarms-horns, bells, etc.; # of smoke detectors; # of heat detectors; # of fire alarm panels; # of radio transmitters/antennae)

DESCRIPTION:

---

---

COST: \_\_\_\_\_

- (4) (880 20/880-222) MANUAL FIRE ALARM SYSTEM - EA (# of pull stations; # of alarm horns; # of fire extinguisher cabinets)

DESCRIPTION:

---

---

COST: \_\_\_\_\_

(5) (880 60/880-231) CO2 FIRE SYSTEM (# of bottles & size of bottles in kilograms (lbs.))  
DESCRIPTION:

---

---

---

COST: \_\_\_\_\_

(6) (880 60/880-232) FOAM FIRE SYSTEM - EA (# of tanks - capacity in kilograms (lbs.) )  
DESCRIPTION:

---

---

---

COST: \_\_\_\_\_

(7) (880 60/880-233) OTHER FIRE SYSTEM - EA  
DESCRIPTION:

---

---

---

COST: \_\_\_\_\_

(8) (880 60/880-234) HALON 1301 FIRE SYSTEM - EA (# of bottles & size of bottles in kilograms (lbs.))  
DESCRIPTION:

---

---

---

COST: \_\_\_\_\_

#### **B. SECURITY:**

(1) (880 40/872-841) SECURITY ALARM SYSTEM - EA (name of system installed)  
DESCRIPTION:

---

---

---

COST: \_\_\_\_\_

#### **C. HEATING/COOLING SYSTEMS**

(1) (826 10/890-126) A/C WINDOW UNITS - kilograms (TN) & Square Meters (SF)-(# of units installed; amount of Square Meters (SF) covered per unit; size & capacity of each unit)  
DESCRIPTION:

---

---

---

COST: \_\_\_\_\_

(2) (826 14/890-125) A/C PLT LESS THAN 4,536 kilograms (5 TN) - kilograms (TN) & square meters (SF)-(# of kilograms (TN); # of square meters (SF) covered)

DESCRIPTION:

\_\_\_\_\_

COST: \_\_\_\_\_

(3) (826 13/890-121) A/C PLT 4,536 to 22,680 kilograms (5 TO 25 TN) - kilograms (TN)-(# of kilograms (TN); # of square meters (SF) covered)

DESCRIPTION:

\_\_\_\_\_

COST: \_\_\_\_\_

(4) (826 12/826-122) A/C PLT 22,680 to 2,267,962 kilograms (25 TO 100 TN) - kilograms (TN)-(# of kilograms (TN); # of square meters (SF) covered)

DESCRIPTION:

\_\_\_\_\_

COST: \_\_\_\_\_

(5) (826 11/826-123) A/C PLT OVER 2,267,962 kilograms (100 TN) - kilograms (TN)-(# of kilograms (TN); # of square meters (SF) covered)

DESCRIPTION:

\_\_\_\_\_

COST: \_\_\_\_\_

(6) (821 33/821-115) HEATING PLT 220/1026 W (750/3500 MB) - W (MB)-(# of kW (MBH); type of heating system - Ex: Warm air furnace, central)

DESCRIPTION:

\_\_\_\_\_

COST: \_\_\_\_\_

(7) (821 32/821-116) HEATING PLT OVER 1026 W (3500 MB) - W(MB)-(# of kW (MBH); type of heating system)

DESCRIPTION:

\_\_\_\_\_

COST: \_\_\_\_\_

(8) (811 60/811-147) ELEC EMERGENCY POWER GENERATOR-KW-(size of engine;  
rating of generator in kilowatts & voltage)  
DESCRIPTION:

---

---

---

COST: \_\_\_\_\_

(9) (81190 or 82320-gas) STORAGE TANK FOR HEATING or GENERATOR FUEL-Liters (GA);  
TYPE; FUEL-(Size, type of tank, kind of fuel & # of liters (gallons))  
DESCRIPTION:

---

---

---

COST: \_\_\_\_\_

(10) (89220/890-272) EMCS – EA (Direct Digital Control Sys)

---

---

---

COST: \_\_\_\_\_

## SITE WORK

### 6. UTILITIES/SURFACE CONSTRUCTION:

(1) (812 41/812-223) PRIM DISTR LINE OH-Lineal Meters (LF)-(# Lineal Meters (LF) of wire; size &  
type of wire; # of poles; voltage)  
DESCRIPTION:

---

---

---

COST: \_\_\_\_\_

(2) (812/81360) TRANSFORMERS-KVA  
POWER POLES-Lineal Meters (LF)  
(# poles; # transformers - pad or pole mounted; kVA of wire; # Lineal Meters (LF) of wire)  
DESCRIPTION:

---

---

---

COST: \_\_\_\_\_

(3) (812 40/812-224) SEC DISTR LINE OH-Lineal Meters (LF)-(voltage; size & type of wire; # transformers; kVA; # Lineal Meters (LF) of wire; # of service drops; # poles)

DESCRIPTION:

---

---

---

COST: \_\_\_\_\_

(4) (812 42/812-225) PRIM DISTR LINE UG-Lineal Meters (LF)-(kVA; voltage; type of conduit & size(encased or direct burial); size & kind of wire inside conduit; Lineal Meters (LF) of wire & conduit)

DESCRIPTION:

---

---

---

COST: \_\_\_\_\_

(5) (812 42/812-226) SEC DISTR LINE UG-Lineal Meters (LF)-(type of conduit & size; type & size of wires in conduit; Lineal Meters (LF) of conduit & wire inside conduit; voltage)

DESCRIPTION:

---

---

---

COST: \_\_\_\_\_

(6) (812 30/812-926) EXTERIOR LIGHTING-EA-(streets or parking area lights) (# & type of lights; whether pole mounted or not; # Lineal Meters (LF) of connecting wire if pole mounted)

DESCRIPTION:

---

---

---

COST: \_\_\_\_\_

(7) (824 10/824-464) GAS MAINS-Lineal Meters (LF) (size, type, & # of Lineal Meters (LF) of pipe)

DESCRIPTION:

---

---

---

COST: \_\_\_\_\_

(8) (831 90/831-169) SEWAGE SEPTIC TANK-thousand liters (KG)-(size, kind of material, & capacity)

DESCRIPTION:

---

---

---

COST: \_\_\_\_\_

(9) (832 10/832-266) SANITARY SEWER-Lineal Meters (LF)-(sizes & types of pipes - # of Lineal Meters (LF) of each; # of cleanouts; # & size of manholes)

DESCRIPTION:

---

---

---

COST: \_\_\_\_\_

(10) (842 10/842-245) WATER DISTR MAINS (POTABLE)-Lineal Meters (LF)-(# Lineal Meters (LF) & size, type of pipe)

DESCRIPTION:

---

---

---

COST: \_\_\_\_\_

(11) (843 11/843-315) FIRE HYDRANTS-EA-(#; size & type)

DESCRIPTION:

---

---

---

COST: \_\_\_\_\_

(12) (851 90/851-143) CURBS & GUTTERS-Lineal Meters (LF)-(# Lineal Meters (LF); material; width & height)

DESCRIPTION: (Is curb extruded or standard?)\_

---

---

---

COST: \_\_\_\_\_

(13) (851 90/851-145) DRIVEWAY-Square Meters (SY)-Square Meters (SY); material used; thickness)

DESCRIPTION:

---

---

---

COST: \_\_\_\_\_

(14) (851 10/12/851-147) ROAD-Square Meters (SY) & Lineal Meters (LF)-Square Meters (SY); material used; thickness; Lineal Meters (LF) )

DESCRIPTION:

---

---

---

COST: \_\_\_\_\_

(15) (85210/11 /852-262) VEHICLE PARKING-Square Meters (SY)-Square Meters (SY); material used; thickness; # of bollards; # of wheel stops; # of regular parking spaces; # of handicap spaces)  
DESCRIPTION:

---

---

---

COST: \_\_\_\_\_

(16) (852 20/852-289) SIDEWALKS-Square Meters (SY) & Lineal Meters (LF)-(# Square Meters (SF) & Lineal Meters (LF); dimensions of each section & location; thickness; material used)  
DESCRIPTION:

---

---

---

COST: \_\_\_\_\_

(17) (871 10/871-183) STORM DRAIN DISPOSAL-Lineal Meters (LF)-(# Lineal Meters (LF) of pipe; sizes & types of pipe; # of catch basins & manholes & sizes of each)  
DESCRIPTION:

---

---

---

COST: \_\_\_\_\_

(18) (872 15/872-247) FENCE, SECURITY (ARMS)-Lineal Meters (LF)-(# of Lineal Meters (LF); fence material; # & type of gate(s); # strands of barbed wire on top)  
DESCRIPTION:

---

---

---

COST: \_\_\_\_\_

(19) (87210/12/872-248) FENCE, INTERIOR-Lineal Meters (LF)-(# of Lineal Meters (LF); fence material; # & kind of gate(s)  
DESCRIPTION:

---

---

---

COST: \_\_\_\_\_

(20) (890 70/890-187) UTILITY VAULT(4 or more transformers)- Square Meters (SF) (# Square Meters (SF); dimensions of vault; # of transformers)  
DESCRIPTION:

---

---

---

COST: \_\_\_\_\_

(21) (135 10/135-583) TEL DUCT FACILITY-Lineal Meters (LF)-(# of Lineal Meters (LF); size & type of conduit; type of wire)

DESCRIPTION:

---

---

---

COST: \_\_\_\_\_

(22) (135 10/135-586) TEL POLE FACILITY-Lineal Meters (LF)-(# Lineal Meters (LF) & type of wire; # of poles)

DESCRIPTION:

---

---

---

COST: \_\_\_\_\_

7. **INSTALLED EQUIPMENT:** Furnish an Equipment-In-Place List. Any price related to equipment should already be included in this checklist.

8. **SYSTEMS NOT PREVIOUSLY LISTED:** Attach a separate sheet and use the same format to describe the system(s). Example: CATV system, intercom system, or other utilities and surface construction not described on this checklist.



9. **ASBESTOS REMOVAL:** Furnish a description by building of the number of Lineal Meters (LF) of asbestos removed, number of Lineal Meters (LF) of reinsulation, number of Square Meters (SF) of soil encapsulation, and number and size of tanks, etc., where asbestos was removed. Also, identify buildings by their numbers and use.

10. **MAINTENANCE/RENOVATIONS:** List by building number and describe all additions and deletions by quantity and the correct unit of measure. Furnish a cost per building.

**UTILITIES/SURFACE CONSTRUCTION** - Listed below are some additional items which may or may not apply to your contract. EACH item installed on site should be listed and priced separately even if not included on this checklist.

- (1) IRRIGATION SYSTEM(-Lineal Meters (LF) of pipe; size & type of pipe; number and type of heads)
- (2) UNDERGROUND/ABOVEGROUND STORAGE TANKS(-Liters (GA), type of tank; material stored)
- (3) (833-354) DUMPSTER ENCLOSURE(-Square Meters (SF) & dimensions)
- (4) (890-152) UNLOADING PAD(-Square Meters (SY); material)
- (5) SIGNAGE-(Dimensions; material)
- (6) (12580) CATHODIC PROTECTION(kilometers; Lineal Feet) (MI; LF)
- (7) (87270) LIGHTNING PROTECTION-Lineal Feet (LF)
- (8) (81290) POLE DUCT RISER(-Lineal Feet (LF, type of material)
- (9) RAMPS-Square Meters (SF), material; Cubic Meters (CY) if concrete-use code for sidewalk if concrete)
- (10) (89080/890-158) LOAD AND UNLOAD PLATFORM-Square Meters (SF)
- (11) (83240/832-255) INDUSTRIAL WASTE MAIN-Lineal Meters (LF)
- (12) WHEEL STOPS-(EA; size & material)
- (13) (81350) OUTDOOR INTEGRAL DISTR CTR-(kVA)
- (14) (45110) OUTDOOR STORAGE AREA-Square Meters (SF)
- (15) (73055/730-275) BUS/WAIT SHELTER-Square Meters (SF)
- (16) (690-432) FLAGPOLE-(EA; dimensions)
- (17) (93210) SITE IMPROVEMENT-(JOB)
- (18) (93220) LANDSCAPE PLANTING (Hectare (Acre); EA; Square Meters (SF))
- (19) (93230) LANDSCAPE BERMS/MOUNDS-Square Meters (SY)
- (20) (93410) CUT AND FILL-Cubic Meters (CY)
- (21) (843-315) FIRE HYDRANTS-(EA; Type)
- (22) (14970) LOADING AND UNLOADING DOCKS AND RAMPS (not connected to a building)-Square Meters (SF) (23) BICYCLE RACK-(EA)
- (24) (85140/812-928) TRAFFIC SIGNALS-(EA)
- (25) (87210) FENCING OR WALLS-Lineal Meters (LF)
- (26) (15432) RIPRAP-Lineal Meters & Square Meters (LF & SY)
- (27) (75061) GRANDSTAND OR BLEACHERS-(EA; SE)
- (28) 87150/871-187) RETAINING WALLS-Lineal Meters; Square Meters (LF; SY); material

NOTE: 5 Digit Codes-Army; 6 Digit Codes-Air Force

END OF SECTION

## SECTION 01705

### EQUIPMENT-IN-PLACE LIST

#### PART 1 GENERAL

##### 1.1 SUBMITTALS

Data listed in PART 3 of this section shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES. Due dates shall be as indicated in applicable paragraphs and all submittals shall be completed before final payment will be made.

Equipment-In-Place List; G

The final equipment-in-place list shall be completed and returned to the Contracting Officer within 30 calendar days of the final inspection. The Contracting Officer will review all final Equipment-In-Place Lists for accuracy and conformance to the requirements contained in DIVISION 1 GENERAL REQUIREMENTS. The lists shall be returned to the Contractor if corrections are necessary. The Contractor shall make all corrections and shall return the lists to the Contracting Officer within 7 calendar days of receipt.

##### 1.2 PAYMENT

No partial or total payment will be made for this item until both the 1354 Checklist and Equipment in Place List are fully approved by the Government (A or B action) and all copies of approved lists received by the Government.]

#### PART 2 PRODUCTS (NOT APPLICABLE)

#### PART 3 EXECUTION

##### 3.1 EQUIPMENT-IN-PLACE LIST

Contractor shall submit for approval, at the completion of construction, a list of equipment-in-place. This list shall be updated and kept current throughout construction, and shall be jointly inspected for accuracy and completeness by the Contracting Officer's representative and a responsible representative of the Contractor prior to submission of each monthly pay estimate. A sample form showing minimum data required is provided at the end of this section. The EQUIPMENT-IN-PLACE LIST shall be comprised of all equipment falling under one or more of the following classifications:

- a. Each piece of equipment listed on the mechanical equipment schedules.
- b. Each electrical panel, switchboard, and MCC panel.
- c. Each transformer.
- d. Each piece of equipment or furniture designed to be movable.

- e. Each piece of equipment that contains a manufacturer's serial number on the name plate.
- f. All Government furnished, Contractor installed equipment per a. through e. (price data excluded)

**EQUIPMENT-IN-PLACE LIST****CONTRACT NO.:** \_\_\_\_\_

Specification Section: \_\_\_\_\_ Paragraph No. \_\_\_\_\_

**ITEM DESCRIPTION:** \_\_\_\_\_

Item Name: \_\_\_\_\_

Serial Number: \_\_\_\_\_

Model Number: \_\_\_\_\_

Capacity: \_\_\_\_\_ Replacement Cost \_\_\_\_\_

**ITEM LOCATION:**

Building Number: \_\_\_\_\_ Room Number: \_\_\_\_\_

or Column Location: \_\_\_\_\_

**MANUFACTURER INFORMATION:**

Manufacturer Name: \_\_\_\_\_

Trade Name (if  
different from item name): \_\_\_\_\_

Manufacturer's Address: \_\_\_\_\_

Telephone Number: \_\_\_\_\_

**WARRANTY PERIOD:** \_\_\_\_\_

CHECKED BY: \_\_\_\_\_

END OF SECTION

This page intentionally blank.

SECTION 02230

CLEARING AND GRUBBING

PART 1 GENERAL

1.1 DEFINITIONS

1.1.1 Clearing

Clearing shall consist of the felling, trimming, and cutting of trees into sections and the satisfactory disposal of the trees and other vegetation designated for removal, including down timber, snags, brush, and rubbish occurring in the areas to be cleared.

1.1.2 Grubbing

Grubbing shall consist of the removal and disposal of stumps, roots larger than 75 mm in diameter, and matted roots from the designated grubbing areas.

1.2 SUBMITTALS

No Submittals required.

PART 2 PRODUCTS (NOT APPLICABLE)

PART 3 EXECUTION

3.1 CLEARING

Trees, stumps, roots, brush, and other vegetation in areas to be cleared shall be cut off flush with or below the original ground surface, except such trees and vegetation as may be indicated or directed to be left standing. Trees designated to be left standing within the cleared areas shall be trimmed of dead branches 40 mm or more in diameter and shall be trimmed of all branches the heights indicated or directed. Limbs and branches to be trimmed shall be neatly cut close to the bole of the tree or main branches. Cuts more than 40 mm in diameter shall be painted with an approved tree-wound paint. Trees and vegetation to be left standing shall be protected from damage incident to clearing, grubbing, and construction operations by the erection of barriers or by such other means as the circumstances require. Clearing shall also include the removal and disposal of structures that obtrude, encroach upon, or otherwise obstruct the work.

3.2 GRUBBING

3.3 TREE REMOVAL

Where indicated or directed, trees and stumps that are designated as trees shall be removed from areas outside those areas designated for clearing and grubbing. This work shall include the felling of such trees and the removal

01062/BERGER/ABAM  
FY02 Tactical Equipment Complex  
Fort Lewis, Washington

of their stumps and roots as specified in paragraph GRUBBING. Trees shall be disposed of as specified in paragraph DISPOSAL OF MATERIALS.

### 3.4 DISPOSAL OF MATERIALS

#### 3.4.1 Salable Timber

All felled timber will be the property of the Contractor.

#### 3.4.1 Materials Other Than Salable Timber

Logs, stumps, roots, brush, rotten wood, and other refuse from the clearing and grubbing operations, shall be disposed of outside the limits of Government-controlled land at the Contractor's responsibility, except when otherwise directed in writing. Such directive will state the conditions covering the disposal of such products and will also state the areas in which they may be placed. Disposal of refuse and debris and any accidental loss or damage attendant thereto shall be the Contractor's responsibility.

-- End of Section --



SECTION 02300

EARTHWORK

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by basic designation only.

AMERICAN ASSOCIATION OF STATE HIGHWAY AND TRANSPORTATION OFFICIALS  
(AASHTO)

- |              |  |
|--------------|--|
| AASHTO T 180 | (1997) Moisture-Density Relations of Soils Using a 4.54-kg (10-lb) Rammer and an 457 mm (18-in) Drop |
| AASHTO T 224 | (1996) Correction for Coarse Particles in the Soil Compaction Test                                   |

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

- |             |  |
|-------------|--|
| ASTM C 136  | (1996a) Sieve Analysis of Fine and Coarse Aggregates   |
| ASTM D 422  | (1963; R 1998) Particle-Size Analysis of Soils   |
| ASTM D 1140 | (1997) Amount of Material in Soils Finer than the No. 200 (75-micrometer) Sieve  |
| ASTM D 1556 | (1990; R 1996el) Density and Unit Weight of Soil in Place by the Sand-Cone Method  |
| ASTM D 1557 | (1991; R 1998) Laboratory Compaction Characteristics of Soil Using Modified Effort (56,000 ft-lbf/cu. ft. (2,700 kN-m/cu. m.)) |
| ASTM D 2167 | (1994) Density and Unit Weight of Soil in Place by the Rubber Balloon Method   |
| ASTM D 2487 | (1998) Classification of Soils for Engineering Purposes (Unified Soil Classification System)                                   |
| ASTM D 2922 | (1996el) Density of Soil and Soil-Aggregate in Place by Nuclear Methods (Shallow Depth)  |
| ASTM D 2937 | (1994) Density of Soil in Place by the Drive-Cylinder Method   |

ASTM D 3017 (1988; R 1996el) Water Content of Soil and Rock in Place by Nuclear Methods (Shallow Depth)

ASTM D 4318 (1998) Liquid Limit, Plastic Limit, and Plasticity Index of Soils

## 1.2 DEFINITIONS

### 1.2.1 Satisfactory Materials

Satisfactory materials shall comprise any materials classified by ASTM D 2487 as GW, GP, GP-GM, GW-GM, SW, SP, SW-SM, SP-SM. Satisfactory materials for grading shall be comprised of stones less than 200 mm, except for fill material for pavements and railroads which shall be comprised of stones less than 75 mm in any dimension.

### 1.2.2 Unsatisfactory Materials

Materials which do not comply with the requirements for satisfactory materials are unsatisfactory. Unsatisfactory materials also include man-made fills; trash; refuse; backfills from previous construction; and material classified as satisfactory which contains root and other organic matter or frozen material. The Contracting Officer shall be notified of any contaminated materials.

### 1.2.3 Cohesionless and Cohesive Materials

Cohesionless materials include materials classified in ASTM D 2487 as GW, GP, SW, and SP. Cohesive materials include materials classified as GC, SC, ML, CL, MH, and CH. Materials classified as GM and SM will be identified as cohesionless only when the fines are nonplastic. Testing required for classifying materials shall be in accordance with ASTM D 4318, ASTM C 136, ASTM D 422, and ASTM D 1140.

### 1.2.4 Degree of Compaction

Degree of compaction required, except as noted in the second sentence, is expressed as a percentage of the maximum density obtained by the test procedure presented in ASTM D 1557 abbreviated as a percent of laboratory maximum density. Since ASTM D 1557 applies only to soils that have 30 percent or less by weight of their particles retained on the 9.0 mm sieve, the degree of compaction for material having more than 30 percent by weight of their particles retained on the 9.0 mm sieve shall be expressed as a percentage of the maximum density in accordance with AASHTO T 180 Method D and corrected with AASHTO T 224. To maintain the same percentage of coarse material, the "remove and replace" procedure as described in the NOTE 8 in Paragraph 7.2 of AASHTO T 180 shall be used.

### 1.2.5 Topsoil

Topsoil shall be as defined in ASTM D 5258. When available, the topsoil shall be the existing surface soil stripped and stockpiled onsite. The

existing soils at the site may be used in open, seeded, or turfed areas provided that they contain moisture content for the intended use. These soils do contain cobbles and gravels and would need to be processed to meet the specification for topsoil. See Section 02930 for topsoil requirements.

### 1.3 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only. When used, a designation following the "G" designation identifies the office that will review the submittal for the Government. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

#### SD-03 Product Data

Notification of encountering rock in the project.

#### SD-06 Test Reports

Within 24 hours of conclusion of physical tests, 1 copy of test results, including calibration curves and results of calibration tests.

#### SD-07 Certificates

Qualifications of the commercial testing laboratory or Contractor's testing facilities.

### 1.4 SUBSURFACE DATA

The exploration logs and locations are contained in the contract documents. These data represent the best subsurface information available; however, variations may exist in the subsurface between boring locations.

### 1.5 CLASSIFICATION OF EXCAVATION

No consideration will be given to the nature of the materials, and all excavation will be designated as unclassified excavation.

### 1.6 BLASTING

Blasting will not be permitted.

### 1.7 UTILIZATION OF EXCAVATED MATERIALS

Unsatisfactory materials removed from excavations shall be disposed of offsite. Satisfactory material removed from excavations shall be used, insofar as practicable, in the construction of fills, embankments, subgrades, shoulders, bedding (as backfill), and for similar purposes. No satisfactory excavated material shall be wasted without specific written authorization. No excavated material shall be disposed of to obstruct the flow of any stream, endanger a partly finished structure, impair the efficiency or appearance of any structure, or be detrimental to the completed work in any way.

PART 2 PRODUCTS (NOT APPLICABLE)

2.1 QUARRY SPALLS

Quarry spall shall meet the requirements set forth in Section 9-13.6 of the WSDOT Standard Specifications for the Roads, Bridges & Municipal Construction. Installation shall be as per Section 8-15.

2.2 RIVER ROCK FOR POND BOTTOMS

Rock shall be 2 to 6 inches in diameter and be washed for removal of fines. Stone shall be rounded. A sample will be submitted to the Contracting Officer prior to construction for approval.

PART 3 EXECUTION

3.1 STRIPPING OF TOPSOIL

Where practicable, topsoil shall be stripped to a depth as indicated in the boring logs. Topsoil shall be spread on areas already graded and prepared for topsoil, or transported and deposited in stockpiles convenient to areas that are to receive application of the topsoil later, or at locations indicated or specified. Topsoil shall be kept separate from other excavated materials, brush, litter, objectionable weeds, roots, stones larger than 50 mm in diameter, and other materials that would interfere with planting and maintenance operations. Any surplus of topsoil from excavations and grading shall be removed from the site.

3.2 GENERAL EXCAVATION

The Contractor shall perform excavation of every type of material encountered within the limits of the project to the lines, grades, and elevations indicated and as specified. Grading shall be in conformity with the typical sections shown and the tolerances specified in paragraph FINISHING. Satisfactory excavated materials shall be transported to and placed in fill or embankment within the limits of the work. Unsatisfactory materials encountered within the limits of the work shall be excavated below grade and replaced with satisfactory materials as directed. Such excavated material and the satisfactory material ordered as replacement shall be included in excavation. Unsatisfactory excavated material shall be disposed of outside the limits of Government-controlled land. During construction, excavation and fill shall be performed in a manner and sequence that will provide proper drainage at all times. Material required for fill or embankment in excess of that produced by excavation within the grading limits shall be excavated from the borrow areas indicated or from other approved areas selected by the Contractor as specified.

3.2.1 Ditches, Gutters, and Channel Changes

Excavation of ditches, gutters, and channel changes shall be accomplished by cutting accurately to the cross sections, grades, and elevations shown. Ditches and gutters shall not be excavated below grades shown. Excessive open ditch or gutter excavation shall be backfilled with satisfactory,

thoroughly compacted, material or with suitable stone or cobble to grades shown. Material excavated shall be disposed of as shown or as directed, except that in no case shall material be deposited less than 1 meter from the edge of a ditch. The Contractor shall maintain excavations free from detrimental quantities of leaves, brush, sticks, trash, and other debris until final acceptance of the work.

### 3.2.2 Drainage Structures

Excavations shall be made to the lines, grades, and elevations shown, or as directed. Trenches and foundation pits shall be of sufficient size to permit the placement and removal of forms for the full length and width of structure footings and foundations as shown. When concrete or masonry is to be placed in an excavated area, the bottom of the excavation shall not be disturbed. Excavation to the final grade level shall not be made until just before the concrete or masonry is to be placed.

### 3.3 SELECTION OF BORROW MATERIAL

Borrow material shall be selected to meet the requirements and conditions of the particular fill or embankment for which it is to be used. Borrow material shall be obtained from private sources, subject to approval. Unless specifically provided, no borrow shall be obtained within the limits of the project site without prior written approval. Necessary clearing, grubbing, and satisfactory drainage of borrow pits and the disposal of debris thereon shall be considered related operations to the borrow excavation.

### 3.4 GRADING AREAS

Where indicated, work will be divided into grading areas within which satisfactory excavated material shall be placed in embankments, fills, and required backfills. The Contractor shall not haul satisfactory material excavated in one grading area to another grading area except when so directed in writing.

### 3.5 BACKFILL

Backfill adjacent to any and all types of structures shall be placed and compacted to at least 90 percent laboratory maximum density for cohesive materials or 95 percent laboratory maximum density for cohesionless materials to prevent wedging action or eccentric loading upon or against the structure. Ground surface on which backfill is to be placed shall be prepared as specified in paragraph PREPARATION OF GROUND SURFACE FOR EMBANKMENTS. Compaction requirements for backfill materials shall also conform to the applicable portions of paragraphs PREPARATION OF GROUND SURFACE FOR EMBANKMENTS, EMBANKMENTS, and SUBGRADE PREPARATION, and Section 02630 STORM-DRAINAGE SYSTEM; and Section 02316 EXCAVATION, TRENCHING, AND BACKFILLING FOR UTILITIES SYSTEMS. Compaction shall be accomplished by sheepsfoot rollers, pneumatic-tired rollers, steel-wheeled rollers, vibratory compactors, or other approved equipment.

### 3.6 PREPARATION OF GROUND SURFACE FOR EMBANKMENTS

#### 3.6.1 General Requirements

Ground surface on which fill is to be placed shall be stripped of live, dead, or decayed vegetation, rubbish, debris, and other unsatisfactory material; plowed, disked, or otherwise broken up to a depth of 250mm; pulverized; moistened or aerated as necessary; thoroughly mixed; and compacted to at least 90 percent laboratory maximum density for cohesive materials or 95 percent laboratory maximum density for cohesionless materials. Compaction shall be accomplished by sheepsfoot rollers, pneumatic-tired rollers, steel-wheeled rollers, vibratory compactors, or other approved equipment. The prepared ground surface shall be scarified and moistened or aerated as required just prior to placement of embankment materials to assure adequate bond between embankment material and the prepared ground surface.

#### 3.6.2 Frozen Material

Embankment shall not be placed on a foundation which contains frozen material, or which has been subjected to freeze-thaw action. This prohibition encompasses all foundation types, including the natural ground, all prepared subgrades (whether in an excavation or on an embankment) and all layers of previously placed and compacted earth fill which become the foundations for successive layers of earth fill. All material that freezes or has been subjected to freeze-thaw action during the construction work, or during periods of temporary shutdowns, such as, but not limited to, nights, holidays, weekends, winter shutdowns, or earthwork operations, shall be removed to a depth that is acceptable to the Contracting Officer and replaced with new material. Alternatively, the material will be thawed, dried, reworked, and recompactd to the specified criteria before additional material is placed. The Contracting Officer will determine when placement of fill shall cease due to cold weather. The Contracting Officer may elect to use average daily air temperatures, and/or physical observation of the soils for his determination. Embankment material shall not contain frozen clumps of soil, snow, or ice.

### 3.7 EMBANKMENTS

#### 3.7.1 Earth Embankments

Earth embankments shall be constructed from satisfactory materials free of organic or frozen material and rocks with any dimension greater than 75 mm. The material shall be placed in successive horizontal layers of loose material not more than 225 millimeters in depth. Each layer shall be spread uniformly on a soil surface that has been moistened or aerated as necessary, and scarified or otherwise broken up so that the fill will bond with the surface on which it is placed. After spreading, each layer shall be plowed, disked, or otherwise broken up; moistened or aerated as necessary; thoroughly mixed; and compacted to at least 90 percent laboratory maximum density for cohesive materials or 95 percent laboratory maximum density for cohesionless materials. Compaction requirements for the upper portion of earth embankments forming subgrade for pavements shall be identical with those requirements specified in paragraph SUBGRADE PREPARATION. Compaction

shall be accomplished by sheepsfoot rollers, pneumatic-tired rollers, steel-wheeled rollers, vibratory compactors, or other approved equipment.

### 3.8 SUBGRADE PREPARATION

#### 3.8.1 Construction

Subgrade shall be shaped to line, grade, and cross section, and compacted as specified. This operation shall include plowing, disking, and any moistening or aerating required to obtain specified compaction. Soft or otherwise unsatisfactory material shall be removed up to depth of 750 mm and replaced with satisfactory excavated material or other approved material as directed. Low areas resulting from removal of unsatisfactory material shall be brought up to required grade with satisfactory materials, and the entire subgrade shall be shaped to line, grade, and cross section and compacted as specified. The elevation of the finish subgrade shall not vary more than 15 mm from the established grade and cross section.

#### 3.8.2 Compaction

Compaction shall be accomplished by sheepsfoot rollers, pneumatic-tired rollers, steel-wheeled rollers, vibratory compactors, or other approved equipment. Except for paved areas, each layer of the embankment shall be compacted to at least 95 percent of laboratory maximum density.

### 3.9 FINISHING

The surface of excavations, embankments, and subgrades shall be finished to a smooth and compact surface in accordance with the lines, grades, and cross sections or elevations shown. The degree of finish for graded areas shall be within 30 mm of the grades and elevations indicated except that the degree of finish for subgrades shall be specified in paragraph SUBGRADE PREPARATION. Gutters and ditches shall be finished in a manner that will result in effective drainage. The surface of areas to be turfed shall be finished to a smoothness suitable for the application of turfing materials.

### 3.10 PLACING TOPSOIL

On areas to receive topsoil, the compacted subgrade soil shall be scarified to a 50 mm depth for bonding of topsoil with subsoil. Topsoil then shall be spread evenly to a thickness of 300 mm and graded to the elevations and slopes shown. Topsoil shall not be spread when frozen or excessively wet or dry. Material required for topsoil in excess of that produced by excavation within the grading limits shall be obtained from offsite areas.

### 3.11 TESTING

Testing shall be performed by an approved commercial testing laboratory. Field in-place density shall be determined in accordance with ASTM D 2922 or ASTM D 1556. When ASTM D 2922 is used, the calibration curves shall be checked and adjusted using only the sand cone method as described in ASTM D 1556. ASTM D 2922 results in a wet unit weight of soil and when using this method ASTM D 3017 shall be used to determine the moisture content of the soil. The calibration curves furnished with the moisture gauges shall also

be checked along with density calibration checks as described in ASTM D 3017; the calibration checks of both the density and moisture gauges shall be made at the beginning of a job on each different type of material encountered and at intervals as directed by the Contracting Officer. When test results indicate, as determined by the Contracting Officer, that compaction is not as specified, the material shall be removed, replaced and recompacted to meet specification requirements. Tests on recompacted areas shall be performed to determine conformance with specification requirements. Inspections and test results shall be certified by a registered professional civil engineer. These certifications shall state that the tests and observations were performed by or under the direct supervision of the engineer and that the results are representative of the materials or conditions being certified by the tests. The following number of tests, if performed at the appropriate time, will be the minimum acceptable for each type operation.

#### 3.11.1 Fill and Backfill Material Gradation

One test per 200 cubic meters stockpiled or in-place source material. Gradation of fill and backfill material shall be determined in accordance with ASTM D 422.

#### 3.11.2 In-Place Densities

- a. One test per 500 square meters, or fraction thereof, of each lift of fill or backfill areas compacted by other than hand-operated machines.
- b. One test per 200 square meters, or fraction thereof, of each lift of fill or backfill areas compacted by hand-operated machines.

#### 3.11.3 Check Tests on In-Place Densities

If ASTM D 2922 is used, in-place densities shall be checked by ASTM D 1556 as follows:

- a. One check test per lift for each 500 square meters, or fraction thereof, of each lift of fill or backfill compacted by other than hand-operated machines.
- b. One check test per lift for each 200 square meters, of fill or backfill areas compacted by hand-operated machines.

#### 3.11.4 Moisture Contents

In the stockpile, excavation, or borrow areas, a minimum of two tests per day per type of material or source of material being placed during stable weather conditions shall be performed. During unstable weather, tests shall be made as dictated by local conditions and approved by the Contracting Officer.



3.11.5 Optimum Moisture and Laboratory Maximum Density

Tests shall be made for each type material or source of material including borrow material to determine the optimum moisture and laboratory maximum density values. One representative test per 100 cubic meters of fill and backfill, or when any change in material occurs which may affect the optimum moisture content or laboratory maximum density.

3.11.6 Tolerance Tests for Subgrades

Continuous checks on the degree of finish specified in paragraph SUBGRADE PREPARATION shall be made during construction of the subgrades.

3.12 SUBGRADE AND EMBANKMENT PROTECTION

During construction, embankments and excavations shall be kept shaped and drained. Ditches and drains along subgrade shall be maintained to drain effectively at all times. The finished subgrade shall not be disturbed by traffic or other operation and shall be protected and maintained by the Contractor in a satisfactory condition until ballast, subbase, base, or pavement is placed. The storage or stockpiling of materials on the finished subgrade will not be permitted. No subbase, base course, ballast, or pavement shall be laid until the subgrade has been checked and approved, and in no case shall subbase, base, surfacing, pavement, or ballast be placed on a muddy, spongy, or frozen subgrade.

-- End of Section --

01062/BERGER/ABAM  
FY02 Tactical Equipment Complex  
Fort Lewis, Washington

This page intentionally blank.

SECTION 02315

EXCAVATION, FILLING AND BACKFILLING FOR BUILDINGS

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by basic designation only.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM D 1556	(1990; R 1996el) Density and Unit Weight of Soil in Place by the Sand-Cone Method
ASTM D 1557	(1991; R 1998) Laboratory Compaction Characteristics of Soil Using Modified Effort (56,000 ft-lbf/cu. ft. (2,700 kN-m/cu.m.))
ASTM D 2167	(1994) Density and Unit Weight of Soil in Place by the Rubber Balloon Method
ASTM D 2216	(1998) Laboratory Determination of Water (Moisture) Content of Soil and Rock
ASTM D 2487	(1998) Classification of Soils for Engineering Purposes (Unified Soil Classification System)
ASTM D 2922	(1996el) Density of Soil and Soil-Aggregate in Place by Nuclear Methods (Shallow Depth)
ASTM D 2937	(1994) Density of Soil in Place by the Drive-Cylinder Method
ASTM D 3017	(1988; R 1996el) Water Content of Soil and Rock in Place by Nuclear Methods (Shallow Depth)
ASTM D 4318	(1998) Liquid Limit, Plastic Limit, and Plasticity Index of Soils

1.2 DEGREE OF COMPACTION

Degree of compaction is expressed as a percentage of the maximum density obtained by the test procedure presented in ASTM D 1557, abbreviated as percent laboratory maximum density.

### 1.3 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only. When used, a designation following the "G" designation identifies the office that will review the submittal for the Government. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

#### SD-06 Test Reports

##### Testing; G

Copies of all laboratory and field test reports within 24 hours of the completion of the test.

## PART 2 PRODUCTS

### 2.1 MATERIALS

#### 2.1.1 Satisfactory Materials

Satisfactory materials shall be as referenced in Section 02300 EARTHWORK.

#### 2.1.2 Unsatisfactory Materials

Materials which do not comply with the requirements for satisfactory materials are unsatisfactory. Unsatisfactory materials also include man-made fills, trash, refuse, or backfills from previous construction. Unsatisfactory material also includes material classified as satisfactory which contains root and other organic matter, frozen material, and stones larger than 75 mm. The Contracting Officer shall be notified of any contaminated materials.

#### 2.1.3 Cohesionless and Cohesive Materials

Cohesionless materials include materials classified in ASTM D 2487 as GW, GP, SW, and SP. Cohesive materials include materials classified as GC, SC, ML, CL, MH, and CH. Materials classified as GM, GP-GM, GW-GM, SW-SM, SP-SM, and SM shall be identified as cohesionless only when the fines are nonplastic.

### 2.2 CAPILLARY WATER BARRIER

Capillary Water Barrier shall consist of clean, crushed, nonporous rock, crushed gravel, or uncrushed gravel. The maximum particle size shall be 37.5 mm and no more than 2 percent by weight shall pass the 4.75 mm size sieve.

## PART 3 EXECUTION

### 3.1 CLEARING AND GRUBBING

Clearing and grubbing is specified in Section 02230 CLEARING AND GRUBBING.

### 3.2 TOPSOIL

Reference Section 02300 EARTHWORK for handling of Topsoil.

### 3.3 EXCAVATION

Excavation shall conform to the dimensions and elevations indicated for each building, structure, and footing except as specified, and shall include trenching for utility and foundation drainage systems to a point 1.5 m beyond the building line of each building and structure, and all work incidental thereof. Excavation shall extend a sufficient distance from walls and footings to allow for placing and removal of forms. Excavations below indicated depths will not be permitted except to remove unsatisfactory material. All excavated unsatisfactory materials and excess satisfactory materials shall be disposed of outside of Government-controlled land. Unsatisfactory material encountered below the grades shown shall be replaced with satisfactory material. Satisfactory material removed below the depths indicated, without specific direction of the Contracting Officer, shall be replaced, at no additional cost to the Government, with satisfactory materials to the indicated excavation grade. Satisfactory material shall be placed and compacted as specified in paragraph FILLING AND BACKFILLING. Determination of elevations and measurements of approved overdepth excavation of unsatisfactory material below grades indicated shall be done under the direction of the Contracting Officer.

### 3.4 DRAINAGE AND DEWATERING

#### 3.4.1 Drainage

Surface water shall be directed away from excavation and construction sites to prevent erosion and undermining of foundations. Diversion ditches, dikes and grading shall be provided and maintained as necessary during construction. Excavated slopes and backfill surfaces shall be protected to prevent erosion and sloughing. Excavation shall be performed so that the site, the area immediately surrounding the site, and the area affecting operations at the site shall be continually and effectively drained.

#### 3.4.2 Dewatering

Groundwater flowing toward or into excavations shall be controlled to prevent sloughing of excavation slopes and walls, boils, uplift and heave in the excavation and to eliminate interference with orderly progress of construction. French drains, sumps, ditches or trenches will not be permitted within 900 mm of the foundation of any structure, except with specific written approval, and after specific contractual provisions for restoration of the foundation area have been made. Control measures shall be taken by the time the excavation reaches the water level in order to maintain the integrity of the in situ material. While the excavation is open, the water level shall be maintained continuously, at least 1 meter below the working level.

### 3.5 SHORING

Shoring, including sheet piling, shall be furnished and installed as necessary to protect workmen, banks, adjacent paving, structures, and utilities. Shoring, bracing, and sheeting shall be removed as excavations are backfilled, in a manner to prevent caving.

### 3.6 CLASSIFICATION OF EXCAVATION

Excavation will be unclassified regardless of the nature of material encountered.

### 3.7 BLASTING

Blasting will not be permitted.

### 3.8 UTILITY AND DRAIN TRENCHES

Trenches for underground utilities systems and drain lines shall be excavated to the required alignments and depths. The bottoms of trenches shall be graded to secure the required slope and shall be tamped if necessary to provide a firm pipe bed. Recesses shall be excavated to accommodate bells and joints so that pipe will be uniformly supported for the entire length.

### 3.9 BORROW

Where satisfactory materials are not available in sufficient quantity from required excavations, approved materials shall be obtained as specified in Section 02300 EARTHWORK.

### 3.10 EXCAVATED MATERIALS

Satisfactory excavated material required for fill or backfill shall be placed in the proper section of the permanent work required under this section or shall be separately stockpiled if it cannot be readily placed. Satisfactory material in excess of that required for the permanent work and all unsatisfactory material shall be disposed of as specified in Section 02300 EARTHWORK.

### 3.11 FINAL GRADE OF SURFACES TO SUPPORT CONCRETE

Excavation to final grade shall not be made until just before concrete is to be placed. Approximately level surfaces shall be roughened, and sloped surfaces shall be cut as indicated into rough steps or benches to provide a satisfactory bond. Shales shall be protected from slaking and all surfaces shall be protected from erosion resulting from ponding or flow of water.

### 3.12 SUBGRADE PREPARATION

Unsatisfactory material in surfaces to receive fill or in excavated areas shall be removed and replaced with satisfactory materials as directed by the Contracting Officer. The surface shall be scarified to a depth of 150 mm before the fill is started. Sloped surfaces steeper than 1 vertical to 4

horizontal shall be plowed, stepped, benched, or broken up so that the fill material will bond with the existing material. When subgrades are less than the specified density, the ground surface shall be broken up to a minimum depth of 150 mm, pulverized, and compacted to the specified density. When the subgrade is part fill and part excavation or natural ground, the excavated or natural ground portion shall be scarified to a depth of 300 mm and compacted as specified for the adjacent fill. Material shall not be placed on surfaces that are muddy, frozen, or contain frost. Compaction shall be accomplished by sheepsfoot rollers, pneumatic-tired rollers, steel-wheeled rollers, or other approved equipment well suited to the soil being compacted. Material shall be moistened or aerated as necessary to provide the moisture content that will readily facilitate obtaining the specified compaction with the equipment used. Minimum subgrade density shall be as specified in paragraph FILLING AND BACKFILLING.

### 3.13 FILLING AND BACKFILLING

Satisfactory materials shall be used in bringing fills and backfills to the lines and grades indicated and for replacing unsatisfactory materials. Satisfactory materials shall be placed in horizontal layers not exceeding 200 mm in loose thickness, or 150 mm when hand-operated compactors are used. After placing, each layer shall be plowed, disked, or otherwise broken up, moistened or aerated as necessary, thoroughly mixed and compacted as specified. Backfilling shall not begin until construction below finish grade has been approved, underground utilities systems have been inspected, tested and approved, forms removed, and the excavation cleaned of trash and debris. Backfill shall be brought to indicated finish grade. Backfill shall not be placed in wet or frozen areas. Heavy equipment for spreading and compacting backfill shall not be operated closer to foundation or retaining walls than a distance equal to the height of backfill above the top of footing; the area remaining shall be compacted in layers not more than 100 mm in compacted thickness with power-driven hand tampers suitable for the material being compacted. Backfill shall be placed carefully around pipes to avoid damage to coatings, wrappings, or tanks. Backfill shall not be placed against foundation walls prior to 7 days after completion of the walls. As far as practicable, backfill shall be brought up evenly on each side of the wall and sloped to drain away from the wall. Each layer of fill

and backfill shall be compacted to not less than the percentage of maximum density specified below:

	Percent Laboratory maximum density	
	Cohesive material	Cohesionless material
<hr/> Fill, embankment, and backfill <hr/>		
Under structures, building slabs, steps, paved areas, around footings, and in trenches	90	95
Under sidewalks and grassed areas	85	90
 Subgrade <hr/>		
Under building slabs, steps, and paved areas, top 300 mm	90	95
Under sidewalks, top 150 mm	85	90

Approved compacted subgrades that are disturbed by the Contractor's operations or adverse weather shall be scarified and compacted as specified herein before to the required density prior to further construction thereon. Recompression over underground utilities and heating lines shall be by hand tamping.

### 3.14 TESTING

Testing shall be the responsibility of the Contractor and shall be performed at no additional cost to the Government. Testing shall be performed by an approved commercial testing laboratory. Field in-place density shall be determined in accordance with ASTM D 2922 or ASTM D 1556. When ASTM D 2922 is used, the calibration curves shall be checked and adjusted if necessary by the procedure described in ASTM D 2922, paragraph ADJUSTING CALIBRATION CURVE. ASTM D 2922 results in a wet unit weight of soil and when using this method ASTM D 3017 shall be used to determine the moisture content of the soil. The calibration curves furnished with the moisture gauges shall also be checked along with density calibration checks as described in ASTM D 3017. The calibration checks of both the density and moisture gauges shall be made at the beginning of a job on each different type of material encountered and at intervals as directed by the Contracting Officer. The following number of tests, if performed at the appropriate time, shall be the minimum acceptable for each type operation.



### 3.14.1 In-Place Densities

In-place density and moisture content test results shall be included with the Contractor's daily construction quality control reports.

#### 3.14.1.1 In-Place Density of Subgrades

One test per 500 square meters or fraction thereof.

#### 3.14.1.2 In-Place Density of Fills and Backfills

One test per 500 square meters or fraction thereof of each lift for fill or backfill areas compacted by other than hand or hand-operated machines. The density for each lift of fill or backfill materials for trenches, pits, building perimeters or other structures which are compacted with hand or hand-operated machines shall be tested as follows: One test per each area less than 200 square meters, or one test for each 50 linear meter of long narrow fills 100 meters or more in length. If ASTM D 2922 is used, in-place densities shall be checked by ASTM D 1556 as follows: One check per lift for each 50 linear meters of long narrow fills.

### 3.14.2 Moisture Content

In the stockpile, excavation or borrow areas, a minimum of two tests per day per type of material or source of materials being placed is required during stable weather conditions. During unstable weather, tests shall be made as dictated by local conditions and approved moisture content shall be tested in accordance with ASTM D 2216.

### 3.14.3 Optimum Moisture and Laboratory Maximum Density

Tests shall be made for each type material or source of material, including borrow material to determine the optimum moisture and laboratory maximum density values. One representative test per 500 cubic meters of fill and backfill, or when any change in material occurs which may affect the optimum moisture content or laboratory maximum density will be made.

## 3.15 GRADING

Areas within 1.5 m outside of each building and structure line shall be constructed true-to-grade, shaped to drain, and shall be maintained free of trash and debris until final inspection has been completed and the work has been accepted.

## 3.16 SPREADING TOPSOIL

Areas outside the building lines from which topsoil has been removed shall be topsoiled. The surface shall be free of materials that would hinder planting or maintenance operations. The subgrade shall be pulverized to a depth of 50 mm by disking or plowing for the bonding of topsoil with the subsoil. Topsoil shall then be uniformly spread, graded, and compacted to the thickness, elevations, slopes shown, and left free of surface irregularities. Topsoil shall be compacted by one pass of a cultipacker, roller, or other approved equipment weighing 1.46 kN/m to 2.34 kN/m of

01062/BERGER/ABAM  
FY02 Tactical Equipment Complex  
Fort Lewis, Washington

roller. Topsoil shall not be placed when the subgrade is frozen, excessively wet, extremely dry, or in a condition otherwise detrimental to seeding, planting, or proper grading.

### 3.17 PROTECTION

Settlement or washing that occurs in graded, topsoiled, or backfilled areas prior to acceptance of the work, shall be repaired and grades reestablished to the required elevations and slopes.

-- End of Section --

SECTION 02316

EXCAVATION, TRENCHING, AND BACKFILLING FOR UTILITIES SYSTEMS

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by basic designation only.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM D 1556	(1990; R 1996) Density and Unit Weight of Soil in Place by the Sand-Cone Method
ASTM D 1557	(1998) Laboratory Compaction Characteristics of Soil Using Modified Effort (56,000 ft-lbf/cu. ft. (2,700 kN-m/cu. m.))
ASTM D 2167	(1994) Density and Unit Weight of Soil in Place by the Rubber Balloon Method
ASTM D 2487	(1998) Classification of Soils for Engineering Purposes (Unified Soil Classification System)
ASTM D 2922	(1996) Density of Soil and Soil-Aggregate in Place by Nuclear Methods (Shallow Depth)
ASTM D 3017	(1988; R1996el) Water Content of Soil and Rock in Place by Nuclear Methods (Shallow Depth)

1.2 DEGREE OF COMPACTION

Degree of compaction shall be expressed as a percentage of the maximum density obtained by the test procedure presented in ASTM D 1557.

1.3 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only. When used, a designation following the "G" designation identifies the office that will review the submittal for the Government. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

SD-06 Test Reports

Field Density Tests; G  
Testing of Backfill Materials; G

Copies of all laboratory and field test reports within 24 hours of the completion of the test.

## PART 2 PRODUCTS

### 2.1 MATERIALS

#### 2.1.1 Satisfactory Materials

Satisfactory materials shall be as referenced in Section 02300 EARTHWORK.

#### 2.1.2 Unsatisfactory Materials

Materials which do not comply with the requirements for satisfactory materials are unsatisfactory. Unsatisfactory materials also include man-made fills, trash, refuse, or backfills from previous construction. Unsatisfactory material also includes material classified as satisfactory, which contains root and other organic matter, frozen material, and stones larger than 75 mm. The Contracting Officer shall be notified of any contaminated materials.

#### 2.1.3 Cohesionless and Cohesive Materials

Cohesionless materials shall include materials classified in ASTM D 2487 as GW, GP, SW, and SP. Cohesive materials shall include materials classified as GC, SC, ML, CL, MH, and CH. Materials classified as GM and SM shall be identified as cohesionless only when the fines are nonplastic.

#### 2.1.4 Unyielding Material

Unyielding material shall consist of rock and gravelly soils with stones greater than 75 millimeters in any dimension or as defined by the pipe manufacturer, whichever is smaller.

#### 2.1.5 Unstable Material

Unstable material shall consist of materials too wet to properly support the utility pipe, conduit, or appurtenant structure.

#### 2.1.6 Select Granular Material

Select granular material shall consist of well-graded sand, gravel, crushed gravel, crushed stone composed of hard, tough and durable particles, and shall contain not more than 10 percent by weight of material passing a 0.075 mm mesh sieve and no less than 95 percent by weight passing the 25 mm sieve. The maximum allowable aggregate size shall be 20 millimeters, or the maximum size recommended by the pipe manufacturer, whichever is smaller.

#### 2.1.7 Initial Backfill Material

Initial backfill shall consist of select granular material or satisfactory materials free from rocks 75 millimeters or larger in any dimension or free

from rocks of such size as recommended by the pipe manufacturer, whichever is smaller.

## 2.2 PLASTIC MARKING TAPE

Plastic marking tape shall be acid and alkali-resistant polyethylene film, 152 mm wide with minimum thickness of 0.102 mm. Tape shall have a minimum strength of 12.1 MPa lengthwise and 10.3 MPa crosswise. The tape shall be manufactured with integral wires, foil backing or other means to enable detection by a metal detector when the tape is buried up to 1 meter deep. The tape shall be of a type specifically manufactured for marking and locating underground utilities. The metallic core of the tape shall be encased in a protective jacket or provided with other means to protect it from corrosion. Tape color shall be as specified in TABLE 1 and shall bear a continuous printed inscription describing the specific utility.

TABLE 1. Tape Color

Red:	Electric
Yellow:	Gas, Oil, Dangerous Materials
Orange:	Telephone, Telegraph, Television, Police, and Fire Communications
Blue:	Water Systems
Green:	Sewer Systems

## PART 3 EXECUTION

### 3.1 EXCAVATION

Excavation shall be performed to the lines and grades indicated. During excavation, material satisfactory for backfilling shall be stockpiled in an orderly manner at a distance from the banks of the trench equal to 1/2 the depth of the excavation, but in no instance closer than 600 mm. Excavated material not required or not satisfactory for backfill shall be removed from the site. Grading shall be done as may be necessary to prevent surface water from flowing into the excavation, and any water accumulating shall be removed to maintain the stability of the bottom and sides of the excavation. Unauthorized overexcavation shall be backfilled in accordance with paragraph BACKFILLING AND COMPACTION at no additional cost to the Government.

#### 3.1.1 Trench Excavation Requirements

The trench shall be excavated as recommended by the manufacturer of the pipe to be installed. Trench walls below the top of the pipe shall be sloped, or made vertical, and of such width as recommended in the manufacturer's installation manual. Where no manufacturer's installation manual is available, trench walls shall be made vertical. Trench walls more than allowed by the State of Washington or the Corps of Engineers shall be shored, cut back to a stable slope, or provided with equivalent means of protection for employees who may be exposed to moving ground or cave in. Shoring shall meet the requirements of the Corps of Engineers or the State of Washington, whichever is more stringent. Trench walls, which are cut back, shall be excavated to at least the angle of repose of the soil. Special attention shall be given to slopes which may be adversely affected

by weather or moisture content. The trench width below the top of pipe shall not exceed 450 mm plus pipe outside diameter. Where recommended trench widths are exceeded, redesign, stronger pipe, or special installation procedures shall be utilized by the Contractor. The cost of redesign, stronger pipe, or special installation procedures shall be borne by the Contractor without any additional cost to the Government.

#### 3.1.1.1 Bottom Preparation

The bottoms of trenches shall be accurately graded to provide uniform bearing and support for the bottom quadrant of each section of the pipe. Bell holes shall be excavated to the necessary size at each joint or coupling to eliminate point bearing. Stones of 75 millimeters or greater in any dimension, or as recommended by the pipe manufacturer, whichever is smaller, shall be removed to avoid point bearing.

#### 3.1.1.2 Removal of Unyielding Material

Where unyielding material is encountered in the bottom of the trench, such material shall be removed 150 millimeters below the required grade and replaced with suitable materials as provided in paragraph BACKFILLING AND COMPACTION.

#### 3.1.1.3 Removal of Unstable Material

Where unstable material is encountered in the bottom of the trench, such material shall be removed to the depth directed and replaced to the proper grade with select granular material as provided in paragraph BACKFILLING AND COMPACTION. When removal of unstable material is required due to the Contractor's fault or neglect in performing the work, the resulting material shall be excavated and replaced by the Contractor without additional cost to the Government.

#### 3.1.1.4 Excavation for Appurtenances

Excavation for manholes, catch-basins, inlets, or similar structures shall be sufficient to leave at least 300 mm clear between the outer structure surfaces and the face of the excavation or support members. Removal of unstable material shall be as specified above. When concrete or masonry is to be placed in an excavated area, special care shall be taken not to disturb the bottom of the excavation. Excavation to the final grade level shall not be made until just before the concrete or masonry is to be placed.

#### 3.1.2 Stockpiles

Stockpiles of satisfactory and unsatisfactory materials shall be placed and graded as specified. Stockpiles shall be kept in a neat and well-drained condition, giving due consideration to drainage at all times. The ground surface at stockpile locations shall be cleared, grubbed, and sealed by rubber-tired equipment, excavated satisfactory and unsatisfactory materials shall be separately stockpiled. Stockpiles of satisfactory materials shall be protected from contamination, which may destroy the quality and fitness of the stockpiled material. If the Contractor fails to protect the stockpiles, and any material becomes unsatisfactory, such material shall be

removed and replaced with satisfactory material from approved sources at no additional cost to the Government. Locations of stockpiles of satisfactory materials shall be subject to prior approval of the Contracting Officer.

### 3.2 BACKFILLING AND COMPACTION

Backfill material shall consist of satisfactory material, select granular material, or initial backfill material as required. Backfill shall be placed in layers not exceeding 150 mm loose thickness for compaction by hand operated machine compactors, and 200 mm loose thickness for other than hand operated machines, unless otherwise specified. Each layer shall be compacted to at least 95 percent maximum density for cohesionless soils and 90 percent maximum density for cohesive soils, unless otherwise specified.

#### 3.2.1 Trench Backfill

Trenches shall be backfilled to the grade shown.

##### 3.2.1.1 Replacement of Unyielding Material

Unyielding material removed from the bottom of the trench shall be replaced with select granular material or initial backfill material.

##### 3.2.1.2 Replacement of Unstable Material

Unstable material removed from the bottom of the trench or excavation shall be replaced with select granular material placed in layers not exceeding 150 mm loose thickness.

##### 3.2.1.3 Bedding and Initial Backfill

Bedding shall be of the type and thickness shown. Initial backfill material shall be placed and compacted with approved tampers to a height of at least one foot above the utility pipe or conduit. The backfill shall be brought up evenly on both sides of the pipe for the full length of the pipe. Care shall be taken to ensure thorough compaction of the fill under the haunches of the pipe.

##### 3.2.1.4 Final Backfill

The remainder of the trench, except for special materials for roadways, railroads and airfields, shall be filled with satisfactory material. Backfill material shall be placed and compacted as follows:

- a. Sidewalks, Turfed or Seeded Areas and Miscellaneous Areas:  
Backfill shall be deposited in layers of a maximum of 300 mm loose thickness, and compacted to 85 percent maximum density for cohesive soils and 90 percent maximum density for cohesionless soils. Compaction by water flooding or jetting will not be permitted. This requirement shall also apply to all other areas not specifically designated above. Landscape areas shall be prepared and planted as specified herein.

### 3.2.2 Backfill for Appurtenances

After the manhole, catchbasin, inlet, or similar structure has been placed or constructed, backfill shall be placed in such a manner that the structure will not be damaged by the shock of falling earth. The backfill material shall be deposited and compacted as specified for final backfill, and shall be brought up evenly on all sides of the structure to prevent eccentric loading and excessive stress.

### 3.3 SPECIAL REQUIREMENTS

Special requirements for both excavation and backfill relating to the specific utilities are as follows:

#### 3.3.1 Gas Distribution

Trenches shall be excavated to a depth that will provide not less than 600 mm of cover. Trenches shall be graded as specified for pipe-laying requirements in Section 02556 GAS DISTRIBUTION SYSTEM.

#### 3.3.2 Water Lines

Trenches shall be of a depth to provide a minimum cover of 1 meter from the existing ground surface, or from the indicated finished grade, whichever is lower, to the top of the pipe.

#### 3.3.3 Electrical Distribution System

Direct burial cable and conduit or duct line shall have a minimum cover of 600 mm from the finished grade, unless otherwise indicated. Special trenching requirements for direct-burial electrical cables and conduits are specified in Section 16375 ELECTRICAL DISTRIBUTION SYSTEM, UNDERGROUND.

#### 3.3.4 Plastic Marking Tape

Warning tapes shall be installed directly above the pipe, at a depth of 450 millimeters below finished grade unless otherwise shown.

### 3.4 TESTING

Testing shall be the responsibility of the Contractor and shall be performed at no additional cost to the Government.

#### 3.4.1 Testing Facilities

Tests shall be performed by an approved commercial testing laboratory.

#### 3.4.2 Testing of Backfill Materials

Classification of backfill materials shall be determined in accordance with ASTM D 2487 and the moisture-density relations of soils shall be determined in accordance with ASTM D 1557. A minimum of one soil classification and one moisture-density relation test shall be performed on each different type of material used for bedding and backfill.



### 3.4.3 Field Density Tests

Tests shall be performed in sufficient numbers to ensure that the specified density is being obtained. A minimum of one field density test per lift of backfill for every 30 meters of installation shall be performed. One moisture density relationship shall be determined for every 500 cubic meters of material used. Field in-place density shall be determined in accordance with ASTM D 2922 or ASTM D 1556. When ASTM D 2922 is used, the calibration curves shall be checked and adjusted using the sand cone method as described in paragraph Calibration of the ASTM publication. ASTM D 2922 results in a wet unit weight of soil and when using this method, ASTM D 3017 shall be used to determine the moisture content of the soil. The calibration curves furnished with the moisture gauges shall be checked along with density calibration checks as described in ASTM D 3017. The calibration checks of both the density and moisture gauges shall be made at the beginning of a job, on each different type of material encountered, at intervals as directed by the Contracting Officer. Copies of calibration curves, results of calibration tests, and field and laboratory density tests shall be furnished to the Contracting Officer. Trenches improperly compacted shall be reopened to the depth directed, then refilled and compacted to the density specified at no additional cost to the Government.

### 3.4.4 Displacement of Sewers

After other required tests have been performed and the trench backfill compacted to the finished grade surface, the pipe shall be inspected to determine whether significant displacement has occurred. This inspection shall be conducted in the presence of the Contracting Officer. Pipe shall be inspected by shining a light or laser between manholes or manhole locations, or by the use of television cameras passed through the pipe. If, in the judgment of the Contracting Officer, the interior of the pipe shows poor alignment or any other defects that would cause improper functioning of the system, the defects shall be remedied as directed at no additional cost to the Government.

-- End of Section --

01062/BERGER/ABAM  
FY02 Tactical Equipment Complex  
Fort Lewis, Washington

This page intentionally blank.

SECTION 02510

WATER DISTRIBUTION SYSTEM

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by basic designation only.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM B 88M (1996) Seamless Copper Water Tube (Metric)

ASME INTERNATIONAL (ASME)

ASME B16.1 (1998) Cast Iron Pipe Flanges and Flanged Fittings

ASME B16.26 (1988) Cast Copper Alloy Fittings for Flared Copper Tubes

AMERICAN WATER WORKS ASSOCIATION (AWWA)

AWWA B300 (1992) Hypochlorites

AWWA B301 (1992) Liquid Chlorine

AWWA C104 (1995) Cement-Mortar Lining for Ductile-Iron Pipe and Fittings for Water

AWWA C110 (1993) Ductile-Iron and Gray-Iron Fittings, 3 In. Through 48 In. (75 mm through 1200 mm), for Water and Other Liquids

AWWA C111 (1995) Rubber-Gasket Joints for Ductile-Iron Pressure Pipe and Fittings

AWWA C115 (1996) Flanged Ductile-Iron Pipe With Ductile-Iron or Gray-Iron Threaded Flanges

AWWA C151 (1996) Ductile-Iron Pipe, Centrifugally Cast, for Water or Other Liquids

AWWA C502 (1994; C502a) Dry-Barrel Fire Hydrants

AWWA C509 (1994; Addendum 1995) Resilient-Seated Gate Valves for Water Supply Service

AWWA C600 (1993) Installation of Ductile-Iron Water Mains and Their Appurtenances

AWWA C651 (1992) Disinfecting Water Mains

AWWA C800 (1989) Underground Service Line Valves and Fittings

DUCTILE IRON PIPE RESEARCH ASSOCIATION (DIPRA)

DIPRA-Restraint Design (1997) Thrust Restraint Design for Ductile Iron Pipe

NATIONAL FIRE PROTECTION ASSOCIATION (NFPA)

NFPA 24 (1995) Installation of Private Fire Service Mains and Their Appurtenances

## 1.2 PIPING

This section covers water supply distribution service lines, and connections to building service at a point approximately 1.5 m outside buildings and structures to which service is required. The Contractor shall have a copy of the manufacturer's recommendations for each material or procedure to be utilized available at the construction site at all times.

### 1.2.1 Service Lines

Piping for water service lines less than 80 mm copper tubing. Piping for water service lines 80 mm and larger shall be ductile iron.

### 1.2.2 Potable Water Lines

Piping and components of potable water systems which come in contact with the potable water shall conform to NSF 61.

### 1.2.3 Excavation, Trenching, and Backfilling

Excavation, trenching, and backfilling shall be in accordance with the applicable provisions of Section 02316 EXCAVATION, TRENCHING, AND BACKFILLING FOR UTILITIES SYSTEMS, except as modified herein.

## 1.3 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only. When used, a designation following the "G" designation identifies the office that will review the submittal for the Government. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

SD-03 Product Data

Waste Water Disposal Method; GA.

The method proposed for disposal of wastewater from hydrostatic tests and disinfection, prior to performing hydrostatic tests.

SD-06 Test Reports

Bacteriological Disinfection; G.

Test results from commercial laboratory verifying disinfection.

1.4 HANDLING

Pipe and accessories shall be handled to ensure delivery to the trench in sound, undamaged condition, including no injury to the pipe coating or lining. If the coating or lining of any pipe or fitting is damaged, the repair shall be made by the Contractor in a satisfactory manner, at no additional cost to the Government. No other pipe or material shall be placed inside a pipe or fitting after the coating has been applied. Pipe shall be carried into position and not dragged. Use of pinch bars and tongs for aligning or turning pipe will be permitted only on the bare ends of the pipe. The interior of pipe and accessories shall be thoroughly cleaned of foreign matter before being lowered into the trench and shall be kept clean during laying operations by plugging or other approved method. Before installation, the pipe shall be inspected for defects. Material found to be defective before or after laying shall be replaced with sound material without additional expense to the Government. Rubber gaskets that are not to be installed immediately shall be stored in a cool and dark place.

PART 2 PRODUCTS

2.1 PIPE

Pipe shall conform to the respective specifications and other requirements specified below.

2.1.1 Copper Tubing

Copper tubing shall conform to ASTM B 88M, Type K, annealed.

2.2 FITTINGS AND SPECIALS

2.2.1 Ductile-Iron Pipe System

Fittings and specials shall be suitable for 1.03 MPa pressure rating, unless otherwise specified. Fittings and specials for mechanical joint pipe shall conform to AWWA C110. Fittings and specials for use with push-on joint pipe shall conform to AWWA C110 and AWWA C111. Fittings and specials for grooved and shouldered end pipe shall conform to AWWA C606. Fittings and specials shall be cement-mortar lined (standard thickness) in accordance with AWWA C104. Ductile iron compact fittings shall conform to AWWA C153.

2.2.2 Copper Tubing System

Fittings and specials shall be flared and conform to ASME B16.26.

## 2.3 JOINTS

### 2.3.1 Ductile-Iron Pipe Jointing

- a. Mechanical joints shall be of the stuffing box type and shall conform to AWWA C111.
- b. Push-on joints shall conform to AWWA C111.
- c. Rubber gaskets and lubricants shall conform to the applicable requirements of AWWA C111.

#### 2.3.1.1 Mechanical Couplings

Mechanical couplings for steel pipe shall be the sleeve type, or when approved, the split-sleeve type and shall provide a tight flexible joint under all reasonable conditions, such as pipe movements caused by expansion, contraction, slight setting or shifting in the ground, minor variations in trench gradients, and traffic vibrations. Couplings shall be of strength not less than the adjoining pipeline.

### 2.3.2 Copper Tubing Jointing

Joints shall be compression-pattern flared and shall be made with the specified fittings.

## 2.4 VALVES

### 2.4.1 Gate Valves

Gate valves shall be designed for a working pressure of not less than 1.03 MPa. Valve connections shall be as required for the piping in which they are installed. Valves shall have a clear waterway equal to the full nominal diameter of the valve, and shall be opened by turning counterclockwise. The operating nut or wheel shall have an arrow, cast in the metal, indicating the direction of opening.

- a. Valves smaller than 80 mm shall be all bronze and shall conform to MSS SP-80, Type 1, Class 150.
- b. Resilient-Seated Gate Valves: For valves 80 to 300 mm in size, resilient-seated gate valves shall conform to AWWA C509.

## 2.5 VALVE BOXES

Valve boxes shall be cast iron or concrete, except that concrete boxes may be installed only in locations not subjected to vehicular traffic. Cast-iron boxes shall be extension type with slide-type adjustment and with flared base. The minimum thickness of metal shall be 5 mm. Concrete boxes shall be the standard product of a manufacturer of precast concrete equipment. The word "WATER" shall be cast in the cover. The box length shall adapt, without full extension, to the depth of cover required over the pipe at the valve location.

## 2.6 FIRE HYDRANTS

Hydrants shall be dry-barrel type conforming to AWWA C502 with valve opening at least 125 mm in diameter and designed so that the flange at the main valve seat can be removed with the main valve seat apparatus remaining intact, closed and reasonably tight against leakage and with a breakable valve rod coupling and breakable flange connections located no more than 200 mm above the ground. Hydrants shall have a 150 mm bell connection, two 65 mm hose connections and one 127 mm Stortz adaptor for pumper connection. Outlets shall have American National Standard fire-hose coupling threads. Working parts shall be bronze. Design, material, and workmanship shall be equal to the latest stock pattern ordinarily produced by the manufacturer. Hydrants shall be painted with one coat of red iron oxide, zinc oxide primer conforming to SSPC Paint 25 and two finish coats of silicone alkyd paint conforming to SSPC Paint 21. Fire hydrant color: The name of the manufacturer is referenced for color match only and is not intended to be proprietary. Sherwin Williams No. SW 2049 (Brown). Level of gloss 15-40 in 60 degree gloss. Suitable bronze adapter for the 115 mm each outlet, with caps, shall be furnished.

## 2.7 MISCELLANEOUS ITEMS

### 2.7.1 Service Clamps

Service clamps shall have a pressure rating not less than that of the pipe to be connected and shall be either the single or double flattened strap type. Clamps shall have a galvanized malleable-iron body with cadmium plated straps and nuts. Clamps shall have a rubber gasket cemented to the body.

### 2.7.2 Corporation Stops

Corporation stops shall have standard corporation stop thread conforming to AWWA C800 on the inlet end, with flanged joints, compression pattern flared tube couplings, or wiped joints for connections to goosenecks.

### 2.7.3 Goosenecks

Copper tubing for gooseneck connections shall conform to the applicable requirements of ASTM B 88M, Type K, annealed. Length of cable requirement connections shall be in accordance with standard practice.

### 2.7.4 Service Stops

Service stops shall be water-works inverted-ground-key type, oval or round flow way, tee handle, without drain. Pipe connections shall be suitable for the type of service pipe used. All parts shall be of bronze with female iron-pipe-size connections or compression-pattern flared tube couplings, and shall be designed for a hydrostatic test pressure not less than 1.375 MPa

### 2.7.5 Tapping Sleeves

Tapping sleeves of the sizes indicated for connection to existing main shall be the cast gray, ductile, or malleable iron, split-sleeve type with flanged

or grooved outlet, and with bolts, follower rings and gaskets on each end of the sleeve. Construction shall be suitable for a maximum working pressure of 1.03 MPa. Bolts shall have square heads and hexagonal nuts. Longitudinal gaskets and mechanical joints with gaskets shall be as recommended by the manufacturer of the sleeve. When using grooved mechanical tee, it shall consist of an upper housing with full locating collar for rigid positioning which engages a machine-cut hole in pipe, encasing an elastomeric gasket which conforms to the pipe outside diameter around the hole and a lower housing with positioning lugs, secured together during assembly by nuts and bolts as specified, pretorqued to 67.8 Newton meters.

#### 2.7.6 Disinfection

Chlorinating materials shall conform to the following:

Chlorine, Liquid: AWWA B301.

Hypochlorite, Calcium and Sodium: AWWA B300.

#### 2.8 METER VAULTS

Large meters shall be installed in reinforced concrete vaults in accordance with the details shown on the drawings.

### PART 3 EXECUTION

#### 3.1 INSTALLATION

##### 3.1.1 Cutting of Pipe

Cutting of pipe shall be done in a neat and workmanlike manner without damage to the pipe. Unless otherwise recommended by the manufacturer and authorized by the Contracting Officer, cutting shall be done with an approved type mechanical cutter. Wheel cutter shall be used when practicable. Copper tubing shall be cut square and all burrs shall be removed. Squeeze type mechanical cutters shall not be used for ductile iron.

##### 3.1.2 Adjacent Facilities

###### 3.1.2.1 Sewer Lines

Where the location of the water pipe is not clearly defined in dimensions on the drawings, the water pipe shall not be laid closer horizontally than 3 m from a sewer except where the bottom of the water pipe will be at least 300 mm above the top of the sewer pipe, in which case the water pipe shall not be laid closer horizontally than 1.8 m from the sewer. Where water lines cross under gravity-flow sewer lines, the sewer pipe, for a distance of at least 3 m each side of the crossing, shall be fully encased in concrete or shall be made of pressure pipe with no joint located within 900 mm horizontally of the crossing. Water lines shall in all cases cross above sewage force mains or inverted siphons and shall be not less than 600 mm



above the sewer main. Joints in the sewer main, closer horizontally than 900 mm to the crossing, shall be encased in concrete.

#### 3.1.2.2 Water Lines

Water lines shall not be laid in the same trench with sewer lines, gas lines, fuel lines, or electric wiring.

#### 3.1.2.3 Copper Tubing Lines

Copper tubing shall not be installed in the same trench with ferrous piping materials.

#### 3.1.2.4 Nonferrous Metallic Pipe

Where nonferrous metallic pipe, e.g. copper tubing, crosses any ferrous piping material, a minimum vertical separation of 300 mm shall be maintained between pipes.

#### 3.1.3 Joint Deflection

##### 3.1.3.1 Allowable for Ductile-Iron Pipe

The maximum allowable deflection shall be as given in AWWA C600. If the alignment requires deflection in excess of the above limitations, special bends or a sufficient number of shorter lengths of pipe shall be furnished to provide angular deflections within the limit set forth.

#### 3.1.4 Placing and Laying

Pipe and accessories shall be carefully lowered into the trench by means of derrick, ropes, belt slings, or other authorized equipment. Water-line materials shall not be dropped or dumped into the trench. Abrasion of the pipe coating shall be avoided. Except where necessary in making connections with other lines or as authorized by the Contracting Officer, pipe shall be laid with the bells facing in the direction of laying. The full length of each section of pipe shall rest solidly upon the pipe bed, with recesses excavated to accommodate bells, couplings, and joints. Pipe that has the grade or joint disturbed after laying shall be taken up and relaid. Pipe shall not be laid in water or when trench conditions are unsuitable for the work. Water shall be kept out of the trench until joints are complete. When work is not in progress, open ends of pipe, fittings, and valves shall be securely closed so that no trench water, earth, or other substance will enter the pipes or fittings. Where any part of the coating or lining is damaged, the repair shall be made by and at the Contractor's expense in a satisfactory manner. Pipe ends left for future connections shall be valved, plugged, or capped, and anchored, as shown.

##### 3.1.4.1 Piping Connections

Where connections are made between new work and existing mains, the connections shall be made by using specials and fittings to suit the actual conditions. When made under pressure, these connections shall be installed using standard methods as approved by the Contracting Officer.

#### 3.1.4.2 Penetrations

Pipe passing through walls of valve pits and structures shall be provided with ductile-iron or Schedule 40 steel wall sleeves. Annular space between walls and sleeves shall be filled with rich cement mortar. Annular space between pipe and sleeves shall be filled with mastic.

#### 3.1.4.3 Flanged Pipe

Flanged pipe shall only be installed above ground or with the flanges in valve pits.

#### 3.1.5 Jointing

##### 3.1.5.1 Ductile-Iron Pipe Requirements

Mechanical and push-on type joints shall be installed in accordance with AWWA C600 for buried lines or AWWA C606 for grooved and shouldered pipe above ground or in pits.

##### 3.1.5.2 Copper Tubing Requirements

Joints shall be made with flared fittings. The flared end tube shall be pulled tightly against the tapered part of the fitting by a nut which is part of the fitting, so there is metal-to-metal contact.

##### 3.1.5.3 Transition Fittings

Connections between different types of pipe and accessories shall be made with transition fittings approved by the Contracting Officer.

#### 3.1.6 Installation of Service Lines

Service lines shall include the pipeline connecting building piping to water distribution lines to the connections with the building service at a point approximately 1.5 m outside the building where such building service exists. Where building services are not installed, the Contractor shall terminate the service lines approximately 1.5 m from the site of the proposed building at a point designated by the Contracting Officer. Such service lines shall be closed with plugs or caps. All service stops and valves shall be provided with service boxes.

#### 3.1.7 Setting of Fire Hydrants, Meters, Valves and Valve Boxes

##### 3.1.7.1 Location of Fire Hydrants

Fire hydrants shall be located and installed as shown. Each hydrant shall be connected to the main with a 150 mm branch line having at least as much cover as the distribution main. Hydrants shall be set plumb with pumper nozzle facing the roadway, with the center of the lowest outlet not less than 450 mm above the finished surrounding grade, and the operating nut not more than 1.2 m above the finished surrounding grade. Except where approved otherwise, the backfill around hydrants shall be thoroughly compacted to the finished grade immediately after installation to obtain beneficial use of

the hydrant as soon as practicable. The hydrant shall be set upon a slab of concrete not less than 100 mm thick and 400 mm square. Not less than 2 cubic meters of free-draining broken stone or gravel shall be placed around and beneath the waste opening of dry barrel hydrants to ensure drainage.

#### 3.1.7.2 Location of Valves

After delivery, valves, including those in hydrants, shall be drained to prevent freezing and shall have the interiors cleaned of all foreign matter before installation. Stuffing boxes shall be tightened and hydrants and valves shall be fully opened and fully closed to ensure that all parts are in working condition. Check, pressure reducing, vacuum, and air relief valves shall be installed in valve pits. Valves and valve boxes shall be installed where shown or specified, and shall be set plumb. Valve boxes shall be centered on the valves. Boxes shall be installed over each outside gate valve unless otherwise shown. Where feasible, valves shall be located outside the area of roads and streets. Earth fill shall be tamped around each valve box or pit to a distance of 1.2 m on all sides of the box, or the undisturbed trench face if less than 1.2 m.

#### 3.1.8 Thrust Restraint

Plugs, caps, tees and bends deflecting 11.25 degrees or more, either vertically or horizontally, on waterlines 100 mm in diameter or larger, and fire hydrants shall be provided with thrust restraints. Valves shall be securely anchored or shall be provided with thrust restraints to prevent movement. Thrust restraints shall be either thrust blocks or, for ductile-iron pipes, restrained joints.

##### 3.1.8.1 Thrust Blocks

Thrust blocking shall be concrete of a mix not leaner than: 1 cement, 2-1/2 sand, 5 gravel; and having a compressive strength of not less than 14 MPa after 28 days. Blocking shall be placed between solid ground and the hydrant or fitting to be anchored. Unless otherwise indicated or directed, the base and thrust bearing sides of thrust blocks shall be poured directly against undisturbed earth. The sides of thrust blocks not subject to thrust may be poured against forms. The area of bearing shall be as shown or as directed. Blocking shall be placed so that the fitting joints will be accessible for repair. Steel rods and clamps, protected by galvanizing or by coating with bituminous paint, shall be used to anchor vertical down bends into gravity thrust blocks.

##### 3.1.8.2 Restrained Joints

For ductile-iron pipe, restrained joints shall be designed by the Contractor or the pipe manufacturer in accordance with DIPRA-Restraint Design.

#### 3.2 HYDROSTATIC TESTS

Where any section of a water line is provided with concrete thrust blocking for fittings or hydrants, the hydrostatic tests shall not be made until at least 5 days after installation of the concrete thrust blocking, unless otherwise approved.

### 3.2.1 Pressure Test

After the pipe is laid, the joints completed, fire hydrants permanently installed, and the trench partially backfilled leaving the joints exposed for examination, the newly laid piping or any valved section of piping shall, unless otherwise specified, be subjected for 1 hour to a hydrostatic pressure test of 1.38 MPa. Each valve shall be opened and closed several times during the test. Exposed pipe, joints, fittings, hydrants, and valves shall be carefully examined during the partially open trench test. Joints showing visible leakage shall be replaced or remade as necessary. Cracked or defective pipe, joints, fittings, hydrants and valves discovered in consequence of this pressure test shall be removed and replaced with sound material, and the test shall be repeated until the test results are satisfactory. The requirement for the joints to remain exposed for the hydrostatic tests may be waived by the Contracting Officer when one or more of the following conditions is encountered:

- a. Wet or unstable soil conditions in the trench.
- b. Compliance would require maintaining barricades and walkways around and across an open trench in a heavily used area that would require continuous surveillance to assure safe conditions.
- c. Maintaining the trench in an open condition would delay completion of the project.

The Contractor may request a waiver, setting forth in writing the reasons for the request and stating the alternative procedure proposed to comply with the required hydrostatic tests. Backfill placed prior to the tests shall be placed in accordance with the requirements of Section 02316EXCAVATION, TRENCHING, AND BACKFILLING FOR UTILITIES SYSTEMS.

### 3.2.2 Leakage Test

Leakage test shall be conducted after the pressure tests have been satisfactorily completed. The duration of each leakage test shall be at least 2 hours, and during the test the water line shall be subjected to not less than 1.38 MPa pressure. Water supply lines designated on the drawings shall be subjected to a pressure equal to 1.38 MPa. Leakage is defined as the quantity of water to be supplied into the newly laid pipe, or any valved or approved section, necessary to maintain pressure within 34.5 kPa of the specified leakage test pressure after the pipe has been filled with water and the air expelled. Piping installation will not be accepted if leakage exceeds the allowable leakage, which is determined by the following formula:

$$L = 0.0001351ND(P \text{ raised to } 0.5 \text{ power})$$

L = Allowable leakage in gallons per hour

N = Number of joints in the length of pipeline tested

D = Nominal diameter of the pipe in inches

P = Average test pressure during the leakage test, in psi gauge

Should any test of pipe disclose leakage greater than that calculated by the above formula, the defective joints shall be located and repaired until the

leakage is within the specified allowance, without additional cost to the Government.

### 3.2.3 Time for Making Test

Except for joint material setting or where concrete thrust blocks necessitate a 5-day delay, pipelines jointed with rubber gaskets, mechanical or push-on joints, or couplings may be subjected to hydrostatic pressure, inspected, and tested for leakage at any time after partial completion of backfill. Cement-mortar lined pipe may be filled with water as recommended by the manufacturer before being subjected to the pressure test and subsequent leakage test.

### 3.2.4 Concurrent Hydrostatic Tests

The Contractor may elect to conduct the hydrostatic tests using either or both of the following procedures. Regardless of the sequence of tests employed, the results of pressure tests, leakage tests, and disinfection shall be as specified. Replacement, repair or retesting required shall be accomplished by the Contractor at no additional cost to the Government.

- a. Pressure test and leakage test may be conducted concurrently.
- b. Hydrostatic tests and disinfection may be conducted concurrently, using the water treated for disinfection to accomplish the hydrostatic tests. If water is lost when treated for disinfection and air is admitted to the unit being tested, or if any repair procedure results in contamination of the unit, disinfection shall be reaccomplished.

## 3.3 BACTERIAL DISINFECTION

### 3.3.1 Bacteriological Disinfection

Before acceptance of potable water operation, each unit of completed waterline shall be disinfected as prescribed by AWWA C651. After pressure tests have been made, the unit to be disinfected shall be thoroughly flushed with water until all entrained dirt and mud have been removed before introducing the chlorinating material. The chlorinating material shall be either liquid chlorine, calcium hypochlorite, or sodium hypochlorite, conforming to paragraph MISCELLANEOUS ITEMS. The chlorinating material shall provide a dosage of not less than 50 ppm and shall be introduced into the water lines in an approved manner. Polyvinyl Chloride (PVC) pipe lines shall be chlorinated using only the above-specified chlorinating material in solution. The agent shall not be introduced into the line in a dry solid state. The treated water shall be retained in the pipe long enough to destroy all non-spore forming bacteria. Except where a shorter period is approved, the retention time shall be at least 24 hours and shall produce not less than 25 ppm of free chlorine residual throughout the line at the end of the retention period. Valves on the lines being disinfected shall be opened and closed several times during the contact period. The line shall then be flushed with clean water until the residual chlorine is reduced to less than 1.0 ppm. During the flushing period, each fire hydrant on the line shall be opened and closed several times. From several points in the

01062/BERGER/ABAM  
FY02 Tactical Equipment Complex  
Fort Lewis, Washington

unit, personnel from the Contractor's commercial laboratory shall take at least 3 water samples from different points, approved by the Contracting Officer, in proper sterilized containers and perform a bacterial examination in accordance with state approved methods. The commercial laboratory shall be certified by the state's approving authority for examination of potable water. The disinfection shall be repeated until tests indicate the absence of pollution for at least 2 full days. The unit will not be accepted until satisfactory bacteriological results have been obtained.

#### 3.4 CLEANUP

Upon completion of the installation of water lines, and appurtenances, all debris and surplus materials resulting from the work shall be removed.

-- End of Section --

SECTION 02531

SANITARY SEWERS

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by basic designation only.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM D 1784	(1999) Rigid Poly(Vinyl Chloride) (PVC) Compounds and Chlorinated Poly(Vinyl Chloride) (CPVC) Compounds
ASTM D 2680	(1995a) Acrylonitrile-Butadiene-Styrene (ABS) and Poly(Vinyl Chloride) (PVC) Composite Sewer Piping
ASTM D 3034	(1998) Type PSM Poly(Vinyl Chloride) (PVC) Sewer Pipe and Fittings
ASTM D 3212	(1996a) Joints for Drain and Sewer Plastic Pipes Using Flexible Elastomeric Seals
ASTM F 477	(1996a) Elastomeric Seals (Gaskets) for Joining Plastic Pipe

UNI-BELL PVC PIPE ASSOCIATION (UBPPA)

UBPPA UNI-B-6	(1990) Recommended Practice for the Low-Pressure Air Testing of Installed Sewer Pipe
---------------	--

1.2 GENERAL REQUIREMENTS

The construction required herein shall include appurtenant structures and building sewers to points of connection with the building drains 1.5 m outside the building to which the sewer system is to be connected. The Contractor shall replace damaged material and redo unacceptable work at no additional cost to the Government. Excavation and backfilling is specified in Section 02316 EXCAVATION, TRENCHING, AND BACKFILLING FOR UTILITIES SYSTEMS. Backfilling shall be accomplished after inspection by the Contracting Officer. Before, during, and after installation, plastic pipe and fittings shall be protected from any environment that would result in damage or deterioration to the material. The Contractor shall have a copy of the manufacturer's instructions available at the construction site at all times and shall follow these instructions unless directed otherwise by the Contracting Officer. Lubricants, elastomeric gaskets, and any similar materials required to install the plastic pipe shall be stored in accordance with the manufacturer's recommendation and shall be discarded if the storage period exceeds the recommended shelf life.

### 1.3 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only. When used, a designation following the "G" designation identifies the office that will review the submittal for the Government. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

#### SD-07 Certificates

##### Joints; G

Certificates of compliance stating that the fittings or gaskets used for waste drains or lines designated on the plans are oil resistant.

## PART 2 PRODUCTS

### 2.1 PIPE

Pipe shall conform to the respective specifications and other requirements specified below.

#### 2.1.1 Plastic Pipe

Polyvinyl chloride (PVC) composite sewer piping shall conform to ASTM D 2680. Size 200 mm through 380 mm diameter.

##### 2.1.1.1 PVC Pipe

ASTM D 3034, Type PSM with a maximum SDR of 35, Size 380 mm or less in diameter. PVC shall be certified by the compounder as meeting the requirements of ASTM D 1784, cell Class 12454B. The pipe stiffness shall be greater than or equal to 735/D for cohesionless material pipe trench backfills.

### 2.2 REQUIREMENTS FOR FITTINGS

Fittings shall be compatible with the pipe supplied and shall have a strength not less than that of the pipe. Fittings shall conform to the respective specifications and other requirements specified below.

#### 2.2.1 Fittings for Plastic Pipe

ABS and PVC composite sewer pipe fittings shall conform to ASTM D 2680.

##### 2.2.1.1 Fittings for PVC Pipe

ASTM D 3034 for type PSM pipe. ASTM F 949 for corrugated sewer pipe with a smooth interior. UBPPA UNI-B-9 and ASTM F 794, Series 46, for ribbed sewer pipe with smooth interior.



## 2.3 JOINTS

Joints installation shall comply with the manufacturer's instructions. Fittings and gaskets utilized for waste drains or industrial waste lines shall be certified by the manufacturer as oil resistant.

### 2.3.1 Plastic Pipe Jointing

Flexible plastic pipe (PVC or high density polyethylene pipe) gasketed joints shall conform to ASTM D 3212.

## 2.4 BRANCH CONNECTIONS

Branch connections shall be made by use of regular fittings or solvent-cemented saddles as approved. Saddles for PVC composite pipe shall conform to Figure 2 of ASTM D 2680; and saddles for PVC pipe shall conform to Table 4 of ASTM D 3034.

## 2.5 FRAMES AND COVERS

Frames and covers shall be cast iron, ductile iron or reinforced concrete. Cast iron frames and covers shall be as indicated or shall be of type suitable for the application, circular, without vent holes. The frames and covers shall have a combined weight of not less than 181.4 kg. Reinforced concrete frames and covers shall be as indicated or shall conform to ASTM C 478M. The word "Sewer" shall be stamped or cast into covers so that it is plainly visible.

## 2.6 STEEL LADDER

A steel ladder shall be provided where the depth of a manhole exceeds 1 m. The ladder shall not be less than 406 mm in width, with 19 mm diameter rungs spaced 305 mm apart. The two stringers shall be a minimum 10 mm thick and 51 mm wide. Ladders and inserts shall be galvanized after fabrication in conformance with ASTM A 123/A 123M. Polyethelene ladders may be used as approved.

## 2.7 CEMENT MORTAR

Cement mortar shall conform to ASTM C 270, Type M with Type II cement.

### 2.7.1 Portland Cement

Portland cement shall conform to ASTM C 150, Type II for concrete used in concrete pipe, concrete pipe fittings, and manholes and type optional with the Contractor for cement used in concrete cradle, concrete encasement, and thrust blocking.

### 2.7.2 Portland Cement Concrete

Portland cement concrete shall conform to ASTM C 94, compressive strength of 28 MPa at 28 days, except for concrete cradle and encasement or concrete blocks for manholes. Concrete used for cradle and encasement shall have a

compressive strength of 17 MPa minimum at 28 days. Concrete in place shall be protected from freezing and moisture loss for 7 days.

## 2.8 STRUCTURES

### 2.8.1 Precast Reinforced Concrete Manhole Sections

Precast reinforced concrete manhole sections shall conform to ASTM C 478, except that portland cement shall be as specified herein. Joints shall be cement mortar, an approved mastic, rubber gaskets, a combination of these types; or the use of external preformed rubber joint seals and extruded rolls of rubber with mastic adhesive on one side.

## PART 3 EXECUTION

### 3.1 INSTALLATION

#### 3.1.1 Adjacent Facilities

##### 3.1.1.1 Water Lines

Where the location of the sewer is not clearly defined by dimensions on the drawings, the sewer shall not be closer horizontally than 3 m to a water-supply main or service line, except that where the bottom of the water pipe will be at least 300 mm above the top of the sewer pipe, the horizontal spacing may be a minimum of 2 m. Where gravity-flow sewers cross above water lines, the sewer pipe for a distance of 3 m on each side of the crossing shall be fully encased in concrete or shall be acceptable pressure pipe with no joint closer horizontally than 1 m to the crossing. The thickness of the concrete encasement including that at the pipe joints shall be not less than 100 mm.

##### 3.1.1.2 Structural Foundations

Where sewer pipe is to be installed within 1 m of an existing or proposed building or structural foundation such as a retaining wall, control tower footing, water tank footing, or any similar structure, the sewer pipe shall be sleeved as specified above. Contractor shall ensure there is no damage to these structures, and no settlement or movement of foundations or footing.

#### 3.1.2 Pipe Laying

- a. Pipe shall be protected during handling against impact shocks and free fall; the pipe interior shall be free of extraneous material.
- b. Pipe laying shall proceed upgrade with the spigot ends of bell-and-spigot pipe and tongue ends of tongue-and-groove pipe pointing in the direction of the flow. Each pipe shall be laid accurately to the line and grade shown on the drawings. Pipe shall be laid and centered so that the sewer has a uniform invert. As the work progresses, the interior of the sewer shall be cleared of all superfluous materials.

- c. Before making pipe joints, all surfaces of the portions of the pipe to be joined shall be clean and dry. Lubricants, primers, and adhesives shall be used as recommended by the pipe manufacturer. The joints shall then be placed, fitted, joined, and adjusted to obtain the degree of water tightness required.

#### 3.1.2.1 Trenches

Trenches shall be kept free of water and as dry as possible during bedding, laying, and jointing and for as long a period as required. When work is not in progress, open ends of pipe and fittings shall be satisfactorily closed so that no trench water or other material will enter the pipe or fittings.

#### 3.1.2.2 Backfill

As soon as possible after the joint is made, sufficient backfill material shall be placed along the pipe to prevent pipe movement off line or grade. Plastic pipe shall be completely covered to prevent damage from ultraviolet light.

#### 3.1.2.3 Width of Trench

If the maximum width of the trench at the top of the pipe, as specified in Section 02316 EXCAVATION, TRENCHING, AND BACKFILLING FOR UTILITIES SYSTEMS, is exceeded for any reason other than by direction, the Contractor shall install, at no additional cost to the Government, concrete cradling, pipe encasement, or other bedding required to support the added load of the backfill.

#### 3.1.2.4 Jointing

Joints between different pipe materials shall be made as specified, using approved jointing materials.

#### 3.1.2.5 Handling and Storage

Pipe, fittings and joint material shall be handled and stored in accordance with the manufacturer's recommendations. Storage facilities for plastic pipe, fittings, joint materials and solvents shall be classified and marked in accordance with NFPA 704, with classification as indicated in NFPA 49 and NFPA 325-1.

#### 3.1.3 Leakage Tests

Lines shall be tested for leakage by low pressure air testing, infiltration tests or exfiltration tests, as appropriate. Low pressure air testing for PVC pipe shall be as prescribed in UBPPA UNI-B-6. Low pressure air testing procedures for other pipe materials shall use the pressures and testing times prescribed in ASTM C 828 and ASTM C 924, after consultation with the pipe manufacturer. Prior to infiltration or exfiltration tests, the trench shall be backfilled up to at least the lower half of the pipe. If required, sufficient additional backfill shall be placed to prevent pipe movement during testing, leaving the joints uncovered to permit inspection. Visible leaks encountered shall be corrected regardless of leakage test results.

When the water table is 600 mm or more above the top of the pipe at the upper end of the pipeline section to be tested, infiltration shall be measured using a suitable weir or other device acceptable to the Contracting Officer. When the Contracting Officer determines that infiltration cannot be properly tested, an exfiltration test shall be made by filling the line to be tested with water so that a head of at least 600 mm is provided above both the water table and the top of the pipe at the upper end of the pipeline to be tested. The filled line shall be allowed to stand until the pipe has reached its maximum absorption, but not less than 4 hours. After absorption, the head shall be re-established. The amount of water required to maintain this water level during a 2-hour test period shall be measured. Leakage as measured by either the infiltration test or exfiltration test shall not exceed 94 L per 1 mm diameter per km of pipeline per day. When leakage exceeds the maximum amount specified, satisfactory correction shall be made and retesting accomplished. Testing, correction, and retesting shall be made at no additional cost to the Government.

#### 3.1.4 Test for Deflection

When flexible pipe is used, a deflection test shall be made on the entire length of the installed pipeline not less than 30 days after the completion of all work including the leakage test, backfill, and placement of any fill, grading, paving, concrete, or superimposed loads. Deflection shall be determined by use of a deflection device or by use of a spherical, spheroidal, or elliptical ball, a cylinder, or circular sections fused to a common shaft. The ball, cylinder, or circular sections shall have a diameter, or minor diameter as applicable, of 92.5 percent of the inside diameter of the pipe. A tolerance of plus 0.5 percent will be permitted. The ball, cylinder, or circular sections shall be of a homogeneous material throughout, shall have a density greater than 1.0 as related to water at 4.0 degrees C, and shall have a surface brinell hardness of not less than 150. The device shall be center bored and through bolted with a 6 mm minimum diameter steel shaft having a yield strength of 480 MPa or more, with eyes at each end for attaching pulling cables. The eye shall be suitably backed with flange or heavy washer; a pull exerted on the opposite end of the shaft shall produce compression throughout the remote end of the ball, cylinder or circular section. Circular sections shall be spaced so that the distance from the external faces of the front and back sections shall equal or exceed the diameter of the circular section. Failure of the ball, cylinder, or circular section to pass freely through a pipe run, either by being pulled through or by being flushed through with water, shall be cause for rejection of that run. When a deflection device is used for the test in lieu of the ball, cylinder, or circular sections described, such device shall be approved prior to use. The device shall be sensitive to 1.0 percent of the diameter of the pipe being measured and shall be accurate to 1.0 percent of the indicated dimension. Installed pipe showing deflections greater than 7.5 percent of the normal diameter of the pipe, or 5 percent for RTRP and RPMP, shall be retested by a run from the opposite direction. If the retest also fails, the suspect pipe shall be replaced at no cost to the Government.

#### 3.2 INSTALLATION OF WYE BRANCHES

Wye branches shall be installed where sewer connections are indicated or where directed. Cutting into piping for connections shall not be done

except in special approved cases. When the connecting pipe cannot be adequately supported on undisturbed earth or tamped backfill, the pipe shall be encased in concrete backfill or supported on a concrete cradle as directed. Concrete required because of conditions resulting from faulty construction methods or negligence by the Contractor shall be installed at no additional cost to the Government. The installation of wye branches in an existing sewer shall be made by a method, which does not damage the integrity of the existing sewer. One acceptable method consists of removing one pipe section, breaking off the upper half of the bell of the next lower section and half of the running bell of wye section. After placing the new section, it shall be rotated so that the broken half of the bell will be at the bottom. The two joints shall then be made with joint packing and cement mortar.

### 3.3 MANHOLE DETAILS

#### 3.3.1 General Requirements

Manholes shall be constructed of precast concrete manhole sections. The invert channels shall be smooth and semicircular in shape conforming to the inside of the adjacent sewer section. Changes in direction of flow shall be made with a smooth curve of as large a radius as the size of the manhole will permit. Changes in size and grade of the channels shall be made gradually and evenly. The invert channels shall be formed directly in the concrete of the manhole base, or shall be built up with brick and mortar, or shall be half tile laid in concrete, or shall be constructed by laying full section sewer pipe through the manhole and breaking out the top half after the surrounding concrete has hardened. Pipe connections shall be made to manhole using water stops, standard O-ring joints, special manhole coupling, or shall be made in accordance with the manufacturer's recommendation. The Contractor's proposed method of connection, list of materials selected, and specials required, shall be approved prior to installation. The floor of the manhole outside the channels shall be smooth and shall slope toward the channels not less than 100 mm per meter nor more than 200 mm per meter. Free drop inside the manholes shall not exceed 500 mm, measured from the invert of the inlet pipe to the top of the floor of the manhole outside the channels; drop manholes shall be constructed whenever the free drop would otherwise be greater than 500 mm.

#### 3.3.2 Steel Ladder Anchorage

Ladder shall be adequately anchored to the wall by means of steel inserts spaced not more than 1850 mm apart vertically, and shall be installed to provide at least 150 mm of space between the wall and the rungs. The wall along the line of the ladder shall be vertical for its entire length.

#### 3.3.3 Jointing, Plastering and Sealing

Mortar joints shall be completely filled and shall be smooth and free from surplus mortar on the inside of the manhole. Mortar and mastic joints between precast rings shall be full-bedded in jointing compound and shall be smoothed to a uniform surface on both the interior and exterior of the manhole. Installation of rubber gasket joints between precast rings shall be in accordance with the recommendations of the manufacturer. Precast

rings may also be sealed by the use of extruded rolls of rubber with mastic adhesive on one side.

#### 3.3.4 Setting of Frames and Covers

Unless otherwise indicated, tops of frames and covers shall be set flush with finished grade in paved areas or 50 mm higher than finished grade in unpaved areas. Frame and cover assemblies shall be sealed to manhole sections using external preformed rubber joint seals that meet the requirements of ASTM D 412 and ASTM D 624, or other methods specified in paragraph Jointing, Plastering and Sealing, unless otherwise specified.

#### 3.3.5 External Preformed Rubber Joint Seals

External preformed rubber joint seals and extruded rolls of rubber with mastic adhesive shall meet the requirements of ASTM D 412 and ASTM C 972 to ensure conformance with paragraph Leakage Tests. The seal shall be multi-section with neoprene rubber top section and all lower sections made of Ethylene Propylene Di Monomer (EPDM) rubber with a minimum thickness of 1.5 mm. Each unit shall consist of a top and a bottom section and shall have mastic on the bottom of the bottom section and mastic on the top and bottom of the top section. The mastic shall be non-hardening butyl rubber sealant and shall seal to the cone/top slab of the manhole/catch basin and over the lip of the casting. One unit shall seal a casting and up to six, 50 mm adjusting rings. The bottom section shall be 305 mm in height. A 152 mm high top section will cover up to two, 50 mm adjusting rings. A 305 mm high bottom section will cover up to six, 50 mm adjusting rings. Extension sections shall cover up to two more adjusting rings. Each extension shall overlap the bottom section by 50 mm and shall be overlapped by the top section by 50 mm.

#### 3.4 CONNECTING TO EXISTING MANHOLES

Pipe connections to existing manholes shall be made so that finish work will conform as nearly as practicable to the applicable requirements specified for new manholes, including all necessary concrete work, cutting, and shaping. The connection shall be centered on the manhole. Holes for the new pipe shall be of sufficient diameter to allow packing cement mortar around the entire periphery of the pipe but no larger than 1.5 times the diameter of the pipe. Cutting the manhole shall be done in a manner that will cause the least damage to the walls.

#### 3.5 BUILDING CONNECTIONS

Building connections shall include the lines to and connection with the building waste drainage piping at a point approximately 1.5 m outside the building, unless otherwise indicated. Where building drain piping is not installed, the Contractor shall terminate the building connections approximately 1.5 m from the site of the building at a point and in a manner designated.

01062/BERGER/ABAM  
FY02 Tactical Equipment Complex  
Fort Lewis, Washington

### 3.6 CLEANOUTS AND OTHER APPURTENANCES

Cleanouts and other appurtenances shall be installed where shown on the drawings or as directed by the Contracting Officer, and shall conform to the detail of the drawings.

-- End of Section -

01062/BERGER/ABAM  
FY02 Tactical Equipment Complex  
Fort Lewis, Washington

This page intentionally blank.



SECTION 02630

STORM-DRAINAGE SYSTEM

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by basic designation only.

ACI INTERNATIONAL (ACI)

ACI 346/346R (1990) Standard Specification for Cast-in-Place Nonreinforced Concrete Pipe and Recommendations

AMERICAN ASSOCIATION OF STATE HIGHWAY AND TRANSPORTATION OFFICIALS (AASHTO)

AASHTO M 198 (1998) Joints for Circular Concrete Sewer and Culvert Pipe Using Flexible Watertight Gaskets

AASHTO M 294 (1998) Corrugated Polyethylene Pipe, 300- to 1200- mm Diameter

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM A 48M (1994 el) Gray Iron Castings (Metric)

ASTM A 536 (1999el) Ductile Iron Castings

ASTM A 716 (1995) Ductile Iron Culvert Pipe

ASTM C 14M (1999) Concrete Sewer, Storm Drain, and Culvert Pipe (Metric)

ASTM C 76M (1999a) Reinforced Concrete Culvert, Storm Drain, and Sewer Pipe (Metric)

ASTM C 443M (1998) Joints for Circular Concrete Sewer and Culvert Pipe, Using Rubber Gaskets (Metric)

ASTM C 478M (1997) Precast Reinforced Concrete Manhole Sections (Metric)

ASTM C 924M (1998) Concrete Pipe Sewer Lines by Low-Pressure Air Test Method (Metric)

ASTM D 1557	(1998) Laboratory Compaction Characteristics of Soil Using Modified Effort (56,000 ft-lbf/cu. ft. (2,700 kN-m/cu.m.))
ASTM D 1784	(1999a) Rigid Poly(Vinyl Chloride) (PVC) Compounds and Chlorinated Poly(Vinyl Chloride) (CPVC) Compounds
ASTM D 2321	(1989; R 1995) Underground Installation of Thermoplastic Pipe for Sewers and Other Gravity-Flow Applications
ASTM D 3034	(1998) Type PSM Poly(Vinyl Chloride) (PVC) Sewer Pipe and Fittings
ASTM D 3212	(1996a) Joints for Drain and Sewer Plastic Pipes Using Flexible Elastomeric Seals
ASTM D 3350	(1998a) Polyethylene Plastics Pipe and Fittings Materials
ASTM F 477	(1999) Elastomeric Seals (Gaskets) for Joining Plastic Pipe

## 1.2 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only. When used, a designation following the "G" designation identifies the office that will review the submittal for the Government. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

### SD-04 Samples

Pipe for Culverts and Storm Drains; G

### SD-07 Certificates

Pipeline Testing; G

Hydrostatic Test on Watertight Joints; G

Determination of Density; G

Frame and Cover for Gratings; G

Certified copies of test reports demonstrating conformance to applicable pipe specifications, before pipe is installed. Certification on the ability of frame and cover or gratings to carry the imposed live load.

## 1.3 DELIVERY, STORAGE, AND HANDLING

### 1.3.1 Delivery and Storage

Materials delivered to site shall be inspected for damage, unloaded, and stored with a minimum of handling. Materials shall not be stored directly

on the ground. The inside of pipes and fittings shall be kept free of dirt and debris. Before, during, and after installation, plastic pipe and fittings shall be protected from any environment that would result in damage or deterioration to the material. The Contractor shall have a copy of the manufacturer's instructions available at the construction site at all times and shall follow these instructions unless directed otherwise by the Contracting Officer. Lubricants, elastomeric gaskets, and any similar materials required to install plastic pipe shall be stored in accordance with the manufacturer's recommendations and shall be discarded if the storage period exceeds the recommended shelf life. Solvents in use shall be discarded when the recommended pot life is exceeded.

#### 1.3.2 Handling

Materials shall be handled in a manner that ensures delivery to the trench in sound, undamaged condition. Pipe shall be carried to the trench, not dragged.

### PART 2 PRODUCTS

#### 2.1 PIPE FOR CULVERTS AND STORM DRAINS

Pipe for culverts and storm drains shall be of the sizes indicated and shall conform to the requirements specified.

##### 2.1.1 Ductile Iron Culvert Pipe

ASTM A 716.

##### 2.1.2 PVC Pipe

The pipe manufacturer's resin certification, indicating the cell classification of PVC used to manufacture the pipe, shall be submitted prior to installation of the pipe.

##### 2.1.2.1 Type PSM PVC Pipe

ASTM D 3034, Type PSM, maximum SDR 35, produced from PVC certified by the compounder as meeting the requirements of ASTM D 1784, minimum cell class 12454-B.

#### 2.1.2.2 Corrugated PE Pipe

AASHTO M 294, Type S or D, PE certified by the resin producer as meeting the requirements of ASTM D 3350, minimum cell class in accordance with AASHTO M 294. Pipe walls shall have the following properties:

Nominal Size (mm)	Minimum Wall Area (square mm/m)	Minimum Moment of Inertia of Wall Section (mm to the 4th/mm)
300	3200	390
375	4000	870
450	4900	1020
600	6600	1900
750	8300	2670
900	9500	3640
1050	9900	8900
1200	10900	8900
1350	12000	13110
1500	13650	13110

#### 2.2 MISCELLANEOUS MATERIALS

##### 2.2.1 Concrete

Unless otherwise specified, concrete and reinforced concrete shall conform to the requirements for concrete under Section 03300 CAST-IN-PLACE STRUCTURAL CONCRETE. The concrete mixture shall have air content by volume of concrete, based on measurements made immediately after discharge from the mixer, of 5 to 7 percent when maximum size of coarse aggregate exceeds 37.5 mm. Air content shall be determined in accordance with ASTM C 231. Expansion-joint filler material shall conform to ASTM D 1751, or ASTM D 1752, or shall be resin-impregnated fiberboard conforming to the physical requirements of ASTM D 1752.

##### 2.2.2 Mortar

Mortar for pipe joints, connections to other drainage structures, shall conform to ASTM C 270, Type M, except that the maximum placement time shall be 1 hour. The quantity of water in the mixture shall be sufficient to produce a stiff workable mortar. Water shall be clean and free of harmful acids, alkalis, and organic impurities. The mortar shall be used within 30 minutes after the ingredients are mixed with water. The inside of the joint shall be wiped clean and finished smooth. The mortar head on the outside shall be protected from air and sun with a proper covering until satisfactorily cured.

##### 2.2.3 Precast Reinforced Concrete Manholes

Precast reinforced concrete manholes shall conform to ASTM C 478M. Joints between precast concrete risers and tops shall be made with flexible

watertight, rubber-type gaskets meeting the requirements of paragraph JOINTS.

#### 2.2.4 Frame and Cover for Gratings

Frame and cover for gratings shall be cast gray iron, ASTM A 48M, Class 35B; cast ductile iron, ASTM A 536, Grade 65-45-12; or cast aluminum, ASTM B 26/B 26M, Alloy 356.OT6. Weight, shape, size, and waterway openings for grates and curb inlets shall be as indicated on the plans.

#### 2.2.5 Joints

##### 2.2.5.1 Flexible Watertight Joints

- a. Materials: Flexible watertight joints shall be made with plastic or rubber-type gaskets for concrete pipe. The design of joints and the physical requirements for plastic gaskets shall conform to AASHTO M 198, and rubber-type gaskets shall conform to ASTM C 443M. Factory-fabricated resilient joint materials shall conform to ASTM C 425. Gaskets shall have not more than one factory-fabricated splice, except that two factory-fabricated splices of the rubber-type gasket are permitted.
- b. Test Requirements: Watertight joints shall be tested and shall meet test requirements of paragraph HYDROSTATIC TEST ON WATERTIGHT JOINTS. Rubber gaskets shall comply with the oil resistant gasket requirements of ASTM C 443M. Certified copies of test results shall be delivered to the Contracting Officer before gaskets or jointing materials are installed. Alternate types of watertight joint may be furnished, if specifically approved.

##### 2.2.5.2 Flexible Watertight, Gasketed Joints

- a. Gaskets: When infiltration or exfiltration is a concern for pipe lines, the couplings may be required to have gaskets. The closed-cell expanded rubber gaskets shall be a continuous band approximately 178 mm wide and approximately 10 mm thick, meeting the requirements of ASTM D 1056, and shall have a quality retention rating of not less than 70 percent when tested for weather resistance by ozone chamber exposure, Method B of ASTM D 1171. Rubber O-ring gaskets shall be 21 mm in diameter for pipe diameters of 914 mm (36 inches) or smaller and 22 mm in diameter for larger pipe having 13 mm deep end corrugation. Rubber O-ring gaskets shall be 35 mm in diameter for pipe having 25 mm deep end corrugations. O-rings shall meet the requirements of AASHTO M 198 or ASTM C 443M. Flexible plastic gaskets shall conform to requirements of AASHTO M 198, Type B.

##### 2.2.5.3 PVC Plastic Pipes

Joints shall be elastomeric gasket type in accordance with the specification for the pipe and as recommended by the pipe manufacturer.

#### 2.2.5.4 Corrugated PE Plastic Pipe

Watertight joints shall be made using a PVC or PE coupling and rubber gaskets as recommended by the pipe manufacturer. Rubber gaskets shall conform to ASTM F 477. Soil tight joints shall conform to the requirements in AASHTO HB-16, Division II, Section 26.4.2.4. (e) for soil tightness and shall be as recommended by the pipe manufacturer.

#### 2.2.5.5 Ductile Iron Pipe

Couplings and fittings shall be as recommended by the pipe manufacturer.

### 2.3 STEEL LADDER

Steel ladder shall be provided where the depth of the manhole exceeds 1 m. These ladders shall be not less than 406 mm (16 inches) in width, with 19 mm diameter rungs spaced 305 mm apart. The two stringers shall be a minimum 10 mm thick and 63 mm wide. Ladders and inserts shall be galvanized after fabrication in conformance with ASTM A 123/A 123M.

### 2.4 DOWNSPOUT BOOTS

Boots used to connect exterior downspouts to the storm-drainage system shall be of gray cast iron conforming to ASTM A 48M, Class 30B or 35B. Shape and size shall be as indicated.

### 2.5 RESILIENT CONNECTORS

Flexible, watertight connectors used for connecting pipe to manholes and inlets shall conform to ASTM C 923.

### 2.6 HYDROSTATIC TEST ON WATERTIGHT JOINTS

#### 2.6.1 Concrete, PVC and PE Pipe

A hydrostatic test shall be made on the watertight joint types as proposed. Only one sample joint of each type needs testing; however, if the sample joint fails because of faulty design or workmanship, an additional sample joint may be tested. During the test period, gaskets or other jointing material shall be protected from extreme temperatures which might adversely affect the performance of such materials. Performance requirements for joints in reinforced and nonreinforced concrete pipe shall conform to AASHTO M 198 or ASTM C 443M. Test requirements for joints in PVC and PE plastic pipe shall conform to ASTM D 3212.

### 2.7 TRENCH DRAINS

Provide heavy-duty, pre-sloped, trench drain with ductile iron integral edge. Provide boltless locking grate. Product shall be model S 100 K manufactured by ACO Drain or approved equivalent.

PART 3 EXECUTION

3.1 EXCAVATION FOR PIPE CULVERTS, STORM DRAINS, AND DRAINAGE STRUCTURES

Excavation of trenches, and for appurtenances and backfilling for culverts and storm drains, shall be in accordance with the applicable portions of Section 02316 "Excavation, Trenching, and Backfilling for Utilities Systems and the requirements specified below.

3.1.1 Trenching

The width of trenches at any point below the top of the pipe shall be not greater than the outside diameter of the pipe plus 450 mm to permit satisfactory jointing and thorough tamping of the bedding material under and around the pipe. Sheet piling and bracing, where required, shall be placed within the trench width as specified. Contractor shall not overexcavate. Where trench widths are exceeded, redesign with a resultant increase in cost of stronger pipe or special installation procedures will be necessary. Cost of this redesign and increased cost of pipe or installation shall be borne by the Contractor without additional cost to the Government.

3.1.2 Removal of Unstable Material

Where wet or otherwise unstable soil incapable of properly supporting the pipe, as determined by the Contracting Officer, is unexpectedly encountered in the bottom of a trench, such material shall be removed to the depth required and replaced to the proper grade with select granular material, compacted as provided in paragraph BACKFILLING. When removal of unstable material is due to the fault or neglect of the Contractor in his performance of shoring and sheet piling, water removal, or other specified requirements, such removal and replacement shall be performed at no additional cost to the government.

3.2 BEDDING

The bedding surface for the pipe shall provide a firm foundation of uniform density throughout the entire length of the pipe.

3.2.1 Concrete Pipe Requirements

When no bedding class is specified or detailed on the drawings, concrete pipe shall be bedded in a soil foundation accurately shaped and rounded to conform to the lowest one-fourth of the outside portion of circular pipe or to the lower curved portion of pipe arch for the entire length of the pipe or pipe arch. When necessary, the bedding shall be tamped. Bell holes and depressions for joints shall be not more than the length, depth, and width required for properly making the particular type of joint.

3.2.2 Ductile Iron Pipe

Bedding for ductile iron pipe shall be as shown on the drawings.

### 3.2.3 Plastic Pipe

Bedding for PVC shall meet the requirements of ASTM D 2321. Bedding, haunching, and initial backfill shall be either Class IB or II material.

### 3.3 PLACING PIPE

Each pipe shall be thoroughly examined before being laid; defective or damaged pipe shall not be used. Plastic pipe shall be protected from exposure to direct sunlight prior to laying, if necessary to maintain adequate pipe stiffness and meet installation deflection requirements. Pipelines shall be laid to the grades and alignment indicated. Proper facilities shall be provided for lowering sections of pipe into trenches. Lifting lugs in vertically elongated metal pipe shall be placed in the same vertical plane as the major axis of the pipe. Pipe shall not be laid in water, and pipe shall not be laid when trench conditions or weather are unsuitable for such work. Diversion of drainage or dewatering of trenches during construction shall be provided as necessary. Deflection of installed flexible pipe shall not exceed the following limits:

TYPE OF PIPE	MAXIMUM ALLOWABLE DEFLECTION (%)
Ductile Iron Culvert	3
Plastic	7.5

Not less than 30 days after the completion of backfilling, the Government may perform a deflection test on the entire length of installed flexible pipe using a mandrel or other suitable device. Installed flexible pipe showing deflections greater than those indicated above shall be retested by a run from the opposite direction. If the retest also fails, the suspect pipe shall be replaced at no cost to the Government.

#### 3.3.1 Concrete, PVC, and Ductile Iron Pipe

Laying shall proceed upgrade with spigot ends of bell-and-spigot pipe and tongue ends of tongue-and-groove pipe pointing in the direction of the flow.

#### 3.3.2 Corrugated PE Pipe

Laying shall be with the separate sections joined firmly on a bed shaped to line and grade and shall follow manufacturer's recommendations.

### 3.4 JOINTING

#### 3.4.1 Concrete Pipe

##### 3.4.1.1 Cement-Mortar Bell-and-Spigot Joint

The first pipe shall be bedded to the established gradeline, with the bell end placed upstream. The interior surface of the bell shall be thoroughly cleaned with a wet brush and the lower portion of the bell filled with



mortar as required to bring inner surfaces of abutting pipes flush and even. The spigot end of each subsequent pipe shall be cleaned with a wet brush and uniformly matched into a bell so that sections are closely fitted. After each section is laid, the remainder of the joint shall be filled with mortar, and a bead shall be formed around the outside of the joint with sufficient additional mortar. If mortar is not sufficiently stiff to prevent appreciable slump before setting, the outside of the joint shall be wrapped or bandaged with cheesecloth to hold mortar in place.

#### 3.4.1.2 Cement-Mortar Tongue-and-Groove Joint

The first pipe shall be bedded carefully to the established gradeline with the groove upstream. A shallow excavation shall be made underneath the pipe at the joint and filled with mortar to provide a bed for the pipe. The grooved end of the first pipe shall be thoroughly cleaned with a wet brush, and a layer of soft mortar applied to the lower half of the groove. The tongue of the second pipe shall be cleaned with a wet brush; while in horizontal position, a layer of soft mortar shall be applied to the upper half of the tongue. The tongue end of the second pipe shall be inserted in the grooved end of the first pipe until mortar is squeezed out on interior and exterior surfaces. Sufficient mortar shall be used to fill the joint completely and to form a bead on the outside.

#### 3.4.1.3 Flexible Watertight Joints

Gaskets and jointing materials shall be as recommended by the particular manufacturer in regard to use of lubricants, cements, adhesives, and other special installation requirements. Surfaces to receive lubricants, cements, or adhesives shall be clean and dry. Gaskets and jointing materials shall be affixed to the pipe not more than 24 hours prior to the installation of the pipe, and shall be protected from the sun, blowing dust, and other deleterious agents at all times. Gaskets and jointing materials shall be inspected before installing the pipe; any loose or improperly affixed gaskets and jointing materials shall be removed and replaced. The pipe shall be aligned with the previously installed pipe, and the joint pushed home. If, while the joint is being made the gasket becomes visibly dislocated the pipe shall be removed and the joint remade.

### 3.5 DRAINAGE STRUCTURES

#### 3.5.1 Manholes and Inlets

Construction shall be of precast reinforced concrete, complete with frames and covers or gratings; and with fixed galvanized steel ladders where indicated. Pipe studs and junction chambers of prefabricated corrugated metal manholes shall be fully bituminous-coated and paved when the connecting branch lines are so treated. Pipe connections to concrete manholes and inlets shall be made with flexible, watertight connectors.

#### 3.6 STEEL LADDER INSTALLATION

Ladder shall be adequately anchored to the wall by means of steel inserts spaced not more than 1.83 m vertically, and shall be installed to provide at

least 152 mm of space between the wall and the rungs. The wall along the line of the ladder shall be vertical for its entire length.

### 3.7 BACKFILLING

#### 3.7.1 Backfilling Pipe in Trenches

After the pipe has been properly bedded, selected material from excavation or borrow, at a moisture content that will facilitate compaction, shall be placed along both sides of pipe in layers not exceeding 150 mm in compacted depth. The backfill shall be brought up evenly on both sides of pipe for the full length of pipe. The fill shall be thoroughly compacted under the haunches of the pipe. Each layer shall be thoroughly compacted with mechanical tampers or rammers. This method of filling and compacting shall continue until the fill has reached an elevation of at least 300 mm above the top of the pipe. The remainder of the trench shall be backfilled and compacted by spreading and rolling or compacted by mechanical rammers or tampers in layers not exceeding 150 millimeters. Tests for density shall be made as necessary to ensure conformance to the compaction requirements specified below. Where it is necessary, in the opinion of the Contracting Officer, that sheeting or portions of bracing used be left in place, the contract will be adjusted accordingly. Untreated sheeting shall not be left in place beneath structures or pavements.

#### 3.7.2 Backfilling Pipe in Fill Sections

For pipe placed in fill sections, backfill material and the placement and compaction procedures shall be as specified below. The fill material shall be uniformly spread in layers longitudinally on both sides of the pipe, not exceeding 150 mm in compacted depth, and shall be compacted by rolling parallel with pipe or by mechanical tamping or ramming. Prior to commencing normal filling operations, the crown width of the fill at a height of 300 mm above the top of the pipe shall extend a distance of not less than twice the outside pipe diameter on each side of the pipe or 4 m, whichever is less. After the backfill has reached at least 300 mm above the top of the pipe, the remainder of the fill shall be placed and thoroughly compacted in layers not exceeding 150 mm.

#### 3.7.3 Movement of Construction Machinery

When compacting by rolling or operating heavy equipment parallel with the pipe, displacement of or injury to the pipe shall be avoided. Movement of construction machinery over a culvert or storm drain at any stage of construction shall be at the Contractor's risk. Any damaged pipe shall be repaired or replaced.

#### 3.7.4 Compaction

##### 3.7.4.1 General Requirements

Cohesionless materials include gravels, gravel-sand mixtures, sands, and gravelly sands. Cohesive materials include clayey and silty gravels, gravel-silt mixtures, clayey and silty sands, sand-clay mixtures, clays, silts, and very fine sands. When results of compaction tests for moisture-

density relations are recorded on graphs, cohesionless soils will show straight lines or reverse-shaped moisture-density curves, and cohesive soils will show normal moisture-density curves.

#### 3.7.4.2 Minimum Density

Backfill over and around the pipe and backfill around and adjacent to drainage structures shall be compacted at the approved moisture content to the following applicable minimum density, which will be determined as specified below.

- a. Under unpaved or turfed traffic areas, density shall not be less than 90 percent of maximum density for cohesive material and 95 percent of maximum density for cohesionless material.
- b. Under nontraffic areas, density shall be not less than that of the surrounding material.

#### 3.7.5 Determination of Density

Testing shall be the responsibility of the Contractor and performed at no additional cost to the Government. Testing shall be performed by an approved commercial testing laboratory. Tests shall be performed in sufficient number to ensure that specified density is being obtained. Laboratory tests for moisture-density relations shall be made in accordance with ASTM D 1557 except that mechanical tampers may be used provided the results are correlated with those obtained with the specified hand tamper. Field density tests shall be determined in accordance with ASTM D 2167 or ASTM D 2922. When ASTM D 2922 is used, the calibration curves shall be checked and adjusted, if necessary, using the sand cone method as described in paragraph Calibration of the referenced publications. ASTM D 2922 results in a wet unit weight of soil and when using this method ASTM D 3017 shall be used to determine the moisture content of the soil. The calibration curves furnished with the moisture gauges shall be checked along with density calibration checks as described in ASTM D 3017 or ASTM D 2922. Test results shall be furnished the Contracting Officer. The calibration checks of both the density and moisture gauges shall be made at the beginning of a job on each different type of material encountered and at intervals as directed.

#### 3.8 PIPELINE TESTING

Lines shall be tested for leakage by low-pressure air or water testing or exfiltration tests, as appropriate. Low-pressure air testing for concrete pipes shall conform to ASTM C 924M. Low-pressure air testing for plastic pipe shall conform to ASTM F 1417. Low pressure air testing procedures for other pipe materials shall use the pressures and testing times prescribed in ASTM C 828 or ASTM C 924M, after consultation with the pipe manufacturer. Testing of individual joints for leakage by low-pressure air or water shall conform to ASTM C 1103M. Prior to exfiltration tests, the trench shall be backfilled up to at least the lower half of the pipe. If required, sufficient additional backfill shall be placed to prevent pipe movement during testing, leaving the joints uncovered to permit inspection. Visible leaks encountered shall be corrected regardless of leakage test results.

When the water table is 600 mm or more above the top of the pipe at the upper end of the pipeline section to be tested, infiltration shall be measured using a suitable weir or other device acceptable to the Contracting Officer. An exfiltration test shall be made by filling the line to be tested with water so that a head of at least 600 mm is provided above both the water table and the top of the pipe at the upper end of the pipeline to be tested. The filled line shall be allowed to stand until the pipe has reached its maximum absorption, but not less than 4 hours. After absorption, the head shall be reestablished. The amount of water required to maintain this water level during a 2-hour test period shall be measured. Leakage as measured by the exfiltration test shall not exceed 60 liters per mm in diameter per kilometer. When leakage exceeds the maximum amount specified, satisfactory correction shall be made and retesting accomplished. Testing, correcting, and retesting shall be made at no additional cost to the Government.

### 3.9 TRENCH DRAIN INSTALLATION

Provide strip of concrete 150 mm wide and 200-mm deep on each side of drain. Provide one #4 rebar centered on each side of concrete. Provide temporary bracing and supports. Install as per manufacturer's directions.

-- End of Section --

SECTION 02722

AGGREGATE AND/OR GRADED-CRUSHED AGGREGATE BASE COURSE

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by basic designation only.

AMERICAN ASSOCIATION OF STATE HIGHWAY AND TRANSPORTATION OFFICIALS  
(AASHTO)

AASHTO T 180 (1997) Moisture-Density Relations of Soils  
Using a 4.54-kg (10-lb) Rammer and an 457 mm  
(18-in) Drop

AASHTO T 224 (1996) Correction for Coarse Particles in the  
Soil Compaction Test

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM C 29M (1997) Bulk Density ("Unit Weight") and Voids  
in Aggregates

ASTM C 88 (1999a) Soundness of Aggregates by Use of  
Sodium Sulfate or Magnesium Sulfate

ASTM C 117 (1995) Materials Finer Than 75 micrometer  
(No. 200) Sieve in Mineral Aggregates by  
Washing

ASTM C 127 (1988; R 1993el) Specific Gravity and  
Absorption of Course Aggregate

ASTM C 128 (1997) Specific Gravity and Absorption of  
Fine Aggregate

ASTM C 131 (1996) Resistance to Degradation of Small-  
Size Coarse Aggregate by Abrasion and Impact  
in the Los Angeles Machine

ASTM C 136 (1996a) Sieve Analysis of Fine and Coarse  
Aggregates

ASTM D 75 (1987; R 1997) Sampling Aggregates

ASTM D 422 (1963; R 1998) Particle-Size Analysis of  
Soils

ASTM D 1556	(1990; R 1996el) Density and Unit Weight of Soil in Place by the Sand-Cone Method
ASTM D 1557	(1991; R 1998) Laboratory Compaction Characteristics of Soil Using Modified Effort (56,000 ft-lbf/cu. ft. (2,700 kN-m/cu.m.))
ASTM D 2167	(1994) Density and Unit Weight of Soil in Place by the Rubber Balloon Method
ASTM D 2487	(1998) Classification of Soils for Engineering Purposes (Unified Soil Classification System)
ASTM D 2922	(1996el) Density of Soil and Soil-Aggregate in Place by Nuclear Methods (Shallow Depth)
ASTM D 3017	(1988; R 1996el) Water Content of Soil and Rock in Place by Nuclear Methods (Shallow Depth)
ASTM D 4318	(1998) Liquid Limit, Plastic Limit, and Plasticity Index of Soils

## 1.2 DEFINITIONS

For the purposes of this specification, the following definitions apply.

### 1.2.1 Aggregate Base Course

Aggregate base course (ABC) is well graded, durable aggregate uniformly moistened and mechanically stabilized by compaction.

### 1.2.2 Degree of Compaction

Degree of compaction shall be expressed as a percentage of the maximum density obtained by the test procedure presented in ASTM D 1557.

## 1.3 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only. When used, a designation following the "G" designation identifies the office that will review the submittal for the Government. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

### SD-06 Test Reports

Sampling and testing; G  
Field Density Tests; G

Calibration curves and related test results prior to using the device or equipment being calibrated. Copies of field test results within 24 hours after the tests are performed. Certified copies of

test results for approval not less than 30 days before material is required for the work.

#### 1.4 SAMPLING AND TESTING

Sampling and testing shall be the responsibility of the Contractor. Sampling and testing shall be performed by a testing laboratory approved in accordance with Section 01451 CONTRACTOR QUALITY CONTROL. The materials shall be tested to establish compliance with the specified requirements; testing shall be performed at the specified frequency. The Contracting Officer may specify the time and location of the tests. Copies of test results shall be furnished to the Contracting Officer within 24 hours of completion of the tests.

##### 1.4.1 Sampling

Samples for laboratory testing shall be taken in conformance with ASTM D 75. When deemed necessary, the sampling will be observed by the Contracting Officer.

##### 1.4.2 Tests

The following tests shall be performed in conformance with the applicable standards listed.

###### 1.4.2.1 Sieve Analysis

Sieve analysis shall be made in conformance with ASTM C 117 and ASTM D 422. Sieves shall conform to ASTM E 11.

###### 1.4.2.2 Liquid Limit and Plasticity Index

Liquid limit and plasticity index shall be determined in accordance with ASTM D 4318.

###### 1.4.2.3 Moisture-Density Determinations

The maximum density and optimum moisture content shall be determined in accordance with [ASTM D 1557] [AASHTO T 180, Method D and corrected with AASHTO T 224. To maintain the same percentage of coarse material, the "remove and replace" procedure as described in the NOTE 8 in Paragraph 7.2 of AASHTO T 180 shall be used.].

###### 1.4.2.4 Field Density Tests

Density shall be field measured in accordance with ASTM D 2922. For the method presented in ASTM D 2922 the calibration curves shall be checked and adjusted if necessary using only the sand cone method as described in paragraph Calibration, of the ASTM publication. Tests performed in accordance with ASTM D 2922 result in a wet unit weight of soil and when using this method, ASTM D 3017 shall be used to determine the moisture content of the soil. The calibration curves furnished with the moisture gauges shall also be checked along with density calibration checks as described in ASTM D 3017. The calibration checks of both the density and

moisture gauges shall be made by the prepared containers of material method, as described in paragraph Calibration of ASTM D 2922, on each different type of material being tested at the beginning of a job and at intervals as directed.]

#### 1.4.3 Testing Frequency

##### 1.4.3.1 Initial Tests

One of each of the following tests shall be performed on the proposed material prior to commencing construction to demonstrate that the proposed material meets all specified requirements when furnished. If materials from more than one source are going to be utilized, this testing shall be completed for each source.

- a. Sieve Analysis [including 0.02 mm size material].
- b. Liquid limit and plasticity index moisture-density relationship.

##### 1.4.3.2 In Place Tests

One of each of the following tests shall be performed on samples taken from the placed and compacted ABC. Samples shall be taken and tested at the rates indicated.

- a. Density tests shall be performed on every lift of material placed and at a frequency of one set of tests for every 100 square meters, or portion thereof, of completed area.
- b. Sieve Analysis including 0.02 mm size material] shall be performed for every 200 metric tons, or portion thereof, of material placed.
- c. Liquid limit and plasticity index tests shall be performed at the same frequency as the sieve analysis.

##### 1.4.4 Approval of Material

The source of the material shall be selected 3 days prior to the time the material will be required in the work. Tentative approval of material will be based on initial test results. Final approval of the materials will be based on sieve analysis, liquid limit, and plasticity index tests performed on samples taken from the completed and fully compacted ABC.

#### 1.5 WEATHER LIMITATIONS

Construction shall be done when the atmospheric temperature is above 2 degrees C. When the temperature falls below 2 degrees C, the Contractor shall protect all completed areas by approved methods against detrimental effects of freezing. Completed areas damaged by freezing, rainfall, or other weather conditions shall be corrected to meet specified requirements.



## PART 2 PRODUCTS

### 2.1 AGGREGATES

The ABC shall consist of clean, sound, durable particles of crushed stone, crushed gravel, angular sand, or other approved material. ABC shall be free of lumps of clay, organic matter, and other objectionable materials or coatings. The portion retained on the 4.75 mm sieve shall be known as coarse aggregate; that portion passing the 4.75 mm sieve shall be known as fine aggregate.

#### 2.1.1 Coarse Aggregate

Coarse aggregates shall be angular particles of uniform density. When the coarse aggregate is supplied from more than one source, aggregate from each source shall meet the specified requirements and shall be stockpiled separately.

a. Crushed Gravel: Crushed gravel shall be manufactured by crushing gravels, and shall meet all the requirements specified below.

b. Crushed Stone: Crushed stone shall consist of freshly mined quarry rock, and shall meet all the requirements specified below.

##### 2.1.1.1 Aggregate Base Course

ABC coarse aggregate shall not show more than 50 percent loss when subjected to the Los Angeles abrasion test in accordance with ASTM C 131. The amount of flat and elongated particles shall not exceed 30 percent. A flat particle is one having a ratio of width to thickness greater than 3; an elongated particle is one having a ratio of length to width greater than 3. In the portion retained on each sieve specified, the crushed aggregates shall contain at least 50 percent by weight of crushed pieces having two or more freshly fractured faces with the area of each face being at least equal to 75 percent of the smallest midsectional area of the piece. When two fractures are contiguous, the angle between planes of the fractures must be at least 30 degrees in order to count as two fractured faces. Crushed gravel shall be manufactured from gravel particles 50 percent of which, by weight, are retained on the maximum size sieve listed in TABLE 1.

#### 2.1.2 Fine Aggregate

Fine aggregates shall be angular particles of uniform density. When the fine aggregate is supplied from more than one source, aggregate from each source shall meet the specified requirements.

##### 2.1.2.1 Aggregate Base Course

ABC fine aggregate shall consist of screenings, angular sand, crushed recycled concrete fines, or other finely divided mineral matter processed or naturally combined with the coarse aggregate.

### 2.1.3 Gradation Requirements

The specified gradation requirements shall apply to the completed base course. The aggregates shall have a maximum size of 35 mm and shall be continuously well graded within the limits specified in TABLE 1. Sieves shall conform to ASTM E 11.

TABLE 1. GRADATION OF AGGREGATES

Percentage by Weight Passing Square-Mesh Sieve

Sieve Designation	ABC
-----	-----
50.0 mm	----
37.5 mm	100
25.0 mm	60-100
12.5 mm	30-65
4.75 mm	20-50
2.00 mm	15-40
0.425 mm	5-25
0.075 mm	0-10

NOTE 1: Particles having diameters less than 0.02 mm shall not be in excess of 3 percent by weight of the total sample tested.

NOTE 2: The values are based on aggregates of uniform specific gravity. If materials from different sources are used for the coarse and fine aggregates, they shall be tested in accordance with ASTM C 127 and ASTM C 128 to determine their specific gravities. If the specific gravities vary by more than 10 percent, the percentages passing the various sieves shall be corrected as directed by the Contracting Officer.

### 2.1.4 Liquid Limit and Plasticity Index

Liquid limit and plasticity index requirements shall apply to the completed course and shall also apply to any component that is blended to meet the required gradation. The portion of any component or of the completed course passing the 0.425 mm sieve shall be either nonplastic or have a liquid limit not greater than 25 and a plasticity index not greater than 5.

## PART 3 EXECUTION

### 3.1 GENERAL REQUIREMENTS

When the ABC is constructed in more than one layer, the previously constructed layer shall be cleaned of loose and foreign matter by sweeping with power sweepers or power brooms, except that hand brooms may be used in areas where power cleaning is not practicable. Adequate drainage shall be provided during the entire period of construction to prevent water from collecting or standing on the working area. Line and grade stakes shall be

provided as necessary for control. Grade stakes shall be in lines parallel to the centerline of the area under construction and suitably spaced for string lining.

### 3.2 STOCKPILING MATERIAL

Prior to stockpiling of material, storage sites shall be cleared and leveled by the Contractor. All materials, including approved material available from excavation and grading, shall be stockpiled in the manner and at the locations designated. Aggregates shall be stockpiled on the cleared and leveled areas designated by the Contracting Officer to prevent segregation. Materials obtained from different sources shall be stockpiled separately.

### 3.3 PREPARATION OF UNDERLYING COURSE

Prior to constructing the ABC, the underlying course or subgrade shall be cleaned of all foreign substances. At the time of construction of the ABC, the underlying course shall contain no frozen material. The surface of the underlying course or subgrade shall meet specified compaction and surface tolerances. The underlying course shall conform to Section 02300 EARTHWORK. Ruts or soft yielding spots in the underlying courses, areas having inadequate compaction, and deviations of the surface from the requirements set forth herein shall be corrected by loosening and removing soft or unsatisfactory material and by adding approved material, reshaping to line and grade, and recompacting to specified density requirements. For cohesionless underlying courses containing sands or gravels, as defined in ASTM D 2487, the surface shall be stabilized prior to placement of the ABC. Stabilization shall be accomplished by mixing ABC into the underlying course and compacting by approved methods. The stabilized material shall be considered as part of the underlying course and shall meet all requirements of the underlying course. The finished underlying course shall not be disturbed by traffic or other operations and shall be maintained by the Contractor in a satisfactory condition until the ABC is placed.

### 3.4 INSTALLATION

#### 3.4.1 Mixing the Materials

The coarse and fine aggregates shall be mixed in a stationary plant, or in a traveling plant or bucket loader on an approved paved working area. The Contractor shall make adjustments in mixing procedures or in equipment as directed to obtain true grades, to minimize segregation or degradation, to obtain the required water content, and to insure a satisfactory ABC meeting all requirements of this specification.

#### 3.4.2 Placing

The mixed material shall be placed on the prepared subgrade or subbase in layers of uniform thickness with an approved spreader. When a compacted layer 150 mm or less in thickness is required, the material shall be placed in a single layer. When a compacted layer in excess of 150 mm is required, the material shall be placed in layers of equal thickness. No layer shall exceed 150 mm or less than 75mm when compacted. The layers shall be so placed that when compacted they will be true to the grades or levels

required with the least possible surface disturbance. Where the ABC is placed in more than one layer, the previously constructed layers shall be cleaned of loose and foreign matter by sweeping with power sweepers, power brooms, or hand brooms, as directed. Such adjustments in placing procedures or equipment shall be made as may be directed to obtain true grades, to minimize segregation and degradation, to adjust the water content, and to insure an acceptable ABC.

#### 3.4.3 Grade Control

The finished and completed ABC shall conform to the lines, grades, and cross sections shown. Underlying material(s) shall be excavated and prepared at sufficient depth for the required ABC thickness so that the finished ABC with the subsequent surface course will meet the designated grades.

#### 3.4.4 Edges of Base Course

The ABC shall be placed so that the completed section will be a minimum of 1.5 m wider, on all sides, than the next layer that will be placed above it. Additionally, approved fill material shall be placed along the outer edges of ABC in sufficient quantities to compact to the thickness of the course being constructed, or to the thickness of each layer in a multiple layer course, allowing in each operation at least a 600 mm width of this material to be rolled and compacted simultaneously with rolling and compacting of each layer of ABC. If this base course material is to be placed adjacent to another pavement section, then the layers for both of these sections shall be placed and compacted along this edge at the same time.

#### 3.4.5 Compaction

Each layer of the ABC shall be compacted as specified with approved compaction equipment. Rolling shall begin at the outside edge of the surface and proceed to the center, overlapping on successive trips at least one-half the width of the roller. Alternate trips of the roller shall be slightly different lengths. Speed of the roller shall be such that displacement of the aggregate does not occur. In all places not accessible to the rollers, the mixture shall be compacted with hand-operated power tampers. Compaction shall continue until each layer has a degree of compaction that is at least 100 percent of laboratory maximum density through the full depth of the layer. The Contractor shall make such adjustments in compacting or finishing procedures as may be directed to obtain true grades, to minimize segregation and degradation, to reduce or increase water content, and to ensure a satisfactory ABC. Any materials that are found to be unsatisfactory shall be removed and replaced with satisfactory material or reworked, as directed, to meet the requirements of this specification.

#### 3.4.6 Thickness

Compacted thickness of the aggregate course shall be as indicated.

#### 3.4.7 Proof Rolling

Proof rolling of the areas indicated shall be in addition to the compaction specified and shall consist of the application of 30 coverages with a heavy pneumatic-tired roller having four or more tires, each loaded to a minimum of 13,600 kg and inflated to a minimum of 1035 kPa. In areas designated, proof rolling shall be applied to the top of the underlying material on which ABC is laid and to each layer of ABC. Water content of the underlying material shall be maintained at optimum or at the percentage directed from start of compaction to completion of proof rolling of that layer. Water content of each layer of the ABC shall be maintained at the optimum percentage directed from start of compaction to completion of proof rolling. Any ABC materials or any underlying materials that produce unsatisfactory results by proof rolling shall be removed and replaced with satisfactory materials, recompact and proof rolled to meet these specifications.

#### 3.4.8 Finishing

The surface of the top layer of ABC shall be finished after final compaction and proof rolling by cutting any overbuild to grade and rolling with a steel-wheeled roller. Thin layers of material shall not be added to the top layer of base course to meet grade. If the elevation of the top layer of ABC is 13 mm or more below grade, then the top layer should be scarified to a depth of at least 75 mm and new material shall be blended in, compacted and proof rolled to bring to grade. Adjustments to rolling and finishing procedures shall be made as directed to minimize segregation and degradation, obtain grades, maintain moisture content, and insure an acceptable base course. Should the surface become rough, corrugated, uneven in texture, or traffic marked prior to completion, the unsatisfactory portion shall be scarified, reworked and recompact or it shall be replaced as directed.

#### 3.4.9 Smoothness

The surface of the top layer shall show no deviations in excess of 10 mm when tested with a 3.05-meter straightedge. Measurements shall be taken in successive positions parallel to the centerline of the area to be paved. Measurements shall also be taken perpendicular to the centerline at 15-meter intervals. Deviations exceeding this amount shall be corrected by removing material and replacing with new material, or by reworking existing material and compacting it to meet these specifications.

### 3.5 TRAFFIC

Traffic shall not be allowed on the completed ABC course.

### 3.6 MAINTENANCE

The ABC shall be maintained in a satisfactory condition until the full pavement section is completed and accepted. Maintenance shall include immediate repairs to any defects and shall be repeated as often as necessary to keep the area intact. Any ABC that is not paved over prior to the onset of winter shall be retested to verify that it still complies with the

01062/BERGER/ABAM  
FY02 Tactical Equipment Complex  
Fort Lewis, Washington

requirements of this specification. Any area of ABC that is damaged shall be reworked or replaced as necessary to comply with this specification.

### 3.7 DISPOSAL OF UNSATISFACTORY MATERIALS

Any unsuitable materials that must be removed shall be disposed of as directed. No additional payments will be made for materials that must be replaced.

-- End of Section --

SECTION 02741

HOT-MIX ASPHALT (HMA) FOR ROADS AND DRIVE AREAS

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by basic designation only.

AMERICAN ASSOCIATION OF STATE HIGHWAY AND TRANSPORTATION OFFICIALS  
(AASHTO)

AASHTO MP 1	(1998) Provisional Specification for Performance Graded Asphalt Binder
AASHTO MP 2	(1998; Interim 1999) Superpave Volumetric Mix Design
AASHTO TP53	(1998; Interim 1999) Determining Asphalt Content of Hot Mix Asphalt by the Ignition Method

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM C 29/C 29M	(1997) Bulk Density ("Unit Weight") and Voids in Aggregates
ASTM C 88	(1999a) Soundness of Aggregates by Use of Sodium Sulfate or Magnesium Sulfate
ASTM C 117	(1995) Materials Finer than 75 micrometer (No. 200) Sieve in Mineral Aggregates by Washing
ASTM C 131	(1996) Resistance to Degradation of Small-Size Coarse Aggregate by Abrasion and Impact in the Los Angeles Machine
ASTM C 136	(1996a) Sieve Analysis of Fine and Coarse Aggregates
ASTM C 566	(1997) Evaporable Total Moisture Content of Aggregate by Drying
ASTM C 1252	(1998) Uncompacted Void Content of Fine Aggregate (as Influenced by Particle Shape, Surface Texture, and Grading)
ASTM D 140	(1998) Sampling Bituminous Materials

ASTM D 242	(1995) Mineral Filler for Bituminous Paving Mixtures
ASTM D 946	(1999) Penetration-Graded Asphalt Cement for Use in Pavement Construction
ASTM D 995	(1995b) Mixing Plants for Hot-Mixed, Hot-Laid Bituminous Paving Mixtures
ASTM D 1461	(1985)) Moisture or Volatile Distillates in Bituminous Paving Mixtures
ASTM D 1559	(1989) Resistance to Plastic Flow of Bituminous Mixtures Using Marshall Apparatus
ASTM D 2041	(1995) Theoretical Maximum Specific Gravity and Density of Bituminous Paving Mixtures
ASTM D 2172	(1995) Quantitative Extraction of Bitumen from Bituminous Paving Mixtures
ASTM D 2419	(1995) Sand Equivalent Value of Soils and Fine Aggregate
ASTM D 2489	(1984; R 1994el) Degree of Particle Coating of Bituminous-Aggregate Mixtures
ASTM D 2726	(1996el) Bulk Specific Gravity and Density of Non-Absorptive Compacted Bituminous Mixture
ASTM D 2950	(1997) Density of Bituminous Concrete in Place by Nuclear Method
ASTM D 3381	(1999) Viscosity-Graded Asphalt Cement for Use in Pavement Construction
ASTM D 3665	(1999) Random Sampling of Construction Materials
ASTM D 3666	(1998) Minimum Requirements for Agencies Testing and Inspecting Bituminous Paving Materials
ASTM D 4125	(1994el) Asphalt Content of Bituminous Mixtures by the Nuclear Method
ASTM D 4791	(1999) Flat Particles, Elongated Particles, or Flat and Elongated Particles in Coarse Aggregate
ASTM D 4867/D 4867M	(1996) Effect of Moisture on Asphalt Concrete Paving Mixtures



ASTM D 5444 (1998) Mechanical Size Analysis of Extracted Aggregate

ASTM D 6307 (1998) Asphalt Content of Hot Mix Asphalt by Ignition Method

ASPHALT INSTITUTE (AI)

AI MS-2 (1997) Mix Design Methods for Asphalt Concrete and Other Hot-Mix Types

AI MS-22 (1998; 2nd Edition) Construction of Hot-Mix Asphalt Pavements

1.2 DESCRIPTION OF WORK

The work shall consist of pavement courses composed of mineral aggregate and asphalt material heated and mixed in a central mixing plant and placed on a prepared course. HMA designed and constructed in accordance with this section shall conform to the lines, grades, thicknesses, and typical cross sections shown on the drawings. Each course shall be constructed to the depth, section, or elevation required by the drawings and shall be rolled, finished, and approved before the placement of the next course.

1.3 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only. When used, a designation following the "G" designation identifies the office that will review the submittal for the Government. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

SD-03 Product Data

Mix Design; G.

Proposed JMF.

Contractor Quality Control; G.

Quality control plan.

Material Acceptance and Percent Payment; G.

Acceptance test results and pay calculations.

SD-04 Samples

Asphalt Cement Binder.

20 L sample for mix design verification.

Aggregates.

Sufficient materials to produce 90 kg of blended mixture for mix design verification.

SD-06 Test Reports

Aggregates; G.  
QC Monitoring.

Aggregate and QC test results.

SD-07 Certificates

Asphalt Cement Binder; G.

Copies of certified test data.

Testing Laboratory

Certification of compliance.

Plant Scale Calibration Certification

1.4 ASPHALT MIXING PLANT

Plants used for the preparation of hot-mix asphalt shall conform to the requirements of ASTM D 995 with the following changes:

a. Truck Scales. The asphalt mixture shall be weighed on approved certified scales at the Contractor's expense. Scales shall be inspected and sealed at least annually by an approved calibration laboratory.

b. Testing Facilities. The plant shall be equipped with testing facilities.

c. Inspection of Plant. The Contracting Officer shall have access at all times, to all areas of the plant for checking adequacy of equipment; inspecting operation of the plant; verifying weights, proportions, and material properties; checking the temperatures maintained in the preparation of the mixtures and for taking samples. The Contractor shall provide assistance as requested, for the Government to procure any desired samples.

d. Storage Bins. Use of storage bins for temporary storage of hot-mix asphalt will be permitted as follows:

(1) The asphalt mixture may be stored in non-insulated storage bins for a period of time not exceeding 3 hours.

(2) The asphalt mixture may be stored in insulated storage bins for a period of time not exceeding 8 hours. The mix drawn from bins shall meet the same requirements as mix loaded directly into trucks.

#### 1.5 HAULING EQUIPMENT

Trucks used for hauling hot-mix asphalt shall have tight, clean, and smooth metal beds. To prevent the mixture from adhering to them, the truck beds shall be lightly coated with a minimum amount of paraffin oil, lime solution, or other approved material. Petroleum based products shall not be used as a release agent. Each truck shall have a suitable cover to protect the mixture from adverse weather. When necessary to ensure that the mixture will be delivered to the site at the specified temperature, truck beds shall be insulated or heated and covers (tarps) shall be securely fastened.

#### 1.6 ASPHALT PAVERS

Asphalt pavers shall be self-propelled, with an activated screed, heated as necessary, and shall be capable of spreading and finishing courses of hot-mix asphalt which will meet the specified thickness, smoothness, and grade. The paver shall have sufficient power to propel itself and the hauling equipment without adversely affecting the finished surface.

##### 1.6.1 Receiving Hopper

The paver shall have a receiving hopper of sufficient capacity to permit a uniform spreading operation. The hopper shall be equipped with a distribution system to place the mixture uniformly in front of the screed without segregation. The screed shall effectively produce a finished surface of the required evenness and texture without tearing, shoving, or gouging the mixture.

#### 1.7 ROLLERS

Rollers shall be in good condition and shall be operated at slow speeds to avoid displacement of the asphalt mixture. The number, type, and weight of rollers shall be sufficient to compact the mixture to the required density while it is still in a workable condition. Equipment which causes excessive crushing of the aggregate shall not be used.

#### 1.8 WEATHER LIMITATIONS

The hot-mix asphalt shall not be placed upon a wet surface or when the surface temperature of the underlying course is less than specified in Table 1. The temperature requirements may be waived by the Contracting Officer, if requested; however, all other requirements, including compaction, shall be met.

Table 1. Surface Temperature Limitations of Underlying Course

<u>Mat Thickness, mm</u>	<u>Degrees C</u>
75 or greater	4
Less than 75	7

## PART 2 PRODUCTS

### 2.1 AGGREGATES

Aggregates shall consist of crushed stone, crushed gravel, crushed slag, screenings, natural sand and mineral filler, as required. The portion of material retained on the 4.75 mm sieve is coarse aggregate. The portion of material passing the 4.75 mm sieve and retained on the 0.075 mm sieve is fine aggregate. The portion passing the 0.075 mm sieve is defined as mineral filler. All aggregate test results and samples shall be submitted to the Contracting Officer at least 14 days prior to start of construction.

#### 2.1.1 Coarse Aggregate

Coarse aggregate shall consist of sound, tough, durable particles, free from films of material that would prevent thorough coating and bonding with the asphalt material and free from organic matter and other deleterious substances. All individual coarse aggregate sources shall meet the following requirements:

- a. The percentage of loss shall not be greater than 40 percent after 500 revolutions when tested in accordance with ASTM C 131.
- b. The percentage of loss shall not be greater than 18 percent after five cycles when tested in accordance with ASTM C 88 using magnesium sulfate [or 12 percent when using sodium sulfate].
- c. At least 75 percent by weight of coarse aggregate shall have at least two or more fractured faces when tested in accordance with COE CRD-C 171. Fractured faces shall be produced by crushing.
- d. The particle shape shall be essentially cubical and the aggregate shall not contain more than 20% percent, by weight, of flat and elongated particles (3:1 ratio of maximum to minimum) when tested in accordance with ASTM D 4791.

#### 2.1.2 Fine Aggregate

Fine aggregate shall consist of clean, sound, tough, durable particles. The aggregate particles shall be free from coatings of clay, silt, or any objectionable material and shall contain no clay balls. All individual fine aggregate sources shall have a sand equivalent value not less than 45 when tested in accordance with ASTM D 2419.

The fine aggregate portion of the blended aggregate shall have an uncompacted void content not less than 43.0 percent when tested in accordance with ASTM C 1252 Method A.

#### 2.1.3 Mineral Filler

Mineral filler shall be nonplastic material meeting the requirements of ASTM D 242.

#### 2.1.4 Aggregate Gradation

The combined aggregate gradation shall conform to gradations specified in Table 2, when tested in accordance with ASTM C 136 and ASTM C 117, and shall not vary from the low limit on one sieve to the high limit on the adjacent sieve or vice versa, but grade uniformly from coarse to fine.

Table 2. Aggregate Gradations

<u>Sieve Size, mm</u>	<u>Asphaltic Concrete Percent Passing by Mass</u>
25.0	---
19.0	100
12.5	76-96
9.5	69-89
4.75	53-73
2.36	38-60
1.18	26-48
0.60	18-38
0.30	11-27
0.15	6-18
0.075	3-6

#### 2.2 ASPHALT CEMENT BINDER

Asphalt cement binder shall conform to AASHTO MP 1 Performance Grade (PG). Test data indicating grade certification shall be provided by the supplier at the time of delivery of each load to the mix plant. Copies of these certifications shall be submitted to the Contracting Officer. The supplier is defined as the last source of any modification to the binder. The Contracting Officer may sample and test the binder at the mix plant at any time before or during mix production. Samples for this verification testing shall be obtained by the Contractor in accordance with ASTM D 140 and in the presence of the Contracting Officer. These samples shall be furnished to the Contracting Officer for the verification testing, which shall be at no cost to the Contractor. Samples of the asphalt cement specified shall be submitted for approval not less than 14 days before start of the test section.

#### 2.3 MIX DESIGN

The Contractor shall develop the mix design. The asphalt mix shall be composed of a mixture of well-graded aggregate, mineral filler if required, and asphalt material. The aggregate fractions shall be sized, handled in separate size groups, and combined in such proportions that the resulting mixture meets the grading requirements of the job mix formula (JMF). No hot-mix asphalt for payment shall be produced until a JMF has been approved. The hot-mix asphalt shall be designed using procedures contained in AI MS-2 and the criteria shown in Table 3. If the Tensile Strength Ratio (TSR) of the composite mixture, as determined by ASTM D 4867/D 4867M is less than 75, the aggregates shall be rejected or the asphalt mixture treated with an

approved anti-stripping agent. The amount of anti-stripping agent added shall be sufficient to produce a TSR of not less than 75. If an antistrip agent is required, it shall be provided by the Contractor at no additional cost. Sufficient materials to produce 90 kg of blended mixture shall be provided to the Contracting Officer for verification of mix design at least 14 days prior to construction of test section.

At the option of the contractor a currently used DOT superpave hot mix may be used in lieu of developing a new hot mix design study as described herein. The superpave volumetric mix shall be designed in accordance with AASHTO MP 2.

#### 2.3.1 JMF Requirements

The job mix formula shall be submitted in writing by the Contractor for approval at least 14 days prior to the start of the test section and shall include as a minimum:

- a. Percent passing each sieve size.
- b. Percent of asphalt cement.
- c. Percent of each aggregate and mineral filler to be used.
- d. Asphalt viscosity grade, penetration grade, or performance grade.
- e. Number of blows of hammer per side of molded specimen.
- f. Laboratory mixing temperature.
- g. Lab compaction temperature.
- h. Temperature-viscosity relationship of the asphalt cement.
- i. Plot of the combined gradation on the 0.45 power gradation chart, stating the nominal maximum size.
- j. Graphical plots of stability, flow, air voids, voids in the mineral aggregate, and unit weight versus asphalt content as shown in AI MS-2.
- k. Specific gravity and absorption of each aggregate.
- l. Percent natural sand.
- m. Percent particles with 2 or more fractured faces (in coarse aggregate).
- n. Fine aggregate angularity.
- o. Percent flat or elongated particles (in coarse aggregate).
- p. Tensile Strength Ratio(TSR).

- q. Antistrip agent (if required) and amount.
- r. List of all modifiers and amount.

Table 3. Marshall Design Criteria

<u>Test Property</u>	<u>75 Blow Mix</u>
Stability, newtons minimum	*8000
Flow, 0.25 mm	8-16
Air voids, percent	3-5
Percent Voids in mineral aggregate (VMA), (minimum) Asphaltic Concrete	14.0
TSR, minimum percent	75

\* This is a minimum requirement. The average during construction shall be significantly higher than this number to ensure compliance with the specifications.

\*\* Calculate VMA in accordance with AI MS-2, based on ASTM D 2726 bulk specific gravity for the aggregate.

#### 2.3.2 Adjustments to Field JMF

The Laboratory JMF for each mixture shall be in effect until a new formula is approved in writing by the Contracting Officer. Should a change in sources of any materials be made, a new laboratory jmf design shall be performed and a new JMF approved before the new material is used. The Contractor will be allowed to adjust the Laboratory JMF within the limits specified below to optimize mix volumetric properties with the approval of the Contracting Officer. Adjustments to the Laboratory JMF shall be applied to the field (plant) established JMF and limited to those values as shown. Adjustments shall be targeted to produce or nearly produce 4 percent voids total mix (VTM).

TABLE 4. Field (Plant) Established JMF Tolerances  
Sieves                      Adjustments (plus or minus), percent

12.5 mm	3
4.75 mm	3
2.36 mm	3
0.075 mm	1
Binder Content	0.4

If adjustments are needed that exceed these limits, a new mix design shall be developed. Tolerances given above may permit the aggregate grading to be outside the limits shown in Table 2; while not desirable, this is acceptable.

## PART 3 EXECUTION

### 3.1 PREPARATION OF ASPHALT BINDER MATERIAL

The asphalt cement material shall be heated avoiding local overheating and providing a continuous supply of the asphalt material to the mixer at a uniform temperature. The temperature of unmodified asphalts shall be no more than 160 degrees C when added to the aggregates. Modified asphalts shall be no more than 174 degrees C when added to the aggregates.

### 3.2 PREPARATION OF MINERAL AGGREGATE

The aggregate for the mixture shall be heated and dried prior to mixing. No damage shall occur to the aggregates due to the maximum temperature and rate of heating used. The temperature of the aggregate and mineral filler shall not exceed 175 degrees C when the asphalt cement is added. The temperature shall not be lower than is required to obtain complete coating and uniform distribution on the aggregate particles and to provide a mixture of satisfactory workability.

### 3.3 PREPARATION OF HOT-MIX ASPHALT MIXTURE

The aggregates and the asphalt cement shall be weighed or metered and introduced into the mixer in the amount specified by the JMF. The combined materials shall be mixed until the aggregate obtains a uniform coating of asphalt binder and is thoroughly distributed throughout the mixture. Wet mixing time shall be the shortest time that will produce a satisfactory mixture, but no less than 25 seconds for batch plants. The wet mixing time for all plants shall be established by the Contractor, based on the procedure for determining the percentage of coated particles described in ASTM D 2489, for each individual plant and for each type of aggregate used. The wet mixing time will be set to at least achieve 95 percent of coated particles. The moisture content of all hot-mix asphalt upon discharge from the plant shall not exceed 0.5 percent by total weight of mixture as measured by ASTM D 1461.

### 3.4 PREPARATION OF THE UNDERLYING SURFACE

Immediately before placing the hot mix asphalt, the underlying course shall be cleaned of dust and debris. A prime coat and tack coat shall be applied in accordance with the contract specifications.



### 3.5 TEST SECTION

#### 3.5.1 Sampling and Testing for Test Section

One random sample shall be taken at the plant, triplicate specimens compacted, and tested for stability, flow, and laboratory air voids. A portion of the same sample shall be tested for aggregate gradation and asphalt content. Four randomly selected cores shall be taken from the finished pavement mat, and four from the longitudinal joint, and tested for density. Random sampling shall be in accordance with procedures contained in ASTM D 3665. The test results shall be within the tolerances shown in Table 5 for work to continue. If all test results meet the specified requirements, the test section shall remain as part of the project pavement. If test results exceed the tolerances shown, the test section shall be removed and replaced at no cost to the Government and another test section shall be constructed. The test section shall be paid for with the first lot of paving

Table 5. Test Section Requirements for Material and Mixture Properties

<u>Property</u>	<u>Specification Limit</u>
Aggregate Gradation-Percent Passing (Individual Test Result)	
4.75 mm and larger	JMF plus or minus 8
2.36, 1.18, 0.60, and 0.30 mm	JMF plus or minus 6
0.15 and 0.075 mm	JMF plus or minus 2.0
Asphalt Content, Percent (Individual Test Result)	JMF plus or minus 0.5
Laboratory Air Voids, Percent (Average of 3 specimens)	JMF plus or minus 1.0
VMA, Percent (Average of 3 specimens)	14 minimum
Stability, newtons (Average of 3 specimens)	8000 minimum
Flow, 0.25 mm (Average of 3 specimens)	8 - 14
Mat Density, Percent of Marshall (Average of 4 Random Cores)	97.0 - 100.5
Joint Density, Percent of Marshall (Average of 4 Random Cores)	95.5 - 100.5

#### 3.5.2 Additional Test Sections

If the initial test section should prove to be unacceptable, the necessary adjustments to the JMF, plant operation, placing procedures, and/or rolling

procedures shall be made. A second test section shall then be placed. Additional test sections, as required, shall be constructed and evaluated for conformance to the specifications. Full production shall not begin until an acceptable section has been constructed and accepted.

### 3.6 TESTING LABORATORY

The laboratory used to develop the JMF shall meet the requirements of ASTM D 3666. A certification signed by the manager of the laboratory stating that it meets these requirements or clearly listing all deficiencies shall be submitted to the Contracting Officer prior to the start of construction. The certification shall contain as a minimum:

- a. Qualifications of personnel; laboratory manager, supervising technician, and testing technicians.
- b. A listing of equipment to be used in developing the job mix.
- c. A copy of the laboratory's quality control system.
- d. Evidence of participation in the AASHTO Materials Reference Laboratory (AMRL) program.

### 3.7 TRANSPORTING AND PLACING

#### 3.7.1 Transporting

The hot-mix asphalt shall be transported from the mixing plant to the site in clean, tight vehicles. Deliveries shall be scheduled so that placing and compacting of mixture is uniform with minimum stopping and starting of the paver. Adequate artificial lighting shall be provided for night placements. Hauling over freshly placed material will not be permitted until the material has been compacted as specified, and allowed to cool to 60 degrees C. To deliver mix to the paver, the Contractor shall use a material transfer vehicle which shall be operated to produce continuous forward motion of the paver.

#### 3.7.2 Placing

The mix shall be placed and compacted at a temperature suitable for obtaining density, surface smoothness, and other specified requirements. Upon arrival, the mixture shall be placed to the full width by an asphalt paver; it shall be struck off in a uniform layer of such depth that, when the work is completed, it shall have the required thickness and conform to the grade and contour indicated. The speed of the paver shall be regulated to eliminate pulling and tearing of the asphalt mat. Unless otherwise permitted, placement of the mixture shall begin along the centerline of a crowned section or on the high side of areas with a one-way slope. The mixture shall be placed in consecutive adjacent strips having a minimum width of 3 m. The longitudinal joint in one course shall offset the longitudinal joint in the course immediately below by at least 300 mm; however, the joint in the surface course shall be at the centerline of the pavement. Transverse joints in one course shall be offset by at least 3 m from transverse joints in the previous course. Transverse joints in

adjacent lanes shall be offset a minimum of 3 m. On isolated areas where irregularities or unavoidable obstacles make the use of mechanical spreading and finishing equipment impractical, the mixture may be spread and luted by hand tools.

### 3.8 COMPACTION OF MIXTURE

After placing, the mixture shall be thoroughly and uniformly compacted by rolling. The surface shall be compacted as soon as possible without causing displacement, cracking or shoving. The sequence of rolling operations and the type of rollers used shall be at the discretion of the Contractor. The speed of the roller shall, at all times, be sufficiently slow to avoid displacement of the hot mixture and be effective in compaction. Any displacement occurring as a result of reversing the direction of the roller, or from any other cause, shall be corrected at once. Sufficient rollers shall be furnished to handle the output of the plant. Rolling shall continue until the surface is of uniform texture, true to grade and cross section, and the required field density is obtained. To prevent adhesion of the mixture to the roller, the wheels shall be kept properly moistened but excessive water will not be permitted. In areas not accessible to the roller, the mixture shall be thoroughly compacted with hand tampers. Any mixture that becomes loose and broken, mixed with dirt, contains check-cracking, or is in any way defective shall be removed full depth, replaced with fresh hot mixture and immediately compacted to conform to the surrounding area. This work shall be done at the Contractor's expense. Skin patching will not be allowed.

### 3.9 JOINTS

The formation of joints shall be made ensuring a continuous bond between the courses and to obtain the required density. All joints shall have the same texture as other sections of the course and meet the requirements for smoothness and grade.

#### 3.9.1 Transverse Joints

The roller shall not pass over the unprotected end of the freshly laid mixture, except when necessary to form a transverse joint. When necessary to form a transverse joint, it shall be made by means of placing a bulkhead or by tapering the course. The tapered edge shall be cut back to its full depth and width on a straight line to expose a vertical face prior to placing material at the joint. The cutback material shall be removed from the project. In both methods, all contact surfaces shall be given a light tack coat of asphalt material before placing any fresh mixture against the joint.

#### 3.9.2 Longitudinal Joints

Longitudinal joints which are irregular, damaged, uncompacted, cold (less than 80 degrees C at the time of placing adjacent lanes), or otherwise defective, shall be cut back a minimum of 50 mm from the edge with a cutting wheel to expose a clean, sound vertical surface for the full depth of the course. All cutback material shall be removed from the project. All contact surfaces shall be given a light tack coat of asphalt material prior

to placing any fresh mixture against the joint. The Contractor will be allowed to use an alternate method if it can be demonstrated that density, smoothness, and texture can be met.

### 3.10 CONTRACTOR QUALITY CONTROL

#### 3.10.1 General Quality Control Requirements

The Contractor shall develop an approved Quality Control Plan. Hot-mix asphalt for payment shall not be produced until the quality control plan has been approved. The plan shall address all elements which affect the quality of the pavement including, but not limited to:

- a. Mix Design
- b. Aggregate Grading
- c. Quality of Materials
- d. Stockpile Management
- e. Proportioning
- f. Mixing and Transportation
- g. Mixture Volumetrics
- h. Moisture Content of Mixtures
- i. Placing and Finishing
- j. Joints
- k. Compaction
- l. Surface Smoothness

#### 3.10.2 Quality Control Testing

The Contractor shall perform all quality control tests applicable to these specifications and as set forth in the Quality Control Program. The testing program shall include, but shall not be limited to, tests for the control of asphalt content, aggregate gradation, temperatures, aggregate moisture, moisture in the asphalt mixture, laboratory air voids, stability, flow, in-place density, grade and smoothness. A Quality Control Testing Plan shall be developed as part of the Quality Control Program.

##### 3.10.2.1 Asphalt Content

A minimum of two tests to determine asphalt content will be performed by one of the following methods: the extraction method in accordance with ASTM D 2172, Method A or B, the ignition method in accordance with the AASHTO TP53 or ASTM D 6307, or the nuclear method in accordance with ASTM D 4125, provided the nuclear gauge is calibrated for the specific mix being used.

For the extraction method, the weight of ash, as described in ASTM D 2172, shall be determined as part of the first extraction test performed at the beginning of plant production; and as part of every tenth extraction test performed thereafter, for the duration of plant production. The last weight of ash value obtained shall be used in the calculation of the asphalt content for the mixture.

#### 3.10.2.2 Gradation

Aggregate gradations shall be determined a minimum of twice per lot from mechanical analysis of recovered aggregate in accordance with ASTM D 5444. When asphalt content is determined by the nuclear method, aggregate gradation shall be determined from hot bin samples on batch plants, or from the cold feed on drum mix plants. For batch plants, aggregates shall be tested in accordance with ASTM C 136 using actual batch weights to determine the combined aggregate gradation of the mixture.

#### 3.10.2.3 Temperatures

Temperatures shall be checked at least four times per lot, at necessary locations, to determine the temperature at the dryer, the asphalt cement in the storage tank, the asphalt mixture at the plant, and the asphalt mixture at the job site.

#### 3.10.2.4 Aggregate Moisture

The moisture content of aggregate used for production shall be determined a minimum of once per lot in accordance with ASTM C 566.

#### 3.10.2.5 Moisture Content of Mixture

The moisture content of the mixture shall be determined at least once per lot in accordance with ASTM D 1461 or an approved alternate procedure.

#### 3.10.2.6 Laboratory Air Voids, Marshall Stability and Flow

Mixture samples shall be taken at least four times per lot and compacted into specimens, using 75 blows per side with the Marshall hammer as described in ASTM D 1559. After compaction, the laboratory air voids of each specimen shall be determined, as well as the Marshall stability and flow.

#### 3.10.2.7 In-Place Density

The Contractor shall conduct any necessary testing to ensure the specified density is achieved. A nuclear gauge may be used to monitor pavement density in accordance with ASTM D 2950.

#### 3.10.2.8 Grade and Smoothness

The Contractor shall conduct the necessary checks to ensure the grade and smoothness requirements are met in accordance with paragraph MATERIAL ACCEPTANCE AND PERCENT PAYMENT.

#### 3.10.2.9 Additional Testing

Any additional testing, which the Contractor deems necessary to control the process, may be performed at the Contractor's option.

#### 3.10.2.10 QC Monitoring

The Contractor shall submit all QC test results to the Contracting Officer on a daily basis as the tests are performed. The Contracting Officer reserves the right to monitor any of the Contractor's quality control testing and to perform duplicate testing as a check to the Contractor's quality control testing.

#### 3.10.3 Sampling

When directed by the Contracting Officer, the Contractor shall sample and test any material which appears inconsistent with similar material being produced, unless such material is voluntarily removed and replaced or deficiencies corrected by the Contractor. All sampling shall be in accordance with standard procedures specified.

### 3.11 MATERIAL ACCEPTANCE

Testing for acceptability of work will be performed by an independent laboratory hired by the Contractor. Test results and payment calculations shall be forwarded daily to the Contracting Officer. Acceptance of the plant produced mix and in-place requirements will be on a lot-to-lot basis. A standard lot for all requirements will be equal to the total project volume. Where appropriate, adjustment in payment for individual lots of hot-mix asphalt will be made based on in-place density, laboratory air voids, grade and smoothness in accordance with the following paragraphs. Grade and surface smoothness determinations will be made on the lot as a whole. Exceptions or adjustments to this will be made in situations where the mix within one lot is placed as part of both the intermediate and surface courses, thus grade and smoothness measurements for the entire lot cannot be made. In order to evaluate laboratory air voids and in-place (field) density, each lot will be divided into four equal sublots.

#### 3.11.1 Sublot Sampling

One random mixture sample for determining laboratory air voids, theoretical maximum density, and for any additional testing the Contracting Officer desires, will be taken from a loaded truck delivering mixture to each sublot, or other appropriate location for each sublot. All samples will be selected randomly, using commonly recognized methods of assuring randomness conforming to ASTM D 3665 and employing tables of random numbers or computer programs. Laboratory air voids will be determined from three laboratory compacted specimens of each sublot sample in accordance with ASTM D 1559. The specimens will be compacted within 2 hours of the time the mixture was loaded into trucks at the asphalt plant. Samples will not be reheated prior to compaction and insulated containers will be used as necessary to maintain the temperature.

### 3.11.2 Additional Sampling and Testing

The Contracting Officer reserves the right to direct additional samples and tests for any area which appears to deviate from the specification requirements. The cost of any additional testing will be paid for by the Government. Testing in these areas will be in addition to the lot testing, and the requirements for these areas will be the same as those for a lot.

### 3.11.3 Laboratory Air Voids

Laboratory air voids will be calculated by determining the Marshall density of each lab compacted specimen using ASTM D 2726 and determining the theoretical maximum density of every other subplot sample using ASTM D 2041. Laboratory air void calculations for each subplot will use the latest theoretical maximum density values obtained, either for that subplot or the previous subplot. The mean absolute deviation of the four laboratory air void contents (one from each subplot) from the JMF air void content will be evaluated and a pay factor determined from Table 7. All laboratory air void tests will be completed and reported within 24 hours after completion of construction of each lot.

### 3.11.4 In-place Density

Minimum in-place density shall be 97 percent Marshall density.

#### 3.11.4.1 General Density Requirements

For determining in-place density, one random core will be taken by the Government from the mat (interior of the lane) of each subplot, and one random core will be taken from the joint (immediately over joint) of each subplot. Each random core will be full thickness of the layer being placed. When the random core is less than 25 mm thick, it will not be included in the analysis. In this case, another random core will be taken. After air-drying to a constant weight, cores obtained from the mat will be used for in-place density determination.

### 3.11.5 Grade

The final wearing surface of pavement shall conform to the elevations and cross sections shown and shall vary not more than 20 mm from the plan grade established and approved at site of work. Finished surfaces at juncture with other pavements shall coincide with finished surfaces of abutting pavements. Deviation from the plan elevation will not be permitted in areas of pavements where closer conformance with planned elevation is required for the proper functioning of drainage and other appurtenant structures involved. The final wearing surface of the pavement will be tested for conformance with specified plan grade requirements. The grade will be determined by running lines of levels at intervals of 7.6 m, or less, longitudinally and transversely, to determine the elevation of the completed pavement surface. Within 5 working days, after the completion of a particular lot incorporating the final wearing surface, the Contracting Officer will inform the Contractor in writing, of the results of the grade-conformance tests. In areas where the grade exceeds the tolerance, the Contractor shall remove the surface lift full depth; the Contractor shall

then replace the lift with hot-mix asphalt to meet specification requirements, at no additional cost to the Government. Diamond grinding may be used to remove high spots to meet grade requirements. Skin patching for correcting low areas or planing or milling for correcting high areas will not be permitted.

### 3.11.6 Surface Smoothness

The Contractor shall use one of the following methods to test and evaluate surface smoothness of the pavement. All testing shall be performed in the presence of the Contracting Officer. Detailed notes of the results of the testing shall be kept and a copy furnished to the Government immediately after each day's testing. The profilograph method shall be used for all longitudinal and transverse testing, except where the runs would be less than 60 m in length and the ends where the straightedge shall be used. Where drawings show required deviations from a plane surface (crowns, drainage inlets, etc.), the surface shall be finished to meet the approval of the Contracting Officer.

#### 3.11.6.1 Smoothness Requirements

a. Straightedge Testing: The finished surfaces of the pavements shall have no abrupt change of 6 mm or more, and all pavements shall be within the tolerances specified in Table 9 when checked with an approved 4 m straightedge.

Table 9. Straightedge Surface Smoothness--Pavements

Pavement Category	Direction of Testing	Tolerance, mm
-----	-----	-----
All	Longitudinal	6
paved areas	Transverse	6

b. Profilograph Testing: The finished surfaces of the pavements shall have no abrupt change of 3 mm or more, and all pavement shall have a Profile Index not greater than specified in Table 10 when tested with an approved California-type profilograph. If the extent of the pavement in either direction is less than 60 m, that direction shall be tested by the straightedge method and shall meet requirements specified above.

Table 10. Profilograph Surface Smoothness--Pavements

Pavement Category	Direction of Testing	Maximum Specified Profile Index (mm/km)
-----	-----	-----
All Paved Areas	Longitudinal	140



#### 3.11.6.2 Testing Method

After the final rolling, but not later than 24 hours after placement, the surface of the pavement in each entire lot shall be tested by the Contractor in such a manner as to reveal all surface irregularities exceeding the tolerances specified above. Separate testing of individual sublots is not required. If any pavement areas are ground, these areas shall be retested immediately after grinding. The entire area of the pavement shall be tested in both a longitudinal and a transverse direction on parallel lines. The transverse lines shall be 8 m or less apart, as directed. The longitudinal lines shall be at the centerline of each paving lane for lines less than 6.1 m and at the third points for lanes 6.1 m or greater. Other areas having obvious deviations shall also be tested. Longitudinal testing lines shall be continuous across all joints.

a. Straightedge Testing. The straightedge shall be held in contact with the surface and moved ahead one-half the length of the straightedge for each successive measurement. The amount of surface irregularity shall be determined by placing the freestanding (unleveled) straightedge on the pavement surface and allowing it to rest upon the two highest spots covered by its length, and measuring the maximum gap between the straightedge and the pavement surface in the area between these two high points.

b. Profilograph Testing. Profilograph testing shall be performed using approved equipment and procedures described in CDT Test 526. The equipment shall utilize electronic recording and automatic computerized reduction of data to indicate "must-grind" bumps and the Profile Index for the pavement. The "blanking band" shall be 5 mm wide and the "bump template" shall span 25 mm with an offset of 10 mm. The profilograph shall be operated by an approved, factory-trained operator on the alignments specified above. A copy of the reduced tapes shall be furnished the Government at the end of each day's testing.

-- End of Section -

01062/BERGER/ABAM  
FY02 Tactical Equipment Complex  
Fort Lewis, Washington

This page intentionally blank.

SECTION 02763

PAVEMENT MARKINGS

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by basic designation only.

AMERICAN ASSOCIATION OF STATE HIGHWAY AND TRANSPORTATION OFFICIALS  
(AASHTO)

AASHTO M 247 (1981; R 1996) Glass Beads Used in Traffic Paint

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM D 792 (1998) Density and Specific Gravity (Relative Density) of Plastics by Displacement

ASTM D 4280 (1996) Extended Life Type, Nonplowable, Prismatic, Raised, Retroreflective Pavement Markers

ASTM D 4505 (1996) Preformed Plastic Pavement Marking Tape for Extended Service Life

ASTM E 28 (1999) Softening Point of Resins by Ring and Ball Apparatus

FEDERAL SPECIFICATIONS (FS)

FS TT-B-1325 (Rev C; Notice 1; Canc. Notice 2) Beads (Glass Spheres) Retro-Reflective (Metric)

FS TT-P-1952 (Rev D; Canc. Notice 1) Paint, Traffic and Airfield Marking, Waterborne (Metric)

1.2 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only. When used, a designation following the "G" designation identifies the office that will review the submittal for the Government. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

SD-03 Product Data

Equipment; G

Lists of proposed equipment, including descriptive data, and notifications of proposed Contractor actions as specified in this section. List of removal equipment shall include descriptive data indicating area of coverage per pass, pressure adjustment range, tank and flow capacities, and safety precautions required for the equipment operation.

#### Composition Requirements

Manufacturer's current printed product description and Material Safety Data Sheets (MSDS) for each type paint/color proposed for use.

#### Qualifications

Document certifying that personnel are qualified for equipment operation and handling of chemicals.

#### SD-06 Test Reports

##### Sampling and Testing

Certified copies of the test reports, prior to the use of the materials at the jobsite. Testing shall be performed in an approved independent laboratory.

#### SD-07 Certificates

##### Volatile Organic Compound (VOC)

Certificate stating that the proposed pavement marking paint meets the VOC regulations of the local Air Pollution Control District having jurisdiction over the geographical area in which the project is located.

### 1.3 DELIVERY AND STORAGE

All materials shall be delivered and stored in sealed containers that plainly show the designated name, formula or specification number, batch number, color, date of manufacture, manufacturer's name, and directions, all of which shall be plainly legible at time of use.

### 1.4 EQUIPMENT

All machines, tools and equipment used in the performance of the work shall be approved and maintained in satisfactory operating condition. Equipment operating on roads and runways shall display low speed traffic markings and traffic warning lights.

#### 1.4.1 Paint Application Equipment

The equipment to apply paint to pavements shall be a self-propelled or mobile-drawn pneumatic spraying machine with suitable arrangements of atomizing nozzles and controls to obtain the specified results. The machine

shall have a speed during application not less than 8 kilometers per hour (5 mph), and shall be capable of applying the stripe widths indicated, at the paint coverage rate specified in paragraph APPLICATION, and of even uniform thickness with clear-cut edges. The paint applicator shall have paint reservoirs or tanks of sufficient capacity and suitable gauges to apply paint in accordance with requirements specified. Tanks shall be equipped with suitable air-driven mechanical agitators. The spray mechanism shall be equipped with quick-action valves conveniently located, and shall include necessary pressure regulators and gauges in full view and reach of the operator. Paint strainers shall be installed in paint supply lines to ensure freedom from residue and foreign matter that may cause malfunction of the spray guns. The paint applicator shall be readily adaptable for attachment of an air-actuated dispenser for the reflective media approved for use. Pneumatic spray guns shall be provided for hand application of paint in areas where the mobile paint applicator cannot be used.

#### 1.4.2 Surface Preparation Equipment

##### 1.4.2.1 Waterblast Equipment

The water pressure shall be specified at 17.9 MPa at 60 degrees C.

##### 1.4.3 Marking Removal Equipment

Equipment shall be mounted on rubber tires and shall be capable of removing markings from the pavement without damaging the pavement surface or joint sealant. Waterblasting equipment shall be capable of producing an adjustable, pressurized stream of water. Sandblasting equipment shall include an air compressor, hoses, and nozzles. The compressor shall be equipped with traps to maintain the air free of oil and water.

##### 1.4.4 Traffic Controls

Suitable warning signs shall be placed near the beginning of the worksite and well ahead of the worksite for alerting approaching traffic from both directions. Small markers shall be placed along newly painted lines or freshly placed raised markers to control traffic and prevent damage to newly painted surfaces or displacement of raised pavement markers. Painting equipment shall be marked with large warning signs indicating slow-moving painting equipment in operation.

#### 1.5 HAND-OPERATED, PUSH-TYPE MACHINES

All machines, tools, and equipment used in performance of the work shall be approved and maintained in satisfactory operating condition. Hand-operated push-type machines of a type commonly used for application of paint to pavement surfaces will be acceptable for marking small streets and parking areas. Applicator machine shall be equipped with the necessary paint tanks and spraying nozzles, and shall be capable of applying paint uniformly at coverage specified. Sandblasting equipment shall be provided as required for cleaning surfaces to be painted. Hand-operated spray guns shall be provided for use in areas where push-type machines cannot be used.

## 1.6 MAINTENANCE OF TRAFFIC

### 1.6.1 Roads, Streets, and Parking Areas

When traffic must be rerouted or controlled to accomplish the work, the necessary warning signs, flagpersons, and related equipment for the safe passage of vehicles shall be provided.

## 1.7 WEATHER LIMITATIONS FOR REMOVAL

Pavement surface shall be free of snow, ice, or slush. Surface temperature shall be at least 5 degrees C and rising at the beginning of operations, except those involving shot or sand blasting. Operation shall cease during thunderstorms. Operation shall cease during rainfall, except for waterblasting and removal of previously applied chemicals. Waterblasting shall cease where surface water accumulation alters the effectiveness of material removal.

## PART 2 PRODUCTS

### 2.1 PAINT

The paint shall be homogeneous, easily stirred to smooth consistency, and shall show no hard settlement or other objectionable characteristics during a storage period of 6 months. Paints for roads, and streets shall conform to FS TT-P-1952, color as indicated. Pavement marking paints shall comply with applicable state and local laws enacted to ensure compliance with Federal Clean Air Standards. Paint materials shall conform to the restrictions of the local Air Pollution Control District.

### 2.2 SAMPLING AND TESTING

Materials proposed for use shall be stored on the project site in sealed and labeled containers, or segregated at source of supply, sufficiently in advance of needs to allow 60 days for testing. Upon notification by the Contractor that the material is at the site or source of supply, a sample shall be taken by random selection from sealed containers by the Contractor in the presence of a representative of the Contracting Officer. Samples shall be clearly identified by designated name, specification number, batch number, manufacturer's formulation number, project contract number, intended use, and quantity involved. Testing shall be performed in an approved independent laboratory. If materials are approved based on reports furnished by the Contractor, samples will be retained by the Government for possible future testing should the material appear defective during or after application.

## PART 3 EXECUTION

### 3.1 SURFACE PREPARATION

Surfaces to be marked shall be thoroughly cleaned before application of the pavement marking material. Dust, dirt, and other granular surface deposits shall be removed by sweeping, blowing with compressed air, rinsing with water or a combination of these methods as required. Rubber deposits,

surface laitance, existing paint markings, and other coatings adhering to the pavement shall be completely removed with scrapers, wire brushes, sandblasting, approved chemicals, or mechanical abrasion as directed. Areas of old pavement affected with oil or grease shall be scrubbed with several applications of trisodium phosphate solution or other approved detergent or degreaser, and rinsed thoroughly after each application. After cleaning, oil-soaked areas shall be sealed with cut shellac to prevent bleeding through the new paint. Pavement surfaces shall be allowed to dry, when water is used for cleaning, prior to striping or marking. Surfaces shall be recleaned, when work has been stopped due to rain.

### 3.1.1 Cleaning Existing Pavement Markings

In general, markings shall not be placed over existing pavement marking patterns. Existing pavement markings, which are in good condition but interfere or conflict with the newly applied marking patterns, shall be removed. Deteriorated or obscured markings that are not misleading or confusing or interfere with the adhesion of the new marking material do not require removal. New preformed and thermoplastic pavement markings shall not be applied over existing preformed or thermoplastic markings. Whenever grinding, scraping, sandblasting or other operations are performed the work must be conducted in such a manner that the finished pavement surface is not damaged or left in a pattern that is misleading or confusing. When these operations are completed the pavement surface shall be blown off with compressed air to remove residue and debris resulting from the cleaning work.

### 3.1.2 Cleaning Concrete Curing Compounds

On new Portland cement concrete pavements, cleaning operations shall not begin until a minimum of 30 days after the placement of concrete. All new concrete pavements shall be cleaned by either sandblasting or water blasting. When water blasting is performed, thermoplastic and preformed markings shall be applied no sooner than 24 hours after the blasting has been completed. The extent of the blasting work shall be to clean and prepare the concrete surface as follows:

- a. There is no visible evidence of curing compound on the peaks of the textured concrete surface.
- b. There are no heavy puddled deposits of curing compound in the valleys of the textured concrete surface.
- c. All remaining curing compound is intact; all loose and flaking material is removed.
- d. The peaks of the textured pavement surface are rounded in profile and free of sharp edges and irregularities.
- e. The surface to be marked is dry.

### 3.2 APPLICATION

All pavement markings and patterns shall be placed as shown on the plans.

#### 3.2.1 Paint

Paint shall be applied to clean, dry surfaces, and only when air and pavement temperatures are above 5 degrees C and less than 35 degrees C. Paint temperature shall be maintained within these same limits. New asphalt pavement surfaces and new Portland concrete cement shall be allowed to cure for a period of not less than 30 days before applications of paint. Paint shall be applied pneumatically with approved equipment at rate of coverage specified. The Contractor shall provide guidelines and templates as necessary to control paint application. Special precautions shall be taken in marking numbers, letters, and symbols. Edges of markings shall be sharply outlined.

##### 3.2.1.1 Rate of Application

Paint shall be applied evenly to the pavement surface to be coated at a rate of 2.9 plus or minus 0.5 square meter per liter.

##### 3.2.1.2 Drying

The maximum drying time requirements of the paint specifications will be strictly enforced to prevent undue softening of bitumen, and pickup, displacement, or discoloration by tires of traffic. If there is a delay in drying of the markings, painting operations shall be discontinued until cause of the slow drying is determined and corrected.

### 3.3 MARKING REMOVAL

Pavement marking, shall be removed in the areas shown on the drawings. Removal of marking shall be as complete as possible without damage to the surface. Aggregate shall not be exposed by the removal process. After the markings are removed, the cleaned pavement surfaces shall exhibit adequate texture for remarking as specified in paragraph SURFACE PREPARATION. Contractor shall demonstrate removal of pavement marking in an area designated by the Contracting Officer. The demonstration area will become the standard for the remainder of the work.

#### 3.3.1 Equipment Operation

Equipment shall be controlled and operated to remove markings from the pavement surface, prevent dilution or removal of binder from underlying pavement, and prevent emission of blue smoke from asphalt or tar surfaces.

#### 3.3.2 Cleanup and Waste Disposal

The worksite shall be kept clean of debris and waste from the removal operations. Cleanup shall immediately follow removal operations in areas subject to air traffic. Debris shall be disposed of at approved sites.

-- End of Section



SECTION 02770

CONCRETE SIDEWALKS AND CURBS

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by basic designation only.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM C 31/C 31M	(1996) Making and Curing Concrete Test Specimens in the Field
ASTM C 143	(1990a) Slump of Hydraulic Cement Concrete
ASTM C 171	(1997) Sheet Materials for Curing Concrete
ASTM C 172	(1997) Sampling Freshly Mixed Concrete
ASTM C 173	(1996) Air Content of Freshly Mixed Concrete by the Volumetric Method
ASTM C 231	(1997) Air Content of Freshly Mixed Concrete by the Pressure Method
ASTM C 309	(1997) Liquid Membrane-Forming Compounds for Curing Concrete
ASTM C 920	(1995) Elastomeric Joint Sealants
ASTM D 1751	(1983; R 1991) Preformed Expansion Joint Filler for Concrete Paving and Structural Construction (Nonextruding and Resilient Bituminous Types)
ASTM D 3405	(1996) Joint Sealants, Hot-Applied, for Concrete and Asphalt Pavements

1.2 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only. When used, a designation following the "G" designation identifies the office that will review the submittal for the Government. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

## SD-06 Test Reports

### Field Quality Control; G

Copies of all test reports within 24 hours of completion of the test.

## 1.3 WEATHER LIMITATIONS

### 1.3.1 Placing During Cold Weather

Concrete placement shall not take place when the air temperature reaches 5 degrees C and is falling, or is already below that point. Placement may begin when the air temperature reaches 2 degrees C and is rising, or is already above 5 degrees C. Provisions shall be made to protect the concrete from freezing during the specified curing period. If necessary to place concrete when the temperature of the air, aggregates, or water is below 2 degrees C, placement and protection shall be approved in writing. Approval will be contingent upon full conformance with the following provisions. The underlying material shall be prepared and protected so that it is entirely free of frost when the concrete is deposited. Mixing water shall be heated as necessary to result in the temperature of the in-place concrete being between 10 and 30 degrees C. Methods and equipment for heating shall be approved. The aggregates shall be free of ice, snow, and frozen lumps before entering the mixer. Covering and other means shall be provided for maintaining the concrete at a temperature of at least 10 degrees C for not less than 72 hours after placing, and at a temperature above freezing for the remainder of the curing period.

### 1.3.2 Placing During Warm Weather

The temperature of the concrete as placed shall not exceed 30 degrees C except where an approved retarder is used. The mixing water and/or aggregates shall be cooled, if necessary, to maintain a satisfactory placing temperature. The placing temperature shall not exceed 35 degrees C at any time.

## PART 2 PRODUCTS

### 2.1 CONCRETE

Concrete shall conform to the applicable requirements of Section 03300 CAST-IN-PLACE STRUCTURAL CONCRETE except as otherwise specified. Concrete shall have a minimum compressive strength of 24 MPa at 28 days. Maximum size of aggregate shall be 37.5 mm.

#### 2.1.1 Air Content

Mixtures shall have air content by volume of concrete of 5 to 7 percent, based on measurements made immediately after discharge from the mixer.

#### 2.1.2 Slump

The concrete slump shall be 50 mm plus or minus 25 mm where determined in accordance with ASTM C 143.

### 2.2 CONCRETE CURING MATERIALS

#### 2.2.1 Impervious Sheet Materials

Impervious sheet materials shall conform to ASTM C 171, type optional, except that polyethylene film, if used, shall be white opaque.

#### 2.2.2 Burlap

Burlap shall conform to AASHTO M 182.

#### 2.2.3 White Pigmented Membrane-Forming Curing Compound

White pigmented membrane-forming curing compound shall conform to ASTM C 309, Type 2.

### 2.3 CONCRETE PROTECTION MATERIALS

Concrete protection materials shall be a linseed oil mixture of equal parts, by volume, of linseed oil and either mineral spirits, naphtha, or turpentine. At the option of the contractor, commercially prepared linseed oil mixtures, formulated specifically for application to concrete to provide protection against the action of deicing chemicals may be used, except that emulsified mixtures are not acceptable.

### 2.4 JOINT FILLER STRIPS

#### 2.4.1 Contraction Joint Filler for Curb and Gutter

Contraction joint filler for curb and gutter shall consist of hard-pressed fiberboard.

#### 2.4.2 Expansion Joint Filler, Premolded

Expansion joint filler, premolded, shall conform to ASTM D 1751 or ASTM D 1752, 10 mm thick, unless otherwise indicated.

### 2.5 JOINT SEALANTS

#### 2.5.1 Joint Sealant, Cold-Applied

Joint sealant, cold-applied shall conform to ASTM C 920.

#### 2.5.2 Joint Sealant, Hot-Poured

Joint sealant, hot-poured shall conform to ASTM D 3405.

## 2.6 FORM WORK

Form work shall be designed and constructed to ensure that the finished concrete will conform accurately to the indicated dimensions, lines, and elevations, and within the tolerances specified. Forms shall be of wood or steel, straight, of sufficient strength to resist springing during depositing and consolidating concrete. Wood forms shall be surfaced plank, 50 mm nominal thickness, straight and free from warp, twist, loose knots, splits or other defects. Wood forms shall have a nominal length of 3 m. Radius bends may be formed with 19 mm boards, laminated to the required thickness. Steel forms shall be channel-formed sections with a flat top surface and with welded braces at each end and at not less than two intermediate points. Ends of steel forms shall be interlocking and self-aligning. Steel forms shall include flexible forms for radius forming, corner forms, form spreaders, and fillers. Steel forms shall have a nominal length of 3 m with a minimum of 3 welded stake pockets per form. Stake pins shall be solid steel rods with chamfered heads and pointed tips designed for use with steel forms.

### 2.6.1 Sidewalk Forms

Sidewalk forms shall be of a height equal to the full depth of the finished sidewalk.

### 2.6.2 Curb Forms

Curb outside forms shall have a height equal to the full depth of the curb. The inside form of curb shall have batter as indicated and shall be securely fastened to and supported by the outside form. Rigid forms shall be provided for curb returns, except that benders or thin plank forms may be used for curb or curb returns with a radius of 3 m or more, where grade changes occur in the return, or where the central angle is such that a rigid form with a central angle of 90 degrees cannot be used. Back forms for curb returns may be made of 38 mm benders, for the full height of the curb, cleated together. In lieu of inside forms for curbs, a curb "mule" may be used for forming and finishing this surface, provided the results are approved.

## PART 3 EXECUTION

### 3.1 SUBGRADE PREPARATION

The subgrade shall be constructed to the specified grade and cross section prior to concrete placement. Subgrade shall be placed and compacted in conformance with Section 02300 EARTHWORK.

#### 3.1.1 Sidewalk Subgrade

The subgrade shall be tested for grade and cross section with a template extending the full width of the sidewalk and supported between side forms.

### 3.1.2 Curb Subgrade

The subgrade shall be tested for grade and cross section by means of a template extending the full width of the curb and gutter. The subgrade shall be of materials equal in bearing quality to the subgrade under the adjacent pavement.

### 3.1.3 Maintenance of Subgrade

The subgrade shall be maintained in a smooth, compacted condition in conformity with the required section and established grade until the concrete is placed. The subgrade shall be in a moist condition when concrete is placed. The subgrade shall be prepared and protected to produce a subgrade free from frost when the concrete is deposited.

## 3.2 FORM SETTING

Forms shall be set to the indicated alignment, grade and dimensions. Forms shall be held rigidly in place by a minimum of 3 stakes per form placed at intervals not to exceed 1.2 meters. Corners, deep sections, and radius bends shall have additional stakes and braces, as required. Clamps, spreaders, and braces shall be used where required to ensure rigidity in the forms. Forms shall be removed without injuring the concrete. Bars or heavy tools shall not be used against the concrete in removing the forms. Any concrete found defective after form removal shall be promptly and satisfactorily repaired. Forms shall be cleaned and coated with form oil each time before concrete is placed. Wood forms may, instead, be thoroughly wetted with water before concrete is placed, except that with probable freezing temperatures, oiling is mandatory.

### 3.2.1 Sidewalks

Forms for sidewalks shall be set with the upper edge true to line and grade with an allowable tolerance of 3 mm in any 3 m long section. After forms are set, grade and alignment shall be checked with a 3 m straightedge. Forms shall have a transverse slope as indicated. Side forms shall not be removed for 12 hours after finishing has been completed.

### 3.2.2 Curbs and Gutters

The forms of the front of the curb shall be removed not less than 2 hours nor more than 6 hours after the concrete has been placed. Forms back of curb shall remain in place until the face and top of the curb have been finished, as specified for concrete finishing.

## 3.3 SIDEWALK CONCRETE PLACEMENT AND FINISHING

### 3.3.1 Formed Sidewalks

Concrete shall be placed in the forms in one layer. When consolidated and finished, the sidewalks shall be of the thickness indicated. After concrete has been placed in the forms, a strike-off guided by side forms shall be used to bring the surface to proper section to be compacted. The concrete

shall be consolidated with an approved vibrator, and the surface shall be finished to grade with a strike off.

### 3.3.2 Concrete Finishing

After straightedging, when most of the water sheen has disappeared, and just before the concrete hardens, the surface shall be finished with a wood float or darby to a smooth and uniformly fine granular or sandy texture free of waves, irregularities, or tool marks. A scored surface shall be produced by brooming with a fiber-bristle brush in a direction transverse to that of the traffic, followed by edging.

### 3.3.3 Edge and Joint Finishing

All slab edges, including those at formed joints, shall be finished with an edger having a radius of 3 mm. Transverse joint shall be edged before brooming, and the brooming shall eliminate the flat surface left by the surface face of the edger. Corners and edges which have crumbled and areas which lack sufficient mortar for proper finishing shall be cleaned and filled solidly with a properly proportioned mortar mixture and then finished.

### 3.3.4 Surface and Thickness Tolerances

Finished surfaces shall not vary more than 8 mm from the testing edge of a 3 m straightedge. Permissible deficiency in section thickness will be up to 6 mm

## 3.4 CURB CONCRETE PLACEMENT AND FINISHING

### 3.4.1 Formed Curb

Concrete shall be placed to the section required in a single lift. Consolidation shall be achieved by using approved mechanical vibrators. Curve shaped curb shall be finished with a standard curb "mule".

### 3.4.2 Curb and Finishing

Approved slipformed curb machines may be used in lieu of hand placement.

### 3.4.3 Concrete Finishing

Exposed surfaces shall be floated and finished with a smooth wood float until true to grade and section and uniform in texture. Floated surfaces shall then be brushed with a fine-hair brush with longitudinal strokes. The edges of the gutter and top of the curb shall be rounded with an edging tool to a radius of 13 mm. Immediately after removing the front curb form, the face of the curb shall be rubbed with a wood or concrete rubbing block and water until blemishes, form marks, and tool marks have been removed. The front curb surface, while still wet, shall be brushed in the same manner as the gutter and curb top. The top surface of gutter and entrance shall be finished to grade with a wood float.

#### 3.4.4 Joint Finishing

Curb edges at formed joints shall be finished as indicated.

#### 3.4.5 Surface and Thickness Tolerances

Finished surfaces shall not vary more than 6 mm from the testing edge of a 3 m straightedge. Permissible deficiency in section thickness will be up to 6 mm.

### 3.5 SIDEWALK JOINTS

Sidewalk joints shall be constructed to divide the surface into rectangular areas. Transverse contraction joints shall be spaced at a distance equal to the sidewalk width or 1.5 m on centers, whichever is less, and shall be continuous across the slab. Longitudinal contraction joints shall be constructed along the centerline of all sidewalks 3 m or more in width. Transverse expansion joints shall be installed at sidewalk returns and opposite expansion joints in adjoining curbs. Where the sidewalk is not in contact with the curb, transverse expansion joints shall be installed as indicated. Expansion joints shall be formed about structures and features, which project through or into the sidewalk pavement, using joint filler of the type, thickness, and width indicated.

#### 3.5.1 Sidewalk Contraction Joints

The contraction joints shall be formed in the fresh concrete by cutting a groove in the top portion of the slab to a depth of at least one-fourth of the sidewalk slab thickness, using a jointer to cut the groove, or by sawing a groove in the hardened concrete with a power-driven saw, unless otherwise approved. Sawed joints shall be constructed by sawing a groove in the concrete with a 3 mm blade to the depth indicated. An ample supply of saw blades shall be available on the job before concrete placement is started, and at least one standby sawing unit in good working order shall be available at the jobsite at all times during the sawing operations.

#### 3.5.2 Sidewalk Expansion Joints

Expansion joints shall be formed with 10 mm joint filler strips. Joint filler shall be placed with top edge 6 mm below the surface and shall be held in place with steel pins or other devices to prevent warping of the filler during floating and finishing. Immediately after finishing operations are completed, joint edges shall be rounded with an edging tool having a radius of 3 mm, and concrete over the joint filler shall be removed. At the end of the curing period, expansion joints shall be cleaned and filled with joint sealant. The joint opening shall be thoroughly cleaned before the sealing material is placed. Sealing material shall not be spilled on exposed surfaces of the concrete. Concrete at the joint shall be surface dry and atmospheric and concrete temperatures shall be above 10 degrees C at the time of application of joint sealing material. Excess material on exposed surfaces of the concrete shall be removed immediately and concrete surfaces cleaned.

### 3.6 CURB JOINTS

Curb joints shall be constructed at right angles to the line of curb.

#### 3.6.1 Contraction Joints

Contraction joints shall be constructed directly opposite contraction joints in abutting portland cement concrete pavements and spaced so that monolithic sections between curb returns will not be less than 1.5 m nor greater than 4.5 m in length. Contraction joints shall be constructed by means of 3 mm thick separators and of a section conforming to the cross section of the curb and gutter. Separators shall be removed as soon as practicable after concrete has set sufficiently to preserve the width and shape of the joint and prior to finishing.

#### 3.6.2 Expansion Joints

Expansion joints shall be formed by means of preformed expansion joint filler material cut and shaped to the cross section of curb and gutter. Expansion joints shall be provided in curb and gutter directly opposite expansion joints of abutting portland cement concrete pavement, and shall be of the same type and thickness as joints in the pavement. Where curb and gutter do not abut portland cement concrete pavement, expansion joints at least 10 mm in width shall be provided at intervals not exceeding 2 meters. Expansion joints shall be provided in nonreinforced concrete gutter at locations indicated. Expansion joints shall be sealed immediately following curing of the concrete or as soon thereafter as weather conditions permit. Expansion joints and the top 25 mm depth of curb and gutter contraction-joints shall be sealed with joint sealant. The joint opening shall be thoroughly cleaned before the sealing material is placed. Sealing material shall not be spilled on exposed surfaces of the concrete. Concrete at the joint shall be surface dry and atmospheric and concrete temperatures shall be above 10 degrees C at the time of application of joint sealing material. Excess material on exposed surfaces of the concrete shall be removed immediately and concrete surfaces cleaned.

### 3.7 CURING AND PROTECTION

#### 3.7.1 General Requirements

Concrete shall be protected against loss of moisture and rapid temperature changes for at least 7 days from the beginning of the curing operation. Unhardened concrete shall be protected from rain and flowing water. All equipment needed for adequate curing and protection of the concrete shall be on hand and ready for use before actual concrete placement begins. Protection shall be provided as necessary to prevent cracking of the pavement due to temperature changes during the curing period.

##### 3.7.1.1 Mat Method

The entire exposed surface shall be covered with 2 or more layers of burlap. Mats shall overlap each other at least 150 mm. The mat shall be thoroughly wetted with water prior to placing on concrete surface and shall be kept



continuously in a saturated condition and in intimate contact with concrete for not less than 7 days.

#### 3.7.1.2 Impervious Sheeting Method

The entire exposed surface shall be wetted with a fine spray of water and then covered with impervious sheeting material. Sheets shall be laid directly on the concrete surface with the light-colored side up and overlapped 300 mm when a continuous sheet is not used. The curing medium shall not be less than 450 mm wider than the concrete surface to be cured, and shall be securely weighted down by heavy wood planks, or a bank of moist earth placed along edges and laps in the sheets. Sheets shall be satisfactorily repaired or replaced if torn or otherwise damaged during curing. The curing medium shall remain on the concrete surface to be cured for not less than 7 days.

#### 3.7.1.3 Membrane Curing Method

A uniform coating of white-pigmented membrane-curing compound shall be applied to the entire exposed surface of the concrete as soon after finishing as the free water has disappeared from the finished surface. Formed surfaces shall be coated immediately after the forms are removed and in no case longer than 1 hour after the removal of forms. Concrete shall not be allowed to dry before the application of the membrane. If any drying has occurred, the surface of the concrete shall be moistened with a fine spray of water and the curing compound applied as soon as the free water disappears. Curing compound shall be applied in two coats by hand-operated pressure sprayers at a coverage of approximately 5 square meters per liter for the total of both coats. The second coat shall be applied in a direction approximately at right angles to the direction of application of the first coat. The compound shall form a uniform, continuous, coherent film that will not check, crack, or peel and shall be free from pinholes or other imperfections. If pinholes, abrasion, or other discontinuities exist, an additional coat shall be applied to the affected areas within 30 minutes. Concrete surfaces that are subjected to heavy rainfall within 3 hours after the curing compound has been applied shall be resprayed by the method and at the coverage specified above. Areas where the curing compound is damaged by subsequent construction operations within the curing period shall be resprayed. Necessary precautions shall be taken to insure that the concrete is properly cured at sawed joints, and that no curing compound enters the joints. The top of the joint opening and the joint groove at exposed edges shall be tightly sealed before the concrete in the region of the joint is resprayed with curing compound. The method used for sealing the joint groove shall prevent loss of moisture from the joint during the entire specified curing period. Approved standby facilities for curing concrete pavement shall be provided at a location accessible to the jobsite for use in the event of mechanical failure of the spraying equipment or other conditions that might prevent correct application of the membrane-curing compound at the proper time. Concrete surfaces to which membrane-curing compounds have been applied shall be adequately protected during the entire curing period from pedestrian and vehicular traffic, except as required for joint-sawing operations and surface tests, and from any other possible damage to the continuity of the membrane.

### 3.7.2 Backfilling

After curing, debris shall be removed and the area adjoining the concrete shall be backfilled, graded, and compacted to conform to the surrounding area in accordance with lines and grades indicated.

### 3.7.3 Protection

Completed concrete shall be protected from damage until accepted. The Contractor shall repair damaged concrete and clean concrete discolored during construction. Concrete that is damaged shall be removed and reconstructed for the entire length between regularly scheduled joints. Refinishing the damaged portion will not be acceptable. Removed damaged portions shall be disposed of as directed.

## 3.8 FIELD QUALITY CONTROL

### 3.8.1 General Requirements

The Contractor shall perform the inspection and tests described and meet the specified requirements for inspection details and frequency of testing. Based upon the results of these inspections and tests, the Contractor shall take the action and submit reports as required below, and any additional tests to insure that the requirements of these specifications are met.

### 3.8.2 Concrete Testing

#### 3.8.2.1 Strength Testing

The Contractor shall provide molded concrete specimens for strength tests. Samples of concrete placed each day shall be taken not less than once a day nor less than once for every 190 cubic meters of concrete. The samples for strength tests shall be taken in accordance with ASTM C 172. Cylinders for acceptance shall be molded in conformance with ASTM C 31M by an approved testing laboratory. Each strength test result shall be the average of 2 test cylinders from the same concrete sample tested at 28 days, unless otherwise specified or approved. Concrete specified on the basis of compressive strength will be considered satisfactory if the averages of all sets of three consecutive strength test results equal or exceed the specified strength, and no individual strength test result falls below the specified strength by more than 4 MPa.

#### 3.8.2.2 Air Content

Air content shall be determined in accordance with ASTM C 173 or ASTM C 231. ASTM C 231 shall be used with concretes and mortars made with relatively dense natural aggregates. Two tests for air content shall be made on randomly selected batches of each class of concrete placed during each shift. Additional tests shall be made when excessive variation in concrete workability is reported by the placing foreman or the Government inspector. If results are out of tolerance, the placing foreman shall be notified and he shall take appropriate action to have the air content corrected at the plant. Additional tests for air content will be performed on each truckload

of material until such time as the air content is within the tolerance specified.

#### 3.8.2.3 Slump Test

Two slump tests shall be made on randomly selected batches of each class of concrete for every 190 cubic meters, or fraction thereof, of concrete placed during each shift. Additional tests shall be performed when excessive variation in the workability of the concrete is noted or when excessive crumbling or slumping is noted along the edges of slip-formed concrete.

#### 3.8.3 Thickness Evaluation

The anticipated thickness of the concrete shall be determined prior to placement by passing a template through the formed section or by measuring the depth of opening of the extrusion template of the curb-forming machine. If a slip form paver is used for sidewalk placement, the subgrade shall be true to grade prior to concrete placement and the thickness will be determined by measuring each edge of the completed slab.

#### 3.8.4 Surface Evaluation

The finished surface of each category of the completed work shall be uniform in color and free of blemishes and form or tool marks.

### 3.9 SURFACE DEFICIENCIES AND CORRECTIONS

#### 3.9.1 Thickness Deficiency

When measurements indicate that the completed concrete section is deficient in thickness by more than 6 mm the deficient section will be removed, between regularly scheduled joints, and replaced.

#### 3.9.2 High Areas

In areas not meeting surface smoothness and plan grade requirements, high areas shall be reduced either by rubbing the freshly finished concrete with carborundum brick and water when the concrete is less than 36 hours old or by grinding the hardened concrete with an approved surface grinding machine after the concrete is 36 hours old or more. The area corrected by grinding the surface of the hardened concrete shall not exceed 5 percent of the area of any integral slab, and the depth of grinding shall not exceed 6 mm. Pavement areas requiring grade or surface smoothness corrections in excess of the limits specified above shall be removed and replaced.

#### 3.9.3 Appearance

Exposed surfaces of the finished work will be inspected by the Government and any deficiencies in appearance will be identified. Areas which exhibit excessive cracking, discoloration, form marks, or tool marks or which are otherwise inconsistent with the overall appearances of the work shall be removed and replaced.

-- End of Section --

01062/BERGER/ABAM  
FY02 Tactical Equipment Complex  
Fort Lewis, Washington

This page intentionally blank.

SECTION 02821

FENCING

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by basic designation only.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM A 116	(1995) Zinc-Coated (Galvanized) Steel Woven Wire Fence Fabric
ASTM A 153M	(1998) Zinc-Coated (Hot Dip) on Iron and Steel Hardware
ASTM A 666	(1999) Annealed or Cold-Worked Austenitic Stainless Steel Sheet, Strip, Plate, and Flat Bar
ASTM A 702	(1989; R 1994e1) Steel Fence Posts and Assemblies, Hot Wrought
ASTM A 780	(1993a) Repair of Damaged and Uncoated Areas of Hot-Dipped Galvanized Coatings
ASTM A 824	(1995) Metallic-Coated Steel Marcellled Tension Wire for Use With Chain Link Fence
ASTM C 94M	(2000) Ready-Mixed Concrete
ASTM F 626	(1996a) Fence Fittings
ASTM F 883	(1997) Padlocks
ASTM F 900	(1994) Industrial and Commercial Swing Gates
ASTM F 1043	(1999) Strength and Protective Coatings on Metal Industrial Chain-Link Fence Framework
ASTM F 1083	(1997) Specification for Pipe, Steel, Hot-Dipped Zinc-Coated (Galvanized) Welded, for Fence Structures

1.2 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only. When used, a designation following the "G" designation identifies the office that

will review the submittal for the Government. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

SD-07 Certificates

Chain Link Fence; G

Statement, signed by an official authorized to certify on behalf of the manufacturer, attesting that the chain link fence and component materials meet the specified requirements.

PART 2 PRODUCTS

2.1 FENCE FABRIC

Fence fabric shall conform to the following:

2.1.1 Chain Link Fence Fabric

ASTM A 392, Class 1, zinc-coated steel wire with minimum coating weight of 370 grams of zinc per square meter of coated surface, or ASTM A 491, Type I, aluminum-coated steel wire. Fabric shall be fabricated of 9-gauge wire woven in 50 mm mesh. Fabric height shall be as shown. Fabric shall be twisted and barbed on the top selvage and knuckled on the bottom selvage.

2.2 GATES

ASTM F 900 and/or ASTM F 1184. Gate shall be the type and swing shown. Gate frames shall conform to strength and coating requirements of ASTM F 1083 for Group IA, steel pipe, with external coating Type A, nominal pipe size (NPS) 1-1/2. Gate fabric shall be as specified for chain link fabric. Gate leaves more than 2.44 m wide shall have either intermediate members and diagonal truss rods or shall have tubular members as necessary to provide rigid construction, free from sag or twist. Gate leaves less than 2.44 m wide shall have truss rods or intermediate braces. Intermediate braces shall be provided on all gate frames with an electro-mechanical lock. Gate fabric shall be attached to the gate frame by method standard with the manufacturer except that welding will not be permitted. Latches, hinges, stops, keepers, rollers, and other hardware items shall be furnished as required for the operation of the gate. Latches shall be arranged for padlocking so that the padlock will be accessible from both sides of the gate. Stops shall be provided for holding the gates in the open position.

2.3 POSTS

2.3.1 Metal Posts for Chain Link Fence

ASTM F 1083, zinc-coated. Group IA, with external coating Type A steel pipe. Group III, ASTM F 1043 steel H-section may be used for line posts in lieu of line post shapes specified for the other classes. Sizes shall be as shown on the drawings. Line posts and terminal (corner, gate, and pull) posts selected shall be of the same designation throughout the fence. Gate

post shall be for the gate type specified subject to the limitation specified in ASTM F 900 and/or ASTM F 1184.

## 2.4 WIRE

### 2.4.1 Tension Wire

Tension wire shall be Type I or Type II, Class 2 coating, in accordance with ASTM A 824.

## 2.5 ACCESSORIES

ASTM F 626. Ferrous accessories shall be zinc or aluminum coated. Truss rods shall be furnished for each terminal post. Truss rods shall be provided with turnbuckles or other equivalent provisions for adjustment. Tie wire for attaching fabric to rails, braces, and posts shall be 9 gauge steel wire and match the coating of the fence fabric. Miscellaneous hardware coatings shall conform to ASTM A 153/A 153M unless modified.

## 2.6 CONCRETE

ASTM C 94M, using 19 mm maximum size aggregate, and having minimum compressive strength of 21 MPa at 28 days. Grout shall consist of one part portland cement to three parts clean, well-graded sand and the minimum amount of water to produce a workable mix.

## PART 3 EXECUTION

### 3.1 INSTALLATION

Fence shall be installed to the lines and grades indicated. The area on either side of the fence line shall be cleared to the extent indicated. Line posts shall be spaced equidistant at intervals not exceeding 3 m. Terminal (corner, gate, and pull) posts shall be set at abrupt changes in vertical and horizontal alignment. Fabric shall be continuous between terminal posts; however, runs between terminal posts shall not exceed 152.4 m. Any damage to galvanized surfaces, including welding, shall be repaired with paint containing zinc dust in accordance with ASTM A 780.

### 3.2 EXCAVATION

Postholes shall be cleared of loose material. Waste material shall be spread where directed. The ground surface irregularities along the fence line shall be eliminated to the extent necessary to maintain a 25 mm clearance between the bottom of the fabric and finish grade.

### 3.3 POST INSTALLATION

#### 3.3.1 Posts for Chain Link Fence

Posts shall be set plumb and in alignment. Diameter and depth of postholes shall be as recommended by the manufacturer.

### 3.4 RAILS

#### 3.4.1 Top Rail

Top rail shall be supported at each post to form a continuous brace between terminal posts. Where required, sections of top rail shall be joined using sleeves or couplings that will allow expansion or contraction of the rail. Top rail, if required for high security fence, shall be installed as indicated on the drawings.

### 3.5 BRACES AND TRUSS RODS

Braces and truss rods shall be installed as indicated and in conformance with the standard practice for the fence furnished. Horizontal (compression) braces and diagonal truss (tension) rods shall be installed on fences over 1.83 m in height. A center brace or 2 diagonal truss rods shall be installed on 3.66 m fences. Braces and truss rods shall extend from terminal posts to line posts. Diagonal braces shall form an angle of approximately 40 to 50 degrees with the horizontal. No bracing is required on fences 1.83 m high or less if a top rail is installed.

### 3.6 TENSION WIRES

Tension wires shall be installed along the bottom of the fence line and attached to the terminal posts of each stretch of the fence. Bottom tension wire shall be installed within the bottom 152 mm of the installed fabric. Tension wire shall be pulled taut and shall be free of sag.

### 3.7 CHAIN LINK FABRIC

Chain link fabric shall be installed on the side of the post indicated. Fabric shall be attached to terminal posts with stretcher bars and tension bands. Bands shall be spaced at approximately 381 mm intervals. The fabric shall be installed and pulled taut to provide a smooth and uniform appearance free from sag, without permanently distorting the fabric diamond or reducing the fabric height. Fabric shall be fastened to line posts at approximately 381 mm intervals and fastened to all rails and tension wires at approximately 610 mm intervals. Fabric shall be cut by untwisting and removing pickets. Splicing shall be accomplished by weaving a single picket into the ends of the rolls to be joined. The bottom of the installed fabric shall be 50 mm above the ground. For high security fence, after the fabric installation is complete, the fabric shall be exercised by applying a 222 newtons push-pull force at the center of the fabric between posts; the use of a 133 newtons pull at the center of the panel shall cause fabric deflection of not more than 63.5 mm when pulling fabric from the post side of the fence; every second fence panel shall meet this requirement; all failed panels shall be resecured and retested at the Contractor's expense.

### 3.8 GATE INSTALLATION

Gates shall be installed at the locations shown. Hinged gates shall be mounted to swing as indicated. Latches, stops, and keepers shall be installed as required. Hinge pins, and hardware shall be welded or otherwise secured to prevent removal. For farm style fencing, standard



01062/BERGER/ABAM  
FY02 Tactical Equipment Complex  
Fort Lewis, Washington

metal gate assemblies with frame and fittings necessary for complete installation or wood gates shall be furnished as shown.

-- End of Section -

01062/BERGER/ABAM  
FY02 Tactical Equipment Complex  
Fort Lewis, Washington

This page intentionally blank.

SECTION 02921

SEEDING

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by basic designation only.

AGRICULTURAL MARKETING SERVICE (AMS)

AMS Seed Act (1995) Federal Seed Act Regulations Part 201

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM C 602 (1995a) Agricultural Liming Materials

ASTM D 4972 (1995a) pH of Soils

ASTM D 5268 (1992; R 1996) Topsoil Used for Landscaping Purposes

ASTM D 5883 (1996el) Use of Rotary Kiln Produced Expanded Shale, Clay or Slate (ESCS) as a Mineral Amendment in Topsoil Used for Landscaping and Related Purposes

1.2 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only. When used, a designation following the "G" designation identifies the office that will review the submittal for the Government. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

SD-03 Product Data

Equipment;

Manufacturer's literature including physical characteristics, application and installation instructions for equipment, surface erosion control material and chemical treatment material.

A listing of equipment to be used for the seeding operation.

Delivery;

Finished Grade and Topsoil;

Finished grade shall be verified for correctness prior to performing landscape work.

Topsoil;G

See Section 02300 EARTHWORK and Section 02315 EXCAVATION FILLING AND BACKFILLING FOR BUILDINGS.

Quantity Check; G

Bag count or bulk weight measurements of material used compared with area covered to determine the application rate and quantity installed.

Seed Establishment Period; G

Calendar time period for the seed establishment period. When there is more than one seed establishment period, the boundaries of the seeded area covered for each period shall be described.

Maintenance Record; G

Maintenance work performed, area repaired or reinstalled, diagnosis for unsatisfactory stand of grass plants.

Application of Pesticide; G

Pesticide treatment plan with sequence of treatment work with dates and times. The pesticide trade name, EPA registration number, chemical composition, formulation, concentration of original and diluted material, application rate of active ingredients, method of application, area treated, amount applied; and the name and state license number of the state certified applicator shall be included.

SD-04 Samples

Delivered Topsoil; G

Samples taken from several locations at the source.

Soil Amendments; G

A 4.5 kg sample.

Mulch; G

A 4.5 kg sample.

#### SD-06 Test Reports

##### Equipment Calibration;

Certification of calibration tests conducted on the equipment used in the seeding operation.

##### Soil Test;G

Certified reports of inspections and laboratory tests, prepared by an independent testing agency, including analysis and interpretation of test results. Each report shall be properly identified. Test methods used and compliance with recognized test standards shall be described.

#### SD-07 Certificates

Seed; G  
Topsoil; G  
pH Adjuster; G  
Fertilizer; G  
Organic Material; G  
Soil Conditioner; G  
Mulch; G  
Pesticide; G

Prior to the delivery of materials, certificates of compliance attesting that materials meet the specified requirements. Certified copies of the material certificates shall include the following:

- a. Seed. Classification, botanical name, common name, percent pure live seed, minimum percent germination and hard seed, maximum percent weed seed content, and date tested.
- b. Topsoil. Particle size, pH, organic matter content, textural class, soluble salts, chemical and mechanical analyses.
- c. pH Adjuster. Calcium carbonate equivalent and sieve analysis.
- d. Fertilizer. Chemical analysis and composition percent.
- e. Organic Material: Composition and source.
- f. Soil Conditioner: Composition and source.
- g. Mulch: Composition and source.
- h. Asphalt Adhesive: Composition.
- i. Pesticide. EPA registration number and registered uses.

### 1.3 SOURCE INSPECTION

The source of delivered topsoil shall be subject to inspection.

### 1.4 DELIVERY, INSPECTION, STORAGE, AND HANDLING

#### 1.4.1 Delivery

A delivery schedule shall be provided at least 10 calendar days prior to the first day of delivery.

##### 1.4.1.1 Delivered Topsoil

Prior to the delivery of any topsoil, its availability shall be verified in paragraph TOPSOIL. A soil test shall be provided for topsoil delivered to the site.

##### 1.4.1.2 Soil Amendments

Soil amendments shall be delivered to the site in the original, unopened containers bearing the manufacturer's chemical analysis. In lieu of containers, soil amendments may be furnished in bulk. A chemical analysis shall be provided for bulk deliveries.

##### 1.4.1.3 Pesticides

Pesticide material shall be delivered to the site in the original, unopened containers bearing legible labels indicating the EPA registration number and the manufacturer's registered uses.

#### 1.4.2 Inspection

Seed shall be inspected upon arrival at the job site for conformity to species and quality. Seed that is wet, moldy, or bears a test date five months or older, shall be rejected. Other materials shall be inspected for compliance with specified requirements. The following shall be rejected: open soil amendment containers or wet soil amendments; topsoil that contains slag, cinders, stones, lumps of soil, sticks, roots, trash or other material over a minimum 40 mm diameter; and topsoil that contains viable plants and plant parts. Unacceptable materials shall be removed from the job site.

#### 1.4.3 Storage

Materials shall be stored in designated areas. Seed, lime, and fertilizer shall be stored in cool, dry locations away from contaminants. Chemical treatment material shall be stored according to manufacturer's instructions and not with seeding operation materials.

#### 1.4.4 Handling

Except for bulk deliveries, materials shall not be dropped or dumped from vehicles.

#### 1.4.5 Time Limitation

Hydroseeding time limitation for holding seed in the slurry shall be a maximum 24 hours.

## PART 2 PRODUCTS

### 2.1 SEED

#### 2.1.1 Seed Classification

State-approved seed of the latest season's crop shall be provided in original sealed packages bearing the producer's guaranteed analysis for percentages of mixture, purity, germination, hard seed, weed seed content, and inert material. Labels shall be in conformance with AMS Seed Act and applicable state seed laws.

#### 2.1.2 Permanent Seed Species and Mixtures

Permanent seed species and mixtures shall be proportioned by weight as follows:

Botanical Name	Common Name	Mixture Percent by Weight	Percent Pure Live Seed
LAWN SEED MIX			
Lolium perenne	Turf-type perennial ryegrass	50	86
Festuca rubra	Creeping red or chewings fescue var. rubra	50	81
BIOFILTRATION SEED MIX			
Festuca rubra	Creeping red or chewings fescue var. rubra	25	81
Alopercorus pratensis	Meadow Foxtail	25	90
Agrostis alba	Red Top Bentgrass	25	95
Trifolium pratense	Red Clover	25	90

#### 2.1.3 Quality

Weed seed shall be a maximum 1 percent by weight of the total mixture.

#### 2.1.4 Seed Mixing

The mixing of seed may be done by the seed supplier prior to delivery, or on site as directed.

#### 2.1.5 Substitutions

Substitutions will not be allowed without written request and approval from the Contracting Officer.

#### 2.2 TOPSOIL

Topsoil shall be as defined in ASTM D 5268. When available, the topsoil shall be the existing surface soil stripped and stockpiled onsite in accordance with Section 02300 EARTHWORK and Section 02315 EXCAVATION, FILLING AND BACKFILLING FOR BUILDINGS. When additional topsoil is required beyond the available topsoil from the stripping operation, topsoil shall be delivered and amended as recommended by the soil test for the seed specified. Topsoil shall be free from slag, cinders, stones, lumps of soil, sticks, roots, trash or other material over a minimum 40 mm diameter. Topsoil shall be free from viable plants and plant parts.

#### 2.3 SOIL AMENDMENTS

Soil amendments shall consist of pH adjuster, fertilizer, organic material and soil conditioners meeting the following requirements. Vermiculite shall not be used.

##### 2.3.1 pH Adjuster

The pH adjuster shall be an agricultural liming material in accordance with ASTM C 602. These materials may be burnt lime, hydrated lime, ground limestone, sulfur, or shells. The pH adjuster shall be used to create a favorable soil pH for the plant material specified.

##### 2.3.1.1 Limestone

Limestone material shall contain a minimum calcium carbonate equivalent of 80 percent. Gradation: A minimum 95 percent shall pass through a 2.36 mm sieve and a minimum 55 percent shall pass through a 0.250 mm sieve. To raise soil pH, ground limestone shall be used.

##### 2.3.1.2 Hydrated Lime

Hydrated lime shall contain a minimum calcium carbonate equivalent of 110 percent. Gradation: A minimum 100 percent shall pass through a 2.36 mm sieve and a minimum 97 percent shall pass through a 0.250 mm sieve.

##### 2.3.1.3 Burnt Lime

Burnt lime shall contain a minimum calcium carbonate equivalent of 140 percent. Gradation: A minimum 95 percent shall pass through a 2.36 mm sieve and a minimum 35 percent shall pass through a 0.250 mm sieve.

##### 2.3.2 Fertilizer

The nutrients ratio shall be 10 percent nitrogen, 20 percent phosphorus, and 20 percent potassium]. Fertilizer shall be controlled release commercial grade, free flowing, uniform in composition, and consist of a nitrogen-



phosphorus-potassium ratio. The fertilizer shall be derived from sulphur coated urea, urea formaldehyde, plastic or polymer coated pills, or isobutylenediurea (IBDU). Fertilizer shall be balanced with the inclusion of trace minerals and micro-nutrients.

#### 2.3.3 Organic Material

Organic material shall consist of either bonemeal, rotted manure, decomposed wood derivatives, recycled compost, or worm castings.

##### 2.3.3.1 Bonemeal

Bonemeal shall be finely ground, steamed bone product containing from 2 to 4 percent nitrogen and 16 to 40 percent phosphoric acid.

##### 2.3.3.2 Rotted Manure

Rotted manure shall be unleached horse, chicken or cattle manure containing a maximum 25 percent by volume of straw, sawdust, or other bedding materials. It shall contain no chemicals or ingredients harmful to plants. The manure shall be heat treated to kill weed seeds and be free of stones, sticks, and soil.

##### 2.3.3.3 Decomposed Wood Derivatives

Decomposed wood derivatives shall be ground bark, sawdust, yard trimmings, or other wood waste material that is free of stones, sticks, soil, and toxic substances harmful to plants, and is fully composted or stabilized with nitrogen.

##### 2.3.3.4 Recycled Compost

Compost shall be a well decomposed, stable, weed free organic matter source. Compost shall be derived from food; agricultural or industrial residuals; biosolids (treated sewage sludge); yard trimmings; or source-separated or mixed solid waste. The compost shall possess no objectionable odors and shall not resemble the raw material from which it was derived. The material shall not contain substances toxic to plants. Gradation: The compost material shall pass through a 10 mm screen, possess a pH of 5.5 to 8.0, and have a moisture content between 35-55 percent by weight. The material shall not contain more than 1 percent by weight of man-made foreign matter. Compost shall be cleaned of plastic materials larger than 50 mm in length.

##### 2.3.3.5 Worm Castings

Worm castings shall be screened from worms and food source, and shall be commercially packaged.

#### 2.3.4 Soil Conditioner

Soil conditioner shall be sand, super absorbent polymers, calcined clay, or gypsum for use singly or in combination to meet the requirements of the soil test.

#### 2.3.4.1 Sand

Sand shall be clean and free of toxic materials. Gradation: A minimum 95 percent by weight shall pass a 2 mm sieve and a minimum 10 percent by weight shall pass a 1.18 mm sieve. Greensand shall be balanced with the inclusion of trace minerals and nutrients.

#### 2.3.4.2 Super Absorbent Polymers

To improve water retention in soils, super absorbent polymers shall be sized and applied according to the manufacturer's recommendations. Polymers shall be added as a soil amendment and be cross-linked polyacrylamide, with an absorption capacity of 250-400 times its weight. Polymers shall also be added to the seed and be a starch grafted polyacrylonitrile, with graphite added as a tacky sticker. It shall have an absorption capacity of 100 plus times its weight.

#### 2.3.4.3 Calcined Clay

Calcined clay shall be granular particles produced from montmorillonite clay calcined to a minimum temperature of 650 degrees C. Gradation: A minimum 90 percent shall pass a 2.36 mm sieve; a minimum 99 percent shall be retained on a 0.250 mm sieve; and a maximum 2 percent shall pass a 0.150 mm sieve. Bulk density: A maximum 640 kilogram per cubic meter .

#### 2.3.4.4 Gypsum

Gypsum shall be commercially packaged, free flowing, and a minimum 95 percent calcium sulfate by volume.

#### 2.3.4.5 Expanded Shale, Clay, or Slate (ESCS)

Rotary kiln produced ESCS material shall be in conformance with ASTM D 5883.

### 2.4 MULCH

Mulch shall be free from weeds, mold, and other deleterious materials. Mulch materials shall be native to the region.

#### 2.4.1 Wood Cellulose Fiber

Wood cellulose fiber shall not contain any growth or germination-inhibiting factors and shall be dyed an appropriate color to facilitate placement during application. Composition on air-dry weight basis: 9 to 15 percent moisture, pH range from 4.5 to 6.0.

### 2.5 WATER

Water shall be the responsibility of the Contractor, unless otherwise noted. Water shall not contain elements toxic to plant life.

## 2.6 PESTICIDE

Pesticide shall be insecticide, herbicide, fungicide, nematocide, rodenticide or miticide. For the purpose of this specification, a soil fumigant shall have the same requirements as a pesticide. The pesticide material shall be EPA registered and approved.

## 2.7 SURFACE EROSION CONTROL MATERIAL

Surface erosion control material shall conform to the following:

### 2.7.1 Hydrophilic Colloids

Hydrophilic colloids shall be physiologically harmless to plant and animal life without phytotoxic agents. Colloids shall be naturally occurring, silicate powder based, and shall form a water insoluble membrane after curing. Colloids shall resist mold growth.

## PART 3 EXECUTION

### 3.1 INSTALLING SEED TIME AND CONDITIONS

#### 3.1.1 Seeding Time

Seed shall be installed from 15 August to 20 October for fall establishment.

#### 3.1.2 Seeding Conditions

Seeding operations shall be performed only during periods when beneficial results can be obtained. When drought, excessive moisture, or other unsatisfactory conditions prevail, the work shall be stopped when directed. When special conditions warrant a variance to the seeding operations, proposed alternate times shall be submitted for approval.

#### 3.1.3 Equipment Calibration

Immediately prior to the commencement of seeding operations, calibration tests shall be conducted on the equipment to be used. These tests shall confirm that the equipment is operating within the manufacturer's specifications and will meet the specified criteria. The equipment shall be calibrated a minimum of once every day during the operation. The calibration test results shall be provided within 1 week of testing.

#### 3.1.4 Soil Test

Delivered topsoil, existing soil in smooth graded areas, and stockpiled topsoil shall be tested in accordance with ASTM D 5268 and ASTM D 4972 for determining the particle size, pH, organic matter content, textural class, chemical analysis, soluble salts analysis, and mechanical analysis. Sample collection on site shall be random over the entire site. Sample collection for stockpiled topsoil shall be at different levels in the stockpile. The soil shall be free from debris, noxious weeds, toxic substances, or other materials harmful to plant growth. The test shall determine the quantities

and type of soil amendments required to meet local growing conditions for the seed species specified.

### 3.2 SITE PREPARATION

#### 3.2.1 Finished Grade and Topsoil

The Contractor shall verify that finished grades are as indicated on drawings, and the placing of topsoil, smooth grading, and compaction requirements have been completed in accordance with Section 02300 EARTHWORK, prior to the commencement of the seeding operation.

#### 3.2.2 Application of Soil Amendments

##### 3.2.2.1 Applying pH Adjuster

The pH adjuster shall be applied as recommended by the soil test. The pH adjuster shall be incorporated into the soil to a maximum 100 mm depth or may be incorporated as part of the tillage operation.

##### 3.2.2.2 Applying Fertilizer

The fertilizer shall be applied as recommended by the soil test. Fertilizer shall be incorporated into the soil to a maximum 100 mm depth or may be incorporated as part of the tillage or hydroseeding operation.

##### 3.2.2.3 Applying Soil Conditioner

The soil conditioner shall be as recommended by the soil test. The soil conditioner shall be spread uniformly over the soil a minimum 25 mm depth and thoroughly incorporated by tillage into the soil to a maximum 100 mm depth.

##### 3.2.2.4 Applying Super Absorbent Polymers

Polymers shall be spread uniformly over the soil as recommended by the manufacturer and thoroughly incorporated by tillage into the soil to a maximum 100 mm depth.

#### 3.2.3 Tillage

Soil on slopes up to a maximum 3-horizontal-to-1-vertical shall be tilled to a minimum 100 mm depth. On slopes between 3-horizontal-to-1-vertical and 1-horizontal-to-1 vertical, the soil shall be tilled to a minimum 50 mm depth by scarifying with heavy rakes, or other method. Rototillers shall be used where soil conditions and length of slope permit. On slopes 1-horizontal-to-1 vertical and steeper, no tillage is required. Drainage patterns shall be maintained as indicated on drawings. Areas compacted by construction operations shall be completely pulverized by tillage. Soil used for repair of surface erosion or grade deficiencies shall conform to topsoil requirements. The pH adjuster, fertilizer, and soil conditioner may be applied during this procedure.

### 3.2.4 Prepared Surface

#### 3.2.4.1 Preparation

The prepared surface shall be a maximum 25 mm below the adjoining grade of any surfaced area. New surfaces shall be blended to existing areas. The prepared surface shall be completed with a light raking to remove debris.

#### 3.2.4.2 Lawn Area Debris

Debris and stones over a minimum 16 mm in any dimension shall be removed from the surface.

#### 3.2.4.3 Field Area Debris

Debris and stones over a minimum 75 mm in any dimension shall be removed from the surface.

#### 3.2.4.4 Protection

Areas with the prepared surface shall be protected from compaction or damage by vehicular or pedestrian traffic and surface erosion.

### 3.3 INSTALLATION

Prior to installing seed, any previously prepared surface compacted or damaged shall be reworked to meet the requirements of paragraph SITE PREPARATION. Seeding operations shall not take place when the wind velocity will prevent uniform seed distribution.

#### 3.3.1 Installing Seed

Seeding method shall be Hydroseeding. Seeding procedure shall ensure even coverage. Gravity feed applicators, which drop seed directly from a hopper onto the prepared soil, shall not be used because of the difficulty in achieving even coverage, unless otherwise approved. Absorbent polymer powder shall be mixed with the dry seed at the rate recommended by the manufacturer.

##### 3.3.1.1 Broadcast Seeding

Seed shall be uniformly broadcast at the specified rate using broadcast seeders. Half the total rate of seed application shall be broadcast in 1 direction, with the remainder of the seed rate broadcast at 90 degrees from the first direction. Seed shall be covered a maximum 6 mm depth by disk harrow, steel mat drag, cultipacker, or other approved device.

#### 3.3.2 Hydroseeding

Seed shall be mixed to ensure broadcast at the rate of 90.72 kilograms per 0.405 hectare. Seed and fertilizer shall be added to water and thoroughly mixed to meet the rates specified. The time period for the seed to be held in the slurry shall be a maximum 24 hours. Wood cellulose fiber mulch and tackifier shall be added at the rates recommended by the manufacturer after

the seed, fertilizer, and water have been thoroughly mixed to produce a homogeneous slurry. Slurry shall be uniformly applied under pressure over the entire area. The hydroseeded area shall not be rolled.

#### 3.3.2.1 Non-Asphaltic Tackifier

Hydrophilic colloid shall be applied at the rate recommended by the manufacturer, using hydraulic equipment suitable for thoroughly mixing with water. A uniform mixture shall be applied over the area.

#### 3.3.2.2 Wood Cellulose Fiber, Paper Fiber, and Recycled Paper

Wood cellulose fiber, paper fiber, or recycled paper shall be applied as part of the hydroseeding operation. The mulch shall be mixed and applied in accordance with the manufacturer's recommendations.

#### 3.3.3 Watering Requirements

Watering shall be started immediately after completing the seeding of an area. Water shall be applied to supplement rainfall at a rate sufficient to ensure moist soil conditions to a minimum 25 mm depth. Run-off and puddling shall be prevented. Watering trucks shall not be driven over turf areas, unless otherwise directed. Watering of other adjacent areas or plant material shall be prevented.

### 3.4 SURFACE EROSION CONTROL

#### 3.4.1 Surface Erosion Control Material

Where indicated or as directed, surface erosion control material shall be installed in accordance with manufacturer's instructions. Placement of the material shall be accomplished without damage to installed material or without deviation to finished grade.

##### 3.4.1.1 Soil Amendments

When soil amendments have not been applied to the area, the quantity of 1/2 of the required soil amendments shall be applied and the area tilled in accordance with paragraph SITE PREPARATION. The area shall be watered in accordance with paragraph Watering Seed.

##### 3.4.1.2 Remaining Soil Amendments

The remaining soil amendments shall be applied in accordance with the paragraph Tillage when the surface is prepared for installing seed.

### 3.5 QUANTITY CHECK

For materials provided in bags, the empty bags shall be retained for recording the amount used. For materials provided in bulk, the weight certificates shall be retained as a record of the amount used. The amount of material used shall be compared with the total area covered to determine the rate of application used. Differences between the quantity applied and the quantity specified shall be adjusted as directed.

### 3.6 APPLICATION OF PESTICIDE

When application of a pesticide becomes necessary to remove a pest or disease, a pesticide treatment plan shall be submitted and coordinated with the installation pest management program.

#### 3.6.1 Technical Representative

The certified installation pest management coordinator shall be the technical representative, and shall be present at all meetings concerning treatment measures for pest or disease control. They may be present during treatment application.

#### 3.6.2 Application

A state certified applicator shall apply required pesticides in accordance with EPA label restrictions and recommendations. Clothing and personal protective equipment shall be used as specified on the pesticide label. A closed system is recommended as it prevents the pesticide from coming into contact with the applicator or other persons. Water for formulating shall only come from designated locations. Filling hoses shall be fitted with a backflow preventer meeting local plumbing codes or standards. Overflow shall be prevented during the filling operation. Prior to each day of use, the equipment used for applying pesticide shall be inspected for leaks, clogging, wear, or damage. Any repairs are to be performed immediately. A pesticide plan shall be submitted.

### 3.7 RESTORATION AND CLEAN UP

#### 3.7.1 Restoration

Existing turf areas, pavements, and facilities that have been damaged from the seeding operation shall be restored to original condition at Contractor's expense.

#### 3.7.2 Clean Up

Excess and waste material shall be removed from the seeded areas and shall be disposed offsite. Adjacent paved areas shall be cleaned.

### 3.8 PROTECTION OF INSTALLED AREAS

Immediately upon completion of the seeding operation in an area, the area shall be protected against traffic or other use by erecting barricades and providing signage as required, or as directed. Signage shall be in accordance with Section 10430 EXTERIOR SIGNAGE.

### 3.9 SEED ESTABLISHMENT PERIOD

#### 3.9.1 Commencement

The seed establishment period to obtain a healthy stand of grass plants shall begin on the first day of work under this contract and shall end 1 year after the last day of the seeding operation. Written calendar time

period shall be furnished for the seed establishment period. When there is more than 1 seed establishment period, the boundaries of the seeded area covered for each period shall be described. The seed establishment period shall be coordinated with 02930, EXTERIOR PLANTING. The seed establishment period shall be modified for inclement weather, shut down periods, or for separate completion dates of areas.

### 3.9.2 Satisfactory Stand of Grass Plants

Grass plants shall be evaluated for species and health when the grass plants are a minimum 25 mm high.

#### 3.9.2.1 Lawn Area

A satisfactory stand of grass plants from the seeding operation for a lawn area shall be a minimum 200 grass plants per square meter . Bare spots shall be a maximum 150 mm square. The total bare spots shall be a maximum 2 percent of the total seeded area.

### 3.9.3 Maintenance During Establishment Period

Maintenance of the seeded areas shall include eradicating weeds, insects and diseases; protecting embankments and ditches from surface erosion; maintaining erosion control materials and mulch; protecting installed areas from traffic; mowing; watering; and post-fertilization.

#### 3.9.3.1 Mowing

- a. Lawn Areas: Lawn areas shall be mowed to a minimum 75 mm height when the turf is a maximum 100 mm high. Clippings shall be removed when the amount cut prevents sunlight from reaching the ground surface.

#### 3.9.3.2 Post-Fertilization

The application rate shall be 3.125 kilograms per 9.29 square meter . A maximum 4 kilograms per hectare of actual available nitrogen shall be provided to the grass plants. The application shall be timed prior to the advent of winter dormancy and shall be made without burning the installed grass plants.

#### 3.9.3.3 Pesticide Treatment

Treatment for disease or pest shall be in accordance with paragraph APPLICATION OF PESTICIDE.

#### 3.9.3.4 Repair or Reinstall

Unsatisfactory stand of grass plants and mulch shall be repaired or reinstalled, and eroded areas shall be repaired in accordance with paragraph SITE PREPARATION.



01062/BERGER/ABAM  
FY02 Tactical Equipment Complex  
Fort Lewis, Washington

3.9.3.5 Maintenance Record

A record of each site visit shall be furnished, describing the maintenance work performed; areas repaired or reinstalled; and diagnosis for unsatisfactory stand of grass plants.

-- End of Section -

01062/BERGER/ABAM  
FY02 Tactical Equipment Complex  
Fort Lewis, Washington

This page intentionally blank.

SECTION 02930

EXTERIOR PLANTING

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by basic designation only.

AMERICAN NURSERY AND LANDSCAPE ASSOCIATION (ANLA)

ANLA Z60.1 (1996) Nursery Stock

AMERICAN NATIONAL STANDARDS INSTITUTE (ANSI)

ANSI A300 (1995) Tree Care Operations - Trees, Shrubs  
and other Woody Plant Maintenance

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM C 602 (1995a) Agricultural Liming Materials

ASTM D 4972 (1995a) pH of Soils

ASTM D 5268 (1992; R 1996) Topsoil Used for Landscaping  
Purposes

ASTM D 5883 (1996e1) Use of Rotary Kiln Produced Expanded  
Shale, Clay or Slate (ESCS) as a Mineral  
Amendment in Topsoil Used for Landscaping and  
Related Purposes

1.2 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only. When used, a designation following the "G" designation identifies the office that will review the submittal for the Government. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

SD-03 Product Data

Equipment;

A listing of equipment to be used for the planting operation.

Delivery;

Plant materials shall be delivered to the site a maximum of 48 hours prior to planting and arranged in groups by species for plant inspection purposes.

Plant Establishment Period; G

Calendar time period for the plant establishment period. When there is more than one establishment period, the boundaries of the planted areas covered for each period shall be described.

Maintenance Record; G

Maintenance work performed, quantity of plant losses, and replacements; and diagnosis of unhealthy plant material.

Application of Pesticide;

Pesticide treatment plan with sequence of treatment work with dates and times. The pesticide trade name, EPA registration number, chemical composition, formulation, concentration of original and diluted material, application rate of active ingredients, method of application, area treated, amount applied; and the name and state license number of the state certified applicator shall be included.

SD-04 Samples

Delivered Topsoil; G

Samples taken from several locations at the source.

Soil Amendments; G

A 4.5 kg ( sample.

Mulch; G

A 4.5 kg ( sample.

SD-06 Test Reports

Soil Test; G

Percolation Test; G

Certified reports of inspections and laboratory tests, prepared by an independent testing agency, including analysis and interpretation of test results. Each report shall be properly identified. Test methods used and compliance with recognized test standards shall be described.

#### SD-07 Certificates

Plant Material; G  
Topsoil; G  
pH Adjuster; G  
Fertilizer; G  
Organic Material; G  
Soil Conditioner; G  
Organic Mulch; G  
Mycorrhizal Fungi Inoculum; G  
Pesticide; G

Prior to delivery of materials, certificates of compliance attesting that materials meet the specified requirements. Certified copies of the material certificates shall include the following.

- a. Plant Material: Classification, botanical name, common name, size, quantity by species, and location where grown.
- b. Topsoil: Particle size, pH, organic matter content, textural class, soluble salts, chemical and mechanical analyses.
- c. pH Adjuster: Sieve analysis and calcium carbonate equivalent.
- d. Fertilizer: Chemical analysis and composition percent.
- e. Organic Material: Composition and source.
- f. Soil Conditioner: Composition and source.
- g. Organic Mulch: Composition, source, and treatment against fungi growth.
- h. Mycorrhizal Fungi Inoculum: Plant material treated.
- i. Pesticide. EPA registration number and registered uses.

#### SD-10 Operation and Maintenance Data

Maintenance Instructions; G

Instruction for year-round care of installed plant material.

#### 1.3 SOURCE INSPECTIONS

The nursery or source of plant material and the source of delivered topsoil shall be subject to inspection.

#### 1.4 DELIVERY, INSPECTION, STORAGE, AND HANDLING

##### 1.4.1 Delivery

A delivery schedule shall be provided at least 10 calendar days prior to the first day of delivery.

##### 1.4.1.1 Plant Material Identification

Plant material shall be identified with attached, durable, waterproof labels and weather-resistant ink, stating the correct botanical plant name and size.

##### 1.4.1.2 Protection During Delivery

Plant material shall be protected during delivery to prevent desiccation and damage to the branches, trunk, root system, or earth ball. Branches shall be protected by tying-in. Exposed branches shall be covered during transport.

##### 1.4.1.3 Delivered Topsoil

Prior to the delivery of any topsoil, the availability of topsoil shall be verified in paragraph TOPSOIL. A soil test shall be provided for delivered topsoil.

##### 1.4.1.4 Soil Amendments

Soil amendments shall be delivered to the site in the original, unopened containers bearing the manufacturer's chemical analysis. In lieu of containers, soil amendments may be furnished in bulk. A chemical analysis shall be provided for bulk deliveries.

##### 1.4.1.5 Pesticide Material

Pesticide material shall be delivered to the site in the original, unopened containers bearing legible labels indicating the Environmental Protection Agency (EPA) registration number and the manufacturer's registered uses.

##### 1.4.2 Inspection

Plant material shall be well shaped, vigorous and healthy with a healthy, well branched root system, free from disease, harmful insects and insect eggs, sun-scald injury, disfigurement or abrasion. Plant material shall be checked for unauthorized substitution and to establish nursery grown status. Plant material showing desiccation, abrasion, sun-scald injury, disfigurement, or unauthorized substitution shall be rejected. The plant material shall exhibit typical form of branch to height ratio; and meet the caliper and height measurements specified. Plant material that measures less than specified, or has been poled, topped off or headed back, shall be rejected. Container-grown plant material shall show new fibrous roots and the root mass shall contain its shape when removed from the container. Plant material with broken or cracked balls; or broken containers shall be rejected. Bare-root plant material that is not dormant or is showing roots

were pulled from the ground shall be rejected. Other materials shall be inspected for compliance with paragraph PRODUCTS. Open soil amendment containers or wet soil amendments shall be rejected. Topsoil that contains slag, cinders, stones, lumps of soil, sticks, roots, trash or other material larger than 40 mm diameter shall be rejected. Topsoil that contains viable plant material and plant parts shall be rejected. Unacceptable material shall be removed from the job site.

#### 1.4.3 Storage

##### 1.4.3.1 Plant Material Storage

Plant material not installed on the day of arrival at the site shall be stored and protected in designated areas. Plant material shall not be stored longer than 30 days. Plant material shall be protected from direct exposure to wind and sun. Bare-root plant material shall be heeled-in. All plant material shall be kept in a moist condition by watering with a fine mist spray until installed.

##### 1.4.3.2 Other Material Storage

Storage of other material shall be in designated areas. Soil amendments shall be stored in dry locations and away from contaminants. Chemical treatment material shall be stored according to manufacturer's instructions and not with planting operation material.

#### 1.4.4 Handling

Plant material shall not be injured in handling. Cracking or breaking the earth ball of balled and burlapped plant material shall be avoided. Plant material shall not be handled by the trunk or stems. Materials shall not be dropped from vehicles.

#### 1.4.5 Time Limitation

Except for container-grown plant material, the time limitation from digging to installing plant material shall be a maximum 90 days. The time limitation between installing the plant material and placing the mulch shall be a maximum 24 hours.

### 1.5 WARRANTY

Furnished plant material shall have a warranty for plant growth to be in a vigorous growing condition for a minimum 12 month period. A minimum 12 month calendar time period for the warranty of plant growth shall be provided regardless of the contract time period. When plant material is determined to be unhealthy in accordance with paragraph PLANT ESTABLISHMENT PERIOD, it shall be replaced once under this warranty.

PART 2 PRODUCTS

2.1 PLANT MATERIAL

2.1.1 Plant Material Classification

The plant material shall be nursery grown stock conforming to ANLA Z60.1 and shall be the species specified.

2.1.2 Plant Schedule

The plant schedule shall provide botanical names as included in one or more of the publications listed under "Nomenclature" in ANLA Z60.1.

2.1.3 Substitutions

Substitutions will not be permitted without written request and approval from the Contracting Officer.

2.1.4 Quality

Well shaped, well grown, vigorous plant material having healthy and well branched root systems in accordance with ANLA Z60.1 shall be provided. Plant material shall be provided free from disease, harmful insects and insect eggs, sun-scald injury, disfigurement and abrasion. Plant material shall be free of shock or damage to branches, trunk, or root systems, which may occur from the digging and preparation for shipment, method of shipment, or shipment. Plant quality is determined by the growing conditions; method of shipment to maintain health of the root system; and growth of the trunk and crown as follows.

2.1.5 Growing Conditions

Plant material shall be native to or well-suited to the growing conditions of the project site. Plant material shall be grown under climatic conditions similar to those at the project site.

2.1.6 Method of Shipment to Maintain Health of Root System

2.1.6.1 Balled and Burlapped (BB) Plant Material

Ball size and ratio shall be in accordance with ANLA Z60.1. The ball shall be of a diameter and depth to encompass enough fibrous and feeding root system necessary for the full recovery of the plant. The plant stem or trunk shall be centered in the ball. All roots shall be clean cut at the ball surface. Roots shall not be pulled from the ground. Before shipment the root ball shall be dipped in gels containing mycorrhizal fungi inoculum. The root ball shall be completely wrapped with burlap or other suitable material and securely laced with biodegradable twine.

2.1.6.2 Container-Grown (C) Plant Material

Container size shall be in accordance with ANLA Z60.1. Plant material shall be grown in a container over a duration of time for new fibrous roots to



have developed and for the root mass to retain its shape and hold together when removed from the container. Container-grown plant material shall be inoculated with mycorrhizal fungi during germination in the nursery. Before shipment the root system shall be dipped in gels containing mycorrhizal fungi inoculum. The container shall be sufficiently rigid to hold ball shape and protect root mass during shipping.

#### 2.1.7 Growth of Trunk and Crown

##### 2.1.7.1 Deciduous Trees

A height to caliper relationship shall be provided in accordance with ANLA Z60.1. Height of branching shall bear a relationship to the size and species of tree specified and with the crown in good balance with the trunk. The trees shall not be "poled" or the leader removed.

- a. Single stem: The trunk shall be reasonably straight and symmetrical with crown and have a persistent main leader.
- b. Multi-stem: All countable stems, in aggregate, shall average the size specified. To be considered a stem, there shall be no division of the trunk which branches more than 150 mm from ground level.
- c. Specimen: The tree provided shall be well branched and pruned naturally according to the species. The form of growth desired, which may not be in accordance with natural growth habit, shall be as indicated.

##### 2.1.7.2 Coniferous Evergreen Plant Material

Coniferous Evergreen plant material shall have the height-to-spread ratio recommended by ANLA Z60.1. The coniferous evergreen trees shall not be "poled" or the leader removed. Acceptable plant material shall be exceptionally heavy, well shaped and trimmed to form a symmetrical and tightly knit plant. The form of growth desired shall be as indicated.

#### 2.1.8 Plant Material Size

Plant material shall be furnished in sizes indicated. Plant material larger in size than specified may be provided at no additional cost to the Government.

#### 2.1.9 Plant Material Measurement

Plant material measurements shall be in accordance with ANLA Z60.1.

### 2.2 TOPSOIL

Topsoil shall be as defined in ASTM D 5268. When available, the topsoil shall be the existing surface soil stripped and stockpiled onsite in accordance with Section 02300 EARTHWORK and Section 02315 EXCAVATION FILLING AND BACKFILLING FOR BUILDINGS. When additional topsoil is required beyond the available topsoil from the stripping operation, topsoil shall be

delivered and amended as recommended by the soil test for the plant material specified. Topsoil shall be free from slag, cinders, stones, lumps of soil, sticks, roots, trash or other material over a minimum 40 mm diameter. Topsoil shall be free from viable plants and plant parts.

## 2.3 SOIL AMENDMENTS

Soil amendments shall consist of pH adjuster, fertilizer, organic material and soil conditioners meeting the following requirements. Vermiculite is not recommended.

### 2.3.1 pH Adjuster

The pH adjuster shall be an agricultural liming material in accordance with ASTM C 602. These materials may be burnt lime, hydrated lime, ground limestone, or shells. The pH adjuster shall be used to create a favorable soil pH for the plant material specified.

#### 2.3.1.1 Limestone

Limestone material shall contain a minimum calcium carbonate equivalent of 80 percent. Gradation: A minimum 95 percent shall pass through a 2.36 mm sieve and a minimum 55 percent shall pass through a 0.25 mm sieve. To raise soil pH, ground limestone shall be used.

#### 2.3.1.2 Hydrated Lime

Hydrated lime shall contain a minimum calcium carbonate equivalent of 110 percent. Gradation: A minimum 100 percent shall pass through a 2.36 mm sieve and a minimum 97 percent shall pass through a 0.25 mm sieve.

#### 2.3.1.3 Burnt Lime

Burnt lime shall contain a minimum calcium carbonate equivalent of 140 percent. Gradation: A minimum 95 percent shall pass through a 2.36 mm sieve and a minimum 35 percent shall pass through a 0.25 mm sieve.

### 2.3.2 Fertilizer

It shall be as recommended by the soil test. Fertilizer shall be controlled release commercial grade; free flowing, pellet or tablet form; uniform in composition; and consist of a nitrogen-phosphorus-potassium ratio. The fertilizer shall be derived from sulphur coated urea, urea formaldehyde, plastic or polymer coated pills, or isobutylenediurea (IBDU). Fertilizer shall be balanced with the inclusion of trace minerals and micro-nutrients.

<u>Plant Size</u>	<u>Tablet Size</u>	<u>No. of Tablets</u>
609mm (24 inches) or greater ht. or spread	20-25 gram	2-3
25mm (1 inch) Cal. of tree	20-25 gram	2 per 25mm (1 inch)
Ht. of tree	20-25 gram	2 per 609mm (24 inches) of ht.

### 2.3.3 Organic Material

Organic material shall consist of either bonemeal, peat, rotted manure, decomposed wood derivatives, recycled compost, or worm castings.

#### 2.3.3.1 Bonemeal

Bonemeal shall be a finely ground, steamed bone product containing from 2 to 4 percent nitrogen and 16 to 40 percent phosphoric acid.

#### 2.3.3.2 Rotted Manure

Rotted manure shall be unleached horse, chicken, or cattle manure containing a maximum 25 percent by volume of straw, sawdust, or other bedding materials. Manure shall contain no chemicals or ingredients harmful to plants. The manure shall be heat treated to kill weed seeds and shall be free of stones, sticks, and soil.

#### 2.3.3.3 Decomposed Wood Derivatives

Decomposed wood derivatives shall be ground bark, sawdust, or other wood waste material free of stones, sticks, and toxic substances harmful to plants, and stabilized with nitrogen.

#### 2.3.3.4 Recycled Compost

Compost shall be a well decomposed, stable, weed free organic matter source. It shall be derived from food, agricultural, or industrial residuals; biosolids (treated sewage sludge); yard trimmings; or source-separated or mixed solid waste. The compost shall possess no objectionable odors and shall not resemble the raw material from which it was derived. The material shall not contain substances toxic to plants. Gradation: The compost material shall pass through a 10 mm screen, possess a pH of 5.5 to 8.0, and have a moisture content between 35-55 percent by weight. The material shall not contain more than 1 percent or less by weight of man-made foreign matter. Compost shall be cleaned of plastic materials larger than 50 mm in length.

#### 2.3.3.5 Worm Castings

Worm castings shall be screened from worms and food source and shall be commercially packaged.

### 2.3.4 Soil Conditioner

Soil conditioner shall be sand, super absorbent polymers, calcined clay, or gypsum for single use or in combination to meet topsoil requirements for the plant material specified.

#### 2.3.4.1 Sand

Sand shall be clean and free of toxic materials. Gradation: A minimum 95 percent by weight shall pass a 2 mm sieve and a minimum 10 percent by weight

shall pass a 1.18 mm sieve. Greensand shall be balanced with the inclusion of trace minerals and nutrients.

#### 2.3.4.2 Super Absorbent Polymers

To improve water retention in soils, super absorbent polymers shall be sized according to manufacturer's recommendations. Polymers shall be added as a soil amendment and be cross-linked polyacrylamide with an absorption capacity of 250-400 times its weight.

#### 2.3.4.3 Calcined Clay

Granular particles shall be produced from montmorillonite clay calcined to minimum temperature of 650 degrees C. Gradation: A minimum 90 percent passing 2.36 mm sieve; a minimum 99 percent shall be retained on 0.25 mm sieve; and a maximum 2 percent shall pass a 0.15 mm sieve. Bulk density: A maximum 640 kilogram per cubic meter .

#### 2.3.4.4 Gypsum

Gypsum shall be commercially packaged, free flowing, and a minimum 95 percent calcium sulfate by volume.

#### 2.3.4.5 Expanded Shale, Clay, or Slate (ESCS)

Rotary kiln produced ESCS material shall be in conformance with ASTM D 5883.

### 2.4 MULCH

Mulch shall be free from weeds, mold, and other deleterious materials. Mulch materials shall be native to the region. Rotted manure is not recommended to be used as a mulch because it would encourage surface rooting of the plant material and weeds.

#### 2.4.1 Organic Mulch

Organic mulch materials shall be native to the project site and consist of recycled mulch, shredded bark, wood chips, or ground bark.

##### 2.4.1.1 Recycled Mulch

Recycled mulch may include compost, tree trimmings, or pine needles with a gradation that passes through a 65 x 65 mm screen. It shall be cleaned of all sticks a minimum 25 mm in diameter and plastic materials a minimum 75 mm ) length. The material shall be treated to retard the growth of mold and fungi. Other recycled mulch may include peanut shells, pecan shells or coco bean shells.

##### 2.4.1.2 Shredded Bark

Locally shredded material shall be treated to retard the growth of mold and fungi.

#### 2.4.1.3 Wood Chips and Ground Bark

Locally chipped or ground material shall be treated to retard the growth of mold and fungi. Gradation: A maximum 50 mm wide by 100 mm long.

#### 2.5 MYCORRHIZAL FUNGI INOCULUM

Mycorrhizal fungi inoculum shall be composed of multiple-fungus inoculum as recommended by the manufacturer for the plant material specified.

#### 2.6 WATER

Unless otherwise directed, water shall be the responsibility of the Contractor. Water shall not contain elements toxic to plant life.

#### 2.7 PESTICIDE

Pesticide shall be insecticide, herbicide, fungicide, nematocide, rodenticide or miticide. For the purpose of this specification a soil fumigant shall have the same requirements as a pesticide. The pesticide material shall be EPA registered and approved.

### PART 3 EXECUTION

#### 3.1 INSTALLING PLANT MATERIAL TIME AND CONDITIONS

##### 3.1.1 Plant Material Time

Plant material shall be installed in the fall from 1 September to 30 November, except when ground is frozen or excessively wet or when temperatures are below 35 degrees.

##### 3.1.2 Plant Material Conditions

Planting operations shall be performed only during periods when beneficial results can be obtained. When drought, excessive moisture, frozen ground or other unsatisfactory conditions prevail, the work shall be stopped when directed. When special conditions warrant a variance to the planting operations, proposed planting times shall be submitted for approval.

##### 3.1.3 Tests

###### 3.1.3.1 Percolation Test

Test for percolation shall be done to determine positive drainage of plant pits and beds. A positive percolation shall consist of a minimum 25 mm per 3 hours; when a negative percolation test occurs, a shop drawing shall be submitted indicating the corrective measures.

###### 3.1.3.2 Soil Test

Delivered topsoil, excavated plant pit soil, and stockpiled topsoil shall be tested in accordance with ASTM D 5268 and ASTM D 4972 for determining the particle size, pH, organic matter content, textural class, chemical

analysis, soluble salts analysis, and mechanical analysis. Sample collection onsite shall be random over the entire site. Sample collection for stockpiled topsoil shall be at different levels in the stockpile. The soil shall be free from debris, noxious weeds, toxic substances, or other materials harmful to plant growth. The test shall determine the quantities and type of soil amendments required to meet local growing conditions for the plant material specified.

### 3.2 SITE PREPARATION

#### 3.2.1 Finished Grade, Topsoil and Underground Utilities

The Contractor shall verify that finished grades are as indicated on drawings, and that the placing of topsoil, the smooth grading, and the compaction requirements have been completed in accordance with Section 02300 EARTHWORK, prior to the commencement of the planting operation. The location of underground utilities and facilities in the area of the planting operation shall be verified. Damage to underground utilities and facilities shall be repaired at the Contractor's expense.

#### 3.2.2 Layout

Plant material locations and bed outlines shall be staked on the project site before any excavation is made. Plant material locations may be adjusted to meet field conditions.

#### 3.2.3 Protecting Existing Vegetation

When there are established lawns in the planting area, the turf shall be covered and/or protected during planting operations. Existing trees, shrubs, and plant beds that are to be preserved shall be barricaded along the dripline to protect them during planting operations.

### 3.3 EXCAVATION

#### 3.3.1 Obstructions Below Ground

When obstructions below ground affect the work, shop drawings showing proposed adjustments to plant material location, type of plant and planting method shall be submitted for approval.

#### 3.3.2 Turf Removal

Where the planting operation occurs in an existing lawn area to remain, the turf shall be removed from the excavation area to a depth that will ensure the removal of the entire root system.

#### 3.3.3 Plant Pits

Plant pits for ball and burlapped or container plant material shall be in accordance with the planting details on Plan Sheet L-1.

### 3.4 INSTALLATION

#### 3.4.1 Setting Plant Material

Plant material shall be set plumb and held in position until sufficient soil has been firmly placed around root system or ball. In relation to the surrounding grade, the plant material shall be set even with the grade at which it was grown.

#### 3.4.2 Backfill Soil Mixture

The backfill soil mixture shall be a mix of 50% amended on-site topsoil suitable for the plant material and 50% excavated soil from the planting pit.

#### 3.4.3 Adding Mycorrhizal Fungi Inoculum

Mycorrhizal fungi inoculum shall be added as recommended by the manufacturer for the plant material specified.

#### 3.4.4 Backfill Procedure

Prior to backfilling, all metal, wood, synthetic products, or treated burlap devices shall be removed from the ball or root system avoiding damage to the root system. The backfill procedure shall remove air pockets from around the root system. Additional requirements are as follows.

##### 3.4.4.1 Balled and Burlapped, and Balled and Platformed Plant Material

Biodegradable burlap and tying material shall be carefully opened and folded back from the top a minimum 1/3 depth from the top of the root ball. Backfill mixture shall be added to the plant pit in 150 mm layers with each layer tamped.

##### 3.4.4.2 Container-Grown and Balled and Potted Plant Material

The plant material shall be carefully removed from containers that are not biodegradable. Prior to setting the plant in the pit, root mass shall be spread apart to promote new root growth. For plant material in biodegradable containers the container shall be split prior to setting the plant with container. Backfill mixture shall be added to the plant pit in 150 mm layers with each layer tamped.

##### 3.4.4.3 Earth Berm

An earth berm, consisting of backfill soil mixture, shall be formed with a minimum 100 mm height around the edge of the plant pit to aid in water retention and to provide soil for settling adjustments.

#### 3.4.5 Plant Bed

Plant material shall be set in plant beds according to the drawings. Backfill soil mixture shall be placed on previously scarified subsoil to completely surround the root balls, and shall be brought to a smooth and

even surface, blending to existing areas. Earth berms shall be provided. Polymers shall be spread uniformly over the plant bed and in the planting pit as recommended by the manufacturer and thoroughly incorporated into the soil to a maximum 100 mm depth.

#### 3.4.6 Watering

Plant pits and plant beds shall be watered immediately after backfilling, until completely saturated.

### 3.5 FINISHING

#### 3.5.1 Plant Material

Prior to placing mulch, the installed area shall be uniformly edged to provide a clear division line between the planted area and the adjacent turf area, shaped to provide a 3 foot diameter around each tree. The installed area shall be raked and smoothed while maintaining the earth berms.

#### 3.5.2 Placing Mulch

The placement of mulch shall occur a maximum 48 hours after planting. Mulch, used to reduce soil water loss, regulate soil temperature and prevent weed growth, shall be spread to cover the installed area with a minimum 100 mm uniform thickness. Mulch shall be kept out of the root crowns of trees and shall be kept off buildings, sidewalks and other facilities.

#### 3.5.3 Pruning

Pruning shall be accomplished by trained and experienced personnel. The pruning of trees and palms shall be in accordance with ANSI A300. Only dead or broken material shall be pruned from installed plants. The typical growth habit of individual plant material shall be retained. Clean cuts shall be made flush with the parent trunk. Improper cuts, stubs, dead and broken branches shall be removed. "Headback" cuts at right angles to the line of growth will not be permitted. Trees shall not be poled or the leader removed, nor shall the leader be pruned or "topped off".

### 3.6 MAINTENANCE DURING PLANTING OPERATION

Installed plant material shall be maintained in a healthy growing condition. Maintenance operations shall begin immediately after each plant is installed to prevent desiccation and shall continue until the plant establishment period commences. Installed areas shall be kept free of weeds, grass, and other undesired vegetation. The maintenance includes maintaining the mulch, watering, and adjusting settling.

### 3.7 APPLICATION OF PESTICIDE

When application of a pesticide becomes necessary to remove a pest or disease, a pesticide treatment plan shall be submitted and coordinated with the installation pest management program.



### 3.7.1 Technical Representative

The certified installation pest management coordinator shall be the technical representative, and shall be present at all meetings concerning treatment measures for pest or disease control. They may be present during treatment application.

### 3.7.2 Application

A state certified applicator shall apply required pesticides in accordance with EPA label restrictions and recommendations. Clothing and personal protective equipment shall be used as specified on the pesticide label. A closed system is recommended as it prevents the pesticide from coming into contact with the applicator or other persons. Water for formulating shall only come from designated locations. Filling hoses shall be fitted with a backflow preventer meeting local plumbing codes or standards. Overflow shall be prevented during the filling operation. Prior to each day of use, the equipment used for applying pesticide shall be inspected for leaks, clogging, wear, or damage. Any repairs are to be performed immediately.

## 3.8 RESTORATION AND CLEAN UP

### 3.8.1 Restoration

Turf areas, pavements and facilities that have been damaged from the planting operation shall be restored to original condition at the Contractor's expense.

### 3.8.2 Clean Up

Excess and waste material shall be removed from the installed area and shall be disposed offsite. Adjacent paved areas shall be cleared.

## 3.9 PLANT ESTABLISHMENT PERIOD

### 3.9.1 Commencement

Upon completion of the last day of the planting operation, the plant establishment period for maintaining installed plant material in a healthy growing condition shall commence and shall be in effect for a minimum of 24 months. Written calendar time period shall be furnished for the plant establishment period. When there is more than one plant establishment period, the boundaries of the planted area covered for each period shall be described. The plant establishment period shall be coordinated with Sections 02921 SEEDING. The plant establishment period shall be modified for inclement weather shut down periods, or for separate completion dates for areas.

### 3.9.2 Maintenance During Establishment Period

Maintenance of plant material shall include straightening plant material, supplementing mulch; pruning dead or broken branch tips; maintaining plant material labels; watering; eradicating weeds, insects and disease; post-fertilization; and removing and replacing unhealthy plants. Labels and all

foreign materials shall be removed from the project site at the end of the maintenance period prior to the final walk through.

#### 3.9.2.1 Watering Plant Material

The plant material shall be watered as necessary to prevent desiccation and to maintain an adequate supply of moisture within the root zone. An adequate supply of moisture is estimated to be the equivalent of 25 mm absorbed water per week, delivered in the form of rain or augmented by watering. Run-off, puddling and wilting shall be prevented. Unless otherwise directed, watering trucks shall not be driven over turf areas. Watering of other adjacent areas or existing plant material shall be prevented.

#### 3.9.2.2 Weeding

Grass and weeds in the installed areas shall not be allowed to reach a maximum 75 mm ) height before being completely removed, including the root system.

#### 3.9.2.3 Pesticide Treatment

Treatment for disease or pest shall be in accordance with paragraph APPLICATION OF PESTICIDE.

#### 3.9.2.4 Post-Fertilization

The plant material shall be topdressed at least once a year during the period of establishment with controlled release fertilizer, reference paragraph SOIL AMENDMENTS. Apply at the rate of 1 kilogram per 10 square meters of plant pit or bed area. Dry fertilizer adhering to plants shall be flushed off. The application shall be timed prior to the advent of winter dormancy.

#### 3.9.2.5 Plant Pit Settling

When settling occurs to the backfill soil mixture, additional backfill soil shall be added to the plant pit or plant bed until the backfill level is equal to the surrounding grade. Serious settling that affects the setting of the plant in relation to the maximum depth at which it was grown requires replanting in accordance with paragraph INSTALLATION. The earth berm shall be maintained.

#### 3.9.2.6 Maintenance Record

A record shall be furnished describing the maintenance work performed during the Plant Establishment Period, the quantity of plant losses, diagnosis of the plant loss, and the quantity of replacements made on each site visit.

#### 3.9.3 Unhealthy Plant Material

A tree shall be considered unhealthy or dead when the main leader has died back, or up to a maximum 25 percent of the crown has died. A shrub shall be considered unhealthy or dead when up to a maximum 25 percent of the plant

has died. This condition shall be determined by scraping on a branch an area 2 mm square, maximum, to determine if there is a green cambium layer below the bark. The Contractor shall determine the cause for unhealthy plant material and shall provide recommendations for replacement. Unhealthy or dead plant material shall be removed immediately and shall be replaced as soon as seasonal conditions permit.

#### 3.9.4 Replacement Plant Material

Unless otherwise directed, plant material shall be provided for replacement in accordance with paragraph PLANT MATERIAL. Replacement plant material shall be installed in accordance with paragraph INSTALLATION, and recommendations in paragraph PLANT ESTABLISHMENT PERIOD. Plant material shall be replaced in accordance with paragraph WARRANTY. An extended plant establishment period shall not be required for replacement plant material.

#### 3.9.5 Maintenance Instructions

Written instructions shall be furnished containing drawings and other necessary information for year-round care of the installed plant material; including, when and where maintenance should occur, and the procedures for plant material replacement.

-- End of Section --

01062/BERGER/ABAM  
FY02 Tactical Equipment Complex  
Fort Lewis, Washington

This page intentionally blank.

SECTION 03100

STRUCTURAL CONCRETE FORMWORK

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by basic designation only.

ACI INTERNATIONAL (ACI)

ACI 347R (1994) Guide to Formwork for Concrete

AMERICAN HARDBOARD ASSOCIATION (AHA)

AHA A135.4 (1995) Basic Hardboard

DEPARTMENT OF COMMERCE (DOC)

DOC PS 1 (1996) Voluntary Product Standard -  
Construction and Industrial Plywood

1.2 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only. When used, a designation following the "G" designation identifies the office that will review the submittal for the Government. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

SD-02 Shop Drawings

Formwork; G

Drawings showing details of formwork, including dimensions of joints, supports, studding and shoring, and sequence of form and shoring removal.

SD-03 Product Data

Design; G

Design analysis and calculations for form design and methodology used in the design.

Form Materials; G

Manufacturer's data including literature describing form materials, accessories, and form releasing agents.

Form Releasing Agents; G

Manufacturer's recommendation on method and rate of application of form releasing agents.

1.3 DESIGN

Formwork shall be designed in accordance with methodology of ACI 347R for anticipated loads, lateral pressures, and stresses. Forms shall be capable of producing a surface which meets the requirements of the class of finish specified in Section 03300 CAST-IN-PLACE STRUCTURAL CONCRETE. Forms shall be capable of withstanding the pressures resulting from placement and vibration of concrete.

1.4 STORAGE AND HANDLING

Fiber voids shall be stored above ground level in a dry location. Fiber voids shall be kept dry until installed and overlaid with concrete.

PART 2 PRODUCTS

2.1 FORM MATERIALS

2.1.1 Forms For Class A and Class B Finish

Forms for Class A and Class B finished surfaces shall be plywood panels conforming to DOC PS 1, Grade B-B concrete form panels, Class I or II. Other form materials or liners may be used provided the smoothness and appearance of concrete produced will be equivalent to that produced by the plywood concrete form panels. Forms for round columns shall be the prefabricated seamless type.

2.1.2 Forms For Class C Finish

Forms for Class C finished surfaces shall be shiplap lumber; plywood conforming to DOC PS 1, Grade B-B concrete form panels, Class I or II; tempered concrete form hardboard conforming to AHA A135.4; other approved concrete form material; or steel, except that steel lining on wood sheathing shall not be used. Forms for round columns may have one vertical seam.

2.1.3 Form Ties

Form ties shall be factory-fabricated metal ties, shall be of the removable or internal disconnecting or snap-off type, and shall be of a design that will not permit form deflection and will not spall concrete upon removal. Solid backing shall be provided for each tie. Except where removable tie rods are used, ties shall not leave holes in the concrete surface less than 6 mm nor more than 25 mm deep and not more than 25 mm in diameter. Removable tie rods shall be not more than 38 mm in diameter.

#### 2.1.4 Form Releasing Agents

Form releasing agents shall be commercial formulations that will not bond with, stain or adversely affect concrete surfaces. Agents shall not impair subsequent treatment of concrete surfaces depending upon bond or adhesion nor impede the wetting of surfaces to be cured with water or curing compounds.

### PART 3 EXECUTION

#### 3.1 INSTALLATION

##### 3.1.1 Formwork

Forms shall be mortar tight, properly aligned and adequately supported to produce concrete surfaces meeting the surface requirements specified in Section 03300 CAST-IN-PLACE STRUCTURAL CONCRETE and conforming to construction tolerance given in TABLE 1. Where concrete surfaces are to have a Class A or Class B finish, joints in form panels shall be arranged as approved. Where forms for continuous surfaces are placed in successive units, the forms shall fit over the completed surface to obtain accurate alignment of the surface and to prevent leakage of mortar. Forms shall not be reused if there is any evidence of surface wear and tear or defects which would impair the quality of the surface. Surfaces of forms to be reused shall be cleaned of mortar from previous concreting and of all other foreign material before reuse. Form ties that are to be completely withdrawn shall be coated with a nonstaining bond breaker.

#### 3.2 COATING

Forms for Class A and Class B finished surfaces shall be coated with a form releasing agent before the form or reinforcement is placed in final position. The coating shall be used as recommended in the manufacturer's printed or written instructions. Forms for Class C and D finished surfaces may be wet with water in lieu of coating immediately before placing concrete, except that in cold weather with probable freezing temperatures, coating shall be mandatory. Surplus coating on form surfaces and coating on reinforcing steel and construction joints shall be removed before placing concrete.

#### 3.3 REMOVAL OF FORMS

Forms shall be removed preventing injury to the concrete and ensuring the complete safety of the structure. Formwork for columns, walls, side of beams and other parts not supporting the weight of concrete may be removed when the concrete has attained sufficient strength to resist damage from the removal operation but not before at least 24 hours has elapsed since concrete placement. Supporting forms and shores shall not be removed from beams, floors and walls until the structural units are strong enough to carry their own weight and any other construction or natural loads. Supporting forms or shores shall not be removed before the concrete strength has reached 70 percent of design strength, as determined by field cured cylinders or other approved methods. This strength shall be demonstrated by job-cured test specimens, and by a structural analysis considering the

proposed loads in relation to these test strengths and the strength of forming and shoring system. The job-cured test specimens for form removal purposes shall be provided in numbers as directed and shall be in addition to those required for concrete quality control. The specimens shall be removed from molds at the age of 24 hours and shall receive, insofar as possible, the same curing and protection as the structures they represent.

TABLE 1

TOLERANCES FOR FORMED SURFACES

1.	Variations from the plumb:	In any 3 m of length ----- 6 mm
	a. In the lines and surfaces of columns, piers, walls and in arises	Maximum for entire length -- 25 mm
	b. For exposed corner columns, control-joint grooves, and other conspicuous lines	In any 6 m of length ----- 6 mm Maximum for entire length 13 mm
2.	Variation from the level or from the grades indicated on the drawings:	In any 3 m of length ----- 6 mm In any bay or in any 6 m of length ----- 10 mm
	a. In slab soffits, ceilings beam soffits, and in arises, measured before removal of supporting shores	Maximum for entire length - 20 mm
	b. In exposed lintels, sills, parapets, horizontal grooves, and other conspicuous lines	In any bay or in any 6 m of length ----- 6 mm Maximum for entire length - 13 mm
3.	Variation of the linear building lines from established position in plan	In any 6 m ----- 13 mm Maximum ----- 25 mm
4.	Variation of distance between walls, columns, partitions	6 mm per 3 m of distance, but not more than 13 mm in any one bay, and not more than 25 mm total variation



- |   |  |
|---|--|
| 5. Variation in the sizes and locations of sleeves, floor openings, and wall opening                    | Minus ----- 6 mm<br>Plus ----- 13 mm   |
| 6. Variation in cross-sectional dimensions of columns and beams and in the thickness of slabs and walls | Minus ----- 6 mm<br>Plus ----- 13 mm   |
| 7. Footings:  |  |
| a. Variation of dimensions in plan  | Minus ----- 13 mm<br>Plus ----- 50 mm<br>when formed or plus 75 mm when placed against unformed excavation |
| b. Misplacement of eccentricity   | 2 percent of the footing width in the direction of misplacement but not more than ----- 50 mm              |
| c. Reduction in thickness   | Minus ----- 5 percent<br>of specified thickness  |

-- End of Section -

01062/BERGER/ABAM  
FY02 Tactical Equipment Complex  
Fort Lewis, Washington

This page intentionally blank.

SECTION 03150

EXPANSION JOINTS, CONTRACTION JOINTS, AND WATERSTOPS

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by basic designation only.

AMERICAN HARDBOARD ASSOCIATION (AHA)

AHA A135.4 (1995) Basic Hardboard

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM B 152M (1997a) Copper Sheet, Strip, Plate, and Rolled Bar (Metric)

ASTM C 920 (1998) Elastomeric Joint Sealants

ASTM D 1751 (1999) Preformed Expansion Joint Filler for Concrete Paving and Structural Construction (Nonextruding and Resilient Bituminous Types)

ASTM D 1752 (1984; R 1996el) Preformed Sponge Rubber and Cork Expansion Joint Fillers for Concrete Paving and Structural Construction

ASTM D 5249 (1995) Backer Material for Use With Cold and Hot-Applied Joint Sealants in Portland-Cement Concrete and Asphalt Joints

1.2 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only. When used, a designation following the "G" designation identifies the office that will review the submittal for the Government. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

SD-03 Product Data

Preformed Expansion Joint Filler; G  
Sealant; G

Manufacturer's literature, including safety data sheets, for preformed fillers and the lubricants used in their installation; field-molded sealants and primers (when required by sealant manufacturer); preformed compression seals; and waterstops.

Manufacturer's recommended instructions for installing preformed fillers, field-molded sealants; and preformed compression seals.

#### SD-07 Certificates

Preformed Expansion Joint Filler; G  
Sealant; G

Certificates of compliance stating that the joint filler and sealant materials and waterstops conform to the requirements specified.

### 1.3 DELIVERY AND STORAGE

Material delivered and placed in storage shall be stored off the ground and protected from moisture, dirt, and other contaminants. Sealants shall be delivered in the manufacturer's original unopened containers. Sealants whose shelf life has expired shall be removed from the site.

## PART 2 PRODUCTS

### 2.1 CONTRACTION JOINT STRIPS

Contraction joint strips shall be 3 mm thick tempered hardboard conforming to AHA A135.4, Class 1. In lieu of hardboard strips, rigid polyvinylchloride (PVC) or high impact polystyrene (HIPS) insert strips specifically designed to induce controlled cracking in slabs on grade may be used. Such insert strips shall have removable top section.

### 2.2 PREFORMED EXPANSION JOINT FILLER

Expansion joint filler shall be preformed material conforming to ASTM D 1751 or ASTM D 1752. Unless otherwise indicated, filler material shall be 10 mm thick and of a width applicable for the joint formed. Backer material, when required, shall conform to ASTM D 5249.

### 2.3 SEALANT

Joint sealant shall conform to the following:

#### 2.3.1 Field-Molded Type

ASTM C 920, Type M for horizontal joints or Type NS for vertical joints, Class 25, and Use NT. Bond breaker material shall be polyethylene tape, coated paper, metal foil or similar type materials. The back-up material shall be compressible, non-shrink, nonreactive with sealant, and non-absorptive material type such as extruded butyl or polychloroprene rubber.

## PART 3 EXECUTION

### 3.1 JOINTS

Joints shall be installed at locations indicated and as authorized.

### 3.1.1 Contraction Joints

Contraction joints may be constructed by inserting tempered hardboard strips or rigid PVC or HIPS insert strips into the plastic concrete using a steel parting bar, when necessary, or by cutting the concrete with a saw after concrete has set. Joints shall be approximately 3 mm wide and shall extend into the slab one-fourth the slab thickness, minimum, but not less than 25 mm.

#### 3.1.1.1 Joint Strips

Strips shall be of the required dimensions and as long as practicable. After the first floating, the concrete shall be grooved with a tool at the joint locations. The strips shall be inserted in the groove and depressed until the top edge of the vertical surface is flush with the surface of the slab. The slab shall be floated and finished as specified. Working of the concrete adjacent to the joint shall be the minimum necessary to fill voids and consolidate the concrete. Where indicated, the top portion of the strip shall be sawed out after the curing period to form a recess for sealer. The removable section of PVC or HIPS strips shall be discarded and the insert left in place. True alignment of the strips shall be maintained during insertion.

#### 3.1.1.2 Sawed Joints

Joint sawing shall be early enough to prevent uncontrolled cracking in the slab, but late enough that this can be accomplished without appreciable spalling. Concrete sawing machines shall be adequate in number and power, and with sufficient replacement blades to complete the sawing at the required rate. Joints shall be cut to true alignment and shall be cut in sequence of concrete placement. Sludge and cutting debris shall be removed.

### 3.1.2 Expansion Joints

Preformed expansion joint filler shall be used in expansion and isolation joints in slabs around columns and between slabs on grade and vertical surfaces where indicated. The filler shall extend the full slab depth, unless otherwise indicated. The edges of the joint shall be neatly finished with an edging tool of 3 mm radius, except where a resilient floor surface will be applied. Where the joint is to receive a sealant, the filler strips shall be installed at the proper level below the finished floor with a slightly tapered, dressed and oiled wood strip temporarily secured to the top to form a recess to the size shown on the drawings. The wood strip shall be removed after the concrete has set. Contractor may opt to use a removable expansion filler cap designed and fabricated for this purpose in lieu of the wood strip. The groove shall be thoroughly cleaned of laitance, curing compound, foreign materials, protrusions of hardened concrete, and any dust which shall be blown out of the groove with oil-free compressed air.

#### 3.1.3 Joint Sealant

Sawed contraction joints and expansion joints in slabs shall be filled with joint sealant, unless otherwise shown. Joint surfaces shall be clean, dry,

and free of oil or other foreign material which would adversely affect the bond between sealant and concrete. Joint sealant shall be applied as recommended by the manufacturer of the sealant.

#### 3.1.3.1 Joints With Field-Molded Sealant

Joints shall not be sealed when the sealant material, ambient air, or concrete temperature is less than 4 degrees C . When the sealants are meant to reduce the sound transmission characteristics of interior walls, ceilings, and floors the guidance provided in ASTM C 919 shall be followed. Joints requiring a bond breaker shall be coated with curing compound or with bituminous paint. Bond breaker and back-up material shall be installed where required. Joints shall be primed and filled flush with joint sealant in accordance with the manufacturer's recommendations.

### 3.2 CONSTRUCTION JOINTS

Construction joints are specified in Section 03300 CAST-IN-PLACE STRUCTURAL CONCRETE except that construction joints coinciding with expansion and contraction joints shall be treated as expansion or contraction joints as applicable.

-- End of Section --

SECTION 03200

CONCRETE REINFORCEMENT

PART 1 GENERAL

1.1 REFERENCES

ACI INTERNATIONAL (ACI)

- |              |  |
|--------------|--|
| ACI 318/318R | (1995) Building Code Requirements for<br>Structural Concrete and Commentary          |
| ACI 318M     | (1995) Building Code Requirements for<br>Structural Concrete and Commentary (Metric) |

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

- |                   |  |
|-------------------|--|
| ASTM A 185        | (1997) Steel Welded Wire Fabric, Plain, for<br>Concrete Reinforcement                      |
| ASTM A 496        | (1997) Steel Wire, Deformed, for Concrete<br>Reinforcement                                 |
| ASTM A 497        | (1997) Steel Welded Wire Fabric, Deformed,<br>for Concrete Reinforcement                   |
| ASTM A 615/A 615M | (1996a) Deformed and Plain Billet-Steel Bars<br>for Concrete Reinforcement                 |
| ASTM A 706/A 706M | (1998) Low-Alloy Steel Deformed and Plain<br>Bars for Concrete Reinforcement               |
| ASTM A 884/A 884M | (1996a <sup>el</sup> ) Epoxy-Coated Steel Wire and Welded<br>Wire Fabric for Reinforcement |
| ASTM C 1116       | (1995) Fiber-Reinforced Concrete and<br>Shotcrete  |

CONCRETE REINFORCING STEEL INSTITUTE (CRSI)

- |            |                                    |
|------------|------------------------------------|
| CRSI MSP-1 | (1996) Manual of Standard Practice |
|------------|------------------------------------|

1.2 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only. When used, a designation following the "G" designation identifies the office that will review the submittal for the Government. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

## SD-02 Shop Drawings

### Reinforcement; G

Detail drawings showing reinforcing steel placement, schedules, sizes, grades, and splicing and bending details. Drawings shall show support details including types, sizes and spacing.

## 1.3 DELIVERY AND STORAGE

Reinforcement and accessories shall be stored off the ground on platforms, skids, or other supports.

## PART 2 PRODUCTS

### 2.1 REINFORCING STEEL

Reinforcing steel shall be deformed bars conforming to ASTM A 615/A 615M or ASTM A 706/A 706M, grades and sizes as indicated.

### 2.2 WELDED WIRE FABRIC

Welded wire fabric shall conform to ASTM A 185. When directed by the Contracting Officer for special applications, welded wire fabric shall conform to ASTM A 884/A 884M.

### 2.3 WIRE TIES

Wire ties shall be 16 gauge or heavier black annealed steel wire.

### 2.4 SUPPORTS

Bar supports for formed surfaces shall be designed and fabricated in accordance with CRSI MSP-1 and shall be steel or precast concrete blocks. Precast concrete blocks shall have wire ties and shall be not less than 100 by 100 mm when supporting reinforcement on ground. Precast concrete block shall have compressive strength equal to that of the surrounding concrete. Where concrete formed surfaces will be exposed to weather or where surfaces are to be painted, steel supports within 13 mm of concrete surface shall be galvanized, plastic protected or of stainless steel. Concrete supports used in concrete exposed to view shall have the same color and texture as the finish surface. For slabs on grade, supports shall be precast concrete blocks, plastic coated steel fabricated with bearing plates, or specifically designed wire-fabric supports fabricated of plastic.

## PART 3 EXECUTION

### 3.1 REINFORCEMENT

Reinforcement shall be fabricated to shapes and dimensions shown and shall conform to the requirements of ACI 318M. Reinforcement shall be cold bent unless otherwise authorized. Bending may be accomplished in the field or at the mill. Bars shall not be bent after embedment in concrete. Safety caps shall be placed on all exposed ends of vertical concrete reinforcement bars



that pose a danger to life safety. Wire tie ends shall face away from the forms.

### 3.1.1 Placement

Reinforcement shall be free from loose rust and scale, dirt, oil, or other deleterious coating that could reduce bond with the concrete. Reinforcement shall be placed in accordance with ACI 318M at locations shown plus or minus one bar diameter. Reinforcement shall not be continuous through expansion joints and shall be as indicated through construction or contraction joints. Concrete coverage shall be as indicated or as required by ACI 318M. If bars are moved more than one bar diameter to avoid interference with other reinforcement, conduits or embedded items, the resulting arrangement of bars, including additional bars required to meet structural requirements, shall be approved before concrete is placed.

### 3.1.2 Splicing

Splices of reinforcement shall conform to ACI 318M and shall be made only as required or indicated. Splicing shall be by lapping or by mechanical connection; except that lap splices shall not be used for bars larger than No. 11 unless otherwise indicated. Lapped bars shall be placed in contact and securely tied or spaced transversely apart to permit the embedment of the entire surface of each bar in concrete. Lapped bars shall not be spaced farther apart than one-fifth the required length of lap or 150 mm. Mechanical butt splices shall be in accordance with the recommendation of the manufacturer of the mechanical splicing device. Butt splices shall develop 125 percent of the specified minimum yield tensile strength of the spliced bars or of the smaller bar in transition splices. Bars shall be flame dried before butt splicing.

## 3.2 WELDED-WIRE FABRIC PLACEMENT

Welded-wire fabric shall be placed in slabs as indicated. Fabric placed in slabs on grade shall be continuous between expansion, construction, and contraction joints. Fabric placement at joints shall be as indicated. Lap splices shall be made in such a way that the overlapped area equals the distance between the outermost crosswires plus 50 mm. Laps shall be staggered to avoid continuous laps in either direction. Fabric shall be wired or clipped together at laps at intervals not to exceed 1.2 m. Fabric shall be positioned by the use of supports.

## 3.3 DOWEL INSTALLATION

Dowels shall be installed in slabs on grade at locations indicated and at right angles to joint being doweled. Dowels shall be accurately positioned and aligned parallel to the finished concrete surface before concrete placement. Dowels shall be rigidly supported during concrete placement. One end of dowels shall be coated with a bond breaker.

01062/BERGER/ABAM  
FY02 Tactical Equipment Complex  
Fort Lewis, Washington

#### 3.4 SPECIAL INSPECTION AND TESTING FOR SEISMIC-RESISTING SYSTEMS

Special inspections and testing for seismic-resisting systems and components shall be done in accordance with Section 01452 SPECIAL INSPECTION FOR SEISMIC-RESISTING SYSTEMS.

-- End of Section --

SECTION 03300

CAST-IN-PLACE STRUCTURAL CONCRETE

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by basic designation only.

ACI INTERNATIONAL (ACI)

ACI 117/117R	(1990; Errata) Standard Tolerances for Concrete Construction and Materials
ACI 211.1	(1991) Standard Practice for Selecting Proportions for Normal, Heavyweight, and Mass Concrete
ACI 211.2	(1998) Standard Practice for Selecting Proportions for Structural Lightweight Concrete
ACI 213R	(1987) Guide for Structural Lightweight Aggregate Concrete
ACI 214.3R	(1988) Simplified Version of the Recommended Practice for Evaluation of Strength Test Results of Concrete
ACI 301	(1996) Standard Specifications for Structural Concrete
ACI 303R	(1991) Guide to Cast-In-Place Architectural Concrete Practice
ACI 305R	(1991) Hot Weather Concreting
ACI 318/318R	(1999) Building Code Requirements for Structural Concrete and Commentary

AMERICAN ASSOCIATION OF STATE HIGHWAY AND TRANSPORTATION OFFICIALS  
(AASHTO)

AASHTO M 182	(1991; R 1996) Burlap Cloth Made From Jute or Kenaf
--------------	---

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM C 31/C 31M	(1998) Making and Curing Concrete Test Specimens in the Field
-----------------	---

ASTM C 33	(19999a) Concrete Aggregates
ASTM C 39	(1996) Compressive Strength of Cylindrical Concrete Specimens
ASTM C 42	(1999) Obtaining and Testing Drilled Cores and Sawed Beams of Concrete
ASTM C 78	(1994) Flexural Strength of Concrete (Using Simple Beam With Third-Point Loading)
ASTM C 94	(1999) Ready-Mixed Concrete
ASTM C 131	(1996) Resistance to Degradation of Small-Size Coarse Aggregate by Abrasion and Impact in the Los Angeles Machine
ASTM C 136	(1996a) Sieve Analysis of Fine and Coarse Aggregates
ASTM C 143	(1998) Slump of Hydraulic Cement Concrete
ASTM C 150	(1998a) Portland Cement
ASTM C 171	(1997a) Sheet Materials for Curing Concrete
ASTM C 172	(1999) Sampling Freshly Mixed Concrete
ASTM C 173	(1994ael) Air Content of Freshly Mixed Concrete by the Volumetric Method
ASTM C 192/C 192M	(1998) Making and Curing Concrete Test Specimens in the Laboratory
ASTM C 231	(1997el) Air Content of Freshly Mixed Concrete by the Pressure Method
ASTM C 260	(1998) Air-Entraining Admixtures for Concrete
ASTM C 309	(1998a) Liquid Membrane-Forming Compounds for Curing Concrete
ASTM C 330	(1999) Lightweight Aggregates for Structural Concrete
ASTM C 494	(1999) Chemical Admixtures for Concrete
ASTM C 496	(1996) Splitting Tensile Strength of Cylindrical Concrete Specimens
ASTM C 552	(1991) Cellular Glass Thermal Insulation
ASTM C 567	(1999a) Unit Weight of Structural Lightweight Concrete

ASTM C 578	(1995) Rigid, Cellular Polystyrene Thermal Insulation
ASTM C 591	(1994) Unfaced Preformed Rigid Cellular Polyisocyanurate Thermal Insulation
ASTM C 595	(1998) Blended Hydraulic Cements
ASTM C 595M	(1997) Blended Hydraulic Cements (Metric)
ASTM C 618	(1999) Coal Fly Ash and Raw or Calcined Natural Pozzolan for Use as a Mineral Admixture in Concrete
ASTM C 685	(1998a) Concrete Made by Volumetric Batching and Continuous Mixing
ASTM C 881	(1999) Epoxy-Resin-Base Bonding Systems for Concrete
ASTM C 937	(1997) Grout Fluidifier for Preplaced-Aggregate Concrete
ASTM C 940	(1998a) Expansion and Bleeding of Freshly Mixed Grouts for Preplaced-Aggregate Concrete in the Laboratory
ASTM C 989	(1999) Ground Granulated Blast-Furnace Slag for Use in Concrete and Mortars
ASTM C 1017	(1998) Chemical Admixtures for Use in Producing Flowing Concrete
ASTM C 1059	(1999) Latex Agents for Bonding Fresh to Hardened Concrete
ASTM C 1064/C 1064M	(1999) Temperature of Freshly Mixed Portland Cement Concrete
ASTM C 1077	(1998) Laboratories Testing Concrete and Concrete Aggregates for Use in Construction and Criteria for Laboratory Evaluation
ASTM C 1107	(1999) Packaged Dry, Hydraulic-Cement Grout (Nonshrink)
ASTM C 1116	(1995) Fiber-Reinforced Concrete and Shotcrete
ASTM C 1240	(1999) Silica Fume for Use as a Mineral Admixture in Hydraulic-Cement Concrete, Mortar and Grout

ASTM D 75	(1987; R 1997) Sampling Aggregates
ASTM D 1751	(1999) Preformed Expansion Joint Filler for Concrete Paving and Structural Construction (Nonextruding and Resilient Bituminous Types)
ASTM D 1752	(1984; R 1996el) Preformed Sponge Rubber and Cork Expansion Joint Fillers for Concrete Paving and Structural Construction
ASTM E 96	(1995) Water Vapor Transmission of Materials
ASTM E 1155	(1996) Determining Floor Flatness and Levelness Using the F-Number System
ASTM E 1155M	(1996) Determining Floor Flatness and Levelness Using the F-Number System (Metric)

CORPS OF ENGINEERS (COE)

COE CRD-C 94	(1995) Surface Retarders
COE CRD-C 104	(1980) Method of Calculation of the Fineness Modulus of Aggregate
COE CRD-C 400	(1963) Requirements for Water for Use in Mixing or Curing Concrete
COE CRD-C 521	(1981) Standard Test Method for Frequency and Amplitude of Vibrators for Concrete
COE CRD-C 540	(1971; R 1981) Standard Specification for Nonbituminous Inserts for Contraction Joints in Portland Cement Concrete Airfield Pavements, Sawable Type
COE CRD-C 572	(1974) Corps of Engineers Specifications for Polyvinylchloride Waterstop

NATIONAL INSTITUTE OF STANDARDS AND TECHNOLOGY (NIST)

NIST HB 44	(1997) NIST Handbook 44: Specifications, Tolerances, and Other Technical Requirements for Weighing and Measuring Devices
------------	--

NATIONAL READY-MIXED CONCRETE ASSOCIATION (NRMCA)

NRMCA CPMB 100	(1996) Concrete Plant Standards
NRMCA TMMB 100	(1994) Truck Mixer Agitator and Front Discharge Concrete Carrier Standards

NRMCA QC 3

(1984) Quality Control Manual: Section 3,  
Plant Certifications Checklist: Certification  
of Ready Mixed Concrete Production Facilities

## 1.2 LUMP SUM CONTRACT

Under this type of contract concrete items will be paid for by lump sum and will not be measured. The work covered by these items consists of furnishing all concrete materials, reinforcement, miscellaneous embedded materials, and equipment, and performing all labor for the forming, manufacture, transporting, placing, finishing, curing, and protection of concrete in these structures.

## 1.3 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only. When used, a designation following the "G" designation identifies the office that will review the submittal for the Government. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

### SD-03 Product Data

#### Mixture Proportions; G

The results of trial mixture design studies along with a statement giving the maximum nominal coarse aggregate size and the proportions of ingredients that will be used in the manufacture of each strength or class of concrete, at least 14 days prior to commencing concrete placing operations. Aggregate weights shall be based on the saturated surface dry condition. The statement shall be accompanied by test results from an approved independent commercial testing laboratory, showing that mixture design studies have been made with materials proposed for the project and that the proportions selected will produce concrete of the qualities indicated. No substitutions shall be made in the materials used in the mixture design studies without additional tests to show that the quality of the concrete is satisfactory.

### SD-06 Test Reports

#### Testing and Inspection for Contractor Quality Control; G

Certified copies of laboratory test reports, including mill tests and all other test data, for Portland cement, blended cement, pozzolan, ground granulated blast furnace slag, silica fume, aggregate, admixtures, and curing compound proposed for use on this project.

### SD-07 Certificates

#### Qualifications; FIO

Written documentation for Contractor Quality Control personnel.

#### 1.4 QUALIFICATIONS

Contractor Quality Control personnel assigned to concrete construction shall be American Concrete Institute (ACI) Certified Workmen in one of the following grades or shall have written evidence of having completed similar qualification programs:

Concrete Field Testing Technician, Grade I  
Concrete Laboratory Testing Technician, Grade I or II  
Concrete Construction Inspector, Level II

Concrete Transportation Construction Inspector or  
Reinforced Concrete Special Inspector, Jointly certified by American Concrete Institute (ACI), Building Official and Code Administrators International (BOCA), International Conference of Building Officials (ICBO), and Southern Building Code Congress International (SBCCI).

The foreman or lead journeyman of the flatwork finishing crew shall have similar qualification for ACI Concrete Flatwork Technician/Finisher or equal, with written documentation.

#### 1.5 GENERAL REQUIREMENTS

##### 1.5.1 Tolerances

Except as otherwise specified herein, tolerances for concrete batching, mixture properties, and construction as well as definition of terms and application practices shall be in accordance with ACI 117/117R. Level and grade tolerance measurements of slabs shall be made as soon as possible after finishing; when forms or shoring are used, the measurements shall be made prior to removal.

##### 1.5.1.1 Floors

For the purpose of this Section the following terminology correlation between ACI 117/117R and this Section shall apply:

Floor Profile Quality Classification From ACI 117/117R	This Section
-----	-----
Conventional Bullfloated	Same
Conventional Straightedged	Same
Flat	Float Finish or Trowel Finish

Levelness tolerance shall not apply where design requires floors to be sloped to drains or sloped for other reasons.

##### 1.5.1.2 Floors by the Straightedge System

The flatness of the floors shall be carefully controlled and the tolerances shall be measured by the straightedge system as specified in paragraph 4.5.7



of ACI 117/117R, using a 3 m straightedge, within 72 hours after floor slab installation and before shores and/or forms are removed. The listed tolerances shall be met at any and every location at which the straightedge can be placed.

Float Finish 6 mm  
Trowel Finish 6 mm

#### 1.5.2 Strength Requirements and w/c Ratio

##### 1.5.2.1 Strength Requirements

Specified compressive strength ( $f'_c$ ) shall be as follows:

#### COMPRESSIVE STRENGTH

#### STRUCTURE OR PORTION OF STRUCTURE

20 MPa at 28 days

Foundations, slab on grade, walls, and ceilings

Concrete slabs on-grade shall have a 28-day flexural strength of 4.5 MPa. Concrete made with high-early strength cement shall have a 7-day strength equal to the specified 28-day strength for concrete made with Type I or II Portland cement. Compressive strength shall be determined in accordance with ASTM C 39. Flexural strength shall be determined in accordance with ASTM C 78.

- a. Evaluation of Concrete Compressive Strength. Compressive strength specimens (152 by 305 mm cylinders) shall be fabricated by the Contractor and laboratory cured in accordance with ASTM C 31/C 31M and tested in accordance with ASTM C 39. The strength of the concrete will be considered satisfactory so long as the average of all sets of three consecutive test results equals or exceeds the specified compressive strength  $f'_c$  and no individual test result falls below the specified strength  $f'_c$  by more than 3.5 MPa. A "test" is defined as the average of two companion cylinders, or if only one cylinder is tested, the results of the single cylinder test. Additional analysis or testing, including taking cores and/or load tests may be required at the Contractor's expense when the strength of the concrete in the structure is considered potentially deficient.
- b. Investigation of Low-Strength Compressive Test Results. When any strength test of standard-cured test cylinders falls below the specified strength requirement by more than 3.5 MPa or if tests of field-cured cylinders indicate deficiencies in protection and curing, steps shall be taken to assure that the load-carrying capacity of the structure is not jeopardized. When the strength of concrete in place is considered potentially deficient, cores shall be obtained and tested in accordance with ASTM C 42. At least three representative cores shall be taken from each member or area of concrete in place that is considered potentially deficient. The location of cores will be determined by the Contracting Officer to least impair the strength of the structure. Concrete in the area represented by the core testing will be considered adequate if the

average strength of the cores is equal to at least 85 percent of the specified strength requirement and if no single core is less than 75 percent of the specified strength requirement. Non-destructive tests (tests other than test cylinders or cores) shall not be used as a basis for acceptance or rejection. The Contractor shall perform the coring and repair the holes. Cores will be tested by the Government.

- c. Load Tests. If the core tests are inconclusive or impractical to obtain or if structural analysis does not confirm the safety of the structure, load tests may be directed by the Contracting Officer in accordance with the requirements of ACI 318/318R. Concrete work evaluated by structural analysis or by results of a load test as being understrength shall be corrected in a manner satisfactory to the Contracting Officer. All investigations, testing, load tests, and correction of deficiencies shall be performed by and at the expense of the Contractor and must be approved by the Contracting Officer, except that if all concrete is found to be in compliance with the drawings and specifications, the cost of investigations, testing, and load tests will be at the expense of the Government.
- d. Evaluation of Concrete Flexural Strength. Flexural strength specimens (beams) shall be fabricated by the Contractor and laboratory cured in accordance with ASTM C 31/C 31M and tested in accordance with ASTM C 78. The strength of the concrete will be considered satisfactory so long as the average of all sets of three consecutive test results equals or exceeds the specified flexural strength and no individual test result falls below the specified flexural strength by more than 350 kPa. A "test" is defined as the average of two companion beams. Additional analysis or testing, including taking cores and/or load tests may be required at the Contractor's expense when the strength of the concrete in the slab is considered potentially deficient.

#### 1.5.2.2 Water-Cement Ratio

Maximum water-cement ratio (w/c) for normal weight concrete shall be as follows:

WATER-CEMENT RATIO, BY WEIGHT	STRUCTURE OR PORTION OF STRUCTURE
0.45	Slabs on grade
0.50	Unless noted otherwise

These w/c's may cause higher strengths than that required above for compressive or flexural strength. The maximum w/c required will be the equivalent w/c as determined by conversion from the weight ratio of water to cement plus pozzolan, silica fume, and ground granulated blast furnace slag (GGBF slag) by the weight equivalency method as described in ACI 211.1. In the case where silica fume or GGBF slag is used, the weight of the silica fume and GGBF slag shall be included in the equations of ACI 211.1 for the term P which is used to denote the weight of pozzolan.

#### 1.5.3 Air Entrainment

Except as otherwise specified for lightweight concrete, all normal weight concrete shall be air entrained to contain between 4 and 7 percent total air, except that when the nominal maximum size coarse aggregate is 19 mm or smaller it shall be between 4.5 and 7.5 percent. Specified air content shall be attained at point of placement into the forms. Air content for normal weight concrete shall be determined in accordance with ASTM C 231.

#### 1.5.4 Slump

Slump of the concrete, as delivered to the point of placement into the forms, shall be within the following limits. Slump shall be determined in accordance with ASTM C 143.

Structural Element	Slump	
	Minimum	Maximum
Walls, columns and beams	50 mm	100 mm
Foundation walls, substructure walls, footings, slabs	25 mm	75 mm
Any structural concrete approved for placement by pumping:		
At pump	50 mm	150 mm
At discharge of line	25 mm	100 mm

When use of a plasticizing admixture conforming to ASTM C 1017 or when a Type F or G high range water reducing admixture conforming to ASTM C 494 is permitted to increase the slump of concrete, concrete shall have a slump of 50 to 100 mm before the admixture is added and a maximum slump of 200 mm at the point of delivery after the admixture is added. For troweled floors, slump of structural lightweight concrete with normal weight sand placed by pump shall not exceed 125 mm at the point of placement. For other slabs, slump of lightweight concrete shall not exceed 100 mm at point of placement.

#### 1.5.5 Concrete Temperature

The temperature of the concrete as delivered shall not exceed 32 degrees C. When the ambient temperature during placing is 5 degrees C or less, or is expected to be at any time within 6 hours after placing, the temperature of the concrete as delivered shall be between 12 and 25 degrees C.

#### 1.5.6 Size of Coarse Aggregate

The largest feasible nominal maximum size aggregate (NMSA) specified in paragraph AGGREGATES shall be used in each placement. However, nominal maximum size of aggregate shall not exceed any of the following: three-fourths of the minimum cover for reinforcing bars, three-fourths of the minimum clear spacing between reinforcing bars, one-fifth of the narrowest

dimension between sides of forms, or one-third of the thickness of slabs or toppings.

#### 1.5.7 Special Properties and Products

Concrete may contain admixtures other than air entraining agents, such as water reducers, superplasticizers, or set retarding agents to provide special properties to the concrete, if specified or approved. Any of these materials to be used on the project shall be used in the mix design studies.

#### 1.6 MIXTURE PROPORTIONS

Concrete shall be composed of Portland cement, other cementitious and pozzolanic materials as specified, aggregates, water and admixtures as specified.

##### 1.6.1 Proportioning Studies for Normal Weight Concrete

Trial design batches, mixture proportioning studies, and testing requirements for various classes and types of concrete specified shall be the responsibility of the Contractor. Except as specified for flexural strength concrete, mixture proportions shall be based on compressive strength as determined by test specimens fabricated in accordance with ASTM C 192/C 192M and tested in accordance with ASTM C 39. Samples of all materials used in mixture proportioning studies shall be representative of those proposed for use in the project and shall be accompanied by the manufacturer's or producer's test reports indicating compliance with these specifications. Trial mixtures having proportions, consistencies, and air content suitable for the work shall be made based on methodology described in ACI 211.1, using at least three different water-cement ratios for each type of mixture, which will produce a range of strength encompassing those required for each class and type of concrete required on the project. The maximum water-cement ratios required in subparagraph Water-Cement Ratio will be the equivalent water-cement ratio as determined by conversion from the weight ratio of water to cement plus pozzolan, silica fume, and ground granulated blast furnace slag (GGBF slag) by the weight equivalency method as described in ACI 211.1. In the case where silica fume or GGBF slag is used, the weight of the silica fume and GGBF slag shall be included in the equations in ACI 211.1 for the term P, which is used to denote the weight of pozzolan. If pozzolan is used in the concrete mixture, the minimum pozzolan content shall be 15 percent by weight of the total cementitious material, and the maximum shall be 35 percent. Laboratory trial mixtures shall be designed for maximum permitted slump and air content. Separate sets of trial mixture studies shall be made for each combination of cementitious materials and each combination of admixtures proposed for use. No combination of either shall be used until proven by such studies, except that, if approved in writing and otherwise permitted by these specifications, an accelerator or a retarder may be used without separate trial mixture study. Separate trial mixture studies shall also be made for concrete for any conveying or placing method proposed which requires special properties and for concrete to be placed in unusually difficult placing locations. The temperature of concrete in each trial batch shall be reported. For each water-cement ratio, at least three test cylinders for each test age shall be made and cured in accordance with ASTM C 192/C 192M.

They shall be tested at 7 and 28 days in accordance with ASTM C 39. From these test results, a curve shall be plotted showing the relationship between water-cement ratio and strength for each set of trial mix studies. In addition, a curve shall be plotted showing the relationship between 7 day and 28 day strengths. Each mixture shall be designed to promote easy and suitable concrete placement, consolidation and finishing, and to prevent segregation and excessive bleeding.

#### 1.6.2 Proportioning Studies for Flexural Strength Concrete

Trial design batches, mixture proportioning studies, and testing requirements shall conform to the requirements specified in paragraph Proportioning Studies for Normal Weight Concrete, except that proportions shall be based on flexural strength as determined by test specimens (beams) fabricated in accordance with ASTM C 192/C 192M and tested in accordance with ASTM C 78. Procedures given in ACI 211.1 shall be modified as necessary to accommodate flexural strength.

#### 1.6.4 Average Compressive Strength Required for Mixtures

The mixture proportions selected during mixture design studies shall produce a required average compressive strength ( $f'_{cr}$ ) exceeding the specified compressive strength ( $f'_c$ ) by the amount indicated below. This required average compressive strength,  $f'_{cr}$ , will not be a required acceptance criteria during concrete production. However, whenever the daily average compressive strength at 28 days drops below  $f'_{cr}$  during concrete production, or daily average 7-day strength drops below a strength correlated with the 28-day  $f'_{cr}$ , the mixture shall be adjusted, as approved, to bring the daily average back up to  $f'_{cr}$ . During production, the required  $f'_{cr}$  shall be adjusted, as appropriate, based on the standard deviation being attained on the job.

##### 1.6.4.1 Computations from Test Records

Where a concrete production facility has test records, a standard deviation shall be established in accordance with the applicable provisions of ACI 214.3R. Test records from which a standard deviation is calculated shall represent materials, quality control procedures, and conditions similar to those expected; shall represent concrete produced to meet a specified strength or strengths ( $f'_c$ ) within 7 MPa of that specified for proposed work; and shall consist of at least 30 consecutive tests. A strength test shall be the average of the strengths of two cylinders made from the same sample of concrete and tested at 28 days. Required average compressive strength  $f'_{cr}$  used as the basis for selection of concrete proportions shall be the larger of the equations that follow using the standard deviation as determined above:

$$f'_{cr} = f'_c + 1.34S \text{ where units are in MPa}$$

$$f'_{cr} = f'_c + 2.33S - 3.45 \text{ where units are in MPa}$$

Where S = standard deviation

Where a concrete production facility does not have test records meeting the requirements above but does have a record based on 15 to 29 consecutive tests, a standard deviation shall be established as the product of the calculated standard deviation and a modification factor from the following table:

NUMBER OF TESTS	MODIFICATION FACTOR FOR STANDARD DEVIATION
15	1.16
20	1.08
25	1.03
30 or more	1.00

#### 1.6.4.2 Computations without Previous Test Records

When a concrete production facility does not have sufficient field strength test records for calculation of the standard deviation, the required average strength  $f'_{cr}$  shall be determined as follows:

- a. If the specified compressive strength  $f'_c$  is less than 20 MPa,  
$$f'_{cr} = f'_c + 6.9 \text{ MPa}$$
- b. If the specified compressive strength  $f'_c$  is 20 to 35 MPa,  
$$f'_{cr} = f'_c + 8.3 \text{ MPa}$$
- c. If the specified compressive strength  $f'_c$  is over 35 MPa,  
$$f'_{cr} = f'_c + 9.7 \text{ MPa}$$

#### 1.9.5 Average Flexural Strength Required for Mixtures

The mixture proportions selected during mixture design studies for flexural strength mixtures and the mixture used during concrete production shall be designed and adjusted during concrete production as approved, except that the overdesign for average flexural strength shall simply be 15 percent greater than the specified flexural strength at all times.

#### 1.7 STORAGE OF MATERIALS

Cement and other cementitious materials shall be stored in weathertight buildings, bins, or silos which will exclude moisture and contaminants and keep each material completely separated. Aggregate stockpiles shall be arranged and used in a manner to avoid excessive segregation and to prevent contamination with other materials or with other sizes of aggregates. Aggregate shall not be stored directly on ground unless a sacrificial layer is left undisturbed. Reinforcing bars and accessories shall be stored above the ground on platforms, skids or other supports. Other materials shall be stored in such a manner as to avoid contamination and deterioration. Admixtures which have been in storage at the project site for longer than 6 months or which have been subjected to freezing shall not be used unless retested and proven to meet the specified requirements. Materials shall be

capable of being accurately identified after bundles or containers are opened.

#### 1.8 GOVERNMENT ASSURANCE INSPECTION AND TESTING

Day-to day inspection and testing shall be the responsibility of the Contractor Quality Control (CQC) staff. However, representatives of the Contracting Officer can and will inspect construction as considered appropriate and will monitor operations of the Contractor's CQC staff. Government inspection or testing will not relieve the Contractor of any of his CQC responsibilities.

##### 1.8.1 Materials

The Government will sample and test aggregates, cementitious materials, other materials, and concrete to determine compliance with the specifications as considered appropriate. The Contractor shall provide facilities and labor as may be necessary for procurement of representative test samples. Samples of aggregates will be obtained at the point of batching in accordance with ASTM D 75. Other materials will be sampled from storage at the jobsite or from other locations as considered appropriate. Samples may be placed in storage for later testing when appropriate.

##### 1.8.2 Fresh Concrete

Fresh concrete will be sampled as delivered in accordance with ASTM C 172 and tested in accordance with these specifications, as considered necessary.

##### 1.8.3 Hardened Concrete

Tests on hardened concrete will be performed by the Government when such tests are considered necessary.

##### 1.8.4 Inspection

Concrete operations may be tested and inspected by the Government as the project progresses. Failure to detect defective work or material will not prevent rejection later when a defect is discovered nor will it obligate the Government for final acceptance.

#### PART 2 PRODUCTS

##### 2.1 CEMENTITIOUS MATERIALS

Cementitious Materials shall be Portland cement in combination with pozzolan and shall conform to appropriate specifications listed below. Use of cementitious materials in concrete which will have surfaces exposed in the completed structure shall be restricted so there is no change in color, source, or type of cementitious material.

##### 2.1.1 Portland Cement

ASTM C 150, Type I low alkali with a maximum 15 percent amount of tricalcium aluminate, or Type II low alkali. White Portland cement shall meet the

above requirements except that it may be Type I, Type II or Type III low alkali. White Type III shall be used only in specific areas of the structure, when approved in writing.

#### 2.1.2 Pozzolan (Fly Ash)

ASTM C 618, Class F with the optional requirements for multiple factor, drying shrinkage, and uniformity from Table 2A of ASTM C 618. Requirement for maximum alkalies from Table 1A of ASTM C 618 shall apply. If pozzolan is used, it shall never be less than 15 percent nor more than 35 percent by weight of the total cementitious material.

### 2.2 AGGREGATES

Aggregates shall conform to the following.

#### 2.2.1 Fine Aggregate

Fine aggregate shall conform to the quality and gradation requirements of ASTM C 33.

#### 2.2.2 Coarse Aggregate

Coarse aggregate shall conform to ASTM C 33, Class 5S, size designation normal weight aggregate.

### 2.3 CHEMICAL ADMIXTURES

Chemical admixtures, when required or permitted, shall conform to the appropriate specification listed. Admixtures shall be furnished in liquid form and of suitable concentration for easy, accurate control of dispensing.

#### 2.3.1 Air-Entraining Admixture

ASTM C 260 and shall consistently entrain the air content in the specified ranges under field conditions.

#### 2.3.2 Accelerating Admixture

ASTM C 494, Type C or E, except that calcium chloride or admixtures containing calcium chloride shall not be used.

#### 2.3.3 Water-Reducing or Retarding Admixture

ASTM C 494, Type A, B, or D, except that the 6-month and 1-year compressive and flexural strength tests are waived.

### 2.4 CURING MATERIALS

#### 2.4.1 Impervious-Sheet

Impervious-sheet materials shall conform to ASTM C 171, type optional, except, that polyethylene sheet shall not be used.



#### 2.4.2 Membrane-Forming Compound

Membrane-Forming curing compound shall conform to ASTM C 309, Type 1-D or 2, except that only a styrene acrylate or chlorinated rubber compound meeting Class B requirements shall be used for surfaces that are to be painted or are to receive bituminous roofing, or waterproofing, or floors that are to receive adhesive applications of resilient flooring. The curing compound selected shall be compatible with any subsequent paint, roofing, waterproofing, or flooring specified. Nonpigmented compound shall contain a fugitive dye, and shall have the reflective requirements in ASTM C 309 waived.

#### 2.4.3 Burlap and Cotton Mat

Burlap and cotton mat used for curing shall conform to AASHTO M 182.

#### 2.5 WATER

Water for mixing and curing shall be fresh, clean, potable, and free of injurious amounts of oil, acid, salt, or alkali, except that non-potable water may be used if it meets the requirements of COE CRD-C 400.

#### 2.6 NONSHRINK GROUT

Nonshrink grout shall conform to ASTM C 1107, Grade A, and shall be a commercial formulation suitable for the proposed application.

#### 2.7 LATEX BONDING AGENT

Latex agents for bonding fresh to hardened concrete shall conform to ASTM C 1059.

#### 2.8 EPOXY RESIN

Epoxy resins for use in repairs shall conform to ASTM C 881, Type V, Grade 2. Class as appropriate to the existing ambient and surface temperatures.

#### 2.9 EMBEDDED ITEMS

Embedded items shall be of the size and type indicated or as needed for the application. Inserts for shelf angles and bolt hangers shall be of malleable iron or cast or wrought steel.

#### 2.10 PERIMETER INSULATION

Perimeter insulation shall be polystyrene conforming to ASTM C 578, Type II; polyurethane conforming to ASTM C 591, Type II; or cellular glass conforming to ASTM C 552, Type I or IV.

#### 2.11 VAPOR BARRIER

Vapor barrier shall be polyethylene sheeting with a minimum thickness of 0.15 mm or other equivalent material having a vapor permeance rating not

exceeding 30 nanograms per Pascal per second per square meter as determined in accordance with ASTM E 96.

## 2.12 JOINT MATERIALS

### 2.12.1 Joint Fillers, Sealers, and Waterstops

Expansion joint fillers shall be preformed materials conforming to ASTM D 1751. Materials for and sealing of joints shall conform to the requirements of Section 07900 JOINT SEALING.

### 2.12.2 Contraction Joints in Slabs

Sawable type contraction joint inserts shall conform to COE CRD-C 540. Nonsawable joint inserts shall have sufficient stiffness to permit placement in plastic concrete without undue deviation from a straight line and shall conform to the physical requirements of COE CRD-C 540, with the exception of Section 3.4 "Resistance to Sawing". Plastic inserts shall be polyvinyl chloride conforming to the materials requirements of COE CRD-C 572.

## PART 3 EXECUTION

### 3.1 PREPARATION FOR PLACING

Before commencing concrete placement, the following shall be performed. Surfaces to receive concrete shall be clean and free from frost, ice, mud, and water. Forms shall be in place, cleaned, coated, and adequately supported, in accordance with Section 03100 STRUCTURAL CONCRETE FORMWORK. Reinforcing steel shall be in place, cleaned, tied, and adequately supported, in accordance with Section 03200 CONCRETE REINFORCEMENT. Transporting and conveying equipment shall be in-place, ready for use, clean, and free of hardened concrete and foreign material. Equipment for consolidating concrete shall be at the placing site and in proper working order. Equipment and material for curing and for protecting concrete from weather or mechanical damage shall be at the placing site, in proper working condition and in sufficient amount for the entire placement. When hot, windy conditions during concreting appear probable, equipment and material shall be at the placing site to provide windbreaks, shading, fogging, or other action to prevent plastic shrinkage cracking or other damaging drying of the concrete.

#### 3.1.1 Foundations

##### 3.1.1.1 Concrete on Earth Foundations

Earth (subgrade, base, or subbase courses) surfaces upon which concrete is to be placed shall be clean, damp, and free from debris, frost, ice, and standing or running water. Prior to placement of concrete, the foundation shall be well drained and shall be satisfactorily graded and uniformly compacted.

#### 3.1.2.1 Preparation of Previously Placed Concrete

Concrete surfaces to which other concrete is to be bonded shall be abraded in an approved manner that will expose sound aggregate uniformly without damaging the concrete. Laitance and loose particles shall be removed. Surfaces shall be thoroughly washed and shall be moist but without free water when concrete is placed.

#### 3.1.3 Vapor Barrier

Vapor barrier shall be provided beneath the interior on-grade concrete floor slabs. The greatest widths and lengths practicable shall be used to eliminate joints wherever possible. Joints shall be lapped a minimum of 300 mm. Torn, punctured, or damaged vapor barrier material shall be removed and new vapor barrier shall be provided prior to placing concrete. For minor repairs, patches may be made using laps of at least 300 mm. Lapped joints shall be sealed and edges patched with pressure-sensitive adhesive or tape not less than 50 mm wide and compatible with the membrane. Vapor barrier shall be placed directly on underlying subgrade, base course, or capillary water barrier, unless it consists of crushed material or large granular material which could puncture the vapor barrier. In this case, the surface shall be choked with a light layer of sand, as approved, before placing the vapor barrier. A 50 mm layer of compacted, clean concrete sand (fine aggregate) shall be placed on top of the vapor barrier before placing concrete. Concrete placement shall be controlled so as to prevent damage to the vapor barrier, or any covering sand.

#### 3.1.4 Perimeter Insulation

Perimeter insulation shall be installed at locations indicated. Adhesive shall be used where insulation is applied to the interior surface of foundation walls and may be used for exterior application.

#### 3.1.5 Embedded Items

Before placement of concrete, care shall be taken to determine that all embedded items are firmly and securely fastened in place as indicated on the drawings, or required. Conduit and other embedded items shall be clean and free of oil and other foreign matter such as loose coatings or rust, paint, and scale. The embedding of wood in concrete will be permitted only when specifically authorized or directed. Voids in sleeves, inserts, and anchor slots shall be filled temporarily with readily removable materials to prevent the entry of concrete into voids. Welding shall not be performed on embedded metals within 300 mm of the surface of the concrete. Tack welding shall not be performed on or to embedded items.

### 3.2 CONCRETE PRODUCTION, SMALL PROJECTS

Batch-type equipment shall be used for producing concrete. Ready-mixed concrete shall be batched, mixed, and transported in accordance with ASTM C 94, except as otherwise specified. Truck mixers, agitators, and nonagitating transporting units shall comply with NRMCA TMMB 100. Ready-mix plant equipment and facilities shall be certified in accordance with NRMCA QC 3. Approved batch tickets shall be furnished for each load of ready-

mixed concrete. Site-mixed concrete shall be produced in accordance with ACI 301, and plant shall conform to NRMCA CPMB 100.

### 3.3 TRANSPORTING CONCRETE TO PROJECT SITE

Concrete shall be transported to the placing site in truck mixers, agitators.

### 3.4 CONVEYING CONCRETE ON SITE

Concrete shall be conveyed from mixer or transporting unit to forms as rapidly as possible and within the time interval specified by methods which will prevent segregation or loss of ingredients using following equipment. Conveying equipment shall be cleaned before each placement.

#### 3.4.1 Buckets

The interior hopper slope shall be not less than 58 degrees from the horizontal, the minimum dimension of the clear gate opening shall be at least 5 times the nominal maximum-size aggregate, and the area of the gate opening shall not be less than 0.2 square meters. The maximum dimension of the gate opening shall not be greater than twice the minimum dimension. The bucket gates shall be essentially grout tight when closed and may be manually, pneumatically, or hydraulically operated except that buckets larger than 1.5 cubic meters shall not be manually operated. The design of the bucket shall provide means for positive regulation of the amount and rate of deposit of concrete in each dumping position.

#### 3.4.2 Transfer Hoppers

Concrete may be charged into nonagitator hoppers for transfer to other conveying devices. Transfer hoppers shall be capable of receiving concrete directly from delivery vehicles and shall have conical-shaped discharge features. The transfer hopper shall be equipped with a hydraulically operated gate and with a means of external vibration to effect complete discharge. Concrete shall not be held in nonagitator transfer hoppers more than 30 minutes.

#### 3.4.3 Trucks

Truck mixers operating at agitating speed or truck agitators used for transporting plant-mixed concrete shall conform to the requirements of ASTM C 94. Nonagitator equipment shall be used only for transporting plant-mixed concrete over a smooth road and when the hauling time is less than 15 minutes. Bodies of nonagitator equipment shall be smooth, watertight, metal containers specifically designed to transport concrete, shaped with rounded corners to minimize segregation, and equipped with gates that will permit positive control of the discharge of the concrete.

#### 3.4.4 Chutes

When concrete can be placed directly from a truck mixer, agitator, or nonagitator equipment, the chutes normally attached to this equipment by the manufacturer may be used. A discharge deflector shall be used when

required by the Contracting Officer. Separate chutes and other similar equipment will not be permitted for conveying concrete.

#### 3.4.5 Belt Conveyors

Belt conveyors shall be designed and operated to assure a uniform flow of concrete from mixer to final place of deposit without segregation of ingredients or loss of mortar and shall be provided with positive means, such as discharge baffle or hopper, for preventing segregation of the concrete at the transfer points and the point of placing. Belt conveyors shall be constructed such that the idler spacing shall not exceed 900 mm. The belt speed shall be a minimum of 90 meters per minute and a maximum of 225 meters per minute. If concrete is to be placed through installed horizontal or sloping reinforcing bars, the conveyor shall discharge concrete into a pipe or elephant truck that is long enough to extend through the reinforcing bars.

#### 3.4.6 Concrete Pumps

Concrete may be conveyed by positive displacement pump when approved. The pumping equipment shall be piston or squeeze pressure type; pneumatic placing equipment shall not be used. The pipeline shall be rigid steel pipe or heavy-duty flexible hose. The inside diameter of the pipe shall be at least 3 times the nominal maximum-size coarse aggregate in the concrete mixture to be pumped but not less than 100 mm. Aluminum pipe shall not be used.

### 3.5 PLACING CONCRETE

Mixed concrete shall be discharged within 1-1/2 hours or before the mixer drum has revolved 300 revolutions, whichever comes first after the introduction of the mixing water to the cement and aggregates. When the concrete temperature exceeds 30 degrees C, the time shall be reduced to 45 minutes. Concrete shall be placed within 15 minutes after it has been discharged from the transporting unit. Concrete shall be handled from mixer or transporting unit to forms in a continuous manner until the approved unit of operation is completed. Adequate scaffolding, ramps and walkways shall be provided so that personnel and equipment are not supported by in-place reinforcement. Placing will not be permitted when the sun, heat, wind, or limitations of facilities furnished by the Contractor prevent proper consolidation, finishing and curing. Sufficient placing capacity shall be provided so that concrete can be kept free of cold joints.

#### 3.5.1 Depositing Concrete

Concrete shall be deposited as close as possible to its final position in the forms, and there shall be no vertical drop greater than 1.5 meters except where suitable equipment is provided to prevent segregation and where specifically authorized. Depositing of the concrete shall be so regulated that it will be effectively consolidated in horizontal layers not more than 300 mm thick, except that all slabs shall be placed in a single layer. Concrete to receive other construction shall be screeded to the proper level. Concrete shall be deposited continuously in one layer or in layers so that fresh concrete is deposited on in-place concrete that is still

plastic. Fresh concrete shall not be deposited on concrete that has hardened sufficiently to cause formation of seams or planes of weakness within the section. Concrete that has surface dried, partially hardened, or contains foreign material shall not be used. When temporary spreaders are used in the forms, the spreaders shall be removed as their service becomes unnecessary. Concrete shall not be placed in slabs over columns and walls until concrete in columns and walls has been in-place at least two hours or until the concrete begins to lose its plasticity. Concrete for beams, girders, brackets, column capitals, haunches, and drop panels shall be placed at the same time as concrete for adjoining slabs.

### 3.5.2 Consolidation

Immediately after placing, each layer of concrete shall be consolidated by internal vibrators, except for slabs 100 mm thick or less. The vibrators shall at all times be adequate in effectiveness and number to properly consolidate the concrete; a spare vibrator shall be kept at the jobsite during all concrete placing operations. The vibrators shall have a frequency of not less than 10,000 vibrations per minute, an amplitude of at least 0.6 mm, and the head diameter shall be appropriate for the structural member and the concrete mixture being placed. Vibrators shall be inserted vertically at uniform spacing over the area of placement. The distance between insertions shall be approximately 1-1/2 times the radius of action of the vibrator so that the area being vibrated will overlap the adjacent just-vibrated area by a reasonable amount. The vibrator shall penetrate rapidly to the bottom of the layer and at least 150 mm into the preceding layer if there is such. Vibrator shall be held stationary until the concrete is consolidated and then vertically withdrawn slowly while operating. Form vibrators shall not be used unless specifically approved and unless forms are constructed to withstand their use. Vibrators shall not be used to move concrete within the forms. Slabs 100 mm and less in thickness shall be consolidated by properly designed vibrating screeds or other approved technique. Excessive vibration of lightweight concrete resulting in segregation or flotation of coarse aggregate shall be prevented. Frequency and amplitude of vibrators shall be determined in accordance with COE CRD-C 521. Grate tampers ("jitterbugs") shall not be used.

### 3.5.3 Cold Weather Requirements

Special protection measures, approved by the Contracting Officer, shall be used if freezing temperatures are anticipated before the expiration of the specified curing period. The ambient temperature of the air where concrete is to be placed and the temperature of surfaces to receive concrete shall be not less than 5 degrees C. The temperature of the concrete when placed shall be not less than 10 degrees C nor more than 25 degrees C. Heating of the mixing water or aggregates will be required to regulate the concrete placing temperature. Materials entering the mixer shall be free from ice, snow, or frozen lumps. Salt, chemicals or other materials shall not be incorporated in the concrete to prevent freezing. Upon written approval, an accelerating admixture conforming to ASTM C 494, Type C or E may be used, provided it contains no calcium chloride. Calcium chloride shall not be used.

#### 3.5.4 Hot Weather Requirements

When the ambient temperature during concrete placing is expected to exceed 30 degrees C, the concrete shall be placed and finished with procedures previously submitted and as specified herein. The concrete temperature at time of delivery to the forms shall not exceed the temperature shown in the table below when measured in accordance with ASTM C 1064/C 1064M. Cooling of the mixing water or aggregates or placing concrete in the cooler part of the day may be required to obtain an adequate placing temperature. A retarder may be used, as approved, to facilitate placing and finishing. Steel forms and reinforcements shall be cooled as approved prior to concrete placement when steel temperatures are greater than 49 degrees C. Conveying and placing equipment shall be cooled if necessary to maintain proper concrete-placing temperature.

Maximum Allowable Concrete Placing Temperature	
Relative Humidity, Percent, During Time of Concrete Placement	Maximum Allowable Concrete Temperature Degrees
Greater than 60	33 C
40-60	30 C
Less than 40	27 C

#### 3.5.5 Prevention of Plastic Shrinkage Cracking

During hot weather with low humidity, and particularly with appreciable wind, as well as interior placements when space heaters produce low humidity, the Contractor shall be alert to the tendency for plastic shrinkage cracks to develop and shall institute measures to prevent this. Particular care shall be taken if plastic shrinkage cracking is potentially imminent and especially if it has developed during a previous placement. Periods of high potential for plastic shrinkage cracking can be anticipated by use of Fig. 2.1.5 of ACI 305R. In addition the concrete placement shall be further protected by erecting shades and windbreaks and by applying fog sprays of water, sprinkling, ponding or wet covering. Plastic shrinkage cracks that occur shall be filled by injection of epoxy resin as directed, after the concrete hardens. Plastic shrinkage cracks shall never be troweled over or filled with slurry.

#### 3.5.6 Placing Concrete in Congested Areas

Special care shall be used to ensure complete filling of the forms, elimination of all voids, and complete consolidation of the concrete when placing concrete in areas congested with reinforcing bars, embedded items, waterstops and other tight spacing. An appropriate concrete mixture shall be used, and the nominal maximum size of aggregate (NMSA) shall meet the specified criteria when evaluated for the congested area. Vibrators with heads of a size appropriate for the clearances available shall be used, and the consolidation operation shall be closely supervised to ensure complete and thorough consolidation at all points. Where necessary, splices of

reinforcing bars shall be alternated to reduce congestion. Where two mats of closely spaced reinforcing are required, the bars in each mat shall be placed in matching alignment to reduce congestion. Reinforcing bars may be temporarily crowded to one side during concrete placement provided they are returned to exact required location before concrete placement and consolidation are completed.

### 3.5.7 Placing Flowable Concrete

If a plasticizing admixture conforming to ASTM C 1017 is used or if a Type F or G high range water reducing admixture is permitted to increase the slump, the concrete shall meet all requirements of paragraph GENERAL REQUIREMENTS in PART 1. Extreme care shall be used in conveying and placing the concrete to avoid segregation. Consolidation and finishing shall meet all requirements of paragraphs Placing Concrete, Finishing Formed Surfaces, and Finishing Unformed Surfaces. No relaxation of requirements to accommodate flowable concrete will be permitted.

## 3.6 JOINTS

Joints shall be located and constructed as indicated or approved. Joints not indicated on the drawings shall be located and constructed to minimize the impact on the strength of the structure. In general, such joints shall be located near the middle of the spans of supported slabs, beams, and girders unless a beam intersects a girder at this point, in which case the joint in the girder shall be offset a distance equal to twice the width of the beam. Joints in walls and columns shall be at the underside of floors, slabs, beams, or girders and at the tops of footings or floor slabs, unless otherwise approved. Joints shall be perpendicular to the main reinforcement. All reinforcement shall be continued across joints; except that reinforcement or other fixed metal items shall not be continuous through expansion joints, or through construction or contraction joints in slabs on grade. Reinforcement shall be 50 mm clear from each joint. Except where otherwise indicated, construction joints between interior slabs on grade and vertical surfaces shall consist of 1.5 kg per square meter asphalt-saturated felt, extending for the full depth of the slab. The perimeters of the slabs shall be free of fins, rough edges, spalling, or other unsightly appearance. Reservoir for sealant for construction and contraction joints in slabs shall be formed to the dimensions shown on the drawings by removing snap-out joint-forming inserts, by sawing sawable inserts, or by sawing to widen the top portion of sawed joints. Joints to be sealed shall be cleaned and sealed as indicated and in accordance with Section 07900 JOINT SEALING.

### 3.6.1 Construction Joints

For concrete other than slabs on grade, construction joints shall be located so that the unit of operation does not exceed 45 meters. Concrete shall be placed continuously so that each unit is monolithic in construction. Fresh concrete shall not be placed against adjacent hardened concrete until it is at least 24 hours old. Construction joints shall be located as indicated or approved. Where concrete work is interrupted by weather, end of work shift or other similar type of delay, location and type of construction joint shall be subject to approval of the Contracting Officer. Unless otherwise



indicated and except for slabs on grade, reinforcing steel shall extend through construction joints. Construction joints in slabs on grade shall be keyed or doweled as shown. Concrete columns, walls, or piers shall be in place at least 2 hours, or until the concrete begins to lose its plasticity, before placing concrete for beams, girders, or slabs thereon. In walls having door or window openings, lifts shall terminate at the top and bottom of the opening. Other lifts shall terminate at such levels as to conform to structural requirements or architectural details. Where horizontal construction joints in walls or columns are required, a strip of 25 mm square-edge lumber, bevelled and oiled to facilitate removal, shall be tacked to the inside of the forms at the construction joint. Concrete shall be placed to a point 25 mm above the underside of the strip. The strip shall be removed 1 hour after the concrete has been placed, and any irregularities in the joint line shall be leveled off with a wood float, and all laitance shall be removed. Prior to placing additional concrete, horizontal construction joints shall be prepared as specified in paragraph Previously Placed Concrete.

### 3.6.2 Contraction Joints in Slabs on Grade

Contraction joints shall be located and detailed as shown on the drawings. Contraction Joints shall be produced by forming a weakened plane in the concrete slab by use of rigid inserts impressed in the concrete during placing operations use of snap-out plastic joint forming inserts or sawing a continuous slot with a concrete saw. Regardless of method used to produce the weakened plane, it shall be 1/4 the depth of the slab thickness and between 3 and 5 mm wide. For saw-cut joints, cutting shall be timed properly with the set of the concrete. Cutting shall be started as soon as the concrete has hardened sufficiently to prevent raveling of the edges of the saw cut. Cutting shall be completed before shrinkage stresses become sufficient to produce cracking. Reservoir for joint sealant shall be formed as previously specified.

### 3.6.3 Expansion Joints

Installation of expansion joints and sealing of these joints shall conform to the requirements of Section 03150 EXPANSION JOINTS, CONTRACTION JOINTS, AND WATERSTOPS and Section 07900 JOINT SEALING.

### 3.6.5 Dowels and Tie Bars

Dowels and tie bars shall be installed at the locations shown on the drawings and to the details shown, using materials and procedures specified in Section 03200 CONCRETE REINFORCEMENT and herein. Conventional smooth "paving" dowels shall be installed in slabs using approved methods to hold the dowel in place during concreting within a maximum alignment tolerance of 1 mm in 100 mm. "Structural" type deformed bar dowels, or tie bars, shall be installed to meet the specified tolerances. Care shall be taken during placing adjacent to and around dowels and tie bars to ensure there is no displacement of the dowel or tie bar and that the concrete completely embeds the dowel or tie bar and is thoroughly consolidated.

### 3.7 FINISHING FORMED SURFACES

Forms, form materials, and form construction are specified in Section 03100 STRUCTURAL CONCRETE FORMWORK. Finishing of formed surfaces shall be as specified herein. Unless another type of architectural or special finish is specified, surfaces shall be left with the texture imparted by the forms except that defective surfaces shall be repaired. Unless painting of surfaces is required, uniform color of the concrete shall be maintained by use of only one mixture without changes in materials or proportions for any structure or portion of structure that requires a Class A or B finish. Except for major defects, as defined hereinafter, surface defects shall be repaired as specified herein within 24 hours after forms are removed. Repairs of the so-called "plaster-type" will not be permitted in any location. Tolerances of formed surfaces shall conform to the requirements of ACI 117/117R. These tolerances apply to the finished concrete surface, not to the forms themselves; forms shall be set true to line and grade. Form tie holes requiring repair and other defects whose depth is at least as great as their surface diameter shall be repaired as specified in paragraph Damp-Pack Mortar Repair. Defects whose surface diameter is greater than their depth shall be repaired as specified in paragraph Repair of Major Defects. Repairs shall be finished flush with adjacent surfaces and with the same surface texture. The cement used for all repairs shall be a blend of job cement with white cement proportioned so that the final color after curing and aging will be the same as the adjacent concrete. Concrete with excessive honeycomb, or other defects which affect the strength of the member, will be rejected. Repairs shall be demonstrated to be acceptable and free from cracks or loose or drummy areas at the completion of the contract and, for Class A and B Finishes, shall be inconspicuous. Repairs not meeting these requirements will be rejected and shall be replaced.

#### 3.7.1 Class B Finish

Class B finish is required in the following areas: secured storage areas and exposed foundation walls. Fins, ravelings, and loose material shall be removed, all surface defects over 12 mm in diameter or more than 12 mm deep, shall be repaired and, except as otherwise indicated or as specified in Section 03100 STRUCTURAL CONCRETE FORMWORK, holes left by removal of form ties shall be reamed and filled. Defects more than 12 mm in diameter shall be cut back to sound concrete, but in all cases at least 25 mm deep. The Contractor shall prepare a sample panel for approval (as specified in PART 1) before commencing repair, showing that the surface texture and color match will be attained. Metal tools shall not be used to finish repairs in Class A surfaces.

#### 3.7.2 Class D Finish

Class D finish is required unless noted otherwise. Fins, ravelings, and loose material shall be removed, and, except as otherwise indicated or as specified in Section 03100 STRUCTURAL CONCRETE FORMWORK, holes left by removal of form ties shall be reamed and filled. Honeycomb and other defects more than 12 mm deep or more than 50 mm in diameter shall be repaired. Defects more than 50 mm in diameter shall be cut back to sound concrete, but in all cases at least 25 mm deep.

### 3.8 REPAIRS

#### 3.8.1 Damp-Pack Mortar Repair

Form tie holes requiring repair and other defects whose depth is at least as great as their surface diameter but not over 100 mm shall be repaired by the damp-pack mortar method. Form tie holes shall be reamed and other similar defects shall be cut out to sound concrete. The void shall then be thoroughly cleaned, thoroughly wetted, brush-coated with a thin coat of neat cement grout and filled with mortar. Mortar shall be a stiff mix of 1 part Portland cement to 2 parts fine aggregate passing the 1.18 mm sieve, and minimum amount of water. Only sufficient water shall be used to produce a mortar which, when used, will stick together on being molded into a ball by a slight pressure of the hands and will not exude water but will leave the hands damp. Mortar shall be mixed and allowed to stand for 30 to 45 minutes before use with remixing performed immediately prior to use. Mortar shall be thoroughly tamped in place in thin layers using a hammer and hardwood block. Holes passing entirely through walls shall be completely filled from the inside face by forcing mortar through to the outside face. All holes shall be packed full. Damp-pack repairs shall be moist cured for at least 48 hours.

#### 3.8.2 Repair of Major Defects

Major defects will be considered to be those more than 12 mm deep or, for Class B finishes, more than 12 mm in diameter and, for Class D finishes, more than 50 mm in diameter. Also included are any defects of any kind whose depth is over 100 mm or whose surface diameter is greater than their depth. Major defects shall be repaired as specified below.

##### 3.8.2.1 Surface Application of Mortar Repair

Defective concrete shall be removed, and removal shall extend into completely sound concrete. Approved equipment and procedures which will not cause cracking or microcracking of the sound concrete shall be used. If reinforcement is encountered, concrete shall be removed so as to expose the reinforcement for at least 50 mm on all sides. All such defective areas greater than 7800 square mm shall be outlined by saw cuts at least 25 mm deep. Defective areas less than 7800 square mm shall be outlined by a 25 mm deep cut with a core drill in lieu of sawing. All saw cuts shall be straight lines in a rectangular pattern in line with the formwork panels. After concrete removal, the surface shall be thoroughly cleaned by high pressure washing to remove all loose material. Surfaces shall be kept continually saturated for the first 12 of the 24 hours immediately before placing mortar and shall be damp but not wet at the time of commencing mortar placement. The Contractor, at his option, may use either hand-placed mortar or mortar placed with a mortar gun. If hand-placed mortar is used, the edges of the cut shall be perpendicular to the surface of the concrete. The prepared area shall be brush-coated with a thin coat of neat cement grout. The repair shall then be made using a stiff mortar, preshrunk by allowing the mixed mortar to stand for 30 to 45 minutes and then remixed, thoroughly tamped into place in thin layers. If hand-placed mortar is used, the Contractor shall test each repair area for drumminess by firm tapping with a hammer and shall inspect for cracks, both in the presence of the

Contracting Officer's representative, immediately before completion of the contract, and shall replace any showing drumminess or cracking. If mortar placed with a mortar gun is used, the gun shall be a small compressed air-operated gun to which the mortar is slowly hand fed and which applies the mortar to the surface as a high-pressure stream, as approved. Repairs made using shotcrete equipment will not be accepted. The mortar used shall be the same mortar as specified for damp-pack mortar repair. If gun-placed mortar is used, the edges of the cut shall be beveled toward the center at a slope of 1:1. All surface applied mortar repairs shall be continuously moist cured for at least 7 days. Moist curing shall consist of several layers of saturated burlap applied to the surface immediately after placement is complete and covered with polyethylene sheeting, all held closely in place by a sheet of plywood or similar material rigidly braced against it. Burlap shall be kept continually wet.

### 3.9 FINISHING UNFORMED SURFACES

The finish of all unformed surfaces shall meet the requirements of paragraph Tolerances in PART 1, when tested as specified herein.

#### 3.9.1 General

The ambient temperature of spaces adjacent to unformed surfaces being finished and of the base on which concrete will be placed shall be not less than 10 degrees C. In hot weather all requirements of paragraphs Hot Weather Requirements and Prevention of Plastic Shrinkage Cracking shall be met. Unformed surfaces that are not to be covered by additional concrete or backfill shall have a float finish, with additional finishing as specified below, and shall be true to the elevation shown on the drawings. Surfaces to receive additional concrete or backfill shall be brought to the elevation shown on the drawings, properly consolidated, and left true and regular. Unless otherwise shown on the drawings, exterior surfaces shall be sloped for drainage, as directed. Where drains are provided, interior floors shall be evenly sloped to the drains. Joints shall be carefully made with a jointing or edging tool. The finished surfaces shall be protected from stains or abrasions. Grate tampers or "jitterbugs" shall not be used for any surfaces. The dusting of surfaces with dry cement or other materials or the addition of any water during finishing shall not be permitted. If bleedwater is present prior to finishing, the excess water shall be carefully dragged off or removed by absorption with porous materials such as burlap. During finishing operations, extreme care shall be taken to prevent over finishing or working water into the surface; this can cause "crazing" (surface shrinkage cracks which appear after hardening) of the surface. Any slabs with surfaces which exhibit significant crazing shall be removed and replaced. During finishing operations, surfaces shall be checked with a 10 foot straightedge, applied in both directions at regular intervals while the concrete is still plastic, to detect high or low areas.

#### 3.9.2 Floated Finish

Slabs to receive more than a rough slab finish shall next be given a wood float finish. The screeding shall be followed immediately by darbying or bull floating before bleeding water is present, to bring the surface to a true, even plane. Then, after the concrete has stiffened so that it will

withstand a man's weight without imprint of more than 6 mm and the water sheen has disappeared, it shall be floated to a true and even plane free of ridges. Floating shall be performed by use of suitable hand floats or power driven equipment. Sufficient pressure shall be used on the floats to bring a film of moisture to the surface. Hand floats shall be made of wood, magnesium, or aluminum. Lightweight concrete or concrete that exhibits stickiness shall be floated with a magnesium float. Care shall be taken to prevent over-finishing or incorporating water into the surface.

### 3.9.3 Troweled Finish

All floors intended as walking surface or for reception of floor covering shall be given a troweled finish. After floating is complete and after the surface moisture has disappeared, unformed surfaces shall be steel-troweled to a smooth, even, dense finish, free from blemishes including trowel marks. In lieu of hand finishing, an approved power finishing machine may be used in accordance with the directions of the machine manufacturer. Additional trowelings shall be performed, either by hand or machine until the surface has been troweled 2 times, with waiting period between each. Care shall be taken to prevent blistering and if such occurs, troweling shall immediately be stopped and operations and surfaces corrected. A final hard steel troweling shall be done by hand, with the trowel tipped, and using hard pressure, when the surface is at a point that the trowel will produce a ringing sound. The finished surface shall be thoroughly consolidated and shall be essentially free of trowel marks and be uniform in texture and appearance. The concrete mixture used for troweled finished areas shall be adjusted, if necessary, in order to provide sufficient fines (cementitious material and fine sand) to finish properly.

### 3.9.4 Non-Slip Finish

Non-slip floors shall be constructed in accordance with the following subparagraphs.

#### 3.9.4.1 Broomed

All exterior walking surfaces shall be given a broomed finish. After floating, the surface shall be lightly steel troweled, and then carefully scored by pulling a [hair] [coarse fiber] push-type broom across the surface. Brooming shall be transverse to traffic or at right angles to the slope of the slab. After the end of the curing period, the surface shall be vigorously broomed with a coarse fiber broom to remove all loose or semi-detached particles.

### 3.10 EXTERIOR SLAB AND RELATED ITEMS

#### 3.10.1 Pavements

Pavements shall be constructed where shown on the drawings. After forms are set and underlying material prepared as specified, the concrete shall be placed uniformly throughout the area and thoroughly vibrated. As soon as placed and vibrated, the concrete shall be struck off and screeded to the crown and cross section and to such elevation above grade that when consolidated and finished, the surface of the pavement will be at the

required elevation. The entire surface shall be tamped with the strike off, or consolidated with a vibrating screed, and this operation continued until the required compaction and reduction of internal and surface voids are accomplished. Care shall be taken to prevent bringing excess paste to the surface. Immediately following the final consolidation of the surface, the pavement shall be floated longitudinally from bridges resting on the side forms and spanning but not touching the concrete. If necessary, additional concrete shall be placed and screeded, and the float operated until a satisfactory surface has been produced. The floating operation shall be advanced not more than half the length of the float and then continued over the new and previously floated surfaces. After finishing is completed but while the concrete is still plastic, minor irregularities and score marks in the pavement surface shall be eliminated by means of long-handled cutting straightedges. Straightedges shall be 3.75 m in length and shall be operated from the sides of the pavement and from bridges. A straightedge operated from the side of the pavement shall be equipped with a handle 1 m longer than one-half the width of the pavement. The surface shall then be tested for trueness with a 3.75 straightedge held in successive positions parallel and at right angles to the center line of the pavement, and the whole area covered as necessary to detect variations. The straightedge shall be advanced along the pavement in successive stages of not more than one-half the length of the straightedge. Depressions shall be immediately filled with freshly mixed concrete, struck off, consolidated, and refinished. Projections above the required elevation shall also be struck off and refinished. The straightedge testing and finishing shall continue until the entire surface of the concrete is true. Before the surface sheen has disappeared and well before the concrete becomes nonplastic, the surface of the pavement shall be given a nonslip sandy surface texture by use of a burlap drag. A strip of clean, wet burlap from 1.0 to 1.5 m wide and 0.7 m longer than the pavement width shall be carefully pulled across the surface. Edges and joints shall be rounded with an edger having a radius of 3 mm. Curing shall be as specified.

### 3.10.2 Sidewalks

Concrete shall be 100 mm minimum thickness. Contraction joints shall be provided at 1.75 m spaces unless otherwise indicated. Contraction joints shall be cut 25 mm deep with a jointing tool after the surface has been finished. Transverse expansion joints 12 mm thick shall be provided at changes in direction and where sidewalk abuts curbs, steps, rigid pavement, or other similar structures. Sidewalks shall be given a lightly broomed finish. A transverse slope of 1 mm per 50 mm shall be provided, unless otherwise indicated. Variations in cross section shall be limited to 1 mm per 250 mm.

### 3.10.3 Curbs and Gutters

Concrete shall be formed, placed, and finished by hand using a properly shaped "mule" or constructed using a slipform machine specially designed for this work. Contraction joints shall be cut 75 mm deep with a jointing tool after the surface has been finished. Expansion joints (12 mm wide) shall be provided at 35 m maximum spacing unless otherwise indicated. Exposed surfaces shall be finished using a stiff bristled brush.

#### 3.10.4 Pits and Trenches

Pits and trenches shall be constructed as indicated on the drawings. Bottoms and walls shall be placed monolithically or waterstops and keys, shall be provided as approved.

### 3.11 CURING AND PROTECTION

#### 3.11.1 General

Concrete shall be cured by an approved method for the period of time given below:

Concrete with Type III cement	3 days
All other concrete	7 days

Immediately after placement, concrete shall be protected from premature drying, extremes in temperatures, rapid temperature change, mechanical injury and damage from rain and flowing water for the duration of the curing period. Air and forms in contact with concrete shall be maintained at a temperature above 10 degrees C for the first 3 days and at a temperature above 0 degrees C for the remainder of the specified curing period. Exhaust fumes from combustion heating units shall be vented to the outside of the enclosure, and heaters and ducts shall be placed and directed so as not to cause areas of overheating and drying of concrete surfaces or to create fire hazards. Materials and equipment needed for adequate curing and protection shall be available and at the site prior to placing concrete. No fire or excessive heat, including welding, shall be permitted near or in direct contact with the concrete at any time. Except as otherwise permitted by paragraph Membrane Forming Curing Compounds, moist curing shall be provided for any areas to receive floor hardener, any paint or other applied coating, or to which other concrete is to be bonded. Concrete containing silica fume shall be initially cured by fog misting during finishing, followed immediately by continuous moist curing. Except for plastic coated burlap, impervious sheeting alone shall not be used for curing.

#### 3.11.2 Moist Curing

Concrete to be moist-cured shall be maintained continuously wet for the entire curing period, commencing immediately after finishing. If water or curing materials used stain or discolor concrete surfaces which are to be permanently exposed, the concrete surfaces shall be cleaned as approved. When wooden forms are left in place during curing, they shall be kept wet at all times. If steel forms are used in hot weather, nonsupporting vertical forms shall be broken loose from the concrete soon after the concrete hardens and curing water continually applied in this void. If the forms are removed before the end of the curing period, curing shall be carried out as on unformed surfaces, using suitable materials. Surfaces shall be cured by ponding, by continuous sprinkling, by continuously saturated burlap or cotton mats, or by continuously saturated plastic coated burlap. Burlap and mats shall be clean and free from any contamination and shall be completely saturated before being placed on the concrete. The Contractor shall have an approved work system to ensure that moist curing is continuous 24 hours per day.

### 3.11.3 Membrane Forming Curing Compounds

Membrane forming curing compounds shall not be used on surfaces that are to receive any subsequent treatment depending on adhesion or bonding to the concrete, including surfaces to which a smooth finish is to be applied or other concrete to be bonded. However, a styrene acrylate or chlorinated rubber compound meeting ASTM C 309, Class B requirements, may be used for surfaces which are to be painted or are to receive bituminous roofing or waterproofing, or floors that are to receive adhesive applications of resilient flooring. The curing compound selected shall be compatible with any subsequent paint, roofing, waterproofing or flooring specified. Membrane curing compound shall not be used on surfaces that are maintained at curing temperatures with free steam. Curing compound shall be applied to formed surfaces immediately after the forms are removed and prior to any patching or other surface treatment except the cleaning of loose sand, mortar, and debris from the surface. All surfaces shall be thoroughly moistened with water. Curing compound shall be applied to slab surfaces as soon as the bleeding water has disappeared, with the tops of joints being temporarily sealed to prevent entry of the compound and to prevent moisture loss during the curing period. The curing compound shall be applied in a two-coat continuous operation by approved motorized power-spraying equipment operating at a minimum pressure of 500 kPa, at a uniform coverage of not more than 10 cubic meters per L for each coat, and the second coat shall be applied perpendicular to the first coat. Concrete surfaces which have been subjected to rainfall within 3 hours after curing compound has been applied shall be resprayed by the method and at the coverage specified. Surfaces on which clear compound is used shall be shaded from direct rays of the sun for the first 3 days. Surfaces coated with curing compound shall be kept free of foot and vehicular traffic, and from other sources of abrasion and contamination during the curing period.

### 3.11.4 Ponding or Immersion

Concrete shall be continually immersed throughout the curing period. Water shall not be more than 10 degrees C less than the temperature of the concrete.

### 3.11.5 Cold Weather Curing and Protection

When the daily ambient low temperature is less than 0 degrees C the temperature of the concrete shall be maintained above 5 degrees C for the first seven days after placing. During the period of protection removal, the air temperature adjacent to the concrete surfaces shall be controlled so that concrete near the surface will not be subjected to a temperature differential of more than 13 degrees C as determined by suitable temperature measuring devices furnished by the Contractor, as required, and installed adjacent to the concrete surface and 50 mm inside the surface of the concrete. The installation of the thermometers shall be made by the Contractor as directed.

### 3.12 SETTING BASE PLATES AND BEARING PLATES

After being properly positioned, column base plates, bearing plates for beams and similar structural members, and machinery and equipment base



plates shall be set to the proper line and elevation with nonshrink grout is indicated. The thickness of the grout shall be approximately 1/24 the width of the plate, but not less than 20 mm. Concrete and metal surfaces in contact with grout shall be clean and free of oil and grease, and concrete surfaces in contact with grout shall be damp and free of laitance when grout is placed.

#### 3.12.1 Nonshrink Grout

Nonshrink grout shall be a ready-mixed material requiring only the addition of water. Water content shall be the minimum that will provide a flowable mixture and completely fill the space to be grouted without segregation, bleeding, or reduction of strength.

##### 3.12.1.1 Mixing and Placing of Nonshrink Grout

Mixing and placing shall be in conformance with the material manufacturer's instructions and as specified therein. Ingredients shall be thoroughly dry-mixed before adding water. After adding water, the batch shall be mixed for 3 minutes. Batches shall be of size to allow continuous placement of freshly mixed grout. Grout not used within 30 minutes after mixing shall be discarded. The space between the top of the concrete or machinery-bearing surface and the plate shall be filled solid with the grout. Forms shall be of wood or other equally suitable material for completely retaining the grout on all sides and on top and shall be removed after the grout has set. The placed grout shall be carefully worked by rodding or other means to eliminate voids; however, overworking and breakdown of the initial set shall be avoided. Grout shall not be retempered or subjected to vibration from any source. Where clearances are unusually small, placement shall be under pressure with a grout pump. Temperature of the grout, and of surfaces receiving the grout, shall be maintained at 18 to 30 degrees C until after setting.

##### 3.12.1.2 Treatment of Exposed Surfaces

For metal-oxidizing nonshrink grout, exposed surfaces shall be cut back 25 mm and immediately covered with a parge coat of mortar consisting of 1 part Portland cement and 2-1/2 parts fine aggregate by weight, with sufficient water to make a plastic mixture. The parge coat shall have a smooth finish. For other mortars or grouts, exposed surfaces shall have a smooth-dense finish and be left untreated. Curing shall comply with paragraph CURING AND PROTECTION.

#### 3.13 TESTING AND INSPECTION FOR CONTRACTOR QUALITY CONTROL

The Contractor shall perform the inspection and tests described below and, based upon the results of these inspections and tests, shall take the action required and shall submit specified reports. When, in the opinion of the Contracting Officer, the concreting operation is out of control, concrete placement shall cease and the operation shall be corrected. The laboratory performing the tests shall be onsite and shall conform with ASTM C 1077. Materials may be subjected to check testing by the Government from samples obtained at the manufacturer, at transfer points, or at the project site. The Government will inspect the laboratory, equipment, and test procedures

prior to start of concreting operations and at least once per day thereafter for conformance with ASTM C 1077.

### 3.13.1 Grading and Corrective Action

#### 3.13.1.1 Fine Aggregate

At least once during each shift when the concrete plant is operating, there shall be one sieve analysis and fineness modulus determination in accordance with ASTM C 136 and COE CRD-C 104 for the fine aggregate or for each fine aggregate if it is batched in more than one size or classification. The location at which samples are taken may be selected by the Contractor as the most advantageous for control. However, the Contractor is responsible for delivering fine aggregate to the mixer within specification limits. When the amount passing on any sieve is outside the specification limits, the fine aggregate shall be immediately resampled and retested. If there is another failure on any sieve, the fact shall immediately reported to the Contracting Officer, concreting shall be stopped, and immediate steps taken to correct the grading.

#### 3.13.1.2 Coarse Aggregate

At least once during each shift in which the concrete plant is operating, there shall be a sieve analysis in accordance with ASTM C 136 for each size of coarse aggregate. The location at which samples are taken may be selected by the Contractor as the most advantageous for production control. However, the Contractor shall be responsible for delivering the aggregate to the mixer within specification limits. A test record of samples of aggregate taken at the same locations shall show the results of the current test as well as the average results of the five most recent tests including the current test. The Contractor may adopt limits for control coarser than the specification limits for samples taken other than as delivered to the mixer to allow for degradation during handling. When the amount passing any sieve is outside the specification limits, the coarse aggregate shall be immediately resampled and retested. If the second sample fails on any sieve, that fact shall be reported to the Contracting Officer. Where two consecutive averages of 5 tests are outside specification limits, the operation shall be considered out of control and shall be reported to the Contracting Officer. Concreting shall be stopped and immediate steps shall be taken to correct the grading.

### 3.13.2 Quality of Aggregates

Thirty days prior to the start of concrete placement, the Contractor shall perform all tests for aggregate quality required by ASTM C 33. In addition, after the start of concrete placement, the Contractor shall perform tests for aggregate quality at least every three months, and when the source of aggregate or aggregate quality changes. Samples tested after the start of concrete placement shall be taken immediately prior to entering the concrete mixer.

### 3.13.3 Scales, Batching and Recording

The accuracy of the scales shall be checked by test weights prior to start of concrete operations and at least once every three months. Such tests shall also be made as directed whenever there are variations in properties of the fresh concrete that could result from batching errors. Once a week the accuracy of each batching and recording device shall be checked during a weighing operation by noting and recording the required weight, recorded weight, and the actual weight batched. At the same time, the Contractor shall test and ensure that the devices for dispensing admixtures are operating properly and accurately. When either the weighing accuracy or batching accuracy does not comply with specification requirements, the plant shall not be operated until necessary adjustments or repairs have been made. Discrepancies in recording accuracies shall be corrected immediately.

### 3.13.4 Batch-Plant Control

The measurement of concrete materials including cementitious materials, each size of aggregate, water, and admixtures shall be continuously controlled. The aggregate weights and amount of added water shall be adjusted as necessary to compensate for free moisture in the aggregates. The amount of air-entraining agent shall be adjusted to control air content within specified limits. A report shall be prepared indicating type and source of cement used, type and source of pozzolan or slag used, amount and source of admixtures used, aggregate source, the required aggregate and water weights per cubic meter, amount of water as free moisture in each size of aggregate, and the batch aggregate and water weights per cubic meter for each class of concrete batched during each day's plant operation.

### 3.13.5 Concrete Mixture

- a. Air Content Testing. Air content tests shall be made when test specimens are fabricated. In addition, at least two tests for air content shall be made on randomly selected batches of each separate concrete mixture produced during each 8-hour period of concrete production. Additional tests shall be made when excessive variation in workability is reported by the placing foreman or Government inspector. Tests shall be made in accordance with ASTM C 231 for normal weight concrete and ASTM C 173 for lightweight concrete. Test results shall be plotted on control charts which shall at all times be readily available to the Government and shall be submitted weekly. Copies of the current control charts shall be kept in the field by testing crews and results plotted as tests are made. When a single test result reaches either the upper or lower action limit, a second test shall immediately be made. The results of the two tests shall be averaged and this average used as the air content of the batch to plot on both the air content and the control chart for range, and for determining need for any remedial action. The result of each test, or average as noted in the previous sentence, shall be plotted on a separate control chart for each mixture on which an "average line" is set at the midpoint of the specified air content range from paragraph Air Entrainment. An upper warning limit and a lower warning limit line shall be set 1.0 percentage point above and below the average line, respectively.

An upper action limit and a lower action limit line shall be set 1.5 percentage points above and below the average line, respectively. The range between each two consecutive tests shall be plotted on a secondary control chart for range where an upper warning limit is set at 2.0 percentage points and an upper action limit is set at 3.0 percentage points. Samples for air content may be taken at the mixer, however, the Contractor is responsible for delivering the concrete to the placement site at the stipulated air content. If the Contractor's materials or transportation methods cause air content loss between the mixer and the placement, correlation samples shall be taken at the placement site as required by the Contracting Officer, and the air content at the mixer controlled as directed.

- b. Air Content Corrective Action. Whenever points on the control chart for percent air reach either warning limit, an adjustment shall immediately be made in the amount of air-entraining admixture batched. As soon as practical after each adjustment, another test shall be made to verify the result of the adjustment. Whenever a point on the secondary control chart for range reaches the warning limit, the admixture dispenser shall be recalibrated to ensure that it is operating accurately and with good reproducibility. Whenever a point on either control chart reaches an action limit line, the air content shall be considered out of control and the concreting operation shall immediately be halted until the air content is under control. Additional air content tests shall be made when concreting is restarted.
- c. Slump Testing. In addition to slump tests which shall be made when test specimens are fabricated, at least four slump tests shall be made on randomly selected batches in accordance with ASTM C 143 for each separate concrete mixture produced during each 8-hour or less period of concrete production each day. Also, additional tests shall be made when excessive variation in workability is reported by the placing foreman or Government inspector. Test results shall be plotted on control charts which shall at all times be readily available to the Government and shall be submitted weekly. Copies of the current control charts shall be kept in the field by testing crews and results plotted as tests are made. When a single slump test reaches or goes beyond either the upper or lower action limit, a second test shall immediately be made. The results of the two tests shall be averaged and this average used as the slump of the batch to plot on both the control charts for slump and the chart for range, and for determining need for any remedial action. Limits shall be set on separate control charts for slump for each type of mixture. The upper warning limit shall be set at 12.5 mm below the maximum allowable slump specified in paragraph Slump in PART 1 for each type of concrete and an upper action limit line and lower action limit line shall be set at the maximum and minimum allowable slumps, respectively, as specified in the same paragraph. The range between each consecutive slump test for each type of mixture shall be plotted on a single control chart for range on which an upper action limit is set at 50 mm. Samples for slump shall be taken at the mixer. However, the Contractor is

responsible for delivering the concrete to the placement site at the stipulated slump. If the Contractor's materials or transportation methods cause slump loss between the mixer and the placement, correlation samples shall be taken at the placement site as required by the Contracting Officer, and the slump at the mixer controlled as directed.

- d. Slump Corrective Action. Whenever points on the control charts for slump reach the upper warning limit, an adjustment shall immediately be made in the batch weights of water and fine aggregate. The adjustments are to be made so that the total water content does not exceed that amount allowed by the maximum w/c ratio specified, based on aggregates which are in a saturated surface dry condition. When a single slump reaches the upper or lower action limit, no further concrete shall be delivered to the placing site until proper adjustments have been made. Immediately after each adjustment, another test shall be made to verify the correctness of the adjustment. Whenever two consecutive individual slump tests, made during a period when there was no adjustment of batch weights, produce a point on the control chart for range at or above the upper action limit, the concreting operation shall immediately be halted, and the Contractor shall take appropriate steps to bring the slump under control. Additional slump tests shall be made as directed.
- e. Temperature. The temperature of the concrete shall be measured when compressive strength specimens are fabricated. Measurement shall be in accordance with ASTM C 1064/C 1064M. The temperature shall be reported along with the compressive strength data.
- f. Strength Specimens. At least one set of test specimens shall be made, for compressive or flexural strength as appropriate, on each different concrete mixture placed during the day for each 380 cubic meters or portion thereof of that concrete mixture placed each day. Additional sets of test specimens shall be made, as directed by the Contracting Officer, when the mixture proportions are changed or when low strengths have been detected. A truly random (not haphazard) sampling plan shall be developed by the Contractor and approved by the Contracting Officer prior to the start of construction. The plan shall assure that sampling is done in a completely random and unbiased manner. A set of test specimens for concrete with a 28-day specified strength per paragraph Strength Requirements in PART 1 shall consist of four specimens, two to be tested at 7 days and two at 28 days. Test specimens shall be molded and cured in accordance with ASTM C 31/C 31M and tested in accordance with ASTM C 39 for test cylinders and ASTM C 78 for test beams. Results of all strength tests shall be reported immediately to the Contracting Officer. Quality control charts shall be kept for individual strength "tests", ("test" as defined in paragraph Strength Requirements in PART 1) moving average of last 3 "tests" for strength, and moving average for range for the last 3 "tests" for each mixture. The charts shall be similar to those found in ACI 214.3R.

### 3.13.6 Inspection Before Placing

Foundations, construction joints, forms, and embedded items shall be inspected by the Contractor in sufficient time prior to each concrete placement in order to certify to the Contracting Officer that they are ready to receive concrete. The results of each inspection shall be reported in writing.

### 3.13.7 Placing

The placing foreman shall supervise placing operations, shall determine that the correct quality of concrete or grout is placed in each location as specified and as directed by the Contracting Officer, and shall be responsible for measuring and recording concrete temperatures and ambient temperature hourly during placing operations, weather conditions, time of placement, volume placed, and method of placement. The placing foreman shall not permit batching and placing to begin until it has been verified that an adequate number of vibrators in working order and with competent operators are available. Placing shall not be continued if any pile of concrete is inadequately consolidated. If any batch of concrete fails to meet the temperature requirements, immediate steps shall be taken to improve temperature controls.

### 3.13.8 Vibrators

The frequency and amplitude of each vibrator shall be determined in accordance with COE CRD-C 521 prior to initial use and at least once a month when concrete is being placed. Additional tests shall be made as directed when a vibrator does not appear to be adequately consolidating the concrete. The frequency shall be determined while the vibrator is operating in concrete with the tachometer being held against the upper end of the vibrator head while almost submerged and just before the vibrator is withdrawn from the concrete. The amplitude shall be determined with the head vibrating in air. Two measurements shall be taken, one near the tip and another near the upper end of the vibrator head, and these results averaged. The make, model, type, and size of the vibrator and frequency and amplitude results shall be reported in writing. Any vibrator not meeting the requirements of paragraph Consolidation, shall be immediately removed from service and repaired or replaced.

### 3.13.9 Curing Inspection

- a. Moist Curing Inspections. At least once each shift, and not less than twice per day on both work and non-work days, an inspection shall be made of all areas subject to moist curing. The surface moisture condition shall be noted and recorded.
- b. Moist Curing Corrective Action. When a daily inspection report lists an area of inadequate curing, immediate corrective action shall be taken, and the required curing period for those areas shall be extended by 1 day.
- c. Membrane Curing Inspection. No curing compound shall be applied until the Contractor has verified that the compound is properly

mixed and ready for spraying. At the end of each operation, the Contractor shall estimate the quantity of compound used by measurement of the container and the area of concrete surface covered, shall compute the rate of coverage in square meters per liter, and shall note whether or not coverage is uniform.

- d. Membrane Curing Corrective Action. When the coverage rate of the curing compound is less than that specified or when the coverage is not uniform, the entire surface shall be sprayed again.
- e. Sheet Curing Inspection. At least once each shift and once per day on non-work days, an inspection shall be made of all areas being cured using impervious sheets. The condition of the covering and the tightness of the laps and tapes shall be noted and recorded.
- f. Sheet Curing Corrective Action. When a daily inspection report lists any tears, holes, or laps or joints that are not completely closed, the tears and holes shall promptly be repaired or the sheets replaced, the joints closed, and the required curing period for those areas shall be extended by 1 day.

#### 3.13.10 Cold-Weather Protection

At least once each shift and once per day on non-work days, an inspection shall be made of all areas subject to cold-weather protection. Any deficiencies shall be noted, corrected, and reported.

#### 3.13.11 Mixer Uniformity

- a. Stationary Mixers. Prior to the start of concrete placing and once every 6 months when concrete is being placed, or once for every 60,000 cubic meters of concrete placed, whichever results in the shortest time interval, uniformity of concrete mixing shall be determined in accordance with ASTM C 94.
- b. Truck Mixers. Prior to the start of concrete placing and at least once every 6 months when concrete is being placed, uniformity of concrete mixing shall be determined in accordance with ASTM C 94. The truck mixers shall be selected randomly for testing. When satisfactory performance is found in one truck mixer, the performance of mixers of substantially the same design and condition of the blades may be regarded as satisfactory.
- c. Mixer Uniformity Corrective Action. When a mixer fails to meet mixer uniformity requirements, either the mixing time shall be increased, batching sequence changed, batch size reduced, or adjustments shall be made to the mixer until compliance is achieved.

#### 3.13.12 Reports

All results of tests or inspections conducted shall be reported informally as they are completed and in writing daily. A weekly report shall be prepared for the updating of control charts covering the entire period from

01062/BERGER/ABAM  
FY02 Tactical Equipment Complex  
Fort Lewis, Washington

the start of the construction season through the current week. During periods of cold-weather protection, reports of pertinent temperatures shall be made daily. These requirements do not relieve the Contractor of the obligation to report certain failures immediately as required in preceding paragraphs. Such reports of failures and the action taken shall be confirmed in writing in the routine reports. The Contracting Officer has the right to examine all contractor quality control records.

-- End of Section --



SECTION 04200

MASONRY

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by basic designation only.

ACI INTERNATIONAL (ACI)

ACI SP-66 (1994) ACI Detailing Manual

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM A 82 (1997a) Steel Wire, Plain, for Concrete Reinforcement

ASTM A 153/A 153M (1998) Zinc Coating (Hot-Dip) on Iron and Steel Hardware

ASTM A 615/A 615M (1996a) Deformed and Plain Billet-Steel Bars for Concrete Reinforcement

ASTM C 55 (1999) Concrete Brick

ASTM C 62 (1999) Building Brick (Solid Masonry Units Made from Clay or Shale)

ASTM C 67 (1999a) Sampling and Testing Brick and Structural Clay Tile

ASTM C 90 (1999a) Loadbearing Concrete Masonry Units

ASTM C 91 (1999) Masonry Cement

ASTM C 126 (1999) Ceramic Glazed Structural Clay Facing Tile, Facing Brick, and Solid Masonry Units

ASTM C 129 (1999a) Nonloadbearing Concrete Masonry Units

ASTM C 140 (1999b) Sampling and Testing Concrete Masonry Units

ASTM C 216 (1999) Facing Brick (Solid Masonry Units Made from Clay or Shale)

ASTM C 270 (1999b) Mortar for Unit Masonry

ASTM C 476 (1999) Grout for Masonry

ASTM C 494/C 494M	(1999a) Chemical Admixtures for Concrete
ASTM C 578	(1995) Rigid, Cellular Polystyrene Thermal Insulation
ASTM C 641	(1982; R 1998el) Staining Materials in Lightweight Concrete Aggregates
ASTM C 652	(1997) Hollow Brick (Hollow Masonry Units Made From Clay or Shale)
ASTM C 744	(1999) Prefaced Concrete and Calcium Silicate Masonry Units
ASTM C 780	(1996el) Preconstruction and Construction Evaluation of Mortars for Plain and Reinforced Unit Masonry
ASTM C 1019	(1989a; R 1999) Sampling and Testing Grout
ASTM C 1072	(1999) Measurement of Masonry Flexural Bond Strength
ASTM C 1289	(1998) Faced Rigid Cellular Polyisocyanurate Thermal Insulation Board
ASTM D 2000	(1999) Rubber Products in Automotive Applications
ASTM D 2240	(1997el) Rubber Property - Durometer Hardness
ASTM D 2287	(1996a) Nonrigid Vinyl Chloride Polymer and Copolymer Molding and Extrusion Compounds
ASTM E 119	(1998) Fire Tests of Building Construction and Materials
ASTM E 447	(1997) Compressive Strength of Masonry Prisms

## 1.2 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only. When used, a designation following the "G" designation identifies the office that will review the submittal for the Government. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

### SD-01 Data

Concrete Masonry Units; G

Manufacturer's descriptive data.

### SD-04 Drawings

Masonry Work; G.

Drawings including plans, elevations, and details of wall reinforcement; details of reinforcing bars at corners and wall intersections; offsets; tops, bottoms, and ends of walls; control and expansion joints; and wall openings. Bar splice locations shall be shown. If the Contractor opts to furnish inch-pound CMU products, drawings showing elevation of walls exposed to view and indicating the location of all cut CMU products shall be submitted for approval. Bent bars shall be identified on a bending diagram and shall be referenced and located on the drawings. Wall dimensions, bar clearances, and wall openings greater than one masonry unit in area shall be shown. No approval will be given to the shop drawings until the Contractor certifies that all openings, including those for mechanical and electrical service, are shown. If, during construction, additional masonry openings are required, the approved shop drawings shall be resubmitted with the additional openings shown along with the proposed changes. Location of these additional openings shall be clearly highlighted. The minimum scale for wall elevations shall be 1 to 50. Reinforcement bending details shall conform to the requirements of ACI SP-66.

SD-08 Statements

Cold Weather Installation; G.

Cold weather construction procedures.

SD-09 Reports

Efflorescence Test; G. Field Testing of Mortar; G. Field Testing of Grout; G. Prism tests; G. Masonry Cement; G.

Test reports from an approved independent laboratory. Test reports on a previously tested material shall be certified as the same as that proposed for use in this project.

Special Inspection; G.

Copies of masonry inspector reports.

SD-13 Certificates

Concrete Masonry Units (CMU); Control Joint Keys; Anchors, Ties, and Bar Positioners; Expansion-Joint Materials; Joint Reinforcement; Reinforcing Steel Bars and Rods; Masonry Cement; Mortar Coloring; Insulation; Mortar Admixtures; Grout Admixtures

Certificates of compliance stating that the materials meet the specified requirements.

Certificate attesting that the polyurethane or polyisocyanurate insulation furnished for the project contains recovered material, and showing an estimated percent of such recovered material.

#### SD-14 Samples

Concrete Masonry Units (CMU); G

Color samples of three stretcher units and one unit for each type of special shape. Units shall show the full range of color and texture.

Anchors, Ties, and Bar Positioners; G.

Two of each type used.

Expansion-Joint Material; G.

One piece of each type used.

Joint Reinforcement; G.

One piece of each type used, including corner and wall intersection pieces, showing at least two cross wires.

Insulation; G.

One piece of board type insulation, not less than 400 mm by 600 mm in size, containing the label indicating the rated permeance and R-values.

### 1.3 SAMPLE MASONRY PANELS

After material samples are approved and prior to starting masonry work, sample masonry panels shall be constructed for each type and color of masonry required. At least 48 hours prior to constructing the sample panel or panels, the Contractor shall submit written notification to the Contracting Officer's Representative. Sample panels shall not be built in, or as part of the structure, but shall be located where directed.

#### 1.3.1 Configuration

Panels shall be L-shaped or otherwise configured to represent all of the wall elements. Panels shall be of the size necessary to demonstrate the acceptable level of workmanship for each type of masonry represented on the project. The minimum size of a straight panel or a leg of an L-shaped panel shall be 2.5 m by 1.8 m.

#### 1.3.2 Composition

Panels shall show full color range, texture, and bond pattern of the masonry work. The Contractor's method for mortar joint tooling; grouting of reinforced vertical cores, collar joints, bond beams, and lintels; positioning, securing, and lapping of reinforcing steel; positioning and lapping of joint reinforcement (including prefabricated corners); and cleaning of masonry work shall be demonstrated during the construction of the panels. Installation or application procedures for anchors, wall ties, glass block units, CMU control joints, brick expansion joints, insulation, flashing, brick soldier, row lock courses and weep holes shall be shown in the sample panels. The panels shall contain a masonry bonded corner that

includes a bond beam corner. Panels that represent reinforced masonry shall contain a 600 mm by 600 mm opening placed at least 600 mm above the panel base and 600 mm away from all free edges, corners, and control joints. Required reinforcing shall be provided around this opening as well as at wall corners and control joints.

#### 1.3.3 Construction Method

Where anchored veneer walls are required, the Contractor shall demonstrate and receive approval for the method of construction; i.e., either bring up the two wythes together or separately, with the insulation and appropriate ties placed within the specified tolerances across the cavity. Temporary provisions shall be demonstrated to preclude mortar or grout droppings in the cavity and to provide a clear open air space of the dimensions shown on the drawings. Where masonry is to be grouted, the Contractor shall demonstrate and receive approval on the method that will be used to bring up the masonry wythes; support the reinforcing bars; and grout cells, bond beams, lintels, and collar joints using the requirements specified herein. If sealer is specified to be applied to the masonry units, sealer shall be applied to the sample panels. Panels shall be built on a properly designed concrete foundation.

#### 1.3.4 Usage

The completed panels shall be used as the standard of workmanship for the type of masonry represented. Masonry work shall not commence until the sample panel for that type of masonry construction has been completed and approved. Panels shall be protected from the weather and construction operations until the masonry work has been completed and approved. After completion of the work, the sample panels, including all foundation concrete, shall become the property of the Contractor and shall be removed from the construction site.

### 1.4 DELIVERY, HANDLING, AND STORAGE

Materials shall be delivered, handled, stored, and protected to avoid chipping, breakage, and contact with soil or contaminating material.

#### 1.4.1 Masonry Units

Concrete masonry units shall be covered or protected from inclement weather and shall conform to the moisture content as specified in ASTM C 90 when delivered to the jobsite. In addition, glass block units and prefaced concrete units shall be stored with their finish surfaces covered. Prefabricated lintels shall be marked on top sides to show either the lintel schedule number or the number and size of top and bottom bars.

#### 1.4.2 Reinforcement, Anchors, and Ties

Steel reinforcing bars, coated anchors, ties, and joint reinforcement shall be stored above the ground. Steel reinforcing bars and uncoated ties shall be free of loose mill scale and rust.

#### 1.4.3 Cementitious Materials, Sand and Aggregates

Cementitious and other packaged materials shall be delivered in unopened containers, plainly marked and labeled with manufacturers' names and brands. Cementitious material shall be stored in dry, weathertight enclosures or be completely covered. Cement shall be handled in a manner that will prevent the inclusion of foreign materials and damage by water or dampness. Sand and aggregates shall be stored in a manner to prevent contamination or segregation.

### PART 2 PRODUCTS

#### 2.1 GENERAL REQUIREMENTS

The source of materials which will affect the appearance of the finished work shall not be changed after the work has started except with Contracting Officer's approval.

#### 2.2 CONCRETE MASONRY UNITS (CMU)

Hollow and solid concrete masonry units shall conform to ASTM C 90, Type I. Cement shall have a low alkali content and be of one brand.

##### 2.2.1 Aggregates

Lightweight aggregates and blends of lightweight and heavier aggregates in proportions used in producing the units, shall comply with the following requirements when tested for stain-producing iron compounds in accordance with ASTM C 641: by visual classification method, the iron stain deposited on the filter paper shall not exceed the "light stain" classification.

##### 2.2.2 Kinds and Shapes

Units shall be modular in size and shall include closer, jamb, header, lintel, and bond beam units and special shapes and sizes to complete the work as indicated. In exposed interior masonry surfaces, units having a bullnose shall be used for vertical external corners except at door, window, and louver jambs. Radius of the bullnose shall be 25 mm. Units used in exposed masonry surfaces in any one building shall have a uniform fine to medium texture and a uniform color.

##### 2.2.2.1 Architectural Units

Units shall have patterned face shell. Face shell pattern shall be split faced. Units shall be integrally colored during manufacture. Color shall be as shown on the drawings. Patterned face shell shall be properly aligned in the completed wall.

##### 2.2.3 Fire-Rated CMU

Concrete masonry units used in fire-rated construction shown on the drawings shall be of minimum equivalent thickness for the fire rating indicated and the corresponding type of aggregates indicated in TABLE I. Units containing more than one of the aggregates listed in TABLE I will be rated on the

aggregate requiring the greater minimum equivalent thickness to produce the required fire rating.

TABLE I  
FIRE-RATED CONCRETE MASONRY UNITS

See note (a) below

Aggregate Type	Minimum equivalent thickness in mm for fire rating of:		
	4 hours	3 hours	2 hours
Pumice	120	100	75
Expanded slag	130	110	85
Expanded clay, shale, or slate	145	120	95
Limestone, scoria, cinders or unexpanded slag	150	130	100
Calcareous gravel	160	135	105
Siliceous gravel	170	145	115

(a) Minimum equivalent thickness shall equal net volume as determined in conformance with ASTM C 140 divided by the product of the actual length and height of the face shell of the unit in millimeters . Where walls are to receive plaster or be faced with brick, or otherwise form an assembly; the thickness of plaster or brick or other material in the assembly will be included in determining the equivalent thickness.

### 2.3 MORTAR

Mortar shall be Type S in accordance with the proportion specification of ASTM C 270 except Type S cement-lime mortar proportions shall be 1 part cement, 1/2 part lime and 4-1/2 parts aggregate; when masonry cement ASTM C 91 is used the maximum air content shall be limited to 12 percent and performance equal to cement-lime mortar shall be verified. Verification of masonry cement performance shall be based on ASTM C 780 and ASTM C 1072. Cement shall have a low alkali content and be of one brand. Aggregates shall be from one source.

#### 2.3.1 Admixtures

In cold weather, a non-chloride based accelerating admixture may be used subject to approval. Accelerating admixture shall be non-corrosive, shall contain less than 0.2 percent chlorides, and shall conform to ASTM C 494/C 494M, Type C.

### 2.3.2 Coloring

Mortar coloring shall be added to the mortar used for exposed masonry surfaces to produce a uniform color matching CMU blocks. Mortar coloring shall not exceed 3 percent of the weight of cement for carbon black and ten percent of the weight of cement for all other pigments. Mortar coloring shall be chemically inert, of finely ground limeproof pigment, and furnished in accurately pre-measured and packaged units that can be added to a measured amount of cement.

## 2.4 GROUT

Grout shall conform to ASTM C 476. Cement used in grout shall have a low alkali content. Grout slump shall be between 200 and 250 mm. Grout shall be used subject to the limitations of Table III. Proportions shall not be changed and materials with different physical or chemical characteristics shall not be used in grout for the work unless additional evidence is furnished that the grout meets the specified requirements.

### 2.4.1 Admixtures

In cold weather, a non-chloride based accelerating admixture may be used subject to approval. Accelerating admixture shall be non-corrosive, shall contain less than 0.2 percent chlorides, and shall conform to ASTM C 494/C 494M, Type C.

### 2.4.2 Grout Barriers

Grout barriers for vertical cores shall consist of fine mesh wire, fiberglass, or expanded metal.

## 2.5 ANCHORS, TIES, AND BAR POSITIONERS

Anchors and ties shall be fabricated without drips or crimps and shall be zinc-coated in accordance with ASTM A 153/A 153M, Class B-2. Steel wire used for anchors and ties shall be fabricated from steel wire conforming to ASTM A 82. Anchors and ties shall be sized to provide a minimum of 16 mm mortar cover from either face.

### 2.5.1 Wall Ties

Wall ties shall be rectangular-shaped or Z-shaped fabricated of 5 mm diameter zinc-coated steel wire. Rectangular wall ties shall be no less than 100 mm wide. Wall ties may also be of a continuous type conforming to paragraph JOINT REINFORCEMENT. Adjustable type wall ties, if approved for use, shall consist of two essentially U-shaped elements fabricated of 5 mm diameter zinc-coated steel wire. Adjustable ties shall be of the double pintle to eye type and shall allow a maximum of 13 mm eccentricity between each element of the tie. Play between pintle and eye opening shall be not more than 2 mm. The pintle and eye elements shall be formed so that both can be in the same plane.



#### 2.5.2 Adjustable Anchors

Adjustable anchors shall be 5 mm diameter steel wire, triangular-shaped. Anchors attached to steel shall be 8 mm diameter steel bars placed to provide 2 mm play between flexible anchors and structural steel members. Spacers shall be welded to rods and columns. Equivalent welded-on steel anchor rods or shapes standard with the flexible-anchor manufacturer may be furnished when approved. Welds shall be cleaned and given one coat of zinc-rich touch up paint.

#### 2.5.3 Bar Positioners

Bar positioners, used to prevent displacement of reinforcing bars during the course of construction, shall be factory fabricated from 9 gauge steel wire or equivalent, and coated with a hot-dip galvanized finish. Not more than one wire shall cross the cell.

#### 2.6 JOINT REINFORCEMENT

Joint reinforcement shall be factory fabricated from steel wire conforming to ASTM A 82, welded construction. Tack welding will not be acceptable in reinforcement used for wall ties. Wire shall have zinc coating conforming to ASTM A 153/A 153M, Class B-2. All wires shall be a minimum of 9 gauge. Reinforcement shall be ladder type design, having one longitudinal wire in the mortar bed of each face shell for hollow units and one wire for solid units. Joint reinforcement shall be placed a minimum of 16 mm cover from either face. The distance between crosswires shall not exceed 400 mm. Joint reinforcement for straight runs shall be furnished in flat sections not less than 3 m long. Joint reinforcement shall be provided with factory formed corners and intersections. If approved for use, joint reinforcement may be furnished with adjustable wall tie features.

#### 2.7 REINFORCING STEEL BARS AND RODS

Reinforcing steel bars and rods shall conform to ASTM A 615/A 615M, Grade 60.

#### 2.8 CONTROL JOINT KEYS

Control joint keys shall be a factory fabricated solid section of natural or synthetic rubber (or combination thereof) conforming to ASTM D 2000 or polyvinyl chloride conforming to ASTM D 2287. The material shall be resistant to oils and solvents. The control joint key shall be provided with a solid shear section not less than 16 mm thick and 10 mm thick flanges, with a tolerance of plus or minus 2 mm. The control joint key shall fit neatly, but without forcing, in masonry unit jamb sash grooves. The control joint key shall be flexible at a temperature of minus 34 degrees C after five hours exposure, and shall have a durometer hardness of not less than 70 when tested in accordance with ASTM D 2240.

#### 2.9 EXPANSION-JOINT MATERIALS

Backer rod and sealant shall be adequate to accommodate joint compression equal to 50 percent of the width of the joint. The backer rod shall be

compressible rod stock of polyethylene foam, polyurethane foam, butyl rubber foam, or other flexible, nonabsorptive material as recommended by the sealant manufacturer. Sealant shall conform to Section 07900 JOINT SEALING.

## 2.10 VENEER ANCHORS

Anchor assemblies for the attachment of the masonry veneer to the cold-formed steel framing, structural steel and/or concrete beam and column members, and concrete floor slabs shall be designed for the design loadings shown. Anchors shall transfer the design loadings from the masonry veneer to the cold-formed steel framing system or other support without exceeding the allowable stresses and deflections in the anchors. Length of anchor wires shall be such that the outermost wires lie between 32 mm from each face of the masonry veneer. Anchors wires shall not have drips. Wires for veneer anchors shall be rectangular or triangular hoops formed from 5 mm diameter steel wire conforming to ASTM A 82. Anchor assemblies including wires and anchor plates shall be hot-dip galvanized conforming to ASTM A 153/A 153M, Class B-2. The veneer anchor shall have a minimum capacity of 900 newtons. The load-displacement capacity of each veneer anchor, both in direct pull-out for tension and compression, shall be not less than 350 kilo newtons per meter (or a deflection of 2.85 mm per kilo newton of load in tension or compression). In the direction perpendicular to the masonry veneer, the anchor assembly shall have a maximum play of 1.6 mm.

### 2.10.1 Adjustable Pintle-Eye Type Wire Anchors

Adjustable pintle-eye type wall anchors shall be two pieces rectangular type double pintle anchors.

## 2.11 FLASHING

Flashing shall be as specified in Section 07600 SHEET METALWORK, GENERAL.

## 2.12 WEEP HOLE VENTILATORS

Weephole ventilators shall be prefabricated aluminum grill type vents designed to prevent insect entry with maximum air entry. Ventilators shall be sized to match modular construction with a standard 10 mm mortar joint.

# PART 3 EXECUTION

## 3.1 ENVIRONMENTAL REQUIREMENTS

### 3.1.1 Hot Weather Installation

The following precautions shall be taken if masonry is erected when the ambient air temperature is more than 37 degrees C in the shade and the relative humidity is less than 50 percent. All masonry materials shall be shaded from direct sunlight; mortar beds shall be spread no more than 1.2 m ahead of masonry; masonry units shall be set within one minute of spreading mortar; and after erection, masonry shall be protected from direct exposure to wind and sun for 48 hours.

### 3.1.2 Cold Weather Installation

Before erecting masonry when ambient temperature or mean daily air temperature falls below 4 degrees C, a written statement of proposed cold weather construction procedures shall be submitted for approval. The following precautions shall be taken during all cold weather erection.

#### 3.1.2.1 Preparation

Ice or snow formed on the masonry bed shall be thawed by the application of heat. Heat shall be applied carefully until the top surface of the masonry is dry to the touch. Sections of masonry deemed frozen and damaged shall be removed before continuing construction of those sections.

- a. Air Temperature 4 to 0 degrees C. Sand or mixing water shall be heated to produce mortar temperatures between 4 degrees C and 49 degrees C.
- b. Air Temperature 0 to minus 4 degrees C. Sand and mixing water shall be heated to produce mortar temperatures between 4 degrees C and 49 degrees C. Temperature of mortar on boards shall be maintained above freezing.
- c. Air Temperature minus 4 to minus 7 degrees C. Sand and mixing water shall be heated to provide mortar temperatures between 4 degrees C and 49 degrees C. Temperature of mortar on boards shall be maintained above freezing. Sources of heat shall be used on both sides of walls under construction. Windbreaks shall be employed when wind is in excess of 24 km/hour.
- d. Air Temperature minus 7 degrees C and below. Sand and mixing water shall be heated to provide mortar temperatures between 4 degrees C and 49 degrees C. Enclosure and auxiliary heat shall be provided to maintain air temperature above 0 degrees C. Temperature of units when laid shall not be less than minus 7 degrees C.

#### 3.1.2.2 Completed Masonry and Masonry Not Being Worked On

- a. Mean daily air temperature 4 degrees C to 0 degrees C. Masonry shall be protected from rain or snow for 24 hours by covering with weather-resistive membrane.
- b. Mean daily air temperature 0 degrees C to minus 4 degrees C. Masonry shall be completely covered with weather-resistant membrane for 24 hours.
- c. Mean Daily Air Temperature minus 4 degrees C to minus 7 degrees C. Masonry shall be completely covered with insulating blankets or equally protected for 24 hours.
- d. Mean Daily Temperature minus 7 degrees C and Below. Masonry temperature shall be maintained above 0 degrees C for 24 hours by enclosure and supplementary heat, by electric heating blankets, infrared heat lamps, or other approved methods.

### 3.2 LAYING MASONRY UNITS

Masonry units shall be laid in running bond pattern. Facing courses shall be level with back-up courses, unless the use of adjustable ties has been approved in which case the tolerances shall be plus or minus 13 mm. Each unit shall be adjusted to its final position while mortar is still soft and plastic. Units that have been disturbed after the mortar has stiffened shall be removed, cleaned, and relaid with fresh mortar. Air spaces, cavities, chases, expansion joints, and spaces to be grouted shall be kept free from mortar and other debris. Units used in exposed masonry surfaces shall be selected from those having the least amount of chipped edges or other imperfections detracting from the appearance of the finished work. Vertical joints shall be kept plumb. Units being laid and surfaces to receive units shall be free of water film and frost. Solid units shall be laid in a nonfurrowed full bed of mortar. Mortar for veneer wythes shall be beveled and sloped toward the center of the wythe from the cavity side. Units shall be shoved into place so that the vertical joints are tight. Vertical joints of brick and the vertical face shells of concrete masonry units, except where indicated at control, expansion, and isolation joints, shall be completely filled with mortar. Mortar will be permitted to protrude up to 13 mm into the space or cells to be grouted. Means shall be provided to prevent mortar from dropping into the space below. In double wythe construction, the inner wythe may be brought up not more than 400 mm ahead of the outer wythe. Collar joints shall be filled with mortar or grout during the laying of the facing wythe, and filling shall not lag the laying of the facing wythe by more than 200 mm.

#### 3.2.1 Surface Preparation

Surfaces upon which masonry is placed shall be cleaned of laitance, dust, dirt, oil, organic matter, or other foreign materials and shall be slightly roughened to provide a surface texture with a depth of at least 3 mm. Sandblasting shall be used, if necessary, to remove laitance from pores and to expose the aggregate.

#### 3.2.2 Forms and Shores

Forms and shores shall be sufficiently rigid to prevent deflections which may result in cracking or other damage to supported masonry and sufficiently tight to prevent leakage of mortar and grout. Supporting forms and shores shall not be removed in less than 10 days.

#### 3.2.3 Concrete Masonry Units

Units in piers, pilasters, columns, starting courses on footings, solid foundation walls, lintels, and beams, and where cells are to be filled with grout shall be full bedded in mortar under both face shells and webs. Other units shall be full bedded under both face shells. Head joints shall be filled solidly with mortar for a distance in from the face of the unit not less than the thickness of the face shell. Foundation walls below grade shall be grouted solid. Jamb units shall be of the shapes and sizes to conform with wall units. Solid units may be incorporated in the masonry work where necessary to fill out at corners, gable slopes, and elsewhere as approved. Double walls shall be stiffened at wall-mounted plumbing fixtures

by use of strap anchors, two above each fixture and two below each fixture, located to avoid pipe runs, and extending from center to center of the double wall. Walls and partitions shall be adequately reinforced for support of wall-hung plumbing fixtures when chair carriers are not specified.

#### 3.2.4 Tolerances

Masonry shall be laid plumb, true to line, with courses level. Bond pattern shall be kept plumb throughout. Corners shall be square unless noted otherwise. Except for walls constructed of prefaced concrete masonry units, masonry shall be laid within the following tolerances (plus or minus unless otherwise noted):

TABLE II

#### TOLERANCES

Variation from the plumb in the lines  
and surfaces of columns, walls and arises

---

In adjacent masonry units	3 mm
In 3 m	6 mm
In 6 m	10 mm
In 12 m or more	13 mm

Variations from the plumb for external corners,  
expansion joints, and other conspicuous lines

---

In 6 m	6 mm
In 12 m or more	13 mm

Variations from the level for exposed lintels,  
sills, parapets, horizontal grooves, and other  
conspicuous lines

---

In 6 m	6 mm
In 12 m or more	13 mm

Variation from level for bed joints and top  
surfaces of bearing walls

---

In 3 m	6 mm
In 12 m or more	13 mm

Variations from horizontal lines

---

In 3 m	6 mm
In 6 m	10 mm
In 12 m or more	13 mm

Variations in cross sectional dimensions of  
columns and in thickness of walls

---

Minus	6 mm
Plus	13 mm

### 3.2.5 Cutting and Fitting

Full units of the proper size shall be used wherever possible, in lieu of cut units. Cutting and fitting, including that required to accommodate the work of others, shall be done by masonry mechanics using power masonry saws. Concrete masonry units may be wet or dry cut. Wet cut units, before being placed in the work, shall be dried to the same surface-dry appearance as uncut units being laid in the wall. Cut edges shall be clean, true and sharp. Openings in the masonry shall be made carefully so that wall plates, cover plates or escutcheons required by the installation will completely conceal the openings and will have bottoms parallel with the masonry bed joints. Reinforced masonry lintels shall be provided above openings over 300 mm wide for pipes, ducts, cable trays, and other wall penetrations, unless steel sleeves are used.

### 3.2.6 Jointing

Joints shall be tooled when the mortar is thumbprint hard. Horizontal joints shall be tooled last. Joints shall be brushed to remove all loose and excess mortar. Mortar joints shall be finished as follows:

#### 3.2.6.1 Flush Joints

Joints in concealed masonry surfaces and joints at electrical outlet boxes in wet areas shall be flush cut. Flush cut joints shall be made by cutting off the mortar flush with the face of the wall. Joints in unparged masonry walls below grade shall be pointed tight. Flush joints for architectural units, such as fluted units, shall completely fill both the head and bed joints.

#### 3.2.6.2 Tooled Joints

Joints in exposed exterior and interior masonry surfaces shall be tooled slightly concave. Joints shall be tooled with a jointer slightly larger than the joint width so that complete contact is made along the edges of the unit. Tooling shall be performed so that the mortar is compressed and the joint surface is sealed. Jointer of sufficient length shall be used to obtain a straight and true mortar joint.

#### 3.2.6.3 Door and Window Frame Joints

On the exposed interior side of exterior frames, joints between frames and abutting masonry walls shall be raked to a depth of 10 mm. On the exterior side of exterior frames, joints between frames and abutting masonry walls shall be raked to a depth of 10 mm.

#### 3.2.7 Joint Widths

Joint widths shall be as follows:

##### 3.2.7.1 Concrete Masonry Units

Concrete masonry units shall have 10 mm joints, except for prefaced concrete masonry units.

#### 3.2.8 Embedded Items

Spaces around built-in items shall be filled with mortar. Openings around flush-mount electrical outlet boxes in wet locations shall be pointed with mortar. Anchors, ties, wall plugs, accessories, flashing, pipe sleeves and other items required to be built-in shall be embedded as the masonry work progresses. Anchors, ties and joint reinforcement shall be fully embedded in the mortar. Cells receiving anchor bolts and cells of the first course below bearing plates shall be filled with grout.

#### 3.2.9 Unfinished Work

Unfinished work shall be stepped back for joining with new work. Toothing may be resorted to only when specifically approved. Loose mortar shall be removed and the exposed joints shall be thoroughly cleaned before laying new work.

#### 3.2.10 Masonry Wall Intersections

Each course shall be masonry bonded at corners and elsewhere as shown. Masonry walls shall be anchored or tied together at corners and intersections with bond beam reinforcement and prefabricated corner or tee pieces of joint reinforcement as shown.

### 3.3 ANCHORED VENEER CONSTRUCTION

Veneer anchors shall be attached with screws through the sheathing and rigid insulation to the steel studs or other support members at the locations shown. When rigid insulation shall be approved by the Contracting Officer. Veneer anchors shall be installed with the outermost wires lying between 16 mm from each face of the masonry veneer. Synthetic rubber washers shall be used between the anchor connector plates and the moisture barrier. A clutch torque slip screw gun shall be used on screws attaching veneer anchors to cold-formed steel members. Veneer anchors with corrugated sheet metal or wire mesh members extending across the wall cavity shall not be used. There shall be one veneer anchor for each 0.2 square meters of wall and shall be attached to steel studs and other supports with a maximum spacing of 600 mm on center. For pintle-eye anchors the vertical distance between the pintle

section horizontal wires and the eye section horizontal wires shall not exceed 13 mm. Dovetail slots shall be installed as specified in the Section 03300 CAST-IN-PLACE STRUCTURAL CONCRETE.

### 3.4 WEEP HOLES

Weep holes shall be provided not more than 600 mm on centers in mortar joints of the exterior wythe above wall flashing, over foundations, bond beams, and any other horizontal interruptions of the cavity. Weep holes shall be constructed using weep hole ventilators. Other approved methods may be used for providing weep holes. Weep holes shall be kept free of mortar and other obstructions.

### 3.5 MORTAR

Mortar shall be mixed in a mechanically operated mortar mixer for at least 3 minutes, but not more than 5 minutes. Measurement of ingredients for mortar shall be by volume. Ingredients not in containers, such as sand, shall be accurately measured by the use of measuring boxes. Water shall be mixed with the dry ingredients in sufficient amount to provide a workable mixture which will adhere to the vertical surfaces of masonry units. Mortar that has stiffened because of loss of water through evaporation shall be retempered by adding water to restore the proper consistency and workability. Mortar that has reached its initial set or that has not been used within 2-1/2 hours after mixing shall be discarded.

### 3.6 REINFORCING STEEL

Reinforcement shall be cleaned of loose, flaky rust, scale, grease, mortar, grout, or other coating which might destroy or reduce its bond prior to placing grout. Bars with kinks or bends not shown on the drawings shall not be used. Reinforcement shall be placed prior to grouting. Unless otherwise indicated, vertical wall reinforcement shall extend to within 50 mm of tops of walls.

#### 3.6.1 Positioning Bars

Vertical bars shall be accurately placed within the cells at the positions indicated on the drawings. A minimum clearance of 13 mm shall be maintained between the bars and masonry units. Minimum clearance between parallel bars shall be one diameter of the reinforcement. Vertical reinforcing may be held in place using bar positioners located near the ends of each bar and at intermediate intervals of not more than 192 diameters of the reinforcement. Column and pilaster ties shall be wired in position around the vertical steel. Ties shall be in contact with the vertical reinforcement and shall not be placed in horizontal bed joints.

#### 3.6.2 Splices

Bars shall be lapped a minimum of 48 diameters of the reinforcement. Welded or mechanical connections shall develop at least 125 percent of the specified yield strength of the reinforcement.



### 3.7 JOINT REINFORCEMENT

Joint reinforcement shall be installed at 400 mm on center or as indicated. Reinforcement shall be lapped not less than 150 mm. Prefabricated sections shall be installed at corners and wall intersections. The longitudinal wires of joint reinforcement shall be placed to provide not less than 16 mm cover to either face of the unit.

### 3.8 PLACING GROUT

Cells containing reinforcing bars shall be filled with grout. Hollow masonry units in walls or partitions supporting plumbing, heating, or other mechanical fixtures, voids at door and window jambs, and other indicated spaces shall be filled solid with grout. Cells under lintel bearings on each side of openings shall be filled solid with grout for full height of openings. Walls below grade, lintels, and bond beams shall be filled solid with grout. Units other than open end units may require grouting each course to preclude voids in the units. Grout not in place within 1-1/2 hours after water is first added to the batch shall be discarded. Sufficient time shall be allowed between grout lifts to preclude displacement or cracking of face shells of masonry units. If blowouts, flowouts, misalignment, or cracking of face shells should occur during construction, the wall shall be torn down and rebuilt.

#### 3.8.1 Vertical Grout Barriers for Fully Grouted Walls

Grout barriers shall be provided not more than 10 m apart, or as required, to limit the horizontal flow of grout for each pour.

#### 3.8.2 Horizontal Grout Barriers

Grout barriers shall be embedded in mortar below cells of hollow units receiving grout.

#### 3.8.3 Grout Holes and Cleanouts

##### 3.8.3.1 Grout Holes

Grouting holes shall be provided in slabs, spandrel beams, and other in-place overhead construction. Holes shall be located over vertical reinforcing bars or as required to facilitate grout fill in bond beams. Additional openings spaced not more than 400 mm on centers shall be provided where grouting of all hollow unit masonry is indicated. Openings shall not be less than 100 mm in diameter or 75 by 100 mm in horizontal dimensions. Upon completion of grouting operations, grouting holes shall be plugged and finished to match surrounding surfaces.

##### 3.8.3.2 Cleanouts for Hollow Unit Masonry Construction

Cleanout holes shall be provided at the bottom of every pour in cores containing vertical reinforcement when the height of the grout pour exceeds 1.5 m. Where all cells are to be grouted, cleanout courses shall be constructed using bond beam units in an inverted position to permit cleaning of all cells. Cleanout holes shall be provided at a maximum spacing of 800

mm where all cells are to be filled with grout. A new series of cleanouts shall be established if grouting operations are stopped for more than 4 hours. Cleanouts shall not be less than 75 by 100 mm openings cut from one face shell. Manufacturer's standard cutout units may be used at the Contractor's option. Cleanout holes shall not be closed until masonry work, reinforcement, and final cleaning of the grout spaces have been completed and inspected. For walls which will be exposed to view, cleanout holes shall be closed in an approved manner to match surrounding masonry.

#### 3.8.3.3 Cleanouts for Solid Unit Masonry Construction

Cleanouts for construction of walls consisting of a grout filled cavity between solid masonry wythes shall be provided at the bottom of every pour by omitting every other masonry unit from one wythe. A new series of cleanouts shall be established if grouting operations are stopped for more than 4 hours. Cleanout holes shall not be plugged until masonry work, reinforcement, and final cleaning of the grout spaces have been completed and inspected. For walls which will be exposed to view, cleanout holes shall be closed in an approved manner to match surrounding masonry.

#### 3.8.4 Grouting Equipment

##### 3.8.4.1 Grout Pumps

Pumping through aluminum tubes will not be permitted. Pumps shall be operated to produce a continuous stream of grout without air pockets, segregation, or contamination. Upon completion of each day's pumping, waste materials and debris shall be removed from the equipment, and disposed of outside the masonry.

##### 3.8.4.2 Vibrators

Internal vibrators shall maintain a speed of not less than 5,000 impulses per minute when submerged in the grout. At least one spare vibrator shall be maintained at the site at all times. Vibrators shall be applied at uniformly spaced points not further apart than the visible effectiveness of the machine. Duration of vibration shall be limited to time necessary to produce satisfactory consolidation without causing segregation.

#### 3.8.5 Grout Placement

Masonry shall be laid to the top of a pour before placing grout. Grout shall not be placed in two-wythe solid unit masonry cavity until mortar joints have set for at least 3 days during hot weather and 5 days during cold damp weather. Grout shall not be placed in hollow unit masonry until mortar joints have set for at least 24 hours. Grout shall be placed using a hand bucket, concrete hopper, or grout pump to completely fill the grout spaces without segregation of the aggregates. Vibrators shall not be inserted into lower pours that are in a semi-solidified state. The height of grout pours and type of grout used shall be limited by the dimensions of grout spaces as indicated in Table III. Low-lift grout methods may be used on pours up to and including 1.5 m in height. High-lift grout methods shall be used on pours exceeding 1.5 m in height.

#### 3.8.5.1 Low-Lift Method

Grout shall be placed at a rate that will not cause displacement of the masonry due to hydrostatic pressure of the grout. Mortar protruding more than 13 mm into the grout space shall be removed before beginning the grouting operation. Grout pours 300 mm or less in height shall be consolidated by mechanical vibration or by puddling. Grout pours over 300 mm in height shall be consolidated by mechanical vibration and reconsolidated by mechanical vibration after initial water loss and settlement has occurred. Vibrators shall not be inserted into lower pours that are in a semi-solidified state. Low-lift grout shall be used subject to the limitations of Table III.

#### 3.8.5.2 High-Lift Method

Mortar droppings shall be cleaned from the bottom of the grout space and from reinforcing steel. Mortar protruding more than 6 mm into the grout space shall be removed by dislodging the projections with a rod or stick as the work progresses. Reinforcing, bolts, and embedded connections shall be rigidly held in position before grouting is started. CMU units shall not be pre-wetted. Grout, from the mixer to the point of deposit in the grout space shall be placed as rapidly as practical by pumping and placing methods which will prevent segregation of the mix and cause a minimum of grout splatter on reinforcing and masonry surfaces not being immediately encased in the grout lift. The individual lifts of grout shall be limited to 1.2 m in height. The first lift of grout shall be placed to a uniform height within the pour section and vibrated thoroughly to fill all voids. This first vibration shall follow immediately behind the pouring of the grout using an approved mechanical vibrator. After a waiting period sufficient to permit the grout to become plastic, but before it has taken any set, the succeeding lift shall be poured and vibrated 300 to 450 mm into the preceding lift. If the placing of the succeeding lift is going to be delayed beyond the period of workability of the preceding, each lift shall be reconsolidated by reworking with a second vibrator as soon as the grout has taken its settlement shrinkage. The waiting, pouring, and reconsolidation steps shall be repeated until the top of the pour is reached. The top lift shall be reconsolidated after the required waiting period. The high-lift grouting of any section of wall between vertical grout barriers shall be completed to the top of a pour in one working day unless a new series of cleanout holes is established and the resulting horizontal construction joint cleaned. High-lift grout shall be used subject to the limitations in Table III.

TABLE III

POUR HEIGHT AND TYPE OF GROUT FOR VARIOUS GROUT SPACE DIMENSIONS

Maximum Grout Pour Height (m) (4)	Grout Type	Grouting Procedure	Minimum Dimensions of the Total Clear Areas Within Grout Spaces and Cells (mm) (1,2)	
			Multiwythe Masonry (3)	Hollow-unit Masonry
0.3	Fine	Low Lift	20	40 x 50
1.5	Fine	Low Lift	50	50 x 75
2.4	Fine	High Lift	50	50 x 75
3.6	Fine	High Lift	65	65 x 75
7.3	Fine	High Lift	75	75 x 75
0.3	Coarse	Low Lift	40	40 x 75
1.5	Coarse	Low Lift	50	65 x 75
2.4	Coarse	High Lift	50	75 x 75
3.6	Coarse	High Lift	65	75 x 75
7.3	Coarse	High Lift	75	75 x 100

Notes:

- (1) The actual grout space or cell dimension must be larger than the sum of the following items:
  - a) The required minimum dimensions of total clear areas given in the table above;
  - b) The width of any mortar projections within the space;
  - c) The horizontal projections of the diameters of the horizontal reinforcing bars within a cross section of the grout space or cell.
- (2) The minimum dimensions of the total clear areas shall be made up of one or more open areas, with at least one area being 20 mm or greater in width.
- (3) For grouting spaces between masonry wythes.
- (4) Where only cells of hollow masonry units containing reinforcement are grouted, the maximum height of the pour shall not exceed the distance between horizontal bond beams.

### 3.9 BOND BEAMS

Bond beams shall be filled with grout and reinforced as indicated on the drawings. Grout barriers shall be installed under bond beam units to retain the grout as required. Reinforcement shall be continuous, including around corners, except through control joints or expansion joints, unless otherwise indicated on the drawings. Where splices are required for continuity, reinforcement shall be lapped 48 bar diameters. A minimum clearance of 13 mm shall be maintained between reinforcement and interior faces of units.

### 3.10 CONTROL JOINTS

Control joints shall be provided as indicated and shall be constructed by using special control-joint units sash jamb units with control joint key in accordance with the details shown on the drawings. Sash jamb units shall have a 19 by 19 mm groove near the center at end of each unit. The vertical mortar joint at control joint locations shall be continuous, including through all bond beams. This shall be accomplished by utilizing half blocks in alternating courses on each side of the joint. The control joint key shall be interrupted in courses containing continuous bond beam steel. In single wythe exterior masonry walls, the exterior control joints shall be raked to a depth of 20 mm; backer rod and sealant shall be installed in accordance with Section 07900 JOINT SEALING. Exposed interior control joints shall be raked to a depth of 6 mm. Concealed control joints shall be flush cut.

### 3.11 LINTELS

#### 3.11.1 Masonry Lintels

Masonry lintels shall be constructed with lintel units filled solid with grout in all courses and reinforced with a minimum of two No. 4 bars in the bottom course unless otherwise indicated on the drawings. Lintel reinforcement shall extend beyond each side of masonry opening 40 bar diameters or 600 mm, whichever is greater. Reinforcing bars shall be supported in place prior to grouting and shall be located 15 mm above the bottom inside surface of the lintel unit.

### 3.12 SILLS AND COPINGS

Sills and copings shall be set in a full bed of mortar with faces plumb and true.

### 3.13 ANCHORAGE TO CONCRETE AND STRUCTURAL STEEL

#### 3.13.1 Anchorage to Structural Steel

Masonry shall be anchored to vertical structural steel framing with adjustable steel wire anchors spaced not over 400 mm on centers vertically, and if applicable, not over 600 mm on centers horizontally.

### 3.14 INSULATION

Anchored veneer walls shall be insulated, where shown, by installing board-type insulation on the cavity side of the inner wythe. Board type insulation shall be applied directly to the masonry or thru-wall flashing with adhesive. Insulation shall be neatly fitted between obstructions without impaling of insulation on ties or anchors. The insulation shall be applied in parallel courses with vertical joints breaking midway over the course below and shall be applied in moderate contact with adjoining units without forcing, and shall be cut to fit neatly against adjoining surfaces.

### 3.15 POINTING AND CLEANING

After mortar joints have attained their initial set, but prior to hardening, mortar and grout daubs or splashings shall be completely removed from masonry-unit surfaces that will be exposed or painted. Before completion of the work, defects in joints of masonry to be exposed or painted shall be raked out as necessary, filled with mortar, and tooled to match existing joints. Immediately after grout work is completed, scum and stains which have percolated through the masonry work shall be removed using a high pressure stream of water and a stiff bristled brush. Masonry surfaces shall not be cleaned, other than removing excess surface mortar, until mortar in joints has hardened. Masonry surfaces shall be left clean, free of mortar daubs, dirt, stain, and discoloration, including scum from cleaning operations, and with tight mortar joints throughout. Metal tools and metal brushes shall not be used for cleaning.

#### 3.15.1 Concrete Brick Surfaces

Exposed concrete masonry unit and concrete brick surfaces shall be dry-brushed at the end of each day's work and after any required pointing, using stiff-fiber bristled brushes.

### 3.16 BEARING PLATES

Bearing plates for beams, joists, joist girders and similar structural members shall be set to the proper line and elevation with damp-pack bedding mortar, except where non-shrink grout is indicated. Bedding mortar and non-shrink grout shall be as specified in Section 03300CAST-IN-PLACE STRUCTURAL CONCRETE.

### 3.17 PROTECTION

Facing materials shall be protected against staining. Top of walls shall be covered with nonstaining waterproof covering or membrane when work is not in progress. Covering of the top of the unfinished walls shall continue until the wall is waterproofed with a complete roof or parapet system. Covering shall extend a minimum of 600 mm down on each side of the wall and shall be held securely in place. Before starting or resuming, top surface of masonry in place shall be cleaned of loose mortar and foreign material.

### 3.18 TEST REPORTS

#### 3.18.1 Field Testing of Mortar

At least three specimens of mortar shall be taken each day. A layer of mortar 13 to 16 mm thick shall be spread on the masonry units and allowed to stand for one minute. The specimens shall then be prepared and tested for compressive strength in accordance with ASTM C 780.

#### 3.18.2 Field Testing of Grout

Field sampling and testing of grout shall be in accordance with the applicable provisions of ASTM C 1019. A minimum of three specimens of grout

01062/BERGER/ABAM  
FY02 Tactical Equipment Complex  
Fort Lewis, Washington

per day shall be sampled and tested. Each specimen shall have a minimum ultimate compressive strength of 13.8 MPa at 28 days.

### 3.18.3 Efflorescence Test

Brick which will be exposed to weathering shall be tested for efflorescence. Tests shall be scheduled far enough in advance of starting masonry work to permit retesting if necessary. Sampling and testing shall conform to the applicable provisions of ASTM C 67. Units meeting the definition of "effloresced" will be subject to rejection.

-- End of Section --

01062/BERGER/ABAM  
FY02 Tactical Equipment Complex  
Fort Lewis, Washington

This page intentionally blank.



SECTION 05090

WELDING, STRUCTURAL

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by basic designation only.

AMERICAN INSTITUTE OF STEEL CONSTRUCTION (AISC)

AISC ASD Spec	(1989) Specification for Structural Steel Buildings - Allowable Stress Design, Plastic Design
---------------	---

AMERICAN SOCIETY FOR NONDESTRUCTIVE TESTING (ASNT)

ASNT RP SNT-TC-1A	(1996) Recommended Practice SNT-TC-1A
-------------------	---------------------------------------

AMERICAN WELDING SOCIETY (AWS)

AWS A2.4	(1998) Standard Symbols for Welding, Brazing and Nondestructive Examination
AWS A3.0	(1994) Standard Welding Terms and Definitions
AWS D1.1	(1998) Structural Welding Code - Steel
AWS Z49.1	(1999) Safety in Welding and Cutting and Allied Processes

1.2 DEFINITIONS

Definitions of welding terms shall be in accordance with AWS A3.0.

1.3 GENERAL REQUIREMENTS

The design of welded connections shall conform to AISC ASD Spec unless otherwise indicated or specified. Material with welds will not be accepted unless the welding is specified or indicated on the drawings or otherwise approved. Welding shall be as specified in this section, except where additional requirements are shown on the drawings or are specified in other sections. Welding shall not be started until welding procedures, inspectors, nondestructive testing personnel, welders, welding operators, and tackers have been qualified and the submittals approved by the Contracting Officer. Qualification testing shall be performed at or near the work site. Each Contractor performing welding shall maintain records of the test results obtained in welding procedure, welder, welding operator, and tacker performance qualifications.

#### 1.3.1 Pre-erection Conference

A pre-erection conference shall be held, prior to the start of the field welding, to bring all affected parties together and to gain a naturally clear understanding of the project and the Welding Procedure Specifications (WPS) (which the Contractor shall develop and submit for all welding, including welding done using prequalified procedures). Attendees shall include all Contractor's welding production and inspection personnel and appropriate Government personnel. Items for discussion could include: responsibilities of various parties; welding procedures and processes to be followed; welding sequence (both within a joint and joint sequence within the building); inspection requirements and procedures, both visual and ultrasonic; welding schedule; fabrication of mock-up model; and other items deemed necessary by the attendees.

#### 1.4 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only. When used, a designation following the "G" designation identifies the office that will review the submittal for the Government. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

##### SD-03 Product Data

Welding Procedure Qualifications; G  
Welder, Welding Operator, and Tacker Qualification; FIO  
Inspector Qualification; FIO  
Previous Qualifications;  
Prequalified Procedures;

Copies of the welding procedure specifications; the procedure qualification test records; and the welder, welding operator, or tacker qualification test records.

##### SD-06 Test Reports

Quality Control; FIO

A quality assurance plan and records of tests and inspections.

#### 1.5 WELDING PROCEDURE QUALIFICATIONS

Except for prequalified (per AWS D1.1) and previously qualified procedures, each Contractor performing welding shall record in detail and shall qualify the welding procedure specification for any welding procedure followed in the fabrication of weldments. Qualification of welding procedures shall conform to AWS D1.1 and to the specifications in this section. Copies of the welding procedure specification and the results of the procedure qualification test for each type of welding which requires procedure qualification shall be submitted for approval. Approval of any procedure, however, will not relieve the Contractor of the sole responsibility for producing a finished structure meeting all the requirements of these specifications. This information shall be submitted on the forms in

Appendix E of AWS D1.1. Welding procedure specifications shall be individually identified and shall be referenced on the detail drawings and erection drawings, or shall be suitably keyed to the contract drawings. In case of conflict between this specification and AWS D1.1, this specification governs.

#### 1.5.1 Previous Qualifications

Welding procedures previously qualified by test may be accepted for this contract without requalification if the following conditions are met:

- a. Testing was performed by an approved testing laboratory, technical consultant, or the Contractor's approved quality control organization.
- b. The qualified welding procedure conforms to the requirements of this specification and is applicable to welding conditions encountered under this contract.
- c. The welder, welding operator, and tacker qualification tests conform to the requirements of this specification and are applicable to welding conditions encountered under this contract.

#### 1.5.2 Prequalified Procedures

Welding procedures which are considered prequalified as specified in AWS D1.1 will be accepted without further qualification. The Contractor shall submit for approval a listing or an annotated drawing to indicate the joints not prequalified. Procedure qualification shall be required for these joints.

#### 1.5.3 Retests

If welding procedure fails to meet the requirements of AWS D1.1, the procedure specification shall be revised and requalified, or at the Contractor's option, welding procedure may be retested in accordance with AWS D1.1. If the welding procedure is qualified through retesting, all test results, including those of test welds that failed to meet the requirements, shall be submitted with the welding procedure.

### 1.6 WELDER, WELDING OPERATOR, AND TACKER QUALIFICATION

Each welder, welding operator, and tacker assigned to work on this contract shall be qualified in accordance with the applicable requirements of AWS D1.1 and as specified in this section. Welders, welding operators, and tackers who make acceptable procedure qualification test welds will be considered qualified for the welding procedure used.

#### 1.6.1 Previous Personnel Qualifications

At the discretion of the Contracting Officer, welders, welding operators, and tackers qualified by test within the previous 6 months may be accepted for this contract without requalification if all the following conditions are met:

a. Copies of the welding procedure specifications, the procedure qualification test records, and the welder, welding operator, and tacker qualification test records are submitted and approved in accordance with the specified requirements for detail drawings.

b. Testing was performed by an approved testing laboratory, technical consultant, or the Contractor's approved quality control organization.

c. The previously qualified welding procedure conforms to the requirements of this specification and is applicable to welding conditions encountered under this contract.

d. The welder, welding operator, and tacker qualification tests conform to the requirements of this specification and are applicable to welding conditions encountered under this contract.

#### 1.6.2 Certificates

Before assigning any welder, welding operator, or tacker to work under this contract, the Contractor shall submit the names of the welders, welding operators, and tackers to be employed, and certification that each individual is qualified as specified. The certification shall state the type of welding and positions for which the welder, welding operator, or tacker is qualified, the code and procedure under which the individual is qualified, the date qualified, and the name of the firm and person certifying the qualification tests. The certification shall be kept on file, and 3 copies shall be furnished. The certification shall be kept current for the duration of the contract.

#### 1.6.3 Renewal of Qualification

Requalification of a welder or welding operator shall be required under any of the following conditions:

a. It has been more than 6 months since the welder or welding operator has used the specific welding process for which he is qualified.

b. There is specific reason to question the welder or welding operator's ability to make welds that meet the requirements of these specifications.

c. The welder or welding operator was qualified by an employer other than those firms performing work under this contract, and a qualification test has not been taken within the past 12 months. Records showing periods of employment, name of employer where welder, or welding operator, was last employed, and the process for which qualified shall be submitted as evidence of conformance.

d. A tacker who passes the qualification test shall be considered eligible to perform tack welding indefinitely in the positions and with the processes for which he is qualified, unless there is some specific reason to question the tacker's ability. In such a case, the tacker shall be required to pass the prescribed tack welding test.

## 1.7 INSPECTOR QUALIFICATION

Inspector qualifications shall be in accordance with AWS D1.1. Nondestructive testing personnel shall be qualified in accordance with the requirements of ASNT RP SNT-TC-1A for Levels I or II in the applicable nondestructive testing method. The inspector may be supported by assistant welding inspectors who are not qualified to ASNT RP SNT-TC-1A, and assistant inspectors may perform specific inspection functions under the supervision of the qualified inspector.

## 1.8 SYMBOLS

Symbols shall be in accordance with AWS A2.4, unless otherwise indicated.

## 1.9 SAFETY

Safety precautions during welding shall conform to AWS Z49.1.

# PART 2 PRODUCTS

## 2.1 WELDING EQUIPMENT AND MATERIALS

All welding equipment, electrodes, welding wire, and fluxes shall be capable of producing satisfactory welds when used by a qualified welder or welding operator performing qualified welding procedures. All welding equipment and materials shall comply with the applicable requirements of AWS D1.1.

# PART 3 EXECUTION

## 3.1 WELDING OPERATIONS

### 3.1.1 Requirements

Workmanship and techniques for welded construction shall conform to the requirements of AWS D1.1 and AISC ASD Spec. When AWS D1.1 and the AISC ASD Spec specification conflict, the requirements of AWS D1.1 shall govern.

### 3.1.2 Identification

Welds shall be identified in one of the following ways:

a. Written records shall be submitted to indicate the location of welds made by each welder, welding operator, or tacker.

b. Each welder, welding operator, or tacker shall be assigned a number, letter, or symbol to identify welds made by that individual. The Contracting Officer may require welders, welding operators, and tackers to apply their symbol next to the weld by means of rubber stamp, felt-tipped marker with waterproof ink, or other methods that do not cause an indentation in the metal. For seam welds, the identification mark shall be adjacent to the weld at 1 meter intervals. Identification with die stamps or electric etchers shall not be allowed.

### 3.2 QUALITY CONTROL

Testing shall be done by an approved inspection or testing laboratory or technical consultant; or if approved, the Contractor's inspection and testing personnel may be used instead of the commercial inspection or testing laboratory or technical consultant. The Contractor shall perform visual ultrasonic, inspection to determine conformance with paragraph STANDARDS OF ACCEPTANCE. Procedures and techniques for inspection shall be in accordance with applicable requirements of AWS D1.1, except that in radiographic inspection only film types designated as "fine grain," or "extra fine," shall be employed.

### 3.3 STANDARDS OF ACCEPTANCE

Dimensional tolerances for welded construction, details of welds, and quality of welds shall be in accordance with the applicable requirements of AWS D1.1 and the contract drawings. Nondestructive testing shall be by visual inspection ultrasonic, methods. The minimum extent of nondestructive testing shall be random 100 percent of welds or joints, as indicated on the drawings.

#### 3.3.1 Nondestructive Examination

The welding shall be subject to inspection and tests in the mill, shop, and field. Inspection and tests in the mill or shop will not relieve the Contractor of the responsibility to furnish weldments of satisfactory quality. When materials or workmanship do not conform to the specification requirements, the Government reserves the right to reject material or workmanship or both at any time before final acceptance of the structure containing the weldment.

#### 3.3.2 Destructive Tests

When metallographic specimens are removed from any part of a structure, the Contractor shall make repairs. The Contractor shall employ qualified welders or welding operators, and shall use the proper joints and welding procedures, including peening or heat treatment if required, to develop the full strength of the members and joints cut and to relieve residual stress.

### 3.4 GOVERNMENT INSPECTION AND TESTING

In addition to the inspection and tests performed by the Contractor for quality control, the Government will perform inspection and testing for acceptance to the extent determined by the Contracting Officer. The costs of such inspection and testing will be borne by the Contractor if unsatisfactory welds are discovered, or by the Government if the welds are satisfactory. The work may be performed by the Government's own forces or under a separate contract for inspection and testing. The Government reserves the right to perform supplemental nondestructive and destructive tests to determine compliance with paragraph STANDARDS OF ACCEPTANCE.

### 3.5 CORRECTIONS AND REPAIRS

When inspection or testing indicates defects in the weld joints, the welds shall be repaired using a qualified welder or welding operator as applicable. Corrections shall be in accordance with the requirements of AWS D1.1 and the specifications. Defects shall be repaired in accordance with the approved procedures. Defects discovered between passes shall be repaired before additional weld material is deposited. Wherever a defect is removed and repair by welding is not required, the affected area shall be blended into the surrounding surface to eliminate sharp notches, crevices, or corners. After a defect is thought to have been removed, and before rewelding, the area shall be examined by suitable methods to ensure that the defect has been eliminated. Repair welds shall meet the inspection requirements for the original welds. Any indication of a defect shall be regarded as a defect, unless reevaluation by nondestructive methods or by surface conditioning shows that no unacceptable defect is present.

-- End of Section --

01062/BERGER/ABAM  
FY02 Tactical Equipment Complex  
Fort Lewis, Washington

This page intentionally blank.



SECTION 05120

STRUCTURAL STEEL

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by basic designation only.

AMERICAN INSTITUTE OF STEEL CONSTRUCTION (AISC)

AISC FCD	(1995a) Quality Certification Program Description
AISC ASD Manual	(1989) Manual of Steel Construction Allowable Stress Design
AISC ASD/LRFD Vol II	(1992) Manual of Steel Construction Vol II: Connections
AISC Design Guide No. 10	(1989) Erection Bracing of Low-Rise Structural Steel Frames
AISC LRFD Vol I	(1995) Manual of Steel Construction Load & Resistance Factor Design, Vol I: Structural Members, Specifications & Codes
AISC LRFD Vol II	(1995) Manual of Steel Construction Load & Resistance Factor Design, Vol II: Structural Members, Specifications & Codes
AISC Pub No. S303	(1992) Code of Standard Practice for Steel Buildings and Bridges

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM A 6/A 6M	(1998a) General Requirements for Rolled Structural Steel Bars, Plates, Shapes, and Sheet Piling
ASTM A 36/A 36M	(1997a) Carbon Structural Steel
ASTM A 53	(1999) Pipe, Steel, Black and Hot-Dipped, Zinc-Coated, Welded and Seamless
ASTM A 242/A 242M	(1998) High-Strength Low-Alloy Structural Steel
ASTM A 307	(1997) Carbon Steel Bolts and Studs, 60 000 PSI Tensile Strength

ASTM A 325	(1997) Structural Bolts, Steel, Heat Treated, 120/105 ksi Minimum Tensile Strength
ASTM A 325M	(1997) High-Strength Bolts for Structural Steel Joints (Metric)
ASTM A 490	(1997) Heat-Treated Steel Structural Bolts, 150 ksi Minimum Tensile Strength
ASTM A 490M	(1993) High-Strength Steel Bolts, Classes 10.9 and 10.9.3, for Structural Steel Joints (Metric)
ASTM A 500	(1999) Cold-Formed Welded and Seamless Carbon Steel Structural Tubing in Rounds and Shapes
ASTM A 501	(1999) Hot-Formed Welded and Seamless Carbon Steel Structural Tubing
ASTM A 502	(1993) Steel Structural Rivets
ASTM A 514/A 514M	(1994a) High-Yield-Strength, Quenched and Tempered Alloy Steel Plate, Suitable for Welding
ASTM A 529/A 529M	(1996) High-Strength Carbon-Manganese Steel of Structural Quality
ASTM A 563	(1997) Carbon and Alloy Steel Nuts
ASTM A 563M	(1997) Carbon and Alloy Steel Nuts (Metric)
ASTM A 572/A 572M	(1999) High-Strength Low-Alloy Columbium-Vanadium Structural Steel
ASTM A 588/A 588M	(1997) High-Strength Low-Alloy Structural Steel with 50 ksi (345 MPa) Minimum Yield Point to 4 in. (100 mm) Thick
ASTM A 618	(1999) Hot-Formed Welded and Seamless High-Strength Low-Alloy Structural Tubing
ASTM A 709/A 709M	(1997a) Carbon and High-Strength Low-Alloy Structural Steel Shapes, Plates, and Bars and Quenched-and-Tempered Alloy Structural Steel Plates for Bridges
ASTM A 852/A 852M	(1997) Quenched and Tempered Low-Alloy Structural Steel Plate with 70 ksi (485 MPa) Minimum Yield Strength to 4 in. (100 mm) Thick
ASTM A 992/A 992M	(1998e1) Steel for Structural Shapes For Use in Building Framing

ASTM F 436	(1993) Hardened Steel Washers
ASTM F 436M	(1993) Hardened Steel Washers (Metric)
ASTM F 844	(1998) Washers, Steel, Plain (Flat), Unhardened for General Use
ASTM F 959	(1999) Compressible-Washer-Type Direct Tension Indicators for Use with Structural Fasteners

AMERICAN SOCIETY OF MECHANICAL ENGINEERS (ASME)

ASME B18.21.1	(1994) Lock Washers (Inch Series)
ASME B46.1	(1995) Surface Texture (Surface Roughness, Waviness, and Lay)

AMERICAN WELDING SOCIETY (AWS)

AWS A2.4	(1998) Standard Symbols for Welding, Brazing and Nondestructive Examination
AWS D1.1	(1998) Structural Welding Code - Steel

STEEL STRUCTURES PAINTING COUNCIL (SSPC)

SSPC Paint 25	(1991) Red Iron Oxide, Zinc Oxide, Raw Linseed Oil and Alkyd Primer (without Lead and Chromate Pigments)
---------------	--

1.2 GENERAL REQUIREMENTS

Structural steel fabrication and erection shall be performed by an organization experienced in structural steel work of equivalent magnitude. The Contractor shall be responsible for correctness of detailing, fabrication, and for the correct fitting of structural members. Connections, for any part of the structure not shown on the contract drawings, shall be considered simple shear connections and shall be designed and detailed in accordance with pertinent provisions of AISC ASD Manual and AISC LRFD Vol II. Substitution of sections or modification of connection details will not be accepted unless approved by the Contracting Officer. AISC ASD Manual and AISC ASD/LRFD Vol II shall govern the work. Welding shall be in accordance with AWS D1.1; except that welding for critical applications shall be in accordance with Section 05090 WELDING, STRUCTURAL or paragraph WELDING. High-strength bolting shall be in accordance with AISC ASD Manual.

1.3 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only. When used, a designation following the "G" designation identifies the office that

will review the submittal for the Government. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

SD-02 Shop Drawings

Structural Steel System; G  
Structural Connections; G

Shop and erection details including members (with their connections) not shown on the contract drawings. Welds shall be indicated by standard welding symbols in accordance with AWS A2.4.

SD-03 Product Data

Erection; G

Prior to erection, erection plan of the structural steel framing describing all necessary temporary supports, including the sequence of installation and removal.

Welding; G

WPS not prequalified.

SD-04 Samples

High Strength Bolts and Nuts;  
Carbon Steel Bolts and Nuts;  
Nuts Dimensional Style;  
Washers;

Random samples of bolts, nuts, and washers as delivered to the job site if requested, taken in the presence of the Contracting Officer and provided to the Contracting Officer for testing to establish compliance with specified requirements.

SD-07 Certificates

Mill Test Reports;

Certified copies of mill test reports for structural steel, structural bolts, nuts, washers and other related structural steel items, including attesting that the structural steel furnished contains no less than 25 percent recycled scrap steel and meets the requirements specified, prior to the installation.

Welder Qualifications;

Certified copies of welder qualifications test records showing qualification in accordance with AWS D1.1.

Welding Inspector;

Welding Inspector qualifications.

Fabrication;

A copy of the AISC certificate indicating that the fabrication plant meets the specified structural steelwork category.

#### 1.4 STORAGE

Material shall be stored out of contact with the ground in such manner and location as will minimize deterioration.

#### 1.5 WELDING INSPECTOR

Welding Inspector qualifications shall be in accordance with AWS D1.1

### PART 2 PRODUCTS

#### 2.1 STRUCTURAL STEEL

##### 2.1.1 Carbon Grade Steel

Carbon grade steel shall conform to ASTM A 36/A 36M.

##### 2.1.2 High-Strength Low-Alloy Steel

High-strength low-alloy steel shall conform to ASTM A 992/A 992M, Grade 345.

##### 2.1.3 Structural Shapes for Use in Building Framing

All wide flange shapes used shall be in accordance with ASTM A 992/A 992M.

#### 2.2 STRUCTURAL TUBING

Structural tubing shall conform to ASTM A 500, Grade B.

#### 2.3 STEEL PIPE

Steel pipe shall conform to ASTM A 53, Grade B.

#### 2.4 HIGH STRENGTH BOLTS AND NUTS

High strength bolts shall conform to ASTM A 325 , Type 1 with carbon steel nuts conforming to ASTM A 563 , Grade C.

#### 2.5 CARBON STEEL BOLTS AND NUTS

Carbon steel bolts shall conform to ASTM A 307, Grade A with carbon steel nuts conforming to ASTM A 563 , Grade A.

#### 2.6 NUTS DIMENSIONAL STYLE

Carbon steel nuts shall be Heavy Hex style when used with ASTM A 307 bolts or Heavy Hex style when used with ASTM A 325 ASTM A 490 bolts.

## 2.7 WASHERS

Plain washers shall conform to ASTM F 844. Other types, when required, shall conform to ASTM F 436.

## 2.8 PAINT

Paint shall conform to SSPC Paint 25.

# PART 3 EXECUTION

## 3.1 FABRICATION

Fabrication shall be in accordance with the applicable provisions of AISC Manual. Fabrication and assembly shall be done in the shop to the greatest extent possible. The fabricating plant shall be certified under the AISC FCD for Category SBD structural steelwork. Compression joints depending on contact bearing shall have a surface roughness not in excess of 13 micrometer as determined by ASME B46.1, and ends shall be square within the tolerances for milled ends specified in ASTM A 6/A 6M. Structural steelwork, except surfaces of steel to be encased in concrete, surfaces to be field welded, surfaces to be fireproofed, and contact surfaces of friction-type high-strength bolted connections shall be prepared for painting in accordance with endorsement "P" of AISC FCD and primed with the specified paint.

## 3.2 ERECTION

Erection of structural steel shall be in accordance with the applicable provisions of AISC LRFD Vol I. Erection plan shall be reviewed, stamped and sealed by a structural engineer licensed by the state in which the project is located.

### 3.2.1 Structural Connections

Anchor bolts and other connections between the structural steel and foundations shall be provided and shall be properly located and built into connecting work. Field welded structural connections shall be completed before load is applied.

### 3.2.2 Base Plates and Bearing Plates

Column base plates for columns and bearing plates for beams, girders, and similar members shall be provided. Base plates and bearing plates shall be provided with full bearing after the supported members have been plumbed and properly positioned, but prior to placing superimposed loads. Separate setting plates under column base plates will not be permitted. The area under the plate shall be damp-packed solidly with bedding mortar, except where nonshrink grout is indicated on the drawings. Bedding mortar and grout shall be as specified in Section 03300 CAST-IN-PLACE STRUCTURAL CONCRETE.

01062/BERGER/ABAM  
FY02 Tactical Equipment Complex  
Fort Lewis, Washington

### 3.2.3 Field Priming

After erection, the field bolt heads and nuts, field welds, and any abrasions in the shop coat shall be cleaned and primed with paint of the same quality as that used for the shop coat.

### 3.3 WELDING

The contractor shall develop and submit the Welding Procedure Specifications (WPS) for all welding, including welding done using prequalified procedures. Prequalified procedures may be submitted for information only; however, procedures that are not prequalified shall be submitted for approval.

### 3.4 SPECIAL INSPECTION AND TESTING FOR SEISMIC-RESISTING SYSTEMS

Special inspections and testing for seismic-resisting systems and components shall be done in accordance with Section 01452 SPECIAL INSPECTION FOR SEISMIC-RESISTING SYSTEMS.

-- End of Section -

01062/BERGER/ABAM  
FY02 Tactical Equipment Complex  
Fort Lewis, Washington

This page intentionally blank.



SECTION 05210

STEEL JOISTS

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by basic designation only.

STEEL JOIST INSTITUTE (SJI)

SJI Specs & Tables	(1994) Standard Specifications Load Tables and Weight Tables for Steel Joists and Joist Girders
--------------------	---

1.2 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only. When used, a designation following the "G" designation identifies the office that will review the submittal for the Government. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

SD-02 Shop Drawings

Steel Joists; G

Detail drawings shall include fabrication and erection details, specifications for shop painting, and identification markings of joists [and joist girders].

SD-07 Certificates

Steel Joists; G

Certificates stating that the steel joists [and joist girders] have been designed and manufactured in accordance with SJI Specs & Tables. Complete engineering design computations may be submitted in lieu of the certification.

1.3 DESCRIPTION

Steel joists are designated on the drawings in accordance with the standard designations of the Steel Joist Institute. Joists of other standard designations or joists with properties other than those shown may be substituted for the joists designated provided the structural properties are equal to or greater than those of the joists shown and provided all other specified requirements are met.

#### 1.4 DELIVERY AND STORAGE

Materials shall be delivered to the site in undamaged condition and stored off the ground in a well drained location, protected from damage, and easily accessible for inspection and handling.

### PART 2 PRODUCTS

#### 2.1 OPEN WEB STEEL JOISTS

Open web steel joists shall conform to SJI Specs & Tables, K-Series. Joists shall be designed to support the loads given in the standard load tables of SJI Specs & Tables.

#### 2.2 LONGSPAN STEEL JOISTS

Longspan steel joists shall conform to SJI Specs & Tables, LH-Series. Joists designated LH shall be designed to support the loads given in the applicable standard load tables of SJI Specs & Tables.

#### 2.3 ACCESSORIES AND FITTINGS

Accessories and fittings, including end supports and bridging, shall be in accordance with the standard specifications under which the members were designed.

#### 2.4 SHOP PAINTING

Joists and accessories shall be shop painted with a rust-inhibiting primer paint. For joists which will be finish painted under Section 09900 PAINTING, GENERAL, the primer paint shall be limited to a primer which is compatible with the specified finish paint.

### PART 3 EXECUTION

#### 3.1 ERECTION

Installation of joists shall be in accordance with the standard specification under which the member was produced. Joists shall be handled in a manner to avoid damage. Damaged joists shall be removed from the site, except when field repair is approved and such repairs are satisfactorily made in accordance with the manufacturer's recommendations. Joists shall be accurately set, and end anchorage shall be in accordance with the standard specification under which the joists were produced. For spans over 12 m through 18 m one row of bridging nearest midspan shall be bolted diagonal bridging; for spans over 18 m bolted diagonal bridging shall be used instead of welded horizontal bridging. Joist bridging and anchoring shall be secured in place prior to the application of any construction loads. Any temporary loads shall be distributed so that the carrying capacity of any joist is not exceeded. Loads shall not be applied to bridging during construction or in the completed work. Abraded, corroded, and field welded areas shall be cleaned and touched up with the same type of paint used in the shop painting.

01062/BERGER/ABAM  
FY02 Tactical Equipment Complex  
Fort Lewis, Washington

### 3.2 BEARING PLATES

Bearing plates shall be provided with full bearing after the supporting members have been plumbed and properly positioned, but prior to placing superimposed loads. The area under the plate shall be damp-packed solidly with bedding mortar, except where nonshrink grout is indicated on the drawings. Bedding mortar and grout shall be as specified in Section 03300 CAST-IN-PLACE STRUCTURAL CONCRETE.

-- End of Section --

01062/BERGER/ABAM  
FY02 Tactical Equipment Complex  
Fort Lewis, Washington

This page intentionally blank.

SECTION 05300

STEEL DECKING

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by basic designation only.

AMERICAN INSTITUTE OF STEEL CONSTRUCTION (AISC)

AISC ASD Spec	(1989) Specification for Structural Steel Buildings - Allowable Stress Design and Plastic Design
---------------	--

AMERICAN IRON AND STEEL INSTITUTE (AISI)

AISI Cold-Formed Mnl	(1996) Cold-Formed Steel Design Manual
----------------------	--

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM A 108	(1995) Steel Bars, Carbon, Cold Finished, Standard Quality
ASTM A 570/A 570M	(1996) Steel, Sheet and Strip, Carbon, Hot-Rolled, Structural Quality
ASTM A 611	(1997) Structural Steel (SS), Sheet, Carbon, Cold-Rolled
ASTM A 653/A 653M	(1997) Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process
ASTM A 780	(1993a) Repair of Damaged and Uncoated Areas of Hot-Dipped Galvanized Coatings
ASTM A 792/A 792M	(1997) Steel Sheet, 55% Aluminum-Zinc Alloy-Coated by the Hot-Dip Process
ASTM C 423	(1990a) Sound Absorption and Sound Absorption Coefficients by the Reverberation Room Method
ASTM E 795	(1993) Mounting Test Specimens During Sound Absorption Tests

AMERICAN WELDING SOCIETY (AWS)

AWS D1.1	(1998) Structural Welding Code - Steel
----------	--

AWS D1.3 (1998) Structural Welding Code - Sheet Steel

STEEL DECK INSTITUTE (SDI)

SDI Diaphragm Mnl (1987; Amended 1991) Diaphragm Design Manual

SDI Pub No 29 (1995) Design Manual for Composite Decks,  
Form Decks, Roof Decks, and Cellular Metal  
Floor Deck with Electrical Distribution

STEEL STRUCTURES PAINTING COUNCIL (SSPC)

SSPC Paint 20 (1991) Zinc-Rich Primers (Type I - Inorganic  
and Type II - Organic)

1.2 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only. When used, a designation following the "G" designation identifies the office that will review the submittal for the Government. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

SD-02 Shop Drawings

Deck Units; G  
Accessories; G  
Attachments; G  
Holes and Openings; G

Drawings shall include type, configuration, structural properties, location, and necessary details of deck units, accessories, and supporting members; size and location of holes to be cut and reinforcement to be provided; location and sequence of welded [or fastener] connections; and the manufacturer's erection instructions.

SD-03 Product Data

Deck Units; G

Design computations for the structural properties of the deck units or SDI certification that the units are designed in accordance with SDI specifications.

Attachments; FIO

Prior to welding operations, copies of qualified procedures and lists of names and identification symbols of qualified welders and welding operators.

## SD-07 Certificates

Deck Units; FIO  
Attachments; FIO

Manufacturer's certificates attesting that the decking material meets the specified requirements. Manufacturer's certificate attesting that the operators are authorized to use the low-velocity piston tool.

### 1.3 DELIVERY, STORAGE, AND HANDLING

Deck units shall be delivered to the site in a dry and undamaged condition, stored off the ground with one end elevated, and stored under a weathertight covering permitting good air circulation. Finish of deck units shall be maintained at all times by using touch-up paint whenever necessary to prevent the formation of rust.

## PART 2 PRODUCTS

### 2.1 DECK UNITS

Deck units shall conform to SDI Pub No 29. Panels of maximum possible lengths shall be used to minimize end laps. Deck units shall be fabricated in lengths to span 3 or more supports with flush, telescoped, or nested 50 mm laps at ends, and interlocking, or nested side laps, unless otherwise indicated. Deck with cross-sectional configuration differing from the units indicated may be used, provided that the properties of the proposed units, determined in accordance with AISI Cold-Formed Mnl, are equal to or greater than the properties of the units indicated and that the material will fit the space provided without requiring revisions to adjacent materials or systems.

#### 2.1.1 Roof Deck

Steel deck used in conjunction with insulation and built-up roofing shall conform to ASTM A 792/A 792M, ASTM A 611 or ASTM A 792/A 792M. Roof deck units shall be fabricated of the steel design thickness required by the design drawings and shall be zinc-coated in conformance with ASTM A 653/A 653M, G90 coating class or aluminum-zinc coated in accordance with ASTM A 792/A 792M Coating Designation AZ55.

### 2.2 TOUCH-UP PAINT

Touch-up paint for zinc-coated units shall be an approved galvanizing repair paint with a high-zinc dust content. Welds shall be touched-up with paint conforming to SSPC Paint 20 in accordance with ASTM A 780. Finish of deck units and accessories shall be maintained by using touch-up paint whenever necessary to prevent the formation of rust.

## 2.3 ADJUSTING PLATES

Adjusting plates or segments of deck units shall be provided in locations too narrow to accommodate full-size units. As far as practical, the plates shall be the same thickness and configuration as the deck units.

## 2.4 CLOSURE PLATES

### 2.4.1 Cover Plates to Close Panels

Cover plates to close panel edge and end conditions and where panels change direction or abut. Butt joints in composite steel deck may receive a tape joint cover.

## 2.5 ACCESSORIES

The manufacturer's standard accessories shall be furnished as necessary to complete the deck installation. Metal accessories shall be of the same material as the deck and have minimum design thickness as follows: saddles, 1.204 mm; welding washers, 1.519 mm; cant strip, 0.749 mm; other metal accessories, 0.909 mm; unless otherwise indicated. Accessories shall include but not be limited to saddles, welding washers, cant strips, butt cover plates, underlapping sleeves, and ridge and valley plates.

# PART 3 EXECUTION

## 3.1 ERECTION

Erection of deck and accessories shall be in accordance with SDI Diaphragm Mnl and the approved detail drawings. Damaged deck and accessories including material which is permanently stained or contaminated, with burned holes or deformed shall not be installed. The deck units shall be placed on secure supports, properly adjusted, and aligned at right angles to supports before being permanently secured in place. The deck shall not be used for storage or as a working platform until the units have been secured in position. Loads shall be distributed by appropriate means to prevent damage during construction and to the completed assembly. The maximum uniform distributed storage load shall not exceed the design live load. There shall be no loads suspended directly from the steel deck.

## 3.2 ATTACHMENTS

All fasteners shall be installed in accordance with the manufacturer's recommended procedure, except as otherwise specified. The deck units shall be welded with nominal 16 mm diameter puddle welds, powder-actuated fasteners, or pneumatically driven fasteners to supports as indicated on the design drawings and in accordance with requirements of SDI Pub No 29. All welding of steel deck shall be in accordance with AWS D1.3 using methods and electrodes as recommended by the manufacturer of the steel deck being used. Welds shall be made only by operators previously qualified by tests prescribed in AWS D1.3 to perform the type of work required. Welding washers shall not be used at the connections of the deck to supports. Welding washers shall not be used at sidelaps. Holes and similar defects will not be acceptable. Deck ends shall be lapped 50 mm. All partial or



segments of deck units shall be attached to structural supports in accordance with Section 2.5 of SDI Diaphragm Mnl. Powder-actuated fasteners shall be driven with a low-velocity piston tool by an operator authorized by the manufacturer of the piston tool. Pneumatically driven fasteners shall be driven with a low-velocity fastening tool and shall comply with the manufacturer's recommendations.

### 3.3 HOLES AND OPENINGS

All holes and openings required shall be coordinated with the drawings, specifications, and other trades. Holes and openings shall be drilled or cut, reinforced and framed as indicated on the drawings or described in the specifications and as required for rigidity and load capacity. Holes and openings less than 150 mm across require no reinforcement. Holes and openings 150 to 300 mm across shall be reinforced by 1.204 mm (0.0474 inch) thick steel sheet at least 300 mm wider and longer than the opening and be fastened to the steel deck at each corner of the sheet and at a maximum of 150 mm on center. Holes and openings larger than 300 mm shall be reinforced by steel angles installed perpendicular to the steel joists and supported by the adjacent steel joists. Steel angles shall be installed perpendicular to the deck ribs and shall be fastened to the angles perpendicular to the steel joists. Openings must not interfere with seismic members such as chords and drag struts.

-- End of Section --

01062/BERGER/ABAM  
FY02 Tactical Equipment Complex  
Fort Lewis, Washington

This page intentionally blank.

SECTION 05400

COLD-FORMED STEEL FRAMING

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by the basic designation only.

AMERICAN IRON AND STEEL INSTITUTE (AISI)

AISI Cold-Formed Spec	(1996) Specification & Commentary for the Design of Cold-Formed Steel Structural Members (Part V of the Cold-Formed Steel Design Manual)
-----------------------	--

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM A 123/A 123M	(1997a <sup>1</sup> ) Zinc (Hot-Dip Galvanized) Coatings on Iron and Steel Products
ASTM A 153/A 153M	(1998) Zinc Coating (Hot-Dip) on Iron and Steel Hardware
ASTM A 370	(1997a) Mechanical Testing of Steel Products
ASTM A 653/A 653M	(1999) Steel Sheet, Zinc Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process
ASTM B 633	(1985; R 1998) Electrodeposited Coatings of Zinc on Iron and Steel
ASTM C 955	(1998) Load-Bearing (Transverse and Axial) Steel Studs, Runners (Tracks), and Bracing or Bridging for Screw Application of Gypsum Panel Products and Metal Plaster Bases
ASTM C 1007	(1998e <sup>1</sup> ) Installation of Load Bearing (Transverse and Axial) Steel Studs and Related Accessories
ASTM E 329	(1998) Agencies Engaged in the Testing and/or Inspection of Materials Used in Construction

AMERICAN WELDING SOCIETY (AWS)

AWS D1.3	(1998) Structural Welding Code - Sheet Steel
----------	--

SOCIETY OF AUTOMOTIVE ENGINEERS (SAE)

SAE J 78 (1998) Steel Self Drilling Tapping Screws

1.2 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only. When used, a designation following the "G" designation identifies the office that will review the submittal for the Government. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

SD-02 Shop Drawings

Framing Components; G

- a. Cross sections, plans, and/or elevations showing component types and locations for each framing application; including shop coatings and material thicknesses for each framing component.
- b. Connection details showing fastener type, quantity, location, and other information to assure proper installation.
- c. Drawings depicting panel configuration, dimensions, components, locations, and construction sequence if the Contractor elects to install prefabricated/prefinished frames.
- d. Shop drawings shall be sealed by a professional structural or civil engineer experienced in design of this Work and licensed in the State of Washington.

SD-06 Calculations

Masonry Veneer/Steel Stud Wall System; G

Calculations demonstrating that cold-formed steel framing components have been sized to withstand seismic loads and sway displacement as calculated in accordance with TI 809-04 Seismic Design for Buildings.

Calculations demonstrating that cold-formed steel framing components have been sized to withstand wind loads as calculated in accordance with ASCE 7-98 Minimum Design Loads for Buildings and Other Structures.

Wall System shall be designed according to AISI - Cold-Formed Steel Design Manual, with a maximum allowable deflection equal to 1:600 of the span. Design to provide for movement of components without damage, failure of joint seals, undue stress on fasteners, or other detrimental effects when subject to seasonal or cyclic day/night temperature ranges. Design system to accommodate construction tolerances, deflection of building structural members, and clearances of intended openings.

Calculations demonstrating the structural adequacy of steel lintels for the calculated gravity loads being supported; this analysis shall be in accordance with AISC ASD Manual. Test results demonstrating that the veneer anchors are structurally adequate to resist the specified load cases shall be submitted for approval.

Design structural elements under direct supervision of a professional structural or civil engineer experienced in design of this Work and licensed in the State of Washington.

Welds;

Certified copies of welder qualifications test records showing qualification in accordance with AWS D1.3.

### 1.3 DELIVERY, HANDLING AND STORAGE

Materials shall be delivered and handled preventing bending or other damage, and avoiding contact with soil or other contaminating materials. Finish of the framing members shall be maintained at all times, using an approved high zinc dust content, galvanizing repair paint whenever necessary to prevent the formation of rust.

## PART 2 PRODUCTS

### 2.1 STEEL STUDS, TRACKS, BRACING, BRIDGING, AND ACCESSORIES

Framing components shall comply with ASTM C 955 and the following:

- a. Material shall be corrosion-resistant steel complying with ASTM A 653/A 653M, Grade 230 or higher, having a minimum yield of 230 MPa and a G 60 minimum zinc coating.
- b. Minimum uncoated steel thickness (design thickness times 0.95):
  - (1). Studs and Tracks: 2.45 mm .
  - (2). Bracing and bridging: Thickness as shown on the drawings.
  - (3). Accessories: Standard thickness as provided by the manufacturer.
- c. Stud and Track web depth: 150 mm .
- d. Stud effective section properties required to meet the previously stated load requirements.

### 2.2 MARKINGS

Studs and track shall have product markings on the web of the section. The markings shall be repeated throughout the length of the member at a maximum

spacing of 1200 mm on center and shall be legible and easily read. The product marking shall include the following:

- a. Manufacturer's identification.
- b. Minimum delivered uncoated steel thickness.
- c. Protective coating designator.
- d. Minimum yield strength.

## 2.3 CONNECTIONS

Screws for steel-to-steel connections shall be self-drilling tapping in compliance with SAE J 78 of the type, size, and location as shown on the drawings. Electroplated screws shall have a Type II coating in accordance with ASTM B 633. Screws, bolts, and anchors shall be hot-dipped galvanized in accordance with ASTM A 123/A 123M or ASTM A 153/A 153M as appropriate. Screws bolts, and anchors shall be hot dipped galvanized in accordance with ASTM A 123/A 123Mor ASTM A 153/A 153M as appropriate.

## PART 3 EXECUTION

### 3.1 DELIVERY, HANDLING AND STORAGE

- a. Materials shall be delivered and handled in a manner to avoid bending or other damage and to avoid contact with the soil or other contaminating materials.
- b. Finish of the framing members shall be maintained at all times, using an approved high zinc dust content galvanizing repair paint whenever necessary to prevent the formation of rust.

### 3.2 CONNECTIONS

#### 3.2.1 Welds

All welding shall be performed in accordance with AWS D1.3, as modified by AISI Cold-Formed Spec. All welders, welding operations, and welding procedures shall be qualified according to AWS D1.3. All welds shall be cleaned and coated with rust inhibitive galvanizing paint.

#### 3.2.2 Screws

Screws shall be self-drilling self-tapping type, size, and location shown on the drawings. Screw penetration through joined materials shall not be less than three exposed threads. Minimum spacings and edge distances for screws shall be as specified in AISI Cold-Formed Spec. Screws covered by sheathing materials shall have low profile heads.

### 3.2.3 Anchors

Anchors shall be of the type, size, and location shown on the drawings.

## 3.3 INSTALLATION

### 3.3.1 General Requirements

- a. Prefabricated frames shall be square, with components attached to prevent racking during fabrication, transportation, and lifting. Design and construction of frames shall include provisions for lifting.
- b. Cutting of steel framing shall be by saw, shear, or plasma cutting equipment. Oxyacetylene torch cutting is not permitted.
- c. Temporary bracing shall be provided and remain in place until work is permanently stabilized.
- d. Abutting lengths of track shall be butt-welded, spliced, or each length securely anchored to a common structural element. Track shall be securely anchored to the supporting structure as shown on the drawings.
- e. Splicing of framing components, other than track and tension members, is not permitted.
- f. Wire tying of framing members is not permitted.

### 3.3.2 Non-Load Bearing Walls (Curtain walls)

- a. Studs shall be spaced as shown on the drawings.
- b. Studs shall be plumbed, aligned, and secured to the continuous runner tracks at each end, unless the stud end terminates at a deflection track.
- c. Tracks shall be securely anchored to the supporting structure as shown on the drawings.
- d. Bridging spaced as shown on the drawings shall be installed prior to the installation of facing materials.
- e. Framed wall openings shall include headers and supporting components as shown on the drawings. Headers shall be installed in all openings that are larger than the stud spacing in a wall.
- f. At wall openings for doors, windows and other similar features, the framing system shall provide for the installation and anchorage of the required subframes or finish frames. Steel frames shall be securely attached through built-in anchors to the nearest stud on each side of the opening with self-drilling screws. Double studs shall be provided at both jambs of all door openings.

- g. Installation of sheathing, wallboards, or any other collateral material shall be performed in accordance with the product manufacturer's specifications.
- h. Components (Deflection Track and/or Slide Clips) shall be provided at locations shown on the drawings to accommodate potential movements of Primary Frames. Construction shall accommodate a vertical movement of 38 mm.

### 3.3.3 Load Bearing Walls

#### 3.3.3.1 Axial Load

Installation shall comply with ASTM C 1007 and the following:

- a. Studs shall be spaced as required to meet the previously stated load requirements.
- b. Studs shall be installed seated squarely against the web of the top and bottom track to assure transfer of axial load. Studs shall be plumbed, aligned, and secured to the continuous runner tracks at each end before the installation of components which induce axial load.
- c. Studs, other than at framed openings, shall align vertically to allow for full transfer of the loads to the foundation. Vertical alignment shall be maintained at floor/wall intersections. Where vertical alignment is not possible, a continuous load distribution member at the top track shall be provided as shown on the drawings.
- d. Foundation bearing bottom track shall rest on a continuous, uniform, and level bearing surface.
- e. Tracks shall be securely anchored to the supporting structure as required to meet the previously stated load requirements.
- f. Bridging shall be installed prior to loading and the installation of facing materials.
- g. Framed wall openings shall include headers and supporting components as required to meet the previously stated load requirements. Headers shall be installed in all openings which are larger than the stud spacing in a wall.
- h. At wall openings for doors, windows and other similar features, the framing system shall provide for the installation and anchorage of the required subframes or finish frames. Steel frames shall be securely attached through built-in anchors to the nearest stud on each side of the opening with self-drilling screws. Double studs shall be provided at both jambs of all door openings.
- i. Installation of sheathing, wallboards, or any other collateral material shall be performed in accordance with the product manufacturer's specifications.



01062/BERGER/ABAM  
FY02 Tactical Equipment Complex  
Fort Lewis, Washington

#### 3.4 TOLERANCES

Vertical alignment (plumbness) of studs shall be within 1/960th of the span. Horizontal alignment (levelness) of walls shall be within 1/960th of their respective lengths. Spacing of studs shall not be more than plus 3 mm from the designed spacing providing the cumulative error does not exceed the requirements of the finishing material.

-- End of Section --

01062/BERGER/ABAM  
FY02 Tactical Equipment Complex  
Fort Lewis, Washington

This page intentionally blank.

SECTION 05500

MISCELLANEOUS METAL

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by basic designation only.

AMERICAN NATIONAL STANDARDS INSTITUTE (ANSI)

ANSI A14.3 (1992) Ladders - Fixed - Safety Requirements

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM A 36/A 36M (1997ael) Carbon Structural Steel ASTM A 53  
(1999b) Pipe, Steel, Black and Hot-Dipped,  
Zinc-Coated, Welded and Seamless

ASTM A 123/A 123M (1997ael) Zinc (Hot-Dip Galvanized) Coatings  
on Iron and Steel Products

ASTM A 283/A 283M (1998) Low and Intermediate Tensile Strength  
Carbon Steel Plates

ASTM A 475 (1998) Zinc-Coated Steel Wire Strand

ASTM A 500 (1999) Cold-Formed Welded and Seamless Carbon  
Steel Structural Tubing in Rounds and Shapes

ASTM A 924/A 924M (1999) General Requirements for Steel Sheet,  
Metallic-Coated by the Hot-Dip Process

AMERICAN SOCIETY OF CIVIL ENGINEERS (ASCE)

ASCE 7 (1995) Minimum Design Loads for Buildings and  
Other Structures

AMERICAN WELDING SOCIETY (AWS)

AWS D1.1 (1998) Structural Welding Code - Steel

1.2 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only. When used, a designation following the "G" designation identifies the office that

will review the submittal for the Government. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

SD-02 Shop Drawings

Miscellaneous Metal Items ; G

Detail drawings indicating material thickness, type, grade, and class; dimensions; and construction details. Drawings shall include catalog cuts, erection details, manufacturer's descriptive data and installation instructions, and templates.

1.3 GENERAL REQUIREMENTS

The Contractor shall verify all measurements and shall take all field measurements necessary before fabrication. Welding to or on structural steel shall be in accordance with AWS D1.1. Items specified to be galvanized, when practicable and not indicated otherwise, shall be hot-dip galvanized after fabrication. Galvanizing shall be in accordance with ASTM A 123/A 123M, ASTM A 653/A 653M, or ASTM A 924/A 924M, as applicable. Exposed fastenings shall be compatible materials, shall generally match in color and finish, and shall harmonize with the material to which fastenings are applied. Materials and parts necessary to complete each item, even though such work is not definitely shown or specified, shall be included. Poor matching of holes for fasteners shall be cause for rejection. Fastenings shall be concealed where practicable. Thickness of metal and details of assembly and supports shall provide strength and stiffness. Joints exposed to the weather shall be formed to exclude water.

1.4 DISSIMILAR MATERIALS

Where dissimilar metals are in contact, or where aluminum is in contact with concrete, mortar, masonry, wet or pressure-treated wood, or absorptive materials subject to wetting, the surfaces shall be protected with a coat of bituminous paint or asphalt varnish.

1.5 WORKMANSHIP

Miscellaneous metalwork shall be well formed to shape and size, with sharp lines and angles and true curves. Drilling and punching shall produce clean true lines and surfaces. Welding shall be continuous along the entire area of contact except where tack welding is permitted. Exposed connections of work in place shall not be tack welded. Exposed welds shall be ground smooth. Exposed surfaces of work in place shall have a smooth finish, and unless otherwise approved, exposed riveting shall be flush. Where tight fits are required, joints shall be milled. Corner joints shall be coped or mitered, well formed, and in true alignment. Work shall be accurately set to established lines and elevations and securely fastened in place. Installation shall be in accordance with manufacturer's installation instructions and approved drawings, cuts, and details.

## 1.6 ANCHORAGE

Anchorage shall be provided where necessary for fastening miscellaneous metal items securely in place. Anchorage not otherwise specified or indicated shall include slotted inserts made to engage with the anchors, expansion shields, and power-driven fasteners when approved for concrete; toggle bolts and through bolts for masonry; machine and carriage bolts for steel; and lag bolts and screws for wood.

## 1.7 SHOP PAINTING

Surfaces of ferrous metal including galvanized surfaces, shall be cleaned and shop coated with the manufacturer's standard protective coating unless otherwise specified. Surfaces of items to be embedded in concrete shall not be painted. Items to be finish painted shall be prepared according to manufacturer's recommendations or as specified.

## PART 2 PRODUCTS

### 2.1 PIPE BOLLARDS

Pipe guards shall be heavy duty steel pipe conforming to ASTM A 53, Type E or S, weight STD, hot dipped galvanized, as shown on drawings and civil details.

### 2.2 DOWNSPOUT BOOTS

Downspout boots shall be cast iron with receiving bells sized to fit downspouts.

### 2.3 GUARDRAILS

Guardrails shall be designed to resist a concentrated load of 890 N in any direction at any point of the top of the rail or 292 Newtons per meter applied horizontally to top of the rail, whichever is more severe.

#### 2.3.1 Steel Guardrails, Including Carbon Steel Inserts

Steel handrails, including inserts in concrete, shall be structural tubing conforming to ASTM A 500, Grade A or B of equivalent strength. Steel railings shall be 40 mm nominal size. Railings shall be hot-dip galvanized. Flush type rail fittings of commercial standard, welded and ground smooth with railing splice locks secured with 10 mm hexagonal recessed-head set screws. Provide 6.5 mm A36 steel toeboards 101.6 mm high continuous at floor level on guardrails located at 5 feet and above floor level.

### 2.4 LADDERS

Ladders shall be steel, fixed rail type in accordance with ANSI A14.3, extend rails at top as shown on drawings and anchor securely to floor.

## 2.5 MISCELLANEOUS

Miscellaneous plates and shapes for items that do not form a part of the structural steel framework, such as lintels, sill angles, miscellaneous mountings, and frames, shall be provided to complete the work.

## 2.6 PARTITIONS AND CEILINGS, WOVEN WIRE TYPE

Partitions shall be constructed of galvanized metal fabric attached to galvanized structural steel framing members. Fabric shall be 8 gauge steel wires woven into 50 mm diamond mesh with wire secured through weaving channels. Framing members shall be channels 38 by 3 mm minimum size. Channel frames shall be mortised and tenoned at intersections. Steel frames, posts, and intermediate members shall be of the sizes and shapes indicated. Cast-iron floor shoes and caps shall be securely attached to floor and ceiling. Doors and grilles shall be provided, complete with hardware and accessories including fixed pin butts, provisions for locking with padlock. Doors and grilles shall have cover plates as indicated. A continuous rubber bumper shall be provided at bottom of grille frame. Ferrous metal portions of partitions and accessories shall be galvanized. Provide ceiling panels of similar construction where shown. Provide provision in doors/frames for locking doors with padlock. Gaps at top and bottom shall be less than 50.8 mm, panel frame connections to walls shall be tight.

### 2.6.1 Security Cage Vestibule at Room 121 of ACE Building

Use 6 gauge wire in lieu of 8 gauge used for standard partitions. Attachment of panel frame to walls/floor/ceilings shall be located on secure side of partition and inaccessible from exterior side of cage.

## 2.7 SAFETY CHAINS

Safety chains shall be galvanized welded steel, proof coil chain tested in accordance with ASTM A 467/A 467M, Class CS. Safety chains shall be straight link style, 5 mm diameter, minimum 39 links per meter and with bolt type snap hooks on each end. Eye bolts for attachment of chains shall be galvanized 10 mm bolt with 19 mm eye, anchored securely. Two chains shall be furnished for each guarded opening.

## 2.8 SHELVING

Shelving shall conform to ANSI MH28.1 and shall be bolted open shelves capable of resisting a uniform load of 112 kg per lineal meter (75 lbs Per lineal foot). Shelves shall be 457 mm wide and the length and number of shelves shall be as indicated on drawings. Shelves shall be solid metal, not mesh.

### PART 3 EXECUTION

#### 3.1 GENERAL INSTALLATION REQUIREMENTS

All items shall be installed at the locations shown and according to the manufacturer's recommendations. Items listed below require additional procedures as specified.

#### 3.2 INSTALLATION OF PIPE BOLLARDS

Pipe guards shall be set vertically in concrete piers. Piers shall be constructed of, and the hollow cores of the pipe filled with, concrete having a compressive strength of 21 MPa.

#### 3.3 INSTALLATION OF DOWNSPOUT BOOTS

Downspouts shall be secured to building through integral lips with appropriate fasteners. Coordinate installation with installation of the storm drainage system.

#### 3.4 INSTALLATION OF GUARDRAILS

Installation shall be in pipe sleeves embedded in concrete and filled with 4,000 PSI pourable concrete.

#### 3.5 WOVEN WIRE PARTITIONS AND CEILINGS

Posts shall be set in shoes bolted securely to the floor and ceiling. Openings shall be formed using channels similar to the partition frames at ducts, pipes, and other obstructions.

#### 3.6 MOUNTING OF SAFETY CHAINS

Safety chains shall be mounted 1070 mm and 610 mm above the floor.

-- End of Section --

01062/BERGER/ABAM  
FY02 Tactical Equipment Complex  
Fort Lewis, Washington

This page intentionally blank.



SECTION 06200

FINISH CARPENTRY

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by basic designation only.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM D 570	(1981; R 1988) Test Method for Water Absorption of Plastics
ASTM D 638	(1990) Test Method for Tensile Properties of Plastics
ASTM D 696	(1979; R 1988) Test Method for Coefficient of Linear Thermal Expansion of Plastics
ASTM D 790	(1990) Test Methods for Flexural Properties of Unreinforced and reinforced Plastics and Electrical Insulating Materials
ASTM D 792	(1986) Test Methods for specific Gravity (Relative Density ) and Density of Plastics by Displacement
ASTM C 1002	(1998) Steel drill screws for the application of gypsum panel products or metal plaster bases
ASTM D 2583	(1987) Test Method for Indentation Hardness of Rigid Plastics by Means of a Barcol Impressor
ASTM D 2898	(1999) Accelerated Weathering of Fire-Retardant-Treated Wood for Fire Testing
ASTM D 3679	(1996a) Rigid Poly(Vinyl Chloride) (PVC) Siding
ASTM D 5420a	(1998) Standard Test Method for Impact Resistance of Flat, Rigid Plastic Specimen by Means of a Striker Impacted by a Falling Weight
ASTM E 84	(1991a) Test Method for Surface Burning Characteristics of Building Materials

AMERICAN WOOD-PRESERVERS' ASSOCIATION (AWPA)

AWPA C20 (1996) Structural Lumber Fire-Retardant  
Pressure Treatment

AWPA C27 (1996) Plywood - Fire-Retardant Pressure  
Treatment

ARCHITECTURAL WOODWORK INSTITUTE (AWI)

AWI Qual Stds (1997) Architectural Woodwork Quality  
Standards

DEPARTMENT OF COMMERCE (DOC)

DOC PS 1 (1996) Voluntary Product Standard -  
Construction and Industrial Plywood

DOC PS 2 (1992) Performance Standards for Wood-Based  
Structural-Use Panels

1.2 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only. When used, a designation following the "G" designation identifies the office that will review the submittal for the Government. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

SD-03 Product Data

Fiber Glass Reinforced Panels; G

Manufacturer's printed data, showing texture, density, catalog cuts, and installation instructions.

SD-04 Samples

Fiber Glass Reinforced Panels; G

Samples shall be of sufficient size to show patterns, color ranges, and types, as applicable, of the material proposed to be used.

1.3 DELIVERY AND STORAGE

Materials shall be delivered to the site in undamaged condition, stored off ground in fully covered, well-ventilated areas, and protected from extreme changes in temperature and humidity.

## PART 2 PRODUCTS

### 2.1 WOOD ITEMS

#### 2.1.1 Grading and Marking

Materials shall bear the grademark, stamp or other identifying marks indicating grades of material and rules or standards under which produced. Such identifying marks on a material shall be in accordance with the rule or standard under which the material is produced, including requirements for qualifications and authority of the inspection organization, usage of authorized identification, and information included in the identification. The inspection agency for lumber shall be certified by the Board of Review, American Lumber Standards Committee, to grade the species used. Except for plywood, wood structural panels, and lumber, bundle marking will be permitted in lieu of marking each individual piece. Surfaces that are to be architecturally exposed to view shall not bear grademarks, stamps, or other types of identifying marks.

#### 2.1.2 Sizes and Patterns

Lumber sizes and patterns shall conform to rules or standards under which produced. Unless otherwise specified, lumber shall be surfaced on four sides. Sizes and patterns for materials other than lumber shall conform to requirements of the rules or standards under which produced. Size references, unless otherwise specified, are nominal sizes, and actual sizes shall be within manufacturing tolerances allowed by the standard under which the product is produced.

#### 2.1.3 Fire-Retardant Treatment

Fire-retardant treated lumber shall be pressure treated in accordance with AWPA C20. Fire-retardant treated plywood shall be pressure treated in accordance with AWPA C27. Material use shall be defined in AWPA C20 and AWPA C27 for Interior Type A. Treatment and performance inspection shall be by a qualified independent testing agency that establishes performance ratings. Each piece or bundle of treated material shall bear identification of the testing agency to indicate performance with such rating. Items to be treated include plywood interior wall panels.

#### 2.1.4 Fire Retardant Interior Plywood Wall Panels

Plywood interior wall panels, 15.875 mm, DOC PSI, exterior type, Grade A-C, Douglas Fir plywood panel siding, fire retardant treated, ease all edges slightly, no splinters allowed.

#### 2.1.5 Fiberglass Reinforced Plastic Panels

Fiberglass reinforced plastic panel factory laminated random chopped fiberglass roving in a modified polyester copolymer resin with internal color and embossed, pebble-like finish, 2.3 mm nominal thickness, 3.42

kg/m<sup>2</sup>. Color shall match the color indicated in Section 09915 Color Schedule. Panels shall have the following minimum physical properties:

Flexural strength (PSI)	9,000 per ASTM D 790
Flexural modulus (PSI)	420,000 per ASTM D 790
Tensile strength (PSI)	4,300 per ASTM D 638
Tensile modulus (PSI)	660,000 per ASTM D 638
Barcol hardness	42 per ASTM D 2583
Gardner impact strength (in./lb.)	16 per ASTM D 3029
	1.6 X 10 <sup>-5</sup> per ASTM D696
Water absorption (%)	0.16/24 hrs @ 77° F
Abrasion resistance (% max. wt. Loss)	0.038 Taber (25 cycles)
Specific gravity	1.18 per ASTM D 792
Surface burning characteristics	Class C per ASTM E84

#### 2.1.5.1 Trim

One piece trim moldings are specifically for use with fiberglass reinforced plastic panels from extruded polyvinyl chloride, integral color matching panel color.

#### 2.1.5.2 Adhesive

Provide adhesive recommended by panel manufacturer for use on substrate material.

#### 2.1.5.2 Sealant

Provide silicon sealant recommended by panel manufacturer.

### 2.2 SCREWS

Screws shall conform to ASTM C 1002. Screws shall be galvanized, bugle head, self-drilling and self-tapping steel, Type S for light gauge steel framing.

## PART 3 EXECUTION

### 3.1 Installation of Interior Plywood Panels

Panels shall be installed horizontally with "A" Grade face out and end joints centered on framing members. Lay out panels on each wall for minimum number of cuts and for equal width cuts at ends. Install panels with edges and ends level and plumb. Accurately cut and fit panels and positioned without springing or otherwise forcing siding in place. Joints shall be fit uniformly snug without open gaps or poor fit. Panels shall be attached to framing members securely with screws spaced at 20.32 cm on center; hold screws back from edge of panel so that screw head is at least 3.175 mm from edge or enough to prevent edge damage; install screws flush with surface of panel and sand any roughness or splinters smooth. Remove dust and dirt in preparation for field painting specified in Section 09900 PAINTING, GENERAL.

01062/BERGER/ABAM  
FY02 Tactical Equipment Complex  
Fort Lewis, Washington

### 3.2 Installation of Fiberglass Reinforced Plastic Panels

Install panels in accordance with panel manufacturer's installation instructions using recommended adhesive for secure attachment to substrate. Install panels vertically; lay out panels for minimum number of cuts and for equal width cuts at ends. Install panels with edges plumb. Install trim at all exposed edges and seal watertight with sealant in accordance with panel manufacturer's instructions.

-- End Of Section -

01062/BERGER/ABAM  
FY02 Tactical Equipment Complex  
Fort Lewis, Washington

This page intentionally blank.

SECTION 07212

BUILDING INSULATION

PART 1 GENERAL

1.1 REFERENCES

AMERICAN SOCIETY FOR TESTING AND MATERIALS

ASTM C 578	(1995) Standard Specification for Rigid, Cellular Polystyrene Thermal Insulation
ASTM C 665	(1995) Standard Specification for Mineral-Fiber Blanket Thermal Insulation for Light Frame Construction and Manufactured Housing
ASTM C 1136	(2000) Standard Specification for Flexible, Low Permeance Vapor Retarders for Thermal Insulation
ASTM D 774/D774M	(1997) Standard Test Method for Bursting Strength of Paper
ASTM E 84	(1996a) Standard Test Method for Surface Burning Characteristics of Building Materials
ASTM E 96	(1995) Standard Test Methods for Water Vapor Transmission of Materials
ASTM E 154	(1988; R 1999) Water Vapor Retarders Used in Contact with Earth Under Concrete Slabs, on Walls, or as Ground Cover

NATIONAL FIRE PROTECTION ASSOCIATION

NFPA 255	Standard Method of Test of Surface Burning Characteristics of Building Materials; 1996.
----------	---

1.2 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only. When used, a designation following the "G" designation identifies the office that will review the submittal for the Government. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

SD-03 Product Data

Insulation; G

Manufacturer's descriptive data and catalog cut sheet

1.3 ENVIRONMENTAL REQUIREMENTS

Do not install insulation adhesives when temperature or weather conditions are detrimental to successful installation.

PART 2 PRODUCTS

2.1 FOUNDATION PERIMETER RIDID INSULATION MATERIALS

Rigid Insulation: Extruded Polystyrene Board Insulation, ASTM C 578, Type IV; extruded cellular type polystyrene board with either natural skin or cut cell surfaces; with the following characteristics:

Board Edges: Square.

Compressive Resistance: 25 psi.

Water Absorption, maximum: 0.3 percent, volume.

Flame/Smoke Properties: 5/165 in accordance with ASTM E 84.

2.2 BATT & BLANKET INSULATION MATERIALS

2.2.1 Batt Insulation

ASTM C 665; preformed glass fiber batt; friction fit, Type I unfaced, widths required for snug friction fit between framing members free of gaps or voids.

2.3 VAPOR RETARDER

Vapor retarder shall be a laminated sheet consisting of 0.0003 thick aluminum foil (exposed face) bonded to a 5x5 tri-directional fiberglass and polyester scrim and 30# natural kraft paper; with a water transmission rate of 0.02 US perm per ASTM E-96, Procedure A; puncture resistance of 85 beach units per ASTM C-1136; bursting strength of 60 psi per ASTM D-774; tensile strength of 24.95 kg MD and 15.88 kg. CD per ASTM C-1136; flame spread of 5 and smoke developed of 0 when tested in accordance with ASTM E-84.

2.3.1 Adhesive

Type recommended by manufacturer for application of vapor retarder to framing.



### PART 3 EXECUTION

#### 3.1 EXAMINATION

Verify that substrate, adjacent materials, and insulation materials are dry and that substrates are ready to receive insulation and adhesive. Verify substrate surfaces are flat, free of honeycomb, fins, irregularities, or materials or substances that may impede adhesive bond.

#### 3.2 RIGID INSULATION INSTALLATION AT FOUNDATION PERIMETER

Install boards as shown at entire foundation perimeter. Where insulation boards are installed horizontally, level subgrade for uniform support of entire panel and so that top of board is at subgrade elevation. Butt edges and ends tightly to adjacent boards and to protrusions. Cut and fit insulation tightly to protrusions or interruptions to the insulation plane.

#### 3.3 BATT INSTALLATION

Install insulation in accordance with manufacturer's instructions. Friction fit in cavities and spaces to prevent displacement or sagging. Insulate the entire area without gaps or voids. Do not compress insulation. Where wall framing is deeper than the insulation, place the batt tight to the exterior wall sheathing (leaving a void space on the interior, warm side of the batt). Trim insulation neatly to fit spaces. Insulate miscellaneous gaps and voids. Fit insulation tightly in cavities and tightly to exterior side of mechanical and electrical services within the plane of the insulation. Leave no gaps or voids. Where there is no wall framing, retain insulation batts/blankets in place with spindle fasteners at 30.48 cm on center.

#### 3.4 VAPOR RETARDER

Install vapor retarder membrane in a continuous unbroken sheet on warm side of thermal insulation installed at building exterior. Lap ends and side flanges of membrane over framing members and seal with continuous tape. At metal framing, place vapor retarder on warm side of insulation using adhesive and tape; lap and seal vapor retarder joints over member face with tape. Tape seal tears or cuts in vapor retarder. Extend vapor retarder tightly to full perimeter of adjacent window and door frames and other items interrupting the plane of the membrane. Overlap the moisture barrier installed on exterior side of wall at all window, door and other openings and tape continuously. Where there is no wall framing, retain insulation and vapor retarder in place with spindle fasteners at 30.48 cm on center.

#### 3.5 PROTECTION OF FINISHED WORK

Do not permit installed insulation to be damaged prior to its concealment.

-- End of Section --

01062/BERGER/ABAM  
FY02 Tactical Equipment Complex  
Fort Lewis, Washington

This page intentionally blank.

SECTION 07261

MOISTURE BARRIERS

PART 1 GENERAL

1.1 REFERENCES

AMERICAN ASSOCIATION OF TEXTILE CHEMISTS AND COLORISTS (AATCC)

AATCC TM 127	(1998) Test Method: Water Resistance: Hydrostatic Pressure Test
--------------	--

AMERICAN SOCIETY FOR TESTING AND MATERIALS

ASTM E 96	(1995) Standard Test Methods for Water Vapor Transmission of Materials
-----------	---

ASTM D412	(1998a) Standard Test Methods for Vulcanized Rubber and Thermoplastic Rubbers and Thermoplastic Elastomers-Tension
-----------	--

ASTM D-779	(1994) Standard Test Method for Water Resistance of Paper, Paper Board and Other Sheet Materials by the Dry Indicator Method
------------	--

ASTM D903	(1998) Standard Test Method for Peel or Stripping Strength of Adhesive Bonds
-----------	---

ASTM D-828	(1993) Tensile Properties of Paper and Paperboard Using Constant-Rate-of- Elongation Apparatus
------------	--

ASTM D-882	(2000) Standard Test Method for Tensile Properties of Thin Plastic Sheeting
------------	--

ASTM D-1204	(1994) Standard Test Method for Linear Dimensional Changes of Nonrigid Thermoplastic Sheeting or Film at Elevated Temperature
-------------	--

ASTM E 1677	(1995) Standard Specification for an Air Retarder (AR) Material or System for Low- Rise Framed Building Walls
-------------	---

ASTM D-1709	(1998) Standard Test Methods for Impact Resistance of Plastic Film by the Free- Falling Dart Method
-------------	---

01062/BERGER/ABAM  
FY02 Tactical Equipment Complex  
Fort Lewis, Washington

ASTM D-2103	(1997) Standard Specification for Polyethylene Film and Sheeting
ASTM D-2261	(1996) Standard Test Method for Tearing Strength of Fabrics by the Tongue (Single Rip) Procedure (Constant-Rate-of-Extension Tensile Testing Machine)
ASTM D-2582	(2000) Standard Test Method for Puncture-Propagation Tear Resistance of Plastic Film and Thin Sheeting

FEDERAL SPECIFICATION (FS)

FS UU-B-790a	Building Paper, Vegetable Fiber: (Kraft, Waterproofed, Water Repellent, and Fire Resistant)
--------------	---

## 1.2 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only. When used, a designation following the "G" designation identifies the office that will review the submittal for the Government. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

SD-03 Product Data

Moisture Barrier; G

Manufacturer's descriptive data and catalog cut sheet

## PART 2 PRODUCTS

### 2.1 MATERIALS

#### 2.1.1 Underslab Vapor Retarder

5-ply high density polyethylene copolymer and nylon yarn laminate; reinforcement shall consist of two non-woven grids of diamond shaped pattern nylon yarn with no less than 96 yarns per square foot which provides a uniform loading resistance of no less than 626 kg per yard in all directions; physical properties shall be as follows:

- 18 kg per 92.9 square meters per ASTM D-2103
- 52 kg tensile strength for 76.2 mm width MD per ASTM D-882
- 160% elongation for 76.2 mm width MD per ASTM D-882
- 10 kg of PPT tear strength per ASTM D-2382
- 6 kg 3x8 tongue tear per ASTM D-2261
- 1700 grams drop dart per ASTM D-1709
- <2.0% total area hot air shrink at 76.66 C per ASTM D-1204

#### 2.1.2 Poly Flashing

25 mil thick self-adhesive membrane flashing consisting of a self-sealing SBS modified asphalt core laminated to a cross-laminated high density polyethylene film reinforcement with a siliconized paper release sheet; 11 kg per 100 square feet; 8.8 lb.<sup>f</sup>/inch per ASTM D-903; 9.3 lb.<sup>f</sup>/inch lap adhesion per ASTM D-903; 996 psi tensile strength per ASTM D-412; 7,600 psi film tensile strength per ASTM D-412; 160% elongation per ASTM D-412; <0.08 perms water vapor permeance per ASTM E-96; >200 hours of water resistance per ASTM D-779. Provide in rolls, width as required to achieve 152.4 mm overlap onto moisture barrier after sealing to door frames, window frames, ducts or other items penetrating the exterior walls.

#### 2.1.3 Type I Moisture Barrier

Two plies of factory laminated asphalt saturated kraft paper breather type sheathing paper exceeding the requirements of FS UU-B-790a, Type 1, Style 2, Grade D; water vapor transmission of 35 grams minimum per ASTM E-96(A); water resistance of 110 minutes when tested in accordance with ASTM D-779; tensile strength of MD-144 lb.<sup>f</sup>/inch and CD-58 lb.<sup>f</sup>/inch minimum.

#### 2.1.4 Type II Moisture Barrier

Spunbonded olefin, nonwoven, non-perforated moisture barrier; conforming with ASTM E 1677, Type I; air leakage at 25 mph wind pressure less than 0.06 cubic feet per minute per square foot; water vapor transmission greater than 20 perms ASTM E 96, Method B; water penetration resistance of 78.7 inches minimum per AATCC Test Method 127.

##### 2.1.4.1 Sealing Tape

Tape recommended by barrier manufacturer.

##### 2.1.4.2 Fasteners:

Steel Framing, Exterior Gypsum: Rust-resistant screws with washers recommended by barrier manufacturer.

Masonry: Polyurethane or elastomeric adhesives recommended by barrier manufacturer.

### PART 3 EXECUTION

#### 3.1 INSTALLATION

##### 3.1.1 Underslab Vapor Retarder

Install underslab vapor retarder in continuous sheet directly under and in contact with the concrete slab on grade. Install boots at all pipe and conduit penetrations through vapor retarder and clamp tight to pipe/conduit. Tape all seams continuously vapor tight; repair any tears or punctures in

vapor retarder prior to placing concrete slab. Protect vapor retarder from damage or puncture during construction.

### 3.1.2 Poly Flashing

Substrate shall be clean and dry; install poly flashing around all doors, windows, vents, openings and penetrations in exterior walls in accordance with manufacturer's installation instructions in a manner that will prevent the entrance of water into the building (behind the moisture barrier). Seal watertight to door frames, window frames, louvers/ducts, pipe, conduit and any other penetrations through the exterior walls and weatherlap moisture barrier at least 152.4 mm. Coordinate installation with installation of moisture barrier to provide weather-lapped, watertight installation.

### 3.1.3 Type I Moisture Barrier

Substrate shall be clean and dry; install moisture barrier horizontally in continuous lengths starting at the bottom with each successive layer overlapping the lower layer by at least 50.8 mm and with vertical joints overlapping at least 152.4 mm using corrosion resistant fasteners recommended by barrier manufacturer. Coordinate installation with installation of flexible flashing to provide weather-lapped, watertight installation.

### 3.1.4 Type II Moisture Barrier

Substrate shall be clean and dry; install moisture barrier in accordance with manufacturer's instructions over the Type I moisture barrier. Seal joints and penetrations through moisture barrier with tape and fasteners before installation of finish material. Ensure that moisture barrier is air tight, free from holes, tears, and punctures. Tape all window and door penetrations in accordance with manufacturer's instructions. Extend barrier into all openings and overlap the vapor retarder on the interior side of wall and tape continuously.

-- End of Section --

SECTION 07412

NON-STRUCTURAL METAL ROOFING

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by basic designation only.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM A 792/A 792M	(1999) Steel Sheet, 55% Aluminum-Zinc Alloy-Coated by the Hot-Dip Process
ASTM C 578	(20000) Standard Specification for Rigid, Cellular Polystyrene Thermal Insulation
ASTM C 991	(1998) Flexible Glass Fiber Insulation for Pre-Engineered Metal Buildings
ASTM D 522	(1993a) Mandrel Bend Test of Attached Organic Coatings
ASTM D 523	(1999) Specular Gloss
ASTM D 610	(1995) Evaluating Degree of Rusting on Painted Steel Surfaces
ASTM D 714	(1987; R 1994e1) Evaluating Degree of Blistering of Paints
ASTM D 968	(1993) Abrasion Resistance of Organic Coatings by Falling Abrasive
ASTM D 1308	(1987; R 1998) Effect of Household Chemicals on Clear and Pigmented Organic Finishes
ASTM D 1654	(1992) Evaluation of Painted or Coated Specimens Subjected to Corrosive Environments
ASTM D 2244	(1995) Calculation of Color Differences from Instrumentally Measured Color Coordinates
ASTM D 2247	(1997) Testing Water Resistance of Coatings in 100% Relative Humidity
ASTM D 2794	(1993) Resistance of Organic Coatings to the Effects of Rapid Deformation (Impact)
ASTM D 3359	(1997) Measuring Adhesion by Tape Test

ASTM D 4214	(1998) Evaluating Degree of Chalking of Exterior Paint Films
ASTM D 4587	(1991) Conducting Tests on Paint and Related Coatings and Materials Using a Fluorescent UV-Condensation Light- and Water- Exposure Apparatus
ASTM D 5894	(1996) Standard Practice for Cyclic Salt Fog/UV Exposure of Painted Metal, (Alternating Exposures in a Fog/Dry Cabinet and a UV/Condensation Cabinet
ASTM E 84	(1999) Surface Burning Characteristics of Building Materials
ASTM E 96	(1995) Water Vapor Transmission of Materials
SHEET METAL & AIR CONDITIONING CONTRACTORS NATIONAL ASSOCIATION (SMACNA)	
SMACNA Arch. Manual	(1993; Errata; Addenda Oct 1997) Architectural Sheet Metal Manual

UNDERWRITERS LABORATORIES (UL)

UL 580	(1994; Rev thru Feb 1998) Tests for Uplift Resistance of Roof Assemblies
--------	--

1.2 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only. When used, a designation following the "G" designation identifies the office that will review the submittal for the Government. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

SD-02 Shop Drawings

Metal Roofing ; G

a. Drawings consisting of catalog cuts, flashing details, erection drawings, shop coating and finishing specifications, and other data as necessary to clearly describe materials, sizes, layouts, construction details, fasteners, and erection. Drawings shall be provided by the metal roofing manufacturer.

b. Drawings showing the UL 580, Class 90 tested roof system assembly.



SD-04 Samples

Color Samples ; G

Two color samples, 3"x5" size, on metal, of each color specified.

SD-07 Certificates

Roof Panels ; G  
Installation ; G  
Accessories ; G

Certificates attesting that the panels and accessories conform to the specified requirements. Certificate for the roof assembly shall certify that the assembly complies with the material and fabrication requirements specified and is suitable for the installation at the indicated design slope. Certified laboratory test reports showing that the sheets to be furnished are produced under a continuing quality control program and that at least 3 representative samples of similar material to that which will be provided on this project have been previously tested and have met the quality standards specified for factory color finish.

Warranties ; G

At the completion of the project, signed copies of the 5-year Warranty for Non-Structural Metal Roofing System, a sample copy of which is attached to this section, and the 20-year Manufacturer's Material and Weathertightness Warranties.

1.3 GENERAL REQUIREMENTS

The Contractor shall furnish a commercially available roofing system which satisfies the specified design and additional requirements contained herein. The roofing system shall be provided by the Contractor as a complete system, as tested and approved in accordance with UL 580. Roof panels, components, transitions, accessories, and assemblies shall be supplied by the same roofing system manufacturer.

1.3.1 Non-Structural Metal Roof System

The Non-Structural Metal Roof System covered under this specification shall include the entire roofing system; the metal roof panels, fasteners, connectors, roof securement components, and assemblies tested and approved in accordance with UL 580. In addition, the system shall consist of panel finishes, slip sheet, insulation, all accessories, components, and trim and all connections with roof panels. This includes roof penetration items such as vents, curbs, skylights; interior or exterior gutters and downspouts, eaves, ridge, hip, valley, rake, gable, wall, or other roof system flashings installed and any other components specified within this contract to provide a weathertight roof system; and items specified in other sections of the specifications that are part of the system.

#### 1.3.2 Manufacturer

The non-structural metal roofing system shall be the product of a manufacturer who has been in the practice of manufacturing metal roofs for a period of not less than 5 years and has been involved in at least 15 projects similar in size and complexity to this project.

#### 1.3.3 Installer

The installer shall be certified by the metal roof manufacturer to have experience in installing at least three projects that are of comparable size, scope and complexity as this project for the particular roof system furnished. The installer may be either employed by the manufacturer or be an independent installer.

#### 1.4 DESIGN LOADS

Non-structural Metal Roof System assemblies shall be tested as defined in UL 580 and shall be capable of resisting the wind uplift pressures shown on the contract drawings or, as a minimum, shall be approved to resist wind uplift pressures of UL 580, Class 90.

#### 1.5 PERFORMANCE REQUIREMENTS

The metal roofing system supplied shall conform to the roof slope, the underlayment, and uplift pressures shown on the contract drawings. The Contractor shall furnish a commercially available roofing system which satisfies all the specified requirements.

#### 1.6 DELIVERY AND STORAGE

Materials shall be delivered to the site in a dry and undamaged condition and stored out of contact with the ground. Materials shall be covered with weather tight coverings and kept dry. Material shall not be covered with plastic where such covering will allow sweating and condensation. Plastic may be used as tenting with air circulation allowed. Storage conditions shall provide good air circulation and protection from surface staining.

#### 1.7 WARRANTIES

The Non-Structural Metal Roofing System shall be warranted as outlined below. Any emergency temporary repairs conducted by the owner shall not negate the warranties.

##### 1.7.1 Contractor's Weathertightness Warranty

The Non-Structural Metal Roofing System shall be warranted by the Contractor on a no penal sum basis for a period of five years against material and workmanship deficiencies; system deterioration caused by exposure to the elements and/or inadequate resistance to specified service design loads, water leaks, and wind uplift damage. The roofing covered under this warranty shall include the entire roofing system, including but not limited to, the roof panels, fasteners, connectors, roof securement components, and assemblies tested and approved in accordance with UL 580. In addition, the

system shall consist of panel finishes, slip sheet, insulation, vapor retarder, all accessories, components, and trim and all connections with roof panels. This includes roof penetration items such as vents, curbs, skylights; interior or exterior gutters and downspouts; eaves, ridge, hip, valley, rake, gable, wall, or other roof system flashings installed and any other components specified within this contract to provide a weathertight roof system; and items specified in other sections of the specifications that are part of the roof system. All material and workmanship deficiencies, system deterioration caused by exposure to the elements and/or inadequate resistance to service design loads, water leaks and wind uplift damage shall be repaired as approved by the Resident Engineer. See the attached Contractor's required warranty for issue resolution of warrantable defects. This warranty shall warrant and cover the entire cost of repair or replacement, including all material, labor, and related markups. The Contractor shall supplement this warranty with written warranties from the installer and system manufacturer, which shall be submitted along with Contractor's warranty; however, the Contractor shall be ultimately responsible for this warranty. The Contractor's written warranty shall be as outlined in attached WARRANTY FOR NON-STRUCTURAL METAL ROOF SYSTEM, and shall start upon final acceptance of the facility. It is required that the Contractor provide a separate bond in an amount equal to the installed total roofing system cost in favor of the owner (Government) covering the Contractor's warranty responsibilities effective throughout the 5 year Contractor's warranty period for the entire roofing system as outlined above.

#### 1.7.2 Manufacturer's Material Warranties

The Contractor shall furnish, in writing, the following manufacturer's material warranties which cover all Non-Structural Metal Roofing System components such as roof panels, flashing, accessories, and trim, fabricated from coil material:

a. A manufacturer's 20 year material warranty warranting that the aluminum-zinc alloy coated steel as specified herein will not rupture, fail structurally, or perforate under normal atmospheric conditions at the site. Liability under this warranty shall be limited exclusively to the cost of either repairing or replacing nonconforming, ruptured, perforated, or structurally failed coil material.

b. A manufacturer's 20 year exterior material finish warranty warranting that the factory color finish, under normal atmospheric conditions at the site, will not crack, peel, or delaminate; chalk in excess of a numerical rating of 8 when measured in accordance with ASTM D 4214; or fade or change colors in excess of 5 NBS units as measured in accordance with ASTM D 2244. Liability under this warranty is exclusively limited to refinishing or replacing the defective coated coil material.

c. A roofing system manufacturer's 20 year system weathertightness warranty.

## 1.8 COORDINATION MEETING

A coordination meeting shall be held within 45 days after contract award for mutual understanding of the metal roofing system contract requirements. This meeting shall take place at the building site and shall include representatives from the Contractor, the roofing system manufacturer, the roofing supplier, the erector, the designer, and the Resident Engineer. All items required by paragraph SUBMITTALS shall be discussed, including applicable standard manufacturer shop drawings, and the approval process. The Contractor shall coordinate time and arrangements for the meeting.

## PART 2 PRODUCTS

### 2.1 ROOF PANELS AND ROOF FLASHINGS

Roof panels and roof flashings shall be steel and shall have a factory color finish. Length of sheets shall be sufficient to cover the entire length of any unbroken roof slope for slope lengths that do not exceed 9 m. Sheets longer than 9 m may be furnished if approved by the Resident Engineer. Width of sheets shall provide nominal 609 mm of coverage in place. Design provisions shall be made for thermal expansion and contraction consistent with the type of system to be used. All sheets shall be either square-cut or miter-cut. Provide roof flashings as specified in Section 07600, the ridge cap and all flashings shall be fabricated and installed as recommended by the metal roofing manufacturer to profile/appearance shown on drawings. Height of seams at overlap of adjacent roof sheets shall be the building manufacturer's standard for the indicated roof slope and be 76 mm minimum and 101 mm maximum.

#### 2.1.1 Steel Panels

Aluminum-zinc alloy coated steel conforming to ASTM A 792/A 792M, AZ 55, 50 coating; Uncoated roof panels shall be 0.6 mm thick minimum. Panels shall be within 95 percent of the nominal thickness. Prior to shipment, mill finish panels shall be treated with a passivating chemical and oiled to inhibit the formation of oxide corrosion products. Panels that have become wet during shipment and have started to oxidize shall be rejected.

### 2.2 ROOF FLASHINGS, GUTTERS AND ACCESSORIES

Accessories shall be compatible with the roofing furnished. Gutters, downspouts, flashing, trim, metal closure strips, caps, and similar metal accessories shall be not less than the minimum thicknesses specified for roof panels. Hem all edges 12 mm and provide continuous cleat at exposed edges of flashing for proper alignment and attachment. Exposed metal accessories shall be finished to match the panels furnished. Fabricate flashings and gutters in accordance with good sheet metal fabrication standards and SMACNA Architectural Manual. Molded closure strips shall be closed-cell or solid-cell synthetic rubber or neoprene, or polyvinyl chloride premolded to match configuration of the panels and shall not absorb or retain water.

### 2.3 ROOF PANEL ATTACHMENT

Fasteners, roof clips and bearing pass for roof panels shall be zinc-coated steel, type and size as recommended by the manufacturer to meet the performance requirements and allow for thermal expansion/contraction of roof panels. Fasteners for accessories shall be the manufacturer's standard. Exposed roof fasteners are not allowed. Washer material shall be compatible with the panels; and gasketed portion of fasteners or washers shall be neoprene or other equally durable elastomeric material approximately 3 mm thick.

### 2.4 FACTORY COLOR FINISH

Panels shall have a factory applied polyvinylidene fluoride finish on the exterior exposed side using 70% Kynar 500 or Hylar 5000 resins. The exterior finish shall consist of a baked-on topcoat with an appropriate prime coat. Color shall match the color indicated in Section 09915 COLOR SCHEDULE. The exterior coating shall be a nominal 1 mil thickness consisting of a topcoat of not less than 0.8 mil dry film thickness and the paint manufacturer's recommended primer of not less than 0.2 mil thickness. The exterior color finish shall meet the test requirements specified below. The interior (backside) finish shall be a nominal 0.15 mil dry film thickness corrosion resistant primer with a 0.35 mil dry film thickness finish coat.

#### 2.4.1 Cyclic Salt Fog/UV Test

A sample of the sheets shall withstand a cyclic corrosion test for a minimum of 2016 hours in accordance with ASTM D 5894, including the scribe requirement in the test. Immediately upon removal of the panel from the test, the coating shall receive a rating of not less than 10, no blistering, as determined by ASTM D 714; 10, no rusting, as determined by ASTM D 610; and a rating of 6, over 2.0 to 3.0 mm failure at scribe, as determined by ASTM D 1654.

#### 2.4.2 Formability Test

When subjected to testing in accordance with ASTM D 522 Method B, 3 mm diameter mandrel, the coating film shall show no evidence of fracturing to the naked eye.

#### 2.4.3 Accelerated Weathering, Chalking Resistance and Color Change

A sample of the sheets shall be tested in accordance with ASTM D 4587. The coating shall withstand the weathering test without cracking, peeling, blistering, loss of adhesion of the protective coating, or corrosion of the base metal. Protective coating that can be readily removed from the base metal with tape in accordance with ASTM D 3359, Test Method B, shall be considered as an area indicating loss of adhesion. Following the accelerated weathering test, the coating shall have a chalk rating not less than No. 8 in accordance with ASTM D 4214 test procedures, and the color change shall not exceed 5 CIE or Hunter Lab color difference (delta E) units in accordance with ASTM D 2244. For sheets required to have a low gloss

finish, the chalk rating shall be not less than No. 6 and the color difference shall be not greater than 7 units.

#### 2.4.4 Humidity Test

When subjected to a humidity cabinet test in accordance with ASTM D 2247 for 1000 hours, a scored panel shall show no signs of blistering, cracking, creepage or corrosion.

#### 2.4.5 Impact Resistance

Factory-painted sheet shall withstand direct and reverse impact in accordance with ASTM D 2794 13 mm diameter hemispherical head indenter, equal to 6.7 times the metal thickness in mm, expressed in N-meters, (1.5 times the metal thickness in mils, expressed in inch-pounds,) with no cracking.

#### 2.4.6 Abrasion Resistance Test

When subjected to the falling sand test in accordance with ASTM D 968, Method A, the coating system shall withstand a minimum of 50, 80 liters of sand before the appearance of the base metal. The term "appearance of base metal" refers to the metallic coating on steel or the aluminum base metal.

#### 2.4.7 Specular Gloss

Finished roof surfaces for shall have a specular gloss value of between 10% and 15% at an angle of 60 degrees when measured in accordance with ASTM D 523.

#### 2.4.8 Pollution Resistance

Coating shall show no visual effects when covered spot tested in a 10 percent hydrochloric acid solution for 24 hours in accordance with ASTM D 1308.

### 2.5 UNDERLAYMENTS

#### 2.5.1 Felt Underlayment

Felt underlayment shall be No. 30 felt in accordance with ASTM D 226, Type II.

#### 2.5.2 Slip Sheet

Slip sheet shall be 5 pounds per 30 square meters rosin sized unsaturated building paper.

### 2.6 INSULATION

Thermal resistance of insulation shall be not less than the R-values shown on the contract drawings. R-values shall be determined at a mean temperature of 24 degrees C in accordance with ASTM C 518. Insulation shall be a standard product with the insulation manufacturer, factory marked or

identified with insulation manufacturer's name or trademark and R-value. Identification shall be on individual pieces or individual packages. The stated R-value of the insulation shall be certified by an independent Registered Professional Engineer if tests are conducted in the insulation manufacturer's laboratory.

#### 2.6.1 Rigid Board Insulation for Use Above a Roof Deck

##### 2.6.1.1 Polystyrene

Expanded bead or extruded polystyrene insulation in accordance with ASTM C 578, Type II, IV or X.

#### 2.7 INSULATION RETAINERS

Insulation retainers shall be type, size, and design necessary to adequately hold the insulation and to provide a neat appearance. Metallic retaining members shall be nonferrous or have a nonferrous coating. Nonmetallic retaining members, including adhesives used in conjunction with mechanical retainers or at insulation seams, shall have a fire resistance classification not less than that permitted for the insulation.

#### 2.8 SEALANT

Sealant shall be an elastomeric type containing no oil or asphalt. Exposed sealant shall be colored to match the applicable building color of type specifically recommended by metal roofing manufacturers for their warranted roofing systems and shall cure to a rubberlike consistency. Sealant placed in the roof panel standing seam ribs shall be provided in accordance with the manufacturer's recommendations.

#### 2.9 GASKETS AND INSULATING COMPOUNDS

Gaskets and insulating compounds shall be nonabsorptive and suitable for insulating contact points of incompatible materials. Insulating compounds shall be nonrunning after drying.

### PART 3 EXECUTION

#### 3.1 INSTALLATION

Installation shall be in accordance with the manufacturer's erection instructions and drawings. Dissimilar materials which are not compatible when contacting each other shall be insulated by means of gaskets or insulating compounds. Improper or mislocated drill holes shall be plugged with an oversize screw fastener and gasketed washer; however, sheets with an excess of such holes or with such holes in critical locations shall not be used. Exposed surfaces and edges shall be kept clean and free from sealant, metal cuttings, hazardous burrs, and other foreign material. Stained, discolored, or damaged sheets shall be removed from the site.

### 3.1.1 Roofing

Side laps shall be laid away from the prevailing winds. Side and end lap distances, joint sealing, and fastening and spacing of fasteners shall be in accordance with manufacturer's standard practice. Spacing of exposed fasteners shall present an orderly appearance. Side laps and end laps of roof panels and joints at accessories shall be sealed. Fasteners shall be driven normal to the surface. Method of applying joint sealant shall conform to the manufacturer's recommendation to achieve a complete weathertight installation. Accessories shall be fastened into substrate, except as otherwise approved. Closure strips shall be provided as indicated and where necessary to provide weathertight construction.

### 3.1.2 Field Forming of Roof Panels for Unique Areas

When roofing panels are formed from factory-color-finished steel coils at the project site, the same care and quality control measures that are taken in shop forming of roofing panels shall be observed. Rollformer shall be operated by the metal roofing manufacturer's approved installer. In cold weather conditions, preheating of the steel coils to be field formed shall be performed as necessary just prior to the rolling operations.

### 3.1.3 Underlayment

Underlayment types shall be installed over the insulation board. Install slip sheet shall as a top layer, beneath the metal roofing panels, to prevent adhesion. All underlayments shall be installed so that successive strips overlap the next lower strip in shingle fashion. Underlayments shall be installed in accordance with the manufacturer's written instructions. The underlayments shall ensure that any water that penetrates below the metal roofing panels will drain outside of the building envelope.

## 3.2 FLASHING AND GUTTER INSTALLATION

Install flashings and gutters straight and true, free of waviness or misalignment. Weatherlap flashings to shed water to building exterior in accordance with good sheet metal fabrication and installation standards and in accordance with SMACNA Architectural Manual. Lap all joints 101 mm minimum and seal lap watertight with sealant. Install expansion joints in gutters as indicated and as recommended by SMACNA Architectural Manual. Underlayment shall overlap onto eave flashings and lap under rake and ridge flashings. Installation shall be completely weather tight.

## 3.3 INSULATION INSTALLATION

Insulation shall be installed as indicated and in accordance with manufacturer's instructions. Insulation shall be continuous over entire roof surface. Rigid insulation shall be laid in the layers with all joints in close contact. Joints in the second layer shall be offset from joints in the first layer. Rigid insulation shall be attached to the metal roof deck with bearing plates and fasteners, as recommended by the insulation manufacturer, so that the insulation joints are held tight against each other, with no less than 1 fastener and bearing plate per 0.37 square meter



01062/BERGER/ABAM  
FY02 Tactical Equipment Complex  
Fort Lewis, Washington

of insulation. Layout and joint pattern of insulation and fasteners shall be indicated on the shop drawings.

01062/BERGER/ABAM  
FY02 Tactical Equipment Complex  
Fort Lewis, Washington

This page intentionally blank.

01062/BERGER/ABAM  
FY02 Tactical Equipment Complex  
Fort Lewis, Washington

CONTRACTOR'S FIVE (5) YEAR NO PENAL SUM WARRANTY  
FOR  
NON-STRUCTURAL METAL ROOF SYSTEM

FACILITY DESCRIPTION\_\_\_\_\_

BUILDING NUMBER:\_\_\_\_\_

CORPS OF ENGINEERS CONTRACT NUMBER:\_\_\_\_\_

CONTRACTOR

CONTRACTOR:\_\_\_\_\_

ADDRESS:\_\_\_\_\_

POINT OF CONTACT:\_\_\_\_\_

TELEPHONE NUMBER:\_\_\_\_\_

OWNER

OWNER:\_\_\_\_\_

ADDRESS:\_\_\_\_\_

POINT OF CONTACT:\_\_\_\_\_

TELEPHONE NUMBER:\_\_\_\_\_

CONSTRUCTION AGENT

CONSTRUCTION AGENT:\_\_\_\_\_

ADDRESS:\_\_\_\_\_

POINT OF CONTACT:\_\_\_\_\_

TELEPHONE NUMBER:\_\_\_\_\_

01062/BERGER/ABAM  
FY02 Tactical Equipment Complex  
Fort Lewis, Washington

CONTRACTOR'S FIVE (5) YEAR NO PENAL SUM WARRANTY  
FOR  
NON-STRUCTURAL METAL ROOF SYSTEM  
(continued)

THE NON-STRUCTURAL METAL ROOF SYSTEM INSTALLED ON THE ABOVE NAMED BUILDING IS WARRANTED BY \_\_\_\_\_ FOR A PERIOD OF FIVE (5) YEARS AGAINST WORKMANSHIP AND MATERIAL DEFICIENCIES, WIND DAMAGE, STRUCTURAL FAILURE, AND LEAKAGE. THE NON-STRUCTURAL METAL ROOFING SYSTEM COVERED UNDER THIS WARRANTY SHALL INCLUDE, BUT SHALL NOT BE LIMITED TO, THE FOLLOWING: THE ENTIRE ROOFING SYSTEM, MANUFACTURER SUPPLIED FRAMING AND STRUCTURAL MEMBERS, METAL ROOF PANELS, FASTENERS, CONNECTORS, ROOF SECUREMENT COMPONENTS, AND ASSEMBLIES TESTED AND APPROVED IN ACCORDANCE WITH UL 580. IN ADDITION, THE SYSTEM PANEL FINISHES, UNDERLAYMENT, SLIP SHEET, INSULATION, ALL ACCESSORIES, COMPONENTS, AND TRIM AND ALL CONNECTIONS ARE INCLUDED. THIS INCLUDES ROOF PENETRATION ITEMS SUCH AS VENTS, CURBS, SKYLIGHTS; INTERIOR OR EXTERIOR GUTTERS AND DOWNSPOUTS; EAVES, RIDGE, HIP, VALLEY, RAKE, GABLE, WALL, OR OTHER ROOF SYSTEM FLASHINGS INSTALLED AND ANY OTHER COMPONENTS SPECIFIED WITHIN THIS CONTRACT TO PROVIDE A WEATHERTIGHT ROOF SYSTEM; AND ITEMS SPECIFIED IN OTHER SECTIONS OF THE SPECIFICATIONS THAT ARE PART OF THE NON-STRUCTURAL METAL ROOFING SYSTEM.

ALL MATERIAL DEFICIENCIES, WIND DAMAGE, STRUCTURAL FAILURE, AND LEAKAGE ASSOCIATED WITH THE NON-STRUCTURAL METAL ROOF SYSTEM COVERED UNDER THIS WARRANTY SHALL BE REPAIRED AS APPROVED BY THE RESIDENT ENGINEER. THIS WARRANTY SHALL COVER THE ENTIRE COST OF REPAIR OR REPLACEMENT, INCLUDING ALL MATERIAL, LABOR, AND RELATED MARKUPS. THE ABOVE REFERENCED WARRANTY COMMENCED ON THE DATE OF FINAL ACCEPTANCE ON \_\_\_\_\_ AND WILL REMAIN IN EFFECT FOR STATED DURATION FROM THIS DATE.

SIGNED, DATED, AND NOTARIZED (BY COMPANY PRESIDENT)

\_\_\_\_\_  
(Company President)

\_\_\_\_\_  
(Date)

CONTRACTOR'S FIVE (5) YEAR NO PENAL SUM WARRANTY  
FOR  
NON-STRUCTURAL METAL ROOFING SYSTEM  
(continued)

THE CONTRACTOR SHALL SUPPLEMENT THIS WARRANTY WITH WRITTEN WARRANTIES FROM THE MANUFACTURER AND/OR INSTALLER OF THE NON-STRUCTURAL METAL ROOFING SYSTEM, WHICH SHALL BE SUBMITTED ALONG WITH THE CONTRACTOR'S WARRANTY. HOWEVER, THE CONTRACTOR WILL BE ULTIMATELY RESPONSIBLE FOR THIS WARRANTY AS OUTLINED IN THE SPECIFICATIONS AND AS INDICATED IN THIS WARRANTY EXAMPLE.

EXCLUSIONS FROM COVERAGE

1. NATURAL DISASTERS, ACTS OF GOD (LIGHTNING, FIRE, EXPLOSIONS, SUSTAINED WIND FORCES IN EXCESS OF THE DESIGN CRITERIA, EARTHQUAKES, AND HAIL).
2. ACTS OF NEGLIGENCE OR ABUSE OR MISUSE BY GOVERNMENT OR OTHER PERSONNEL, INCLUDING ACCIDENTS, VANDALISM, CIVIL DISOBEDIENCE, WAR, OR DAMAGE CAUSED BY FALLING OBJECTS.
3. DAMAGE BY STRUCTURAL FAILURE, SETTLEMENT, MOVEMENT, DISTORTION, WARPAGE, OR DISPLACEMENT OF THE BUILDING STRUCTURE OR ALTERATIONS MADE TO THE BUILDING.
4. CORROSION CAUSED BY EXPOSURE TO CORROSIVE CHEMICALS, ASH OR FUMES GENERATED OR RELEASED INSIDE OR OUTSIDE THE BUILDING FROM CHEMICAL PLANTS, FOUNDRIES, PLATING WORKS, KILNS, FERTILIZER FACTORIES, PAPER PLANTS, AND THE LIKE.
5. FAILURE OF ANY PART OF THE NON-STRUCTURAL METAL ROOF DUE TO ACTIONS BY THE OWNER TO INHIBIT FREE DRAINAGE OF WATER FROM THE ROOF AND GUTTERS AND DOWNSPOUTS OR ALLOW PONDING WATER TO COLLECT ON THE ROOF SURFACE. CONTRACTOR'S DESIGN SHALL INSURE FREE DRAINAGE FROM THE ROOF AND NOT ALLOW PONDING WATER.
6. THIS WARRANTY APPLIES TO THE NON-STRUCTURAL METAL ROOFING SYSTEM. IT DOES NOT INCLUDE ANY CONSEQUENTIAL DAMAGE TO THE BUILDING INTERIOR OR CONTENTS WHICH IS COVERED BY THE WARRANTY OF CONSTRUCTION CLAUSE INCLUDED IN THIS CONTRACT.
7. THIS WARRANTY CANNOT BE TRANSFERRED TO ANOTHER OWNER WITHOUT WRITTEN CONSENT OF THE CONTRACTOR; AND THIS WARRANTY AND THE CONTRACT PROVISIONS WILL TAKE PRECEDENCE OVER ANY CONFLICTS WITH STATE STATUTES.

01062/BERGER/ABAM  
FY02 Tactical Equipment Complex  
Fort Lewis, Washington

CONTRACTOR'S FIVE (5) YEAR NO PENAL SUM WARRANTY  
FOR  
NON-STRUCTURAL METAL ROOF SYSTEM  
(continued)

\*\*REPORTS OF LEAKS AND ROOF SYSTEM DEFICIENCIES SHALL BE RESPONDED TO WITHIN 48 HOURS OF RECEIPT OF NOTICE, BY TELEPHONE OR IN WRITING, FROM EITHER THE OWNER OR RESIDENT ENGINEER. EMERGENCY REPAIRS TO PREVENT FURTHER ROOF LEAKS SHALL BE INITIATED IMMEDIATELY; A WRITTEN PLAN SHALL BE SUBMITTED FOR APPROVAL TO REPAIR OR REPLACE THIS ROOF SYSTEM WITHIN SEVEN (7) CALENDAR DAYS. ACTUAL WORK FOR PERMANENT REPAIRS OR REPLACEMENT SHALL BE STARTED WITHIN 30 DAYS AFTER RECEIPT OF NOTICE, AND COMPLETED WITHIN A REASONABLE TIME FRAME. IF THE CONTRACTOR FAILS TO ADEQUATELY RESPOND TO THE WARRANTY PROVISIONS, AS STATED IN THE CONTRACT AND AS CONTAINED HEREIN, THE RESIDENT ENGINEER MAY HAVE THE NON-STRUCTURAL METAL ROOF SYSTEM REPAIRED OR REPLACED BY OTHERS AND CHARGE THE COST TO THE CONTRACTOR.

IN THE EVENT THE CONTRACTOR DISPUTES THE EXISTENCE OF A WARRANTABLE DEFECT, THE CONTRACTOR MAY CHALLENGE THE OWNER'S DEMAND FOR REPAIRS AND/OR REPLACEMENT DIRECTED BY THE OWNER OR RESIDENT ENGINEER EITHER BY REQUESTING A RESIDENT ENGINEER'S DECISION UNDER THE CONTRACT DISPUTES ACT, OR BY REQUESTING THAT AN ARBITRATOR RESOLVE THE ISSUE. THE REQUEST FOR AN ARBITRATOR MUST BE MADE WITHIN 48 HOURS OF BEING NOTIFIED OF THE DISPUTED DEFECTS. UPON BEING INVOKED, THE PARTIES SHALL, WITHIN TEN (10) DAYS, JOINTLY REQUEST A LIST OF FIVE (5) ARBITRATORS FROM THE FEDERAL MEDIATION AND CONCILIATION SERVICE. THE PARTIES SHALL CONFER WITHIN TEN (10) DAYS AFTER RECEIPT OF THE LIST TO SEEK AGREEMENT ON AN ARBITRATOR. IF THE PARTIES CANNOT AGREE ON AN ARBITRATOR, THE RESIDENT ENGINEER AND THE PRESIDENT OF THE CONTRACTOR'S COMPANY WILL STRIKE ONE (1) NAME FROM THE LIST ALTERNATIVELY UNTIL ONE (1) NAME REMAINS. THE REMAINING PERSON SHALL BE THE DULY SELECTED ARBITRATOR. THE COSTS OF THE ARBITRATION, INCLUDING THE ARBITRATOR'S FEE AND EXPENSES, COURT REPORTER, COURTROOM OR SITE SELECTED, ETC., SHALL BE BORNE EQUALLY BETWEEN THE PARTIES. EITHER PARTY DESIRING A COPY OF THE TRANSCRIPT SHALL PAY FOR THE TRANSCRIPT. A HEARING WILL BE HELD AS SOON AS THE PARTIES CAN MUTUALLY AGREE. A WRITTEN ARBITRATOR'S DECISION WILL BE REQUESTED NOT LATER THAN 30 DAYS FOLLOWING THE HEARING. THE DECISION OF THE ARBITRATOR WILL NOT BE BINDING; HOWEVER, IT WILL BE ADMISSIBLE IN ANY SUBSEQUENT APPEAL UNDER THE CONTRACT DISPUTES ACT.

A FRAMED COPY OF THIS WARRANTY SHALL BE POSTED IN THE MECHANICAL ROOM OR OTHER APPROVED LOCATION DURING THE ENTIRE WARRANTY PERIOD.

-- End Of Section --

SECTION 07413

METAL SIDING

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by basic designation only.

AMERICAN IRON AND STEEL INSTITUTE (AISI)

AISI Cold-Formed Mnl (1996) Cold-Formed Steel Design Manual

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM A 792/A 792M	(1999) Steel Sheet, 55% Aluminum-Zinc Alloy-Coated by the Hot-Dip Process
ASTM D 522	(1993a) Mandrel Bend Test of Attached Organic Coatings
ASTM D 610	(1995) Evaluating Degree of Rusting on Painted Steel Surfaces
ASTM D 714	(1987; R 1994el) Evaluating Degree of Blistering of Paints
ASTM D 968	(1993) Abrasion Resistance of Organic Coatings by Falling Abrasive
ASTM D 1654	(1992) Evaluation of Painted or Coated Specimens Subjected to Corrosive Environments
ASTM D 2244	(1995) Calculation of Color Differences from Instrumentally Measured Color Coordinates
ASTM D 2247	(1997) Testing Water Resistance of Coatings in 100% Relative Humidity
ASTM D 2794	(1993) Resistance of Organic Coatings to the Effects of Rapid Deformation (Impact)
ASTM D 3359	(1997) Measuring Adhesion by Tape Test
ASTM D 4214	(1998) Evaluating Degree of Chalking of Exterior Paint Films

ASTM D 4587 (1991) Conducting Tests on Paint and Related Coatings and Materials Using a Fluorescent UV-Condensation Light- and Water-Exposure Apparatus

ASTM D 5894 (1996) Standard Practice for Cyclic Salt Fog/UV Exposure of Painted Metal, (Alternating Exposures in a Fog/Dry Cabinet and a UV Condensation Cabinet)

ASTM E 84 (1999) Surface Burning Characteristics of Building Materials

ASTM E 96 (1995) Water Vapor Transmission of Materials

AMERICAN SOCIETY OF CIVIL ENGINEERS (ASCE)

ASCE 7 (1995) Minimum Design Loads for Buildings and Other Structures

## 1.2 GENERAL REQUIREMENTS

### 1.2.1 Design

Criteria, loading combinations, and definitions shall be in accordance with ASCE 7. Maximum calculated fiber stress shall not exceed the allowable value in the AISI or AA manuals; a one third overstress for wind is allowed. Midspan deflection under maximum design loads shall be limited to  $L/180$ . Contract drawings show the design wind loads and the extent and general assembly details of the metal siding. Members and connections not shown on the drawings shall be designed by the Contractor. Siding panels and accessories shall be the products of the same manufacturer. Steel siding design shall be in accordance with AISI Cold-Formed Mnl.

### 1.2.2 Architectural Considerations

Panels profile shall be as shown on the drawings.

## 1.3 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only. When used, a designation following the "G" designation identifies the office that will review the submittal for the Government. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

### SD-02 Shop Drawings

Siding ; G

Drawings consisting of catalog cuts, design and erection drawings, shop coating and finishing specifications, and other data as necessary to clearly describe design, materials, sizes, layouts, construction details, fasteners, and erection. Drawings shall be



accompanied by engineering design calculations for the siding panels.

#### SD-04 Samples

Color Samples ; G

Two color samples, 3 inch by 5 inch size, on metal, of each color specified.

#### SD-07 Certificates

Siding ; G  
Installation ; G  
Accessories ; G

Certificates attesting that the panels and accessories conform to the requirements specified. Certified laboratory test reports showing that the sheets to be furnished are produced under a continuing quality control program and that a representative sample consisting of not less than 5 pieces has been tested and has met the quality standards specified for factory color finish. Mill certification for structural bolts, siding, and wall liner panels.

### 1.4 DELIVERY AND STORAGE

Materials shall be delivered to the site in a dry and undamaged condition and stored out of contact with the ground. Materials shall be covered with weathertight coverings and kept dry. Storage accommodations for metal siding shall provide good air circulation and protection from surface staining.

### 1.5 WARRANTIES

The Contractor shall provide a weather tight warranty for the metal siding for a period of 20 years to include siding panel assembly, 10 years against the wear of color finish, and 10 years against the corrosion of fasteners caused by ordinary wear and tear by the elements. The warranties shall start upon final acceptance of the work or the date the Government takes possession, whichever is earlier.

## PART 2 PRODUCTS

### 2.1 SIDING

Panels shall be steel and shall have a mill factory color finish. Length of sheets shall be sufficient to cover the entire height of any unbroken wall surface when length of run is 9 m or less. When length of run exceeds 9 m, each sheet in the run shall extend over two or more spans. Sheets longer than 9 m may be furnished if approved by the Resident Engineer. Width of sheets with overlapping configurations shall provide not less than 600 mm of coverage in place.

#### 2.1.1 Wall Panels

Wall panels shall have edge configurations for overlapping adjacent sheets. Wall panels shall be fastened to framework using exposed fasteners.

#### 2.1.2 Steel Panels

Zinc-coated steel conforming to aluminum-zinc alloy coated steel conforming to ASTM A 792/A 792M, AZ 55 coating. Uncoated wall panels shall be 0.6 mm thick minimum. Prior to shipment, mill finish panels shall be treated with a passivating chemical and oiled to inhibit the formation of oxide corrosion products. Panels that have become wet during shipment but have not started to oxidize shall be dried, retreated, and re-oiled.

#### 2.2 FACTORY COLOR FINISH

Panels shall have a factory applied polyvinylidene fluoride finish on the exterior exposed side using 70% kynar 500 or hylar 5000 resins. The exterior finish shall consist of a baked-on topcoat with an appropriate prime coat. Color shall match the color indicated in Section 09915 COLOR SCHEDULE. The exterior coating shall be a nominal (1 mil) thickness consisting of a topcoat of not less than 0.8 mil dry film thickness and the paint manufacturer's recommended primer of not less than 0.2 mil thickness. The interior color finish shall consist of (0.15 mil) thick prime coat with a 0.35 mil thick finish coat. The exterior color finish shall meet the test requirements specified below.

##### 2.2.1 Salt Spray Test

A sample of the sheets shall withstand a cyclic corrosion test for a minimum of 2016 hours in accordance with ASTM D 5894, including the scribe requirement in the test. Immediately upon removal of the panel from the test, the coating shall receive a rating of not less than 10, no blistering, as determined by ASTM D 714; 10, no rusting, as determined by ASTM D 610; and a rating of 6, 2.0 to 3.0 mm failure at scribe, as determined by ASTM D 1654.

##### 2.2.2 Formability Test

When subjected to testing in accordance with ASTM D 522 Method B, 3 mm diameter mandrel, the coating film shall show no evidence of fracturing to the naked eye.

##### 2.2.3 Accelerated Weathering, Chalking Resistance and Color Change

A sample of the sheets shall be tested in accordance with ASTM D 4587. The coating shall withstand the weathering test without cracking, peeling, blistering, loss of adhesion of the protective coating, or corrosion of the base metal. Protective coating that can be readily removed from the base metal with tape in accordance with ASTM D 3359, Test Method B, shall be considered as an area indicating loss of adhesion. Following the accelerated weathering test, the coating shall have a chalk rating not less than No. 8 in accordance with ASTM D 4214 test procedures, and the color change shall not exceed 5 CIE or Hunter Lab color difference (delta E) units

in accordance with ASTM D 2244. For sheets required to have a low gloss finish, the chalk rating shall be not less than No. 6 and the color difference shall be not greater than 7 units.

#### 2.2.4 Humidity Test

When subjected to a humidity cabinet test in accordance with ASTM D 2247 for 1000 hours, a scored panel shall show no signs of blistering, cracking, creepage or corrosion.

#### 2.2.5 Impact Resistance

Factory-painted sheet shall withstand direct and reverse impact in accordance with ASTM D 2794 13 mm diameter hemispherical head indenter, equal to 6.7 times the metal thickness in mm, expressed in Newton-meters, (1.5 times the metal thickness in mils, expressed in inch-pounds,) with no loss of adhesion.

#### 2.2.6 Abrasion Resistance Test

When subjected to the falling sand test in accordance with ASTM D 968, Method A, the coating system shall withstand a minimum of 50, 80 liters of sand before the appearance of the base metal. The term "appearance of base metal" refers to the metallic coating on steel or the aluminum base metal.

### 2.3 ACCESSORIES

Flashing, trim, metal closure strips, caps, and similar metal accessories shall match wall panel thickness and be custom fabricated to match details/profiles shown on drawings. Exposed metal accessories shall be finished to match the panels furnished. Molded closure strips shall be closed-cell or solid-cell synthetic rubber or neoprene, or polyvinyl chloride premolded to match configuration of the panels and shall not absorb or retain water.

### 2.4 FASTENERS

Fasteners for steel panels shall be zinc-coated steel, type and size specified below or as otherwise approved for the applicable requirements. Fasteners for attaching wall panels to supports shall provide both tensile and shear strength of not less than 3340 N per fastener. Fasteners for accessories shall be the manufacturer's standard. Exposed wall fasteners shall be color finished or provided with plastic color caps to match the panels.

#### 2.4.1 Screws

Screws shall be as recommended by the manufacturer. Impax 45-Tech 5 screws are required at all steel column locations. Provide pancake-head screws at all concealed screw locations.

## 2.5 SEALANT

Sealant shall be an elastomeric type containing no oil or asphalt of type specifically recommended by metal siding manufacturer. Exposed sealant shall be colored to match the applicable building color and shall cure to a rubberlike consistency.

## 2.6 GASKETS AND INSULATING COMPOUNDS

Gaskets and insulating compounds shall be nonabsorptive and suitable for insulating contact points of incompatible materials. Insulating compounds shall be nonrunning after drying.

# PART 3 EXECUTION

## 3.1 INSTALLATION

Installation shall be in accordance with the manufacturer's erection instructions and drawings. Dissimilar materials which are not compatible when contacting each other shall be insulated from each other by means of gaskets or insulating compounds. Improper or mislocated drill holes shall be plugged with an oversize screw fastener and gasketed washer; however, panels with an excess of such holes or with such holes in critical locations shall not be used. Exposed surfaces and edges shall be kept clean and free from sealant, metal cuttings, hazardous burrs, and other foreign material. Stained, discolored, or damaged sheets shall be removed from the site.

### 3.1.1 Siding and Accessories

Siding shall be applied with ribs oriented as shown on the drawings. Accessories shall be fastened into framing members, except as otherwise approved. Closure strips shall be provided as indicated and where necessary to provide weather tight construction.

#### 3.1.1.1 Lap Type Panels with Exposed Fasteners

End laps shall be made over framing members with fasteners into framing members approximately 50 mm from the end of the overlapping sheet. Side laps shall be laid away from the prevailing winds. Spacing of fasteners shall present an orderly appearance and shall conform to siding manufacturer's recommendations not exceeding 203 mm on center at end laps of siding, 200 mm on center at connection of siding to intermediate supports, and 450 mm on center at side laps of siding except when otherwise approved. Side and end laps of siding and joints at accessories shall be sealed weather tight. Fasteners shall be installed in straight lines within a tolerance of weather tight 13 mm in the length of a bay. Fasteners shall be driven normal to the surface and to a uniform depth to seat the gasketed washers properly.

-- End of Section --

SECTION 07600

SHEET METALWORK, GENERAL

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by basic designation only.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM A 167	(1999) Stainless and Heat-Resisting Chromium-Nickel Steel Plate, Sheet, and Strip
ASTM D 226	(1997a) Asphalt-Saturated Organic Felt Used in Roofing and Waterproofing
ASTM D 822	(1996) Conducting Tests on Paint and Related Coatings and Materials Using Filtered Open-Flame Carbon-Arc Exposure Apparatus
ASTM E 96	(1995) Water Vapor Transmission of Materials

SHEET METAL & AIR CONDITIONING CONTRACTORS NATIONAL ASSOCIATION  
(SMACNA)

SMACNA Arch. Manual	(1993; Errata; Addenda Oct 1997) Architectural Sheet Metal Manual
---------------------	--

1.2 GENERAL REQUIREMENTS

Sheet metalwork shall be accomplished to form weathertight construction without waves, warps, buckles, fastening stresses or distortion, and shall allow for expansion and contraction. Cutting, fitting, drilling, and other operations in connection with sheet metal required to accommodate the work of other trades shall be performed by sheet metal mechanics. Sheet metalwork pertaining to heating, ventilating, and air conditioning is specified in Section 15895. Roof flashings, gutters and downspouts are specified in Section 07412. Wall flashings are specified in Section 07413.

1.3 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only. When used, a designation following the "G" designation identifies the office that will review the submittal for the Government. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

SD-02 Shop Drawings

Materials; G

Drawings of sheet metal items showing weights, gauges or thicknesses; types of materials; expansion-joint spacing; fabrication details; and installation procedures.

1.4 DELIVERY, STORAGE, AND HANDLING

Materials shall be adequately packaged and protected during shipment and shall be inspected for damage, dampness, and wet-storage stains upon delivery to the jobsite. Materials shall be clearly labeled as to type and manufacturer. Sheet metal items shall be carefully handled to avoid damage. Materials shall be stored in dry, ventilated areas until immediately before installation.

PART 2 PRODUCTS

2.1 MATERIALS

Lead, lead-coated metal, and galvanized steel shall not be used. Materials shall conform to the requirements specified below.

2.1.1 Accessories

Accessories and other items essential to complete the sheet metal installation, though not specifically indicated or specified, shall be provided.

2.1.2 Sealant

Unless otherwise specified, sealant shall be an elastomeric weather resistant sealant as specified in Section 07900 JOINT SEALING.

2.1.3 Fasteners

Fasteners shall be compatible with the fastened material and shall be the type best suited for the application.

2.1.4 Felt

ASTM D 226, Type I.

2.1.5 Stainless Steel

ASTM A 167, Type 302 or 304; fully annealed, dead soft temper.

#### 2.1.6 Through-Wall Flashing

- a. Stainless steel, Type 304, not less than 0.08 mm thick, completely encased by and permanently bonded on both sides to 23 kg high strength bituminized crepe kraft paper, using hot asphalt, heat, and pressure.

### PART 3 EXECUTION

#### 3.1 GENERAL REQUIREMENTS

Fabricate in conformance with SMACNA. Unless otherwise specified or indicated, exposed edges shall be folded back to form a 13 mm hem on the concealed side, and bottom edges of exposed vertical surfaces shall be angled to form drips.

#### 3.2 FLASHINGS

Flashings shall be installed at locations indicated and as specified below. Sealing shall be according to the flashing manufacturer's recommendations. Perforations in through wall flashings made by masonry anchors shall be covered up by an application of bituminous plastic cement at the perforation. Flashing shall be installed on top of joint reinforcement. Flashing shall be formed to direct water to the outside of the system.

##### 3.2.1 Through-Wall Flashing

Through-wall masonry flashing includes base flashing. The flashing shall be laid so that the total thickness of the mortar and flashing are the same thickness as the regular mortar joints. Joints in flashing shall be lapped and sealed water tight. Flashing shall be one piece for lintels and sills.

#### 3.3 CONTRACTOR QUALITY CONTROL

The Contractor shall establish and maintain a quality control procedure for sheet metal used in conjunction with masonry to assure compliance of the installed sheet metalwork with the contract requirements. Any work found not to be in compliance with the contract shall be promptly removed and replaced or corrected in an approved manner. Quality control shall include, but not be limited to, the following:

- a. Observation of environmental conditions; number and skill level of sheet metal workers; condition of substrate.
- b. Verification of compliance of materials before, during, and after installation.
- c. Inspection of sheet metalwork for proper size and thickness, fastening and joining, and proper installation.

01062/BERGER/ABAM  
FY02 Tactical Equipment Complex  
Fort Lewis, Washington

The actual quality control observations and inspections shall be documented and a copy of the documentation furnished to the Resident Engineer at the end of each day.

-- End of Section --



SECTION 07900

JOINT SEALING

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by basic designation only.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM C 509	(1994) Elastomeric Cellular Preformed Gasket and Sealing Material
ASTM C 734	(1993) Low-Temperature Flexibility of Latex Sealants After Artificial Weathering
ASTM C 834	(1995) Latex Sealants
ASTM C 920	(1998) Elastomeric Joint Sealants
ASTM C 1085	(1991) Butyl Rubber-Based Solvent-Release Sealants
ASTM C 1184	(1995el) Structural Silicone-Sealants
ASTM D 217	(1997) Cone Penetration of Lubricating Grease (IP50/88)
ASTM D 1056	(1998) Flexible Cellular Materials - Sponge or Expanded Rubber
ASTM D 1565	(1999) Flexible Cellular Materials - Vinyl Chloride Polymers and Copolymers (Open-Cell Foam)
ASTM E 84	(1999) Surface Burning Characteristics of Building Materials

1.2 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only. When used, a designation following the "G" designation identifies the office that

will review the submittal for the Government. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

SD-03 Product Data

Backing; G

Bond-Breaker; G

Sealant; G

Manufacturer's descriptive data including storage requirements, shelf life, curing time, instructions for mixing and application, and primer data (if required). A copy of the Material Safety Data Sheet shall be provided for each solvent, primer or sealant material.

SD-07 Certificates

Sealant; G

Certificates of compliance stating that the materials conform to the specified requirements.

1.3 ENVIRONMENTAL REQUIREMENTS

The ambient temperature shall be within the limits of 4 to 32 degrees C when the sealants are applied.

1.4 DELIVERY AND STORAGE

Materials shall be delivered to the job in the manufacturer's original unopened containers. The container label or accompanying data sheet shall include the following information as applicable: manufacturer, name of material, formula or specification number, lot number, color, date of manufacture, mixing instructions, shelf life, and curing time at the standard conditions for laboratory tests. Materials shall be handled and stored to prevent inclusion of foreign materials. Materials shall be stored at temperatures between 4 and 32 degrees C unless otherwise specified by the manufacturer.

PART 2 PRODUCTS

2.1 BACKING

Provide backing material/size as specifically recommended by sealant manufacturer for each joint condition. Backing shall be 25 to 33 percent oversize for closed cell and 40 to 50 percent oversize for open cell material, unless recommended otherwise by sealant manufacturer.

## 2.2 BOND-BREAKER

Bond-breaker shall be as recommended by the sealant manufacturer to prevent adhesion of the sealant to backing or to bottom of the joint.

## 2.3 PRIMER

Primer shall be non-staining type as recommended by sealant manufacturer for the application.

## 2.4 SEALANT

### 2.4.1 LATEX

Latex Sealant shall be ASTM C 834.

### 2.4.2 ELASTOMERIC

Elastomeric sealants shall conform to ASTM C 920 and the following:

- a. Polyurethane sealant: Grade NS, Class 25, Use NT, M, G, A or O as applicable; match color of adjacent surfaces to be sealed.
- b. Silicone sealant: Type S, Grade NS, Class 25, Use NT, M, G, A or O as applicable; match color of adjacent surfaces to be sealed.

### 2.4.3 ACOUSTICAL

Rubber or polymer-based acoustical sealant shall have a flame spread of 25 or less and a smoke developed rating of 50 or less when tested in accordance with ASTM E 84. Acoustical sealant shall have a consistency of 250 to 310 when tested in accordance with ASTM D 217, and shall remain flexible and adhesive after 500 hours of accelerated weathering as specified in ASTM C 734, and shall be non-staining.

### 2.4.4 BUTYL

Butyl sealant shall be ASTM C 1085.

## 2.5 SOLVENTS AND CLEANING AGENTS

Solvents, cleaning agents, and accessory materials shall be provided as recommended by the manufacturer.

## PART 3 EXECUTION

### 3.1 GENERAL

Seal all control joints, gaps, and joints between dissimilar materials using sealant materials specified herein, including perimeter of door frames, window frames, louver frames, exterior lighting, masonry control joints, joints between concrete or masonry and other materials, cracks/gaps in finish work, cracks/gaps between dissimilar materials which could admit water or will be painted. Use latex sealant on building interior only. Use

only elastomeric sealant on exterior of building. Install exterior thresholds in continuous bed of butyl sealant.

#### 3.1.1 Surface Preparation

The surfaces of joints to receive sealant or caulk shall be free of all frost, condensation and moisture. Oil, grease, dirt, chalk, particles of mortar, dust, loose rust, loose mill scale, and other foreign substances shall be removed from surfaces of joints to be in contact with the sealant. Oil and grease shall be removed with solvent and surfaces shall be wiped dry with clean cloths. For surface types not listed below, the sealant manufacturer shall be contacted for specific recommendations.

#### 3.1.2 Concrete and Masonry Surfaces

Where surfaces have been treated with curing compounds, oil, or other such materials, the materials shall be removed by sandblasting or wire brushing. Laitance, efflorescence and loose mortar shall be removed from the joint cavity. Seal joint using elastomeric sealant matching color of adjacent surfaces to be sealed. Broadcast masonry sand into fresh sealant where sealant is used for control joint in masonry construction to match appearance of mortar joints.

#### 3.1.3 Steel Surfaces

Steel surfaces to be in contact with sealant shall be sandblasted or, if sandblasting would not be practical or would damage adjacent finish work, the metal shall be scraped and wire brushed to remove loose mill scale. Protective coatings on steel surfaces shall be removed by sandblasting or by a solvent that leaves no residue. Seal joint using elastomeric sealant matching color of adjacent surfaces to be sealed.

#### 3.1.4 Aluminum Surfaces

Aluminum surfaces to be in contact with sealants shall be cleaned of temporary protective coatings. When masking tape is used for a protective cover, the tape and any residual adhesive shall be removed just prior to applying the sealant. Solvents used to remove protective coating shall be as recommended by the manufacturer of the aluminum work and shall be non-staining. Seal joint using elastomeric sealant matching color of adjacent surfaces to be sealed.

#### 3.1.5 Gypsum Wallboard and Wood Surfaces

Gypsum wallboard and wood surfaces to be in contact with sealants shall be free of splinters and dust or other loose particles. Seal joints using latex sealant.

### 3.2 APPLICATION

#### 3.2.1 Masking Tape

Masking tape [shall] be placed on the finish surface on one or both sides of a joint cavity to protect adjacent finish surfaces from primer or sealant smears. Masking tape shall be removed within 10 minutes after joint has been filled and tooled.

#### 3.2.2 Backing

Backing shall be installed to provide the required sealant depth. The installation tool shall be shaped to avoid puncturing the backing.

#### 3.2.3 Bond-Breaker

Bond-breaker shall be applied to fully cover the bottom of the joint without contaminating the sides where sealant adhesion is required.

#### 3.2.4 Primer

Primer shall be used on concrete masonry units, wood, or other porous surfaces in accordance with instructions furnished with the sealant. Primer shall be applied to the joint surfaces to be sealed. Surfaces adjacent to joints shall not be primed.

#### 3.2.5 Sealant

Sealant shall be used before expiration of shelf life. Multi-component sealants shall be mixed according to manufacturer's printed instructions. Sealant in guns shall be applied with a nozzle of proper size to fit the width of joint. Joints shall be sealed as detailed in the drawings. Sealant shall be forced into joints with sufficient pressure to expel air and fill the groove solidly. Sealant shall be installed to the indicated depth without displacing the backing. Unless otherwise indicated, specified, or recommended by the manufacturer, the installed sealant shall be dry tooled to produce a uniformly smooth surface free of wrinkles and to ensure full adhesion to the sides of the joint; the use of solvents, soapy water, etc., will not be allowed. Sealants shall be installed free of air pockets, foreign embedded matter, ridges and sags. Sealer shall be applied over the sealant when and as specified by the sealant manufacturer.

### 3.3 CLEANING

The surfaces adjoining the sealed joints shall be cleaned of smears and other soiling resulting from the sealant application as work progresses.

-- End Of Section --

01062/BERGER/ABAM  
FY02 Tactical Equipment Complex  
Fort Lewis, Washington

This page intentionally blank.

SECTION 08110

STEEL DOORS AND FRAMES

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by basic designation only.

AMERICAN NATIONAL STANDARDS INSTITUTE (ANSI)

ANSI A250.3	(1999) Test Procedure and Acceptance Criteria for Factory Applied Finish
ANSI A250.6	(1997) Hardware on Steel Doors (Reinforcement - Application)
ANSI A250.8	(1998) Standard Steel Doors and Frames
ANSI A 250.10	(1998) Test Procedure and Acceptance Criteria for Prime Painted Steel Surfaces for Steel Doors

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM C 236	(1989; R 1993el) Steady-State Thermal Performance of Building Assemblies by Means of a Guarded Hot Box
ASTM C 976	(1990; R 1996e) Thermal Performance of Building Assemblies by Means of a Calibrated Hot Box
ASTM D 2863	(1997) Measuring the Minimum Oxygen Concentration to Support Candle-Like Combustion of Plastics (Oxygen Index)
ASTM E 90	(1999) Laboratory Measurement of Airborne Sound Transmission Loss of Building Partitions
ASTM E 283	(1991) Determining the Rate of Air Leakage Through Exterior Windows, Curtain Walls, and Doors Under Specified Pressure Differences Across the Specimen

DOOR AND HARDWARE INSTITUTE (DHI)

DHI A115.1G	(1994) Installation Guide for Doors and Hardware
-------------	--

NATIONAL ASSOCIATION OF ARCHITECTURAL METAL MANUFACTURERS (NAAMM)

NAAMM HMMA 862	(1987) Hollow Metal Manual; Section: Guide Specifications for Commercial Security Hollow Metal Doors and Frames
NAAMM HMMA 865	(1995) Hollow Metal Manual; Section: Guide Specifications for Swinging Sound Control Hollow Metal Doors and Frames

NATIONAL FIRE PROTECTION ASSOCIATION (NFPA)

NFPA 80	(1999) Fire Doors and Fire Windows
NFPA 80A	(1996) Protection of Buildings from Exterior Fire Exposures
NFPA 101	(2000) Life Safety Code
NFPA 252	(1999) Fire Tests of Door Assemblies

STEEL DOOR INSTITUTE (SDOI)

SDOI SDI-106	(1999) Standard Door Type Nomenclature
SDOI SDI-128	(1997) Guidelines for Acoustical Performance of Standard Steel Doors and Frames

UNDERWRITERS LABORATORIES (UL)

UL 10B	(1997) Fire Tests of Door Assemblies
UL 10C	(1998) Positive Pressure Fire Tests of Door Assemblies

1.2 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only. When used, a designation following the "G" designation identifies the office that will review the submittal for the Government. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

SD-02 Shop Drawings

Doors and Frames; G

Drawings using standard door type nomenclature in accordance with SDOI SDI-106 indicating the location of each door and frame, elevation of each model of door and frame, details of construction, method of assembling sections, location and extent of hardware reinforcement, hardware locations, type and location of anchors for frames, and thicknesses of metal. Drawings shall include catalog



cuts or descriptive data for the doors, frames, and weatherstripping including air infiltration data and manufacturers printed instructions.

#### SD-03 Product Data

##### Fire Rated Doors; G

A letter by a nationally recognized testing laboratory which identifies the product manufacturer, type, and model; certifying that the laboratory has tested a sample assembly in accordance with NFPA 252 and issued a current listing for same.

#### 1.3 DELIVERY AND STORAGE

During shipment, welded unit type frames shall be strapped together in pairs with heads at opposite ends or shall be provided with temporary steel spreaders at the bottom of each frame; and knockdown type frames shall be securely strapped in bundles. Materials shall be delivered to the site in undamaged condition, and stored out of contact with the ground and under a weathertight covering permitting air circulation. Doors and assembled frames shall be stored in an upright position in accordance with DHI A115.1G. Abraded, scarred, or rusty areas shall be cleaned and touched up with matching finishes.

#### 1.4 WARRANTY

Manufacturer's standard performance guarantees or warranties that extend beyond a 1 year period shall be provided.

### PART 2 PRODUCTS

#### 2.1 DOORS AND FRAMES

Doors and frames shall be factory fabricated in accordance with ANSI A250.8 and the additional requirements specified herein. Door Level shall be extra heavy duty (Level 3) unless otherwise indicated on the door and door frame schedules. Exterior doors and frames shall be designation A40 galvanized. Doors and frames shall be prepared to receive hardware conforming to the templates and information provided under Section 08700 BUILDERS' HARDWARE. Doors and frames shall be reinforced, drilled, and tapped to receive mortised hinges, locks, latches, and flush bolts as required. Doors and frames shall be reinforced for surface applied hardware. Frames shall be welded type located as shown. Door frames shall be furnished with a minimum of three jamb anchors and one floor anchor per jamb. Anchors shall be not less than 4.5 mm (7 gauge) steel or diameter wire. For wall conditions that do not allow the use of a floor anchor, an additional jamb anchor shall be provided. Rubber silencers shall be furnished for installation into factory predrilled holes in door frames; adhesively applied silencers are not acceptable. Plaster guards shall be provided on all door frames at hinges and strikes. Full glass doors shall conform to ANSI A250.8 and shall include provisions for glazing. Reinforcing of door assemblies for closers and other required hardware shall be in accordance with ANSI A250.8 and the conditions of the fire door assembly listing when applicable. Exterior

doors shall have top edges closed flush and sealed against water penetration. All frames shall be 14 gauge.

## 2.2 FIRE RATED DOOR AND FRAME ASSEMBLIES

Fire rated door/frame assemblies shall bear the listing identification label of a nationally recognized testing laboratory qualified to perform tests of fire door assemblies in accordance with UL 10B and NFPA 252 and having a listing for the tested assemblies. The fire resistance rating shall be as shown. Doors exceeding the sizes for which listing label service is offered shall be in accordance with UL 10B. Listing identification labels shall be constructed and permanently applied by a method which results in their destruction should they be removed.

## 2.3 THERMAL INSULATED DOORS

All exterior doors and other as noted on door schedule, shall be thermally insulated. The thermal insulated doors shall have a minimum insulation value of R10. The interior of thermal insulated doors shall be filled with rigid plastic foam permanently bonded to each face panel. Doors with cellular plastic cores shall have a minimum oxygen index rating of 22 percent when tested in accordance with ASTM D 2863.

## 2.4 SECURITY DOORS

Security type doors and frames shall be factory fabricated in accordance with NAAMM HMMA 862 and the additional requirements specified herein. Doors and frames shall be galvanized 12 gauge construction. Doors shall have 12 gauge steel plate on both sides, and be internally reinforced vertically with continuous 20 gauge steel stiffeners spaced 150 mm on center maximum. Doors shall be fully welded seamless construction with no visible seams or joints on their faces or vertical edges. Door thickness shall be 44.5 mm. Door frames shall be all welded type, with double rabbet jamb profile. At meeting stiles, an astragal shall be provided by extending the face panel of the active leaf not less than 16 mm across the gap between the two leaves. Astragal shall be flush with the face panel of the inactive leaf. Frame corners shall be machine-mitered, full (continuously) welded. All exposed welds shall be ground and finished smooth.

## 2.5 GLAZING

Glazing shall be as specified in Section 08810 GLASS AND GLAZING. Removable glazing beads shall be screw-on type located on the interior (service) side of frames.

## 2.6 FACTORY FINISH

Doors and frames shall be phosphatized and primed with standard factory primer system.

## PART 3 EXECUTION

### 3.1 GENERAL REQUIREMENTS

Installation shall not begin until temperature and humidity conditions closely approximate interior conditions which will exist when area is complete and occupied; heating and air conditioning shall be operating prior to, during, and after installation. Contractor shall coordinate the work with that of other trades and shall verify opening dimensions with contract and shop drawings. Each frame shall be installed plumb and square using door as template; the frame shall be secured to the wall in accordance with the manufacturer's instructions. All damaged or defective frames shall be repaired/replaced prior to final inspection.

### 3.2 INSTALLATION

Installation shall be in accordance with DHI A115.1G. Preparation for surface applied hardware shall be in accordance with ANSI A250.6. Rubber silencers shall be installed in door frames after finish painting has been completed; adhesively applied silencers are not acceptable. Weatherstripping shall be installed at exterior door openings to provide a weathertight installation. Installation and operational characteristics of fire doors shall be in accordance with NFPA 80, NFPA 80A and NFPA 101. Hollow metal door frames shall be solid grouted in all locations.

#### 3.2.1 Thermal Insulated Doors

Hardware and perimeter seals shall be adjusted for proper operation. Doors shall be sealed weathertight after installation of hardware and shall be in accordance with Section 07900 JOINT SEALING.

#### 3.2.2 Security Doors

Door frames shall be rigidly anchored in place and provided with antispread space filler reinforcements to prevent disengagement of the lock bolt by prying or jacking of the frame. Jambs shall be filled solid with concrete grout.

### 3.3 FIELD PAINTED FINISH

Steel doors and frames shall be field painted in accordance with Section 09900 PAINTING, GENERAL. Weatherstrips shall be protected from paint. Finish shall be free of scratches or other blemishes. Color shall be in accordance with Section 09915 COLOR SCHEDULE.

-- End of Section --

01062/BERGER/ABAM  
FY02 Tactical Equipment Complex  
Fort Lewis, Washington

This page intentionally blank.

SECTION 08330

OVERHEAD ROLLING DOORS

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by basic designation only.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

- |                   |   |
|-------------------|---|
| ASTM A 653/A 653M | (1999a) Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip process           |
| ASTM E 84         | (1999) Surface Burning Characteristics of Building Materials  |
| ASTM E 330        | (1997e1) Structural Performance of Exterior Windows, Curtain Walls, and Doors by Uniform Static Air Pressure Difference |

AMERICAN SOCIETY OF HEATING, REFRIGERATING AND AIR-CONDITIONING ENGINEERS (ASHRAE)

- |                |   |
|----------------|---|
| ASHRAE HDBK-IP | (1997) Handbook, Fundamentals I-P Edition |
| ASHRAE HDBK-SI | (1997) Handbook, Fundamentals SI Edition  |

NATIONAL ELECTRICAL MANUFACTURERS ASSOCIATION (NEMA)

- |            |   |
|------------|---|
| NEMA ICS 2 | (1993) Industrial Control and Systems Controllers, Contactors, and Overload Relays Rated Not More Than 2,000 Volts AC or 750 Volts DC |
| NEMA ICS 6 | (1993) Industrial Control and Systems Enclosures  |
| NEMA MG 1  | (1998) Motors and Generators  |

NATIONAL FIRE PROTECTION ASSOCIATION (NFPA)

- |         |                                 |
|---------|---------------------------------|
| NFPA 70 | (1999) National Electrical Code |
|---------|---------------------------------|

1.2 DESCRIPTION

Overhead rolling doors shall be spring counterbalanced, rolling type, with interlocking slats, complete with guides, fastenings, hood, brackets, and operating mechanisms, and shall be designed for use on openings as

indicated. Each door shall be provided with a permanent label showing the manufacturer's name and address and the model/serial number of the door.

#### 1.2.1 Wind Load Requirements

Doors and components shall be designed to withstand the minimum design wind load of 960 Pa (20 psf). Doors shall be constructed to sustain a superimposed load, both inward and outward, equal to 1-1/2 times the minimum design wind load. Test data showing compliance with design windload requirements for the specific door design tested in accordance with the uniform static air pressure difference test procedures of ASTM E 330 shall be provided. Recovery shall be at least 3/4 of the maximum deflection within 24 hours after the test load is removed. Sound engineering principles may be used to interpolate or extrapolate test results to door sizes not specifically tested.

#### 1.2.2 Operational Cycle Life

All portions of the door and door operating mechanism that are subject to movement, wear, or stress fatigue shall be designed to operate through a minimum number of 10 cycles per day. One complete cycle of door operation is defined as when the door is in the closed position, moves to the full open position, and returns to the closed position.

#### 1.3 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only. When used, a designation following the "G" designation identifies the office that will review the submittal for the Government. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

##### SD-02 Shop Drawings

Overhead Rolling Door Unit ; G

Drawings showing the location of each door including schedules. Drawings shall include elevations of each door type, details and method of anchorage, details of construction, location and installation of hardware, shape and thickness of materials, details of joints and connections, and details of guides, power operators, controls, and other fittings.

##### SD-03 Product Data

Overhead Rolling Door Unit ; G

Manufacturer's catalog data, test data, and summary of forces and loads on the walls/jambs.

Overhead Rolling Door Unit ; G

Manufacturer's preprinted installation instructions.

SD-10 Operation and Maintenance Data

Operation Manual ;

Maintenance and Repair Manual ; G

Six copies of the system operation manual and system maintenance and repair manual for each type of door and control system.

1.4 DELIVERY AND STORAGE

Doors shall be delivered to the job site wrapped in a protective covering with the brands and names clearly marked thereon. Doors shall be stored in a dry location that is adequately ventilated and free from dirt and dust, water, and other contaminants, and in a manner that permits easy access for inspection and handling.

1.5 WARRANTY

Manufacturer's standard performance guarantees or warranties that extend beyond a 1-year period shall be provided.

1.6 OPERATION AND MAINTENANCE MANUALS

Operating instructions outlining the step-by-step procedures required for motorized door and shutter operation for the overhead rolling door unit shall be provided. The instructions shall include the manufacturer's name, model number, service manual, parts list, and brief description of all equipment and their basic operating features. Maintenance instructions listing routine maintenance procedures, possible breakdowns and repairs, troubleshooting guides, and simplified diagrams for the equipment as installed shall be provided. A complete list of parts and supplies, source of supply, and a list of the high mortality maintenance parts shall be provided.

PART 2 PRODUCTS

2.1 OVERHEAD ROLLING DOORS

Doors shall be surface-mounted type with guides at jambs set back a sufficient distance to clear the opening. Exterior doors shall be mounted as indicated.

2.1.1 Curtains

The curtains shall roll up on a barrel supported at the head of opening on brackets, and shall be balanced by helical torsion springs. Steel slats for doors less than 4.6 m wide shall be minimum bare metal thickness of 0.71 mm. Steel slats for doors from 4.6 to 6.4 m wide shall be minimum bare metal thickness of 0.87 mm. Steel slats for doors 6.4 m wide and wider shall be minimum bare metal thickness of 1.1 mm. Slats shall be of the minimum bare metal decimal thickness required for the width indicated and the wind pressure specified above.

#### 2.1.1.2 Insulated Curtains

The slat system shall supply a minimum R-value of 6 when calculated in accordance with ASHRAE HDBK-IP ASHRAE HDBK-SI. Slat shall be of the flat type as standard with the manufacturer. Slat shall consist of a urethane core not less than 17 mm thick, completely enclosed within metal facings. Exterior face of slat shall be gauge as specified for curtains. Interior face shall be not lighter than 0.56 mm. The insulated slat assembly shall have a flame spread rating of not more than 25 and a smoke development factor of not more than 50 when tested in accordance with ASTM E 84.

#### 2.1.2 Endlocks and Windlocks

The ends of each alternate slat for interior doors shall have steel endlocks of manufacturer's stock design. Endlocks shall be provided in accordance with manufacturer's listing on fire doors when required by test results performed by the code listing agency. In addition to endlocks, non-rated exterior doors shall have the manufacturer's standard windlocks as required to withstand the wind load. Windlocks shall prevent the curtain from leaving guides because of deflection from specified wind pressure.

#### 2.1.3 Bottom Bar

The curtain shall have a standard bottom bar consisting of two hot-dip galvanized steel angles for steel doors. A sensing edge shall be attached to the bottom bar of doors that are electric-power operated.

#### 2.1.4 Guides

Guides shall be steel structural shapes or formed steel shapes, of a size and depth to provide proper clearance for operation and resistance under the design windload. Guides shall be attached to adjoining construction with fasteners recommended by the manufacturer. Spacing of fasteners shall be as required to meet the minimum design windload. Doors and guides in hazardous areas shall have static grounding.

#### 2.1.5 Barrel

The barrel shall be steel pipe or commercial welded steel tubing of proper diameter for the size of curtain. Deflection shall not exceed 2.5 mm per meter of span. Ends of the barrel shall be closed with metal plugs, machined to fit the pipe. Aluminum plugs are acceptable on non-fire door barrels.

#### 2.1.6 Springs

Oil tempered helical steel counter-balance torsion springs shall be installed within the barrel and shall be capable of producing sufficient torque to assure easy operation of the door curtain. Access shall be provided for spring tension adjustment from outside of the bracket without removing the hood.



#### 2.1.7 Brackets

Brackets shall be of steel plates to close the ends of the roller-shaft housing, and to provide mounting surfaces for the hood. An operation bracket hub and shaft plugs shall have sealed prelubricated ball bearings.

#### 2.1.8 Hoods

Hoods shall be steel with minimum bare metal thickness of 0.56 mm formed to fit contour of the end brackets, and shall be reinforced with steel rods, rolled beads, or flanges at top and bottom edges. Multiple segment and single piece hoods shall be provided with support brackets of the manufacturer's standard design as required for adequate support.

#### 2.1.9 Weatherstripping

Exterior doors shall be fully weatherstripped. A compressible and replaceable weather seal shall be attached to the bottom bar. Weather seal at door guides shall be continuous vinyl or neoprene, bulb or leaf type, or shall be nylon-brush type. A weather baffle shall be provided at the lintel or inside the hood. Weatherstripping shall be easily replaced without special tools.

#### 2.1.10 Operation

Doors shall be operated by means of electric power with auxiliary chain hoist. Equipment shall be designed and manufactured for usage in non-hazardous areas.

##### 2.1.10.1 Electric Power Operator With Auxiliary Chain Hoist Operation

Electric power operators shall be heavy-duty industrial type. The unit shall operate the door through the operational cycle life specified. The electric power operator shall be complete with electric motor, auxiliary operation, self-locking worm gear in oil bath for heavy-duty doors, brake, mounting brackets, push button controls, limit switches, magnetic reversing starter, and all other accessories necessary to operate components specified in other paragraphs of this section. The operator shall be so designed that the motor may be removed without disturbing the limit-switches settings and without affecting the emergency chain operator. Doors shall be provided with an auxiliary operator for immediate emergency manual operation of the door in case of electrical failure. Auxiliary operation shall be by means of galvanized endless chain extending to within 915 mm of the floor. The emergency manual operating mechanism shall be so arranged that it may be operated from the floor without affecting the settings of the limit switches. A mechanical device shall be included that will disconnect the motor from the drive operating mechanism when the auxiliary operator is used. Where control voltages differ from motor voltage, a control voltage transformer shall be provided in and as part of the electric power operator system. Control voltage shall not exceed 120 volts.

a. Motors: Drive motors shall conform to NEMA MG 1, shall be high-starting torque, reversible type, and shall be of sufficient wattage (horsepower) and torque output to move the door in either direction from any

position at a speed range of 0.18 m per second without exceeding the rated capacity. Motors shall be suitable for operation on electrical power provided and shall be suitable for across-the-line starting. Motors shall be designed to operate at full capacity over a supply voltage variation of plus or minus 10 percent of the motor voltage rating. Motors shall be provided with overload protection.

b. Controls: Control equipment shall conform to NEMA ICS 2. Enclosures shall conform to NEMA ICS 6, Type 12 (industrial use), in accordance with NFPA 70. Exterior control stations shall be weatherproof key-operated type with corrosion-resistant cast-metal cover. Each control station shall be of the three position button type, marked "OPEN," "CLOSE," and "STOP." The "OPEN" and "STOP" controls shall be of the momentary contact type with seal-in contact. The "CLOSE" control shall be of the constant pressure type. When the door is in motion and the "STOP" control is pressed, the door shall stop instantly and remain in the stop position; from the stop position, the door shall be operable in either direction by the "OPEN" or "CLOSE" controls. Controls shall be of the full-guarded type to prevent accidental operation. Readily adjustable limit switches shall be provided to automatically stop the doors at their fully open and closed positions.

c. Sensing Edge Device: The bottom edge of electric power operated doors shall have a pneumatic sensing edge for non-hazardous areas that will reverse the door movement upon contact with an obstruction and cause the door to return to its full open position. The sensing edge shall not substitute for a limit switch. Exterior doors shall be provided with a combination compressible weather seal and sensing edge.

d. Electrical Work: Conduit and wiring necessary for proper operation shall be provided under Section 16415 ELECTRICAL WORK, INTERIOR. Flexible connections between doors and fixed supports shall be made with flexible type SJO cable, except in hazardous locations where wiring shall conform to NFPA 70, as appropriate. The cable shall have a spring-loaded automatic take up reel or a coil cord equivalent device.

#### 2.1.12 Inertia Brake

Overhead rolling door shall have a mechanical inertia brake device which will stop the door from free fall in any position, should there be a failure in the motor operator brake or roller chain drive. The unit shall be capable of being reset with a back drive action.

#### 2.1.13 Locking

Locking for motor operated doors shall consist of self-locking gearing and optional master keyed cylinder with electrical interlock

#### 2.1.14 Finish

Steel slats and hoods shall be hot-dip galvanized and shall be treated for paint adhesion and shall receive a factory baked-on prime coat for field finishing. The paint system shall withstand a minimum of 1500 hours without blistering, bubbling, or rust. Surfaces other than slats, hood, and faying

01062/BERGER/ABAM  
FY02 Tactical Equipment Complex  
Fort Lewis, Washington

surfaces shall be cleaned and treated to assure maximum paint adherence and shall be given a factory dip or spray coat of rust inhibitive metallic oxide or synthetic resin primer.

### PART 3 EXECUTION

#### 3.1 INSTALLATION

Doors shall be installed in accordance with approved detail drawings and manufacturer's instructions. Anchors and inserts for guides, brackets, motors, switches, hardware, and other accessories shall be accurately located. Upon completion, doors shall be free from warp, twist, or distortion. Doors shall be lubricated, properly adjusted, and demonstrated to operate freely.

#### 3.2 FIELD PAINTED FINISH

Steel doors and frames shall be field painted in accordance with Section 09900 PAINTING, GENERAL. Weatherstrips shall be protected from paint. Finish shall be free of scratches or other blemishes. Color shall be in accordance with Section 09915 COLOR SCHEDULE.

-- End Of Section -

01062/BERGER/ABAM  
FY02 Tactical Equipment Complex  
Fort Lewis, Washington

This page intentionally blank.

SECTION 08331

METAL ROLLING COUNTER DOORS

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by basic designation only.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM A 240/A 240M	(1997a) Heat-Resisting Chromium and Chromium-Nickel Stainless Steel Plate, Sheet, and Strip for Pressure Vessels
ASTM A 653/A 653M	(1997) Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process
ASTM B 209	(1996) Aluminum and Aluminum-Alloy Sheet and Plate
ASTM B 209M	(1995) Aluminum and Aluminum-Alloy Sheet and Plate (Metric)
ASTM B 221	(1996) Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Profiles, and Tubes
ASTM B 221M	(1996) Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Profiles, and Tubes (Metric)

NATIONAL FIRE PROTECTION ASSOCIATION (NFPA)

NFPA 80	(1995) Fire Doors and Fire Windows
---------	------------------------------------

1.2 GENERAL

Rolling counter doors shall be of the type, size, and design indicated on the drawings, and shall be the standard product of a manufacturer regularly engaged in the production of rolling counter doors. Each door shall be provided with a permanent label showing the manufacturer's name and address and the model number of the door.

1.3 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only. When used, a designation following the "G" designation identifies the office that

will review the submittal for the Government. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

SD-02 Shop Drawings

Approved Detail Drawings; G

Drawings showing elevations of each door type, details of anchorage, details of construction, location and description of hardware, shape and thickness of materials, details of joints and connections, and details of guides and fittings. A schedule showing the location of each counter door shall be included with the drawings.

SD-03 Product Data

Rolling Counter Doors; G

Manufacturer's descriptive data and catalog cuts.

Installation; G

Manufacturer's preprinted installation.

SD-10 Operation and Maintenance Data

Operation; G

Six complete copies of maintenance instructions listing routine maintenance procedures, possible breakdowns and repairs, troubleshooting guides, and simplified diagrams for the equipment as installed. Spare parts data for each different item of material and equipment specified shall be supplied not later than 2 months prior to the date of beneficial occupancy. The data shall include a complete list of parts and supplies, with current unit prices and source of supply, and a list of the parts recommended by the manufacturer to be replaced after 1 year and 3 years of service.

1.4 DELIVERY AND STORAGE

Rolling counter doors shall be delivered to the jobsite wrapped in a protective covering with the brands and names clearly marked thereon. Rolling counter doors shall be stored in accordance with the manufacturer's instructions in a dry location that is adequately ventilated and free from dust, water, or other contaminants, and in a manner that permits easy access for inspecting and handling. Doors shall be handled carefully to prevent damage. Damaged items that cannot be restored to like-new condition shall be replaced.

1.5 WARRANTY

Manufacturer's standard performance guarantees or warranties that extend beyond a 1 year period shall be provided.

## PART 2 PRODUCTS

### 2.1 BASIC COMPONENTS

#### 2.1.1 Curtain

The curtain shall be fabricated of 22 gauge galvanized steel slats conforming to ASTM A 653/A 653M, Coating Designation G60 as specified. Thickness of slat material shall be as required by width of opening or as required by specified fire-rating. Slats shall be approximately 32 to 38 mm wide with a depth of crown of 13 mm. Alternate slats shall be fitted with end locks to maintain curtain alignment. Bottom of curtain shall be provided with angle or tubular bar reinforcement matching the curtain, and fitted with a resilient bottom seal.

#### 2.1.2 Counterbalance Shaft Assembly

The curtain shall be coiled around a steel tube of sufficient thickness and diameter to prevent deflection exceeding 2.5 mm per meter. The barrel shall contain oil tempered helical steel torsion springs capable of sufficient torque to counterbalance the weight of the curtain. Springs shall be calculated to provide a minimum of 7,500 operating cycles (one complete cycle of door operation will begin with the door in the closed position, move to the full open position and return to the closed position).

#### 2.1.3 Brackets

Brackets shall be a minimum 12 gauge thickness steel if flat plate, or 16 gauge thickness if there are a minimum of 3 returns of 19 mm width.

#### 2.1.4 Hood

The hood shall be of 24 gauge galvanized steel conforming to ASTM A 653/A 653M, Coating Designation G60.

#### 2.1.5 Locks

The curtain shall be locked at each side of the bottom bar by an integral slide bolt suitable for padlocks by others.

### 2.2 FIRE-RATED ROLLING COUNTER DOOR

Fire-rated rolling counter doors shall be Class B (1-1/2 hr) rated as shown and shall conform to the requirements specified and to NFPA 80 for the class indicated. Doors shall bear the labels of a recognized testing agency indicating the applicable fire resistance rating. The construction details necessary for labeled rolling counter doors shall take precedence over details indicated or specified herein. Door curtains, guides and hood shall be galvanized steel. Fire-rated rolling counter doors shall be complete with hardware, accessories, and automatic closing device.

## 2.3 INTEGRAL FRAME ROLLING COUNTER DOOR

Integral frame rolling counter door shall be Class B (1-1/2 hr) rated galvanized steel. Fire-rated doors shall conform to the requirements of NFPA 80 for the Class indicated and shall bear the labels of a recognized testing agency indicating the applicable fire resistance rating. Jambs shall be formed to create guides for the curtain. Head and jambs shall be 16 gauge thickness. Counter shall be 14 gauge thickness.

## 2.4 OPERATION

### 2.4.1 Manual Operation

The curtain shall be operated by means of manual push-up with lift handles or continuous full width lift bar.

## 2.5 AUTOMATIC CLOSING DEVICE

Fire-rated counter doors shall be equipped with an automatic closing device which shall operate upon the fusing of a 74 degrees C fusible link.

## 2.6 FINISH

Exposed parts of the counter door, including the curtain, bottom rail, guides, and hood shall be of uniform finish and appearance. Steel galvanized coating shall have a prime coat and a baked-on or powder-coated Factory top coat finish. All other steel parts shall be given a shop coat of primer paint standard with the manufacturer. Factory coated color shall be in accordance with Section 09915 COLOR SCHEDULE.

## PART 3 EXECUTION

### 3.1 INSTALLATION

Doors shall be installed in accordance with approved detail drawings and manufacturer's instructions. Anchors and inserts for guides, brackets, hardware, and other accessories shall be accurately located. Upon completion, doors shall be free from warp, twist, or distortion. Doors shall be lubricated, properly adjusted, and demonstrated to operate freely. Fire-door installation shall be in conformance with NFPA 80 for the class indicated and the manufacturer's instructions.

### 3.2 TESTS

The fire doors shall be drop tested in accordance with NFPA 80 to show proper operation and full automatic closure and shall be reset in accordance with the manufacturer's instructions. A written record of initial test shall be provided to the Resident engineer.

-- End Of Section --



SECTION 08520

ALUMINUM WINDOWS

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by basic designation only.

ALUMINUM ASSOCIATION (AA)

AA DAF-45 (1997) Designation System for Aluminum Finishes

AMERICAN ARCHITECTURAL MANUFACTURERS ASSOCIATION (AAMA)

AAMA 101 (1997) Voluntary Specifications for Aluminum, Vinyl (PVC) and Wood Windows and Glass Doors

AAMA 603 (1998) Voluntary Performance Requirements and Test Procedures for Pigmented Organic Coatings on Extruded Aluminum

AAMA 605 (1998) Voluntary Specification, Performance Requirements and Test Procedures for High Performance Organic Coatings on Aluminum Extrusions and Panels

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM D 3656 (1997) Insect Screening and Louver Cloth Woven from Vinyl-Coated Glass Yarns

ASTM E 90 (1999) Laboratory Measurement of Airborne Sound Transmission Loss of Building Partitions

ASTM E 283 (1991) Determining the Rate of Air Leakage Through Exterior Windows, Curtain Walls, and Doors Under Specified Pressure Differences Across the Specimen

ASTM E 330 (1997e1) Structural Performance of Exterior Windows, Curtain Walls, and Doors by Uniform Static Air Pressure Difference

ASTM E 331 (1996) Water Penetration of Exterior Windows, Curtain Walls, and Doors by Uniform Static Air Pressure Difference

ASTM E 413 (1987; R 1999) Rating Sound Insulation

ASTM E 547 (1996) Water Penetration of Exterior Windows,  
Curtain Walls, and Doors by Cyclic Static Air  
Pressure Differential

NATIONAL FENESTRATION RATING COUNCIL (NFRC)

NFRC 100 (1997) Procedure for Determining Fenestration  
Product U-factors

NFRC 200 (1997) Procedure for Determining Fenestration  
Product Solar Heat Gain Coefficients at  
Normal Incidence

SCREEN MANUFACTURERS ASSOCIATION (SMA)

SMA ANSI/SMA 1004 (1987) Aluminum Tubular Frame Screens for  
Windows

1.2 WINDOW PERFORMANCE

Aluminum windows shall meet the following performance requirements. Testing requirements shall be performed by an independent testing laboratory or agency.

1.2.1 Structural Performance

Structural test pressures on window units shall be for positive load (inward) and negative load (outward) in accordance with ASTM E 330. After testing, there shall be no glass breakage, permanent damage to fasteners, hardware parts, support arms or actuating mechanisms or any other damage which could cause window to be inoperable. There shall be no permanent deformation of any main frame, sash or ventilator member in excess of the requirements established by AAMA 101 for the window types and classification specified in this section.

1.2.2 Air Infiltration

Air infiltration shall not exceed the amount established by AAMA 101 for each window type when tested in accordance with ASTM E 283.

1.2.3 Water Penetration

Water penetration shall not exceed the amount established by AAMA 101 for each window type when tested in accordance with ASTM E 547.

1.2.4 Thermal Performance

Thermal transmittance for thermally broken aluminum windows with insulating glass shall not exceed a U-factor of  $[0.45 \text{ Btu/hr-ft}^{<2>-F}]$  determined according to NFRC 100.

#### 1.2.5 Condensation Factor

The condensation factor shall be 56.

#### 1.3 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only. When used, a designation following the "G" designation identifies the office that will review the submittal for the Government. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

##### SD-02 Shop Drawings

Aluminum Windows; G

Drawings indicating elevations of window, rough-opening dimensions for each type and size of window, full-size sections, thicknesses of metal, fastenings, methods of installation and anchorage, connections with other work, type of wall construction, size and spacing of anchors, method of glazing, types and locations of operating hardware, mullion details, weatherstripping details, and window schedules showing locations of each window type.

##### SD-03 Product Data

Aluminum Windows; G

Manufacturer's descriptive data and catalog cut sheets.

Aluminum Windows; G

Manufacturer's preprinted installation instructions and cleaning instructions.

##### SD-04 Samples

Aluminum Windows; G

Manufacturer's standard color samples of the specified finishes.

##### SD-07 Certificates

Aluminum Windows; G

Certificates stating that the aluminum windows are AAMA certified conforming to requirements of this section. Labels or markings permanently affixed to the window will be accepted in lieu of certificates. Product ratings determined using NFRC 100 and NFRC 200 shall be authorized for certification and properly labeled by the manufacturer.

#### 1.4 QUALIFICATION

Window manufacturer shall specialize in designing and manufacturing the type of aluminum windows specified in this section, and shall have a minimum of 10 years of documented successful experience. Manufacturer shall have the facilities capable of meeting contract requirements, single-source responsibility and warranty.

#### 1.5 DELIVERY AND STORAGE

Aluminum windows shall be delivered to project site and stored in accordance with manufacturer's recommendations. Damaged windows shall be replaced with new windows.

#### 1.6 WARRANTY

Manufacturer's standard performance guarantees or warranties that extend beyond a 1 year period shall be provided.

### PART 2 PRODUCTS

#### 2.1 ALUMINUM WINDOW TYPES

Aluminum windows shall consist of complete units including sash, glass, frame, weather stripping, and hardware. Windows shall conform to AAMA 101. Windows shall be thermal break type double-glazed. Thermal barrier shall be neoprene, rigid vinyl, or polyurethane and shall be resistant to weather. Window members shall be heli-arc welded or angle-reinforced and mechanically joined and sealed. Exposed welded joints shall be dressed and finished. Joints shall be permanent and weather tight. Frames shall be constructed to provide a minimum 6 mm thermal break between the exterior and interior frame surfaces. Sash corners shall be internally sealed to prevent air and water leaks.

##### 2.1.1 Awning/Projected Windows

Aluminum awning, hopper and projected windows shall conform to AAMA 101 Designation AP-HC65 type consisting of hinged ventilators arranged in a single or vertical series within a common frame. Provide integral perimeter flange for screw attachment to light gauge steel stud framing. Ventilators shall be equipped with concealed four-bar friction hinges. Operating hardware, shall be concealed within frame and sill. Ventilator arms shall be concealed when windows are closed. Ventilator shall have positive latch on interior side designed to allow ventilator to be latched/unlatched and opened/closed by hand or with extension pole.

##### 2.1.2 Single-Hung Windows

Aluminum single-hung windows shall conform to AAMA 101 DH-C55 type which operate vertically with the weight of sash offset by a counterbalancing mechanism mounted in window to hold the sash stationary at any open position. Windows shall be provided with a tilt-in sash. Single-hung windows shall be provided with locking devices to secure the sash in the

closed position. Counterbalancing mechanisms shall be easily replaced after installation.

#### 2.1.3 Fixed Windows

Aluminum fixed windows shall conform to AAMA 101 F-HC65 type, non-operable glazed frame, complete with provisions for reglazing in the field. Provide integral perimeter flange for screw attachment to light gauge steel stud framing.

#### 2.2 WEATHERSTRIPPING

Weatherstripping for ventilating sections shall be of type designed to meet water penetration and air infiltration requirements specified in this section in accordance with AAMA 101, and shall be manufactured of material compatible with aluminum and resistant to weather. Weatherstrips shall be factory-applied and easily replaced in the field. Neoprene or polyvinylchloride weatherstripping are not acceptable where exposed to direct sunlight.

#### 2.3 INSECT SCREENS

Insect screens shall be aluminum window manufacturer's standard design, and shall be provided where scheduled on drawings. Insect screens shall be fabricated of roll-formed or extruded tubular-shaped aluminum frames conforming to SMA ANSI/SMA or 1004 and (18 x 16) vinyl coated glass screening conforming to ASTM D 3656.

#### 2.4 ACCESSORIES

##### 2.4.1 Fasteners

Fastening devices shall be window manufacturer's standard design made from, non-magnetic stainless steel, in compliance with AAMA 101. Self-tapping sheet metal screws will not be acceptable for material thicker than 2 mm.

##### 2.4.2 Hardware

Hardware shall be as specified for each window type and shall be fabricated of, stainless steel, or cast white bronze in accordance with requirements established by AAMA 101.

##### 2.4.3 Window Anchors

Anchoring devices for installing windows shall be made of stainless steel, conforming to AAMA 101.

#### 2.5 GLASS AND GLAZING

Aluminum windows shall be factory glazed with field glazing, glass types scheduled on drawings and specified in Section 08810 GLASS AND GLAZING. Units shall be complete with glass and glazing provisions to meet AAMA 101. Glazing material shall be compatible with aluminum, and shall not require painting.

## 2.6 FINISH

### 2.6.1 Anodized Aluminum Finish

Exposed surfaces of aluminum windows shall be finished with anodic coating conforming to AA DAF-45: Architectural Class II, AA-M12-C22-A31, clear anodic coating, 0.4 to 0.7 mil thick, 204-R1 Natural Color. Color shall match the color indicated in Section 09915 COLOR SCHEDULE. Finish shall be free of scratches and other blemishes.

## PART 3 EXECUTION

### 3.1 INSTALLATION

Aluminum windows shall be installed in accordance with approved shop drawings and manufacturer's published instructions. Aluminum surfaces in contact with masonry, concrete, wood and dissimilar metals other than stainless steel, zinc, cadmium or small areas of white bronze, shall be protected from direct contact using protective materials recommended by AAMA 101. The completed window installation shall be sealed watertight to adjacent surfaces in accordance with Section 07900 JOINT SEALING. Glass and glazing shall be installed in accordance with requirements of this section and Section 08810 GLASS AND GLAZING.

### 3.2 ADJUSTMENTS AND CLEANING

#### 3.2.1 Hardware Adjustments

Final operating adjustments shall be made after glazing work is complete. Operating sash or ventilators shall operate smoothly and shall be weathertight when in locked position.

#### 3.2.2 Cleaning

Aluminum window finish and glass shall be cleaned on exterior and interior sides in accordance with window manufacturer's recommendations. Alkaline or abrasive agents shall not be used. Precautions shall be taken to avoid scratching or marring window finish and glass surfaces.

-- End Of Section --

SECTION 08700

BUILDERS' HARDWARE

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by basic designation only.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM E 283	(1991) Determining the Rate of Air Leakage Through Exterior Windows, Curtain Walls and Doors Under Specified Pressure Differences Across the Specimen
ASTM F 883	(1997) Padlocks

BUILDERS HARDWARE MANUFACTURERS ASSOCIATION (BHMA)

BHMA L & R Directory	(Effective thru Jun 1999) Directory of Certified Locks & Latches
BHMA Closer Directory	(Effective thru Jul (1999) Directory of Certified Door Closers
BHMA Exit Devices Directory	(Effective thru Aug 1998) Directory of Certified Exit Devices
BHMA A156.1	(1997) Butts and Hinges
BHMA A156.2	(1996) Bored and Preassembled Locks and Latches
BHMA A156.3	(1994) Exit Devices
BHMA A156.4	(1992) Door Controls - Closers
BHMA A156.5	(1992) Auxiliary Locks & Associated Products
BHMA A156.6	(1994) Architectural Door Trim
BHMA A156.7	(1997) Template Hinge Dimensions
BHMA A156.8	(1994) Door Controls - Overhead Stops and Holders
BHMA A156.13	(1994) Mortise Locks & Latches
BHMA A156.15	(1995) Closer Holder Release Devices

BHMA A156.16	(1989) Auxiliary Hardware
BHMA A156.17	(1993) Self Closing Hinges & Pivots
BHMA A156.18	(1993) Materials and Finishes
BHMA A156.19	(1997) Power Assist and Low Energy Power Operated Doors
BHMA A156.20	(1996) Strap and Tee Hinges and Hasps
BHMA A156.21	(1996) Thresholds
BHMA A156.23	(1992) Electromagnetic Locks
BHMA A156.24	(1992) Delayed Egress Locks

DOOR AND HARDWARE INSTITUTE (DHI)

DHI Keying Systems	(1989) Keying Systems and Nomenclature
DHI Locations for CSD	(1997) Recommended Locations for Builders' Hardware for Custom Steel Doors and Frames
DHI Locations for SSD	(1990) Recommended Locations for Architectural Hardware for Standard Steel Doors and Frames
DHI ANSI/DHI A115.1G	(1994) Installation Guide for Doors and Hardware
DHI ANSI/DHI A115-W	(Varies) Wood Door Hardware Standards (Incl A115-W1 thru A115-W9)

NATIONAL FIRE PROTECTION ASSOCIATION (NFPA)

NFPA 80	(1999) Fire Doors and Fire Windows
NFPA 101	(1997; Errata 97-1; TIA-97-1) Life Safety Code
NFPA 105	(1999) Installation of Smoke-Control Door Assemblies

1.2 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only. When used, a designation following the "G" designation identifies the office that



will review the submittal for the Government. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

SD-02 Shop Drawings

Electrical Hardware Devices; G

Detail drawings for hardware devices for computerized keying systems, magnetic cards, keyless push button access control systems, and other electrical hardware devices showing complete wiring and schematic diagrams and other details required to demonstrate proper function of units.

SD-03 Product Data

Hardware Schedule; G

Hardware schedule listing all items to be furnished. The schedule shall include for each item: the quantities; manufacturer's name and catalog numbers; the ANSI number specified, sizes; detail information or catalog cuts; finishes; door and frame size and materials; location and hardware set identification cross-references to drawings; corresponding reference standard type number or function number from manufacturer's catalog if not covered by ANSI or BHMA; and list of abbreviations and template numbers.

Keying; G

Keying schedule developed in accordance with DHI Keying Systems, after the keying meeting with the user.

SD-07 Certificates

Hardware and Accessories; G

The hardware manufacturer's certificates of compliance stating that the supplied material or hardware item meets specified requirements. Each certificate shall be signed by an official authorized to certify in behalf of the product manufacturer and shall identify quantity and date or dates of shipment or delivery to which the certificates apply. A statement that the proposed hardware items appear in BHMA L & R Directory, BHMA Closer Directory and BHMA Exit Devices Directory directories of certified products may be submitted in lieu of certificates.

1.3 PREDELIVERY CONFERENCE

Upon approval of the Hardware Schedule, the construction Contractor shall arrange a conference with the hardware supplier, Resident Engineer and the using agency to determine keying system requirements. Location of the key control storage system, set-up and key identification labeling will also be determined.

#### 1.4 DELIVERY, STORAGE, AND HANDLING

Hardware shall be delivered to the project site in the manufacturer's original packages. Each article of hardware shall be individually packaged in the manufacturer's standard commercial carton or container, and shall be properly marked or labeled to be readily identifiable with the approved hardware schedule. Each change key shall be tagged or otherwise identified with the door for which its cylinder is intended. Where double cylinder functions are used or where it is not obvious which is the key side of a door, appropriate instructions shall be included with the lock and on the hardware schedule. Manufacturer's printed installation instructions, fasteners, and special tools shall be included in each package.

#### 1.5 SPECIAL TOOLS

Special tools, such as those supplied by the manufacturer, unique wrenches, and dogging keys, shall be provided as required to adjust hardware items.

#### 1.6 WARRANTY

Manufacturer's standard performance guarantees or warranties that extend beyond a one year period shall be provided.

#### 1.7 OPERATION AND MAINTENANCE MANUALS

Six complete copies of maintenance instructions listing routine maintenance procedures, possible breakdowns and repairs, and troubleshooting guides shall be provided. The instructions for electric locks, electric strikes, electro-magnetic closer holder release devices, and electric exit devices shall include simplified diagrams as installed.

### PART 2 PRODUCTS

#### 2.1 GENERAL HARDWARE REQUIREMENTS

Hardware shall conform to the requirements specified herein and the HARDWARE SETS listing at the end of this section. Hardware set numbers correspond to the set numbers shown on the drawings.

#### 2.2 TEMPLATES

Requirements for hardware to be mounted on metal doors or metal frames shall be coordinated between hardware manufacturer and door or frame manufacturer by use of templates and other information to establish location, reinforcement required, size of holes, and similar details. Templates of hinges shall conform to BHMA A156.7.

#### 2.3 HINGES

Hinges shall conform to BHMA A156.1. Hinges used on metal doors and frames shall also conform to BHMA A156.7. Except as otherwise specified, hinge sizes shall conform to the hinge manufacturer's printed recommendations.

#### 2.3.1 Hinges for Reverse Bevel Doors with Locks

Hinges for reverse bevel doors with locks shall have pins that are made nonremovable by means such as a set screw in the barrel, or safety stud, when the door is in the closed position.

#### 2.3.2 Contractor's Option

Hinges with antifriction bearings may be furnished in lieu of ball bearing hinges, except where prohibited for fire doors by the requirements of NFPA 80.

#### 2.3.3 Electric Hinges

Electric hinges shall conform to BHMA A156.1 with modification of added electric wires to insure correct operation of electric hardware items.

### 2.4 LOCKS AND LATCHES

To the maximum extent possible, locksets, latchsets and deadlocks, and all components thereof, including cylinders and removable cores, shall be the products of a single manufacturer. Lock fronts for double-acting doors shall be rounded. Strikes for wood frames and pairs of wood doors shall be furnished with wrought boxes.

#### 2.4.1 Mortise Lock and Latchsets

Mortise lock, latchsets, and strikes shall be series 1000 and shall conform to BHMA A156.13, operational Grade 1. Strikes for security doors shall be rectangular without curved lip. Mortise type locks and latches for doors 44 mm thick and over shall have adjustable bevel fronts or otherwise conform to the shape of the door. Mortise locks shall have armored fronts.

#### 2.4.2 Electro-Mechanical Locks

Locks shall be fail secured mode (exterior side only locked when power is off). Locks shall be mortise series conforming to BHMA A156.13 with factory installed electric lock modification or manufactured electro-mechanical locks conforming to BHMA A156.13 or BHMA A156.2 test standards.

#### 2.4.3 Lock Cylinders (Mortise, Rim and Bored)

Lock cylinders shall comply with BHMA A156.5. Lock cylinder shall have not less than seven pins. Cylinders shall have key removable type cores. An extension of the existing keying system shall be provided. The cylinders shall be compatible with existing locks that were manufactured by Best, have interchangeable cores. Construction interchangeable cores shall be provided. Disassembly of knob or lockset shall not be required to remove core from lockset. All locksets, lockable exit devices, and padlocks shall accept same interchangeable cores.

#### 2.4.4 Padlocks

Padlocks shall conform to ASTM F 883; all padlocks shall be keyed into master key system.

#### 2.4.5 Lock Trim

Lock trim shall be cast, construction of commercial plain design. Lever handles shall be cast and of plain design with ends returned to no more than 10 mm from the door face.

### 2.5 KEYING

Locks shall be keyed in sets or subsets as scheduled. Change keys for locks shall be stamped with change number and the inscription "U.S. Property - Do Not Duplicate." Keys shall be supplied as follows:

Locks:	3 change keys each lock.
Master keyed sets:	6 keys each set.
Grand master keys:	6 total.
Control keys:	3 total.
Construction keys:	20 total.
Blank keys:	200 total.

The keys shall be furnished to the Resident Engineer arranged in a container in sets or subsets as scheduled.

### 2.6 DOOR CLOSING DEVICES

Door closing devices shall conform to BHMA A156.4, Grade 1. Closing devices shall be products of one manufacturer for each type specified. The opening resistance of closing devices shall not exceed 67 N applied at the latch stile or exceed 22 N where low opening resistance is scheduled.

#### 2.6.1 Surface Type Closers

Surface type closers shall be Grade 1, Series C02000 Full Cover with options PT-4H, Size 1 or 2 through Size 6, and PT-4D with back check position valve. Except as otherwise specified, sizes shall conform to the manufacturer's published recommendations. Closers for outswinging exterior doors shall have parallel arms or shall be top jamb mounted. Closers for doors close to a wall shall be of narrow projection so as not to strike the wall at the 90-degree open position. Security doors shall have extra heavy duty closers equal to specified product.

### 2.7 ARCHITECTURAL DOOR TRIM

Architectural door trim shall conform to BHMA A156.6.

## 2.7.1 Door Protection Plates

### 2.7.1.1 Armor Plates

Armor plates shall be Type J101 stainless steel, 900 mm in height, and 50 mm less in width than the width of the door for single doors and 25 mm less for pairs of doors. Edges of metal plates shall be beveled.

### 2.7.1.2 Kick Plates

Kick plates shall be Type J102 stainless steel. Width of plates shall be 50 mm less than door width for single doors and 25 mm less for pairs of doors. Height shall be 250 mm, except where the bottom rail is less than 250 mm the plate shall extend to within 13 mm of the panel mold or glass bead. Edges of metal plates shall beveled.

### 2.7.1.3 Mop Plates

Mop plates shall be Type J103 stainless steel. Width of plates shall be 50 mm less than door width for single doors and 25 mm less for pairs of doors. The height shall be 100 mm. Edges of metal plates shall be beveled.

### 2.7.3.1 Combination Push-Pull Plates

Combination push-pull plates shall be Type J303, 1.27 mm thick minimum stainless steel beveled four edges.

### 2.7.3.2 Push Plates

Push plates shall be Type J301 1.27 mm thick stainless steel, size 4x16. Edges of metal plates shall be beveled.

## 2.8 AUXILIARY HARDWARE

Auxiliary hardware, consisting of door holders, and door stops, shall conform to BHMA A156.16. Lever extension flush bolts shall be Type L14081. Dust-proof strikes shall be Type L04011 for doors that are not fire rated. Dust-proof strikes shall be Type L04021 for fire rated doors.

## 2.9 MISCELLANEOUS

### 2.9.1 Metal Thresholds

Thresholds shall conform to BHMA A156.21. Thresholds for exterior doors shall be extruded aluminum of the type indicated and shall provide proper clearance and an effective seal with specified weather stripping. Where required, thresholds shall be modified to receive projecting bolts of flush bolts. Thresholds for doors accessible to the handicapped shall be beveled with slopes not exceeding 1:2 and with heights not exceeding 13 mm.

#### 2.9.2 Rain Drips

Extruded aluminum, not less than 1.78 mm thick, clear anodized. Overhead rain drips shall be approximately 38 mm high by 63 mm projection and shall extend 50 mm on either side of the door opening width.

#### 2.9.3 Aluminum Housed Type Weatherseals

Weatherseals of the type indicated shall consist of extruded aluminum retainers not less than 1.78 mm wall thickness with vinyl brush inserts. Aluminum shall be clear anodized. Weatherseal material shall be of an industrial/commercial grade. Seals shall remain functional through all weather and temperature conditions. Air leakage rate of weatherstripping shall not exceed 0.775 liters per second per lineal meter of crack when tested in accordance with ASTM E 283 at standard test conditions.

#### 2.9.4 Gasketing

Gasketing shall be a compression type seal, silicon based, self-adhesive product for use on steel door frames with steel doors. Color shall be bronze. Air leakage rate of weatherstripping shall not exceed 0.775 liters per second per lineal meter of crack when tested in accordance with ASTM E 283 at standard test conditions.

#### 2.9.5 Key Control Storage System

Key control storage system shall conform to BHMA A156.5, capacity 150, and shall be properly labeled for key identification. Set up, identification labeling and location of the key control storage shall be as directed at the Predelivery Conference.

#### 2.9.6 Door Stops

Wall stops, floor stops and combination stop and holders shall conform to BHMA A156.16.

#### 2.10 FASTENINGS

Fastenings of proper type, size, quantity, and finish shall be supplied with each article of hardware. Machine screws and expansion shields shall be used for attaching hardware to concrete or masonry. Fastenings exposed to the weather in the finished work shall be of brass, bronze, or stainless steel. Sex bolts, through bolts, or machine screws and grommet nuts, where used on reverse-bevel exterior doors equipped with half-surface or full-surface hinges, shall employ one-way screws or other approved tamperproof screws. Screws for the jamb leaf of half-mortise and full-surface hinges attached to structural steel frames shall be one-way or other approved tamperproof type.

## 2.11 FINISHES

Unless otherwise specified, finishes shall conform to those identified in BHMA A156.18. Where painting of primed surfaces is required, painting is specified in Section 09900 PAINTING, GENERAL. Finish shall be brushed chrome, BHMA 626/652 unless noted otherwise.

## 2.12 HARDWARE FOR FIRE DOORS

Hardware for fire doors shall conform to the requirements of NFPA 80 and NFPA 101.

## PART 3 EXECUTION

### 3.1 APPLICATION

Hardware shall be located in accordance with DHI Locations for CSD and DHI Locations for SSD, except that deadlocks shall be mounted 1220 mm above finish floor. When approved, slight variations in locations or dimensions will be permitted. Application shall be in accordance with DHI ANSI/DHI A115.1G or DHI ANSI/DHI A115-W. Door control devices for exterior doors such as closers and holders, shall be attached to doors with thru bolts and nuts or sex bolts. Alternate fastening methods may be approved by the Resident Engineer when manufacturers' documentation is submitted to verify that the fastening devices and door reinforcements are adequate to resist wind induced stresses. Electric hardware items and access control devices shall be installed in accordance with manufacturer's printed installation procedures.

#### 3.1.1 Hardware for Fire Doors and Smoke-Control Door Assemblies

Hardware for fire doors shall be installed in accordance with the requirements of NFPA 80. Exit devices installed on fire doors shall have a visible label bearing the marking "Fire Exit Hardware". Other hardware installed on fire doors, such as locksets, closers, and hinges shall have a visible label or stamp indicating that the hardware items have been approved by an approved testing agency for installation on fire-rated doors. Hardware for smoke-control door assemblies shall be installed in accordance with NFPA 105.

#### 3.1.2 Door-Closing Devices

Door-closing devices shall be installed and adjusted in accordance with the templates and printed instructions supplied by the manufacturer of the devices. Insofar as practicable, doors opening to or from halls and corridors shall have the closer mounted on the room side of the door.

#### 3.1.3 Key Control Storage Systems

Key control storage system shall be furnished to the Resident Engineer.

#### 3.1.4 Kick Plates and Mop Plates

Kick plates shall be installed on the push side of single-acting doors and on both sides of double-acting doors. Mop plates shall be installed on the pull side of the single acting doors.

#### 3.1.5 Auxiliary Hardware

Lever extension flush bolts shall be installed at the top and bottom of the inactive leaf of pairs of doors. The bottom bolt shall operate into a dust-proof floor strike or threshold.

#### 3.1.6 Thresholds

Thresholds shall be secured with a minimum of three fasteners per single door width and six fasteners per double door width with a maximum spacing of 300 mm. Exterior thresholds shall be installed in a bed of sealant with expansion anchors and stainless steel screws, except that bronze or anodized bronze thresholds shall be installed with expansion anchors with brass screws. Minimum screw size shall be No. 10 length, dependent on job conditions, with a minimum of 19 mm thread engagement into the floor or anchoring device used.

#### 3.1.7 Rain Drips

Door sill rain drips shall align with the bottom edge of the door. Overhead rain drips shall align with bottom edge of door frame rabbet. Drips shall be set in sealant and fastened with stainless steel screws.

#### 3.1.8 Weatherseals

Weatherseals shall be located as indicated, snug to door face and fastened in place with color matched metal screws after door and frames have been finish painted. Screw spacing shall be as recommended by manufacturer.

#### 3.1.9 Gasketing

Gasketing shall be installed at the inside edge of the hinge and head and latch sides of door frame. Frames shall be toleranced for a 3 mm clearance between door and frame. Frames shall be treated with tape primer prior to installation.

### 3.2 FIELD QUALITY CONTROL

Supplier shall inspect the completed installation and certify that the hardware has been furnished and installed in accordance with the manufacturers' instructions and as specified. The inspection report shall identify any malfunctioning items and recommend adjustment or replacement as appropriate.



### 3.3 HARDWARE SETS

Manufacturer's numbers are listed for style, quality and function levels only. Lock cylinders must be compatible with the existing Best masterkey system.

Miscellaneous Materials - supply as follows:

4 ea. Door Closers	7901PA Alum	Dorma
2 ea. Locks	DL3500 series 626	Alarm Lock
	Mortise type battery operated	
	w/time zones and audit trail	
2 ea. Cylinders	1E74 626	Best
1 ea. Software	DL-Windows	Alarm Lock
1 ea. Data Tranfer	AL-DTM	Alarm Lock
	Module	
1 ea. Infrared	AL-IR1	Alarm Lock
	Wireless	
	Printer	

### Property Book Office (PBO) Building

Hardware Group #1 Door S1

6 ea. Hinges	4B51 127mm x 114.3mm US32D NRP	PBB
2 ea. Hinge Modification	1110 - top hinge each door leaf	ACSI
1 ea. Lock	35H0EW15H 626	Best
	no outside trim or cylinder	
	x 28.575 mm lip strike	
1 ea. Latch Guard	5000 626	Trimco
2 ea. Flushbolts	3917-304.8 mm 626	Trimco
2 ea. Stop/Holders	B1000M 626	Specware
1 ea. Gasket	S88D	Pemko
2 ea. Sweeps	18062CP	Pemko
1 ea. Threshold	171A FHSL25	Pemko
1 ea. Rain Drip	346C x full frame width	Pemko
1 ea. Astragal	By door supplier - mount on	
	inactive leaf	

Hardware Group #2 Doors W1, W2, W4, E1, E2, E3

1 ea. Padlock	21B772	Best
Balance by door manufacturer/supplier		
Monitor switch by security system supplier		

Hardware Group #3 Door W3

3 ea. Hinges	4B51 127mm x 114.3mmUS32D NRP	PBB
* 1 ea. Hinge Modification	1110 - top hinge	ACSI
1 ea. Lock	DL3500 series 626	Alarm Lock
	Mortise type battery operated	
	w/time zones and audit trail	
1 ea. Cylinder	1E74 626	Best
1 ea. Latch Guard	5000 626	Trimco
1 ea. Closer	7901PA Alum	Dorma
1 ea. Stop/Holder	B1000M 626	Specware
1 ea. Gasket	S88D	Pemko
1 ea. Sweep	18062CP	Pemko
1 ea. Threshold	171A FHSL25	Pemko
1 ea. Rain Drip	346C x full frame width	Pemko

Hardware Group #4 Door W5

3 ea. Hinges	4B51 127mm x 114.3mm US32D NRP	PBB
* 1 ea. Hinge Modification	1110 - top hinge	ACSI
1 ea. Lock	35H7EW15M 626 x 28.575 mm	Best
	lip strike	
1 ea. Latch Guard	5000 626	Trimco
1 ea. Stop/Holder	B1000M 626	Specware
1 ea. Gasket	S88D	Pemko
1 ea. Sweep	18062CP	Pemko
1 ea. Threshold	171A FHSL25	Pemko
1 ea. Rain Drip	346C x full frame width	Pemko

Hardware Group #5 Door W6

6 ea. Hinges	4B51 127mm x 114.3mm US32D NRP	PBB
* 2 ea. Hinge Modification	1110 - top hinge each door leaf	ACSI
1 ea. Lock	35H7EW15M 626 x 28.575 mm	Best
	lip strike	
1 ea. Latch Guard	5000 626	Trimco
2 ea. Flushbolts	3917-304.8 mm 626	Trimco
2 ea. Stop/Holders	B1000M 626	Specware
1 ea. Gasket	S88D	Pemko
2 ea. Sweeps	18062CP	Pemko
1 ea. Threshold	171A FHSL25	Pemko
1 ea. Rain Drip	346C x full frame width	Pemko
1 ea. Astragal	By door supplier - mount on inactive leaf	

01062/BERGER/ABAM  
FY02 Tactical Equipment Complex  
Fort Lewis, Washington

Hardware Group #6 Door N1

6 ea. Hinges	4B51 127mm x 114.3mm US32D NRP	PBB
* 2 ea. Hinge Modification	1110 - top hinge each door leaf	ACSI
1 ea. Lock	DL3500 series 626	Alarm Lock
	Mortise type battery operated	
	w/time zones and audit trail	
1 ea. Cylinder	1E74 626	Best
1 ea. Latch Guard	5000 626	Trimco
2 ea. Flush Bolts	3917-304.8 mm 626	Trimco
1 ea. Closer	7901PA Alum @ active leaf	Dorma
2 ea. Stop/holders	B1000M 626	Specware
1 ea. Gasket	S88D	Pemko
2 ea. Sweeps	18062CP	Pemko
1 ea. Threshold	171A FHSL25	Pemko
1 ea. Rain Drip	346C x full frame width	Pemko
1 ea. Astragal	By door supplier - mount on inactive leaf	

Hardware Group #7 Doors 102, 104

3 ea. Hinges	BB81 114.3mm x 114.3mm US26D	PBB
1 ea. Lock	35H7E15M 626	Best
1 ea. Closer	7901 Alum	Dorma
1 ea. Wall Stop	1270 WVCP 630	Trimco
3 ea. Silencers	#20	Ives

Hardware Group #8 Door 102A

3 ea. Hinges	BB81 114.3mm x 114.3mm US26D	PBB
1 ea. Lock	35H7E15M 626	Best
1 ea. Wall Stop	1270 WVCP 630	Trimco
3 ea. Silencers	#20	Ives

Hardware Group #9 Door 106

3 ea. Hinges	BB51 114.3mm x 114.3mm US32D	PBB
1 ea. Latch	35H0N15M 626	Best
1 ea. Wall Stop	1270 WVCP 630	Trimco
3 ea. Silencers	#20	Ives

01062/BERGER/ABAM  
FY02 Tactical Equipment Complex  
Fort Lewis, Washington

Hardware Group #10 Door 107

3 ea. Hinges	BB81 114.3mm x 114.3mm US26D	PBB
1 ea. Push Plate	1001-3 630	Trimco
1 ea. Pull Plate	1018-3 630	Trimco
1 ea. Closer	7901PA Alum	Dorma
1 ea. Kick Plate	K0050 254x50.8 mmLDW B4E 630	Trimco
1 ea. Wall Stop	1270 WVCP 630	Trimco
3 ea. Silencers	#20	Ives

Hardware Group #11 Doors 109, 111

3 ea. Hinges	BB81 114.3mm x 114.3mm US26D NRP	PBB
1 ea. Lock	35H7EW15M 626	Best
1 ea. Wall Stop	1270 WVCP 630	Trimco
3 ea. Silencers	#20	Ives

Hardware Group #12 Door 110

3 ea. Hinges	BB81 114.3mm x 114.3mm US26D	PBB
1 ea. Privacy	35H0LF15M 626	Best
1 ea. Closer	7901 Alum	Dorma
1 ea. Mop Plate	KM050 101.6x25.4 mmLDW B4E 630	Trimco
1 ea. Wall Stop	1270 WVCP 630	Trimco
3 ea. Silencers	#20	Ives

Hardware Group #13 Doors 114

3 ea. Hinges	4B81 114.3mm x 114.3mm US26D	PBB
1 ea. Lock	35H7EW15M 626	Best
1 ea. Closer	7901 Alum	Dorma
1 ea. Wall Stop	1270 WVCP 630	Trimco
3 ea. Silencers	#20	Ives

Hardware Group #14 Door 100

6 ea. Hinges	4B81 114.3mm x 114.3mm US26D	PBB
* 2 ea. Hinge Modification	1110 - top hinge each door leaf	ACSI
1 ea. Lock	DL3500 series 626	Alarm Lock
	Mortise type battery operated	
	w/time zones and audit trail	
1 ea. Cylinder	1E74 626	Best
2 ea. Flush Bolts	3917-304.8 mm 626	Trimco
1 ea. Closer	7901PA Alum @ active leaf	Dorma
2 ea. Wall Stops	1270 WVCP 630	Trimco
4 ea. Silencers	#20	Ives
1 ea. Astragal	By door supplier - mount on inactive leaf	

01062/BERGER/ABAM  
FY02 Tactical Equipment Complex  
Fort Lewis, Washington

Hardware Group #15 Door 115

6 ea. Hinges	BB81 114.3mm x 114.3mm US26D NRP PBB	
1 ea. Lock	35H7C15M 626	Best
2 ea. Flushbolts	3917-304.8 mm 626	Trimco
2 ea. Wall Stops	1270 WVCP 630	Ives
4 ea. Silencers	#20	Ives
1 ea. Astragal	By door supplier - mount on inactive leaf	

Hardware Group #16 Door 105

3 ea. Hinges	IHTHB953 114.3mm x 114.3mm US32D	Hager
1 ea. HS Lock	X-08 Series	Mas-Hamilton
1 ea. Closer	TS93 Alum	Dorma
1 ea. Gasket	S88D	Pemko
*1 ea. Monitor Switch	MS2049F	Detex

01062/BERGER/ABAM  
FY02 Tactical Equipment Complex  
Fort Lewis, Washington

#### A.C.E. BUILDING

##### Hardware Group #1 Doors N1, N3, S1

6 ea. Hinges	4B51 127mm x 114.3mmUS32D NRP	PBB
* 2 ea. Hinge Modification	1110 - top hinge each door leaf	ACSI
1 ea. Lock	DL3500 series 626	Alarm Lock
	Mortise type battery operated	
	w/time zones and audit trail	
1 ea. Cylinder	1E74 626	Best
1 ea. Latch Guard	5000 626	Trimco
2 ea. Flush Bolts	3917-304.8 mm 626	Trimco
1 ea. Closer	7901PA Alum @ active leaf	Dorma
2 ea. Stop/Holders	B1000M 626	Specware
1 ea. Gasket	S88D	Pemko
2 ea. Sweeps	18062CP	Pemko
1 ea. Threshold	171A FHSL25	Pemko
1 ea. Rain Drip	346C x full frame width	Pemko
1 ea. Astragal	By door supplier - mount on	
	inactive leaf	

##### Hardware Group #2 Door N2

1 ea. Padlock	21B772	Best
Balance by door manufacturer/supplier		
Monitor switch by security system supplier		

##### Hardware Group #3 Doors E1, E2

6 ea. Hinges	4B51 127mm x 114.3mm US32D NRP	PBB
* 2 ea. Hinge Modification	1110 - top hinge each door leaf	ACSI
1 ea. Lock	35H7EW15M 626 x 28.575 mm	Best
	lip strike	
1 ea. Latch Guard	5000 626	Trimco
2 ea. Flushbolts	3917-304.8 mm 626	Trimco
2 ea. Stop/Holders	B1000M 626	Specware
1 ea. Gasket	S88D	Pemko
2 ea. Sweeps	18062CP	Pemko
1 ea. Threshold	171A FHSL25	Pemko
1 ea. Rain Drip	346C x full frame width	Pemko
1 ea. Astragal	By door supplier - mount on	
	inactive leaf	

01062/BERGER/ABAM  
FY02 Tactical Equipment Complex  
Fort Lewis, Washington

Hardware Group #4 Door 101

6 ea. Hinges	BB81 114.3mm x 114.3mm US26D	PBB
1 ea. Lock	35H7J15M 626	Best
2 ea. Flushbolts	3917-304.8 mm 626	Trimco
1 ea. Closer	7901 Alum @ active leaf	Dorma
2 ea. Wall Stops	1270 WVCP 630	Ives
4 ea. Silencers	#20	Ives
1 ea. Astragal	By door supplier - mount on inactive leaf	

Hardware Group #5 Doors 102, 110

3 ea. Hinges	BB81 114.3mm x 114.3mm US26D NRP	PBB
1 ea. Lock	35H7EW15M 626	Best
1 ea. Wall Stop	1270 WVCP 630	Trimco
3 ea. Silencers	#20	Ives

Hardware Group #6 Door 105

3 ea. Hinges	BB81 114.3mm x 114.3mm US26D	PBB
1 ea. Push Plate	1001-3 630	Trimco
1 ea. Pull Plate	1018-3 630	Trimco
1 ea. Closer	7901PA Alum	Dorma
1 ea. Kick Plate	K0050 254x50.8 mmLDW B4E 630	Trimco
1 ea. Wall Stop	1270 WVCP 630	Trimco
3 ea. Silencers	#20	Ives

Hardware Group #7 Door 107

3 ea. Hinges	BB81 114.3mm x 114.3mm US26D	PBB
1 ea. Privacy	35H0LF15M 626	Best
1 ea. Closer	7901 Alum	Dorma
1 ea. Mop Plate	KM050 101.6x25.4 mmLDW B4E 630	Trimco
1 ea. Wall Stop	1270 WVCP 630	Trimco
3 ea. Silencers	#20	Ives

Hardware Group #8 Door 108

6 ea. Hinges	BB81 114.3mm x 114.3mm US26D NRP	PBB
1 ea. Lock	35H7J15M 626	Best
2 ea. Flushbolts	3917-304.8 mm 626	Trimco
1 ea. Closer	7901 Alum @ active leaf	Dorma
2 ea. Wall Stops	1270 WVCP 630	Ives
4 ea. Silencers	#20	Ives
1 ea. Astragal	By door supplier - mount on inactive leaf	

01062/BERGER/ABAM  
FY02 Tactical Equipment Complex  
Fort Lewis, Washington

Hardware Group #9 Door 111

6 ea. Hinges	4B81 114.3mm x 114.3mm US26D NRP PBB	
1 ea. Lock	DL3500 series 626	Alarm Lock
	Mortise type battery operated	
	w/time zones and audit trail	
1 ea. Cylinder	1E74 626	Best
1 ea. Latch Guard	5000 626	Trimco
2 ea. Flush Bolts	3917-304.8 mm 626	Trimco
1 ea. Closer	7901PA Alum @ active leaf	Dorma
2 ea. Wall Stops	1270 WVCP 630	Trimco
4 ea. Silencers	#20	Ives
1 ea. Astragal	By door supplier - mount on inactive leaf	

Hardware Group #10 Door 112

6 ea. Hinges	BB81 114.3mm x 114.3mm US26D	PBB
1 ea. Latch	35H0N15M 626	Best
2 ea. Flush Bolts	3917-304.8 mm 626	Trimco
1 ea. Closer	7901PA Alum @ active leaf	Dorma
2 ea. Wall Stops	1270 WVCP 630	Trimco
4 ea. Silencers	#20	Ives
1 ea. Astragal	By door supplier - mount on inactive leaf	

Hardware Group #11 Door 113

3 ea. Hinges	IHTHB953 114.3mm x 114.3mm US32D Hager	
1 ea. HS Lock	X-08 Series	Mas-Hamilton
1 ea. Closer	TS93 Alum	Dorma
1 ea. Gasket	S88D	Pemko
*1 ea. Monitor Switch	MS2049F	Detex

Hardware Group #12 Doors 105, 114

3 ea. Hinges	4B81 114.3mm x 114.3mm US26D	PBB
1 ea. Lock	35H7EW15M 626	Best
1 ea. Closer	7901 Alum	Dorma
1 ea. Wall Stop	1270 WVCP 630	Trimco
3 ea. Silencers	#20	Ives



01062/BERGER/ABAM  
FY02 Tactical Equipment Complex  
Fort Lewis, Washington

Hardware Group #13 Door 115

6 ea. Hinges	BB81 114.3mm x 114.3mm US26D	PBB
1 ea. Lock	35H7E15M 626	Best
2 ea. Flushbolts	3917-304.8 mm 626	Trimco
2 ea. Wall Stops	1270 WVCP 630	Ives
4 ea. Silencers	#20	Ives
1 ea. Astragal	By door supplier - mount on inactive leaf	

Hardware Group #14 Door 116

3 ea. Hinges	BB81 114.3mm x 114.3mm US26D	PBB
1 ea. Lock	35H7E15M 626	Best
1 ea. Wall Stop	1270 WVCP 630	Trimco
3 ea. Silencers	#20	Ives

Hardware Group #15 Doors 116, 117

6 ea. Hinges	4B81 114.3mm x 114.3mm US26D NRP	PBB
1 ea. Lock	35H7EW15M 626 w/28.575 mm lip strike	Best
1 ea. Latch Guard	5000 626	Trimco
2 ea. Flush Bolts	3917-304.8 mm 626	Trimco
2 ea. Wall Stops	1270 WVCP 630	Trimco
4 ea. Silencers	#20	Ives
1 ea. Astragal	By door supplier - mount on inactive leaf	

Hardware Group #16 Door 119

3 ea. Hinges	BB81 114.3mm x 114.3mm US26D NRP	PBB
1 ea. Lock	35H7E15M 626	Best
1 ea. Closer	7901PA Alum	Dorma
1 ea. Wall Stop	1270 WVCP 630	Trimco
3 ea. Silencers	#20	Ives

Hardware Group #17 Door 121

3 ea. Hinges	IHTHB953 114.3mm x 114.3mm US32D	Hager
1 ea. HS Padlock	5000 Series by owner	
1 ea. Closer	TS93 Alum	Dorma
1 ea. Gasket	S88D	Pemko
*1 ea. Monitor Switch	MS2049F	Detex
Heavy duty padlock hasp by door and frame manufacturer, welded construction		

01062/BERGER/ABAM  
FY02 Tactical Equipment Complex  
Fort Lewis, Washington

Hardware group #18 Door 121a

1 ea. Padlock                      2000 Series by owner  
Balance by security gate manufacturer

**RANGER MOTOR POOL (RMP) BUILDING**

Hardware Group #1   Doors W2, S3

6 ea. Hinges	4B51 127mm x 114.3mm US32D NRP	PBB
* 2 ea. Hinge Modification	1110 - top hinge each door leaf	ACSI
1 ea. Lock	35H0EW15H 626	Best
	no outside trim or cylinder	
	x 28.575 mm lip strike	
1 ea. Latch Guard	5000 626	Trimco
2 ea. Flushbolts	3917-304.8 mm 626	Trimco
2 ea. Stop/Holders	B1000M 626	Specware
1 ea. Gasket	S88D	Pemko
2 ea. Sweeps	18062CP	Pemko
1 ea. Threshold	171A FHSL25	Pemko
1 ea. Rain Drip	346C x full frame width	Pemko
1 ea. Astragal	By door supplier - mount on inactive leaf	

Hardware Group #2   Doors W1, N1

3 ea. Hinges	4B51 127mm x 114.3mm US32D NRP	PBB
* 1 ea. Hinge Modification	1110 - top hinge	ACSI
1 ea. Lock	DL3500 series 626	Alarm Lock
	Mortise type battery operated	
	w/time zones and audit trail	
1 ea. Cylinder	1E74 626	Best
1 ea. Latch Guard	5000 626	Trimco
1 ea. Closer	7901PA Alum	Dorma
1 ea. Stop/Holder	B1000M 626	Specware
1 ea. Gasket	S88D	Pemko
1 ea. Sweep	18062CP	Pemko
1 ea. Threshold	171A FHSL25	Pemko
1 ea. Rain Drip	346C x full frame width	Pemko

Hardware Group #3 Door E1

3 ea. Hinges	4B51 127mm x 114.3mmUS32D NRP	PBB
* 1 ea. Hinge Modification	1110 - top hinge each door leaf	ACSI
1 ea. Lock	35H0EW15H 626	Best
	no outside trim or cylinder	
	x 28.575 mm lip strike	
1 ea. Latch Guard	5000 626	Trimco
1 ea. Stop/Holder	B1000M 626	Specware
1 ea. Gasket	S88D	Pemko
1 ea. Sweep	18062CP	Pemko
1 ea. Threshold	171A FHSL25	Pemko
1 ea. Rain Drip	346C x full frame width	Pemko

Hardware Group #4 Door W3, W4, E2, E3

1 ea. Padlock	21B772	Best
Balance by door manufacturer/supplier		
Monitor switch by security system supplier		

Hardware Group #5 Door S2

3 ea. Hinges	4B51 127mm x 114.3mmUS32D NRP	PBB
* 1 ea. Hinge Modification	1110 - top hinge	ACSI
1 ea. Lock	35H7EW15M 626 x 28.575 mm	Best
	lip strike	
1 ea. Latch Guard	5000 626	Trimco
1 ea. Stop/Holder	B1000M 626	Specware
1 ea. Gasket	S88D	Pemko
1 ea. Sweep	18062CP	Pemko
1 ea. Threshold	171A FHSL25	Pemko
1 ea. Rain Drip	346C x full frame width	Pemko

Hardware Group #6 Door S1

6 ea. Hinges	4B51 127mm x 114.3mmUS32D NRP	PBB
* 2 ea. Hinge Modification	1110 - top hinge each door leaf	ACSI
1 ea. Lock	35H7EW15M 626 x 28.575 mm	Best
	lip strike	
1 ea. Latch Guard	5000 626	Trimco
2 ea. Flushbolts	3917-304.8 mm 626	Trimco
2 ea. Stop/Holders	B1000M 626	Specware
1 ea. Gasket	S88D	Pemko
2 ea. Sweeps	18062CP	Pemko
1 ea. Threshold	171A FHSL25	Pemko
1 ea. Rain Drip	346C x full frame width	Pemko
1 ea. Astragal	By door supplier - mount on inactive leaf	

01062/BERGER/ABAM  
FY02 Tactical Equipment Complex  
Fort Lewis, Washington

Hardware Group #7 Doors 101, 110, 113

3 ea. Hinges	BB81 114.3mm x 114.3mm US26D	PBB
1 ea. Lock	35H7E15M 626	Best
1 ea. Wall Stop	1270 WVCP 630	Trimco
3 ea. Silencers	#20	Ives

Hardware Group #8 Doors 102, 112

3 ea. Hinges	BB81 114.3mm x 114.3mm US26D	PBB
1 ea. Latch	35H0N15M 626	Best
1 ea. Wall Stop	1270 WVCP 630	Trimco
3 ea. Silencers	#20	Ives

Hardware Group #9 Doors 103, 104

3 ea. Hinges	BB81 114.3mm x 114.3mm US26D	PBB
1 ea. Lock	35H7EW15M 626	Best
1 ea. Wall Stop	1270 WVCP 630	Trimco
3 ea. Silencers	#20	Ives

Hardware Group #10 Door 107

3 ea. Hinges	BB81 114.3mm x 114.3mm US26D	PBB
1 ea. Push Plate	1001-3 630	Trimco
1 ea. Pull Plate	1018-3 630	Trimco
1 ea. Closer	7901PA Alum	Dorma
1 ea. Kick Plate	K0050 254x50.8 mm LDW B4E 630	Trimco
1 ea. Wall Stop	1270 WVCP 630	Trimco
3 ea. Silencers	#20	Ives

Hardware Group #11 Door 109

3 ea. Hinges	BB81 114.3mm x 114.3mm US26D	PBB
1 ea. Privacy	35H0LF15M 626	Best
1 ea. Closer	7901 Alum	Dorma
1 ea. Mop Plate	KM050 101.6x25.4 mmLDW B4E 630	Trimco
1 ea. Wall Stop	1270 WVCP 630	Trimco
3 ea. Silencers	#20	Ives

01062/BERGER/ABAM  
FY02 Tactical Equipment Complex  
Fort Lewis, Washington

Hardware Group #12 Door 112a

6 ea. Hinges	4B81 127mm x 114.3mmUS26D	PBB
1 ea. Latch	35H0N15M 626	Best
2 ea. Flush Bolts	3917-304.8 mm 626	Trimco
2 ea. Wall Stops	1270 WVCP 630	Trimco
1 ea. Gasket	S88D	Pemko
2 ea. Sweeps	18062CP	Pemko
1 ea. Astragal	By door supplier - mount on inactive leaf	

Hardware Group #13 Door 100

6 ea. Hinges	BB81 114.3mm x 114.3mm US26D	PBB
2 ea. Push Plates	1001-3 630	Trimco
2 ea. Pull Plates	1018-3 630	Trimco
2 ea. Closers	7901PA Alum	Trimco
2 ea. Kick Plates	K050 254x50.8 mm LDW B4E 630	Trimco
2 ea. Wall Stops	1270 WVCP 630	Trimco
1 ea. Gasket	S88D	Pemko
2 ea. Sweeps	18062CP	Pemko
1 ea. Astragal	By door supplier - mount on inactive leaf	

Hardware Group #14 Door 111

6 ea. Hinges	BB81 114.3mm x 114.3mm US26D NRP	PBB
1 ea. Lock	35H7E15M 626 w/ 28.575 mm lip strike	Best
1 ea. Latch Guard	5000 626	Trimco
2 ea. Flush Bolts	3917-304.8 mm 626	Trimco
2 ea. Wall Stops	1270 WVCP 630	Trimco
1 ea. Gasket	S88D	Pemko
2 ea. Sweeps	18062CP	Pemko
1 ea. Astragal	By door supplier - mount on inactive leaf	

Hardware Group #15 Door 113a

3 ea. Hinges	BB81 114.3mm x 114.3mm US26D	PBB
1 ea. Lock	35H7E15M 626	Best
1 ea. Wall Stop	1270 WVCP 630	Trimco
1 ea. Gasket	S88D	Pemko
1 ea. Sweep	18062CP	Pemko

**Ranger Special Operations Vehicle Storage**

Hardware Group #1 Doors S1, S2, S3, S4, S5, S6

3 ea. Hinges	4B51 127mm x 114.3mmUS32D NRP	PBB
* 1 ea. Hinge Modification	1110 - top hinge	ACSI
1 ea. Lock	DL3500 series 626	Alarm Lock
	Mortise type battery operated	
	w/time zones and audit trail	
1 ea. Cylinder	1E74 626	Best
1 ea. Latch Guard	5000 626	Trimco
1 ea. Closer	7901PA Alum	Dorma
1 ea. Stop/Holder	B1000M 626	Specware
1 ea. Gasket	S88D	Pemko
1 ea. Sweep	18062CP	Pemko
1 ea. Threshold	171A FHSL25	Pemko
1 ea. Rain Drip	346C x full frame width	Pemko

Hardware Group #2 Door S1A, S1B, S2A, S3A, S4A, S4B, S5A, S5B, S6A, S6B

1 ea. Padlock	21B772	Best
Balance by door manufacturer/supplier		
Monitor switch by security system supplier		

Hardware Group #3 Doors 100, 200, 300, 400, 500

6 ea. Hinges	4B81 114.3mm x 114.3mm US26D NRP	PBB
1 ea. Lock	35H7C15M 626	Best
2 ea. Flushbolts	3917-304.8 mm 626	Trimco
2 ea. Wall Stops	1270 WVCP 630	Ives
4 ea. Silencers	#20	Ives
1 ea. Astragal	By door supplier - mount on inactive leaf	

Hardware Group #4 Door 101

3 ea. Hinges	BB81 114.3mm x 114.3mm US26D	PBB
1 ea. Lock	35H7EW15M 626	Best
1 ea. Wall Stop	1270 WVCP 630	Trimco
3 ea. Silencers	#20	Ives

\* Requires electronic coordination

-- End of Section --

SECTION 08810

GLASS AND GLAZING

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by basic designation only.

AMERICAN NATIONAL STANDARDS INSTITUTE (ANSI)

ANSI Z97.1 (1984; R 1994) Safety Performance  
Specifications and Methods of Test for Safety  
Glazing Materials Used in Buildings

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM C 509 (1994) Elastomeric Cellular Preformed Gasket  
and Sealing Material

ASTM C 669 (1995) Glazing Compounds for Back Bedding and  
Face Glazing of Metal Sash

ASTM C 864 (1999) Dense Elastomeric Compression Seal  
Gaskets, Setting Blocks, and Spacers

ASTM C 920 (1998) Elastomeric Joint Sealants

ASTM C 1036 (1991; R 1997) Flat Glass

ASTM C 1048 (1997b) Heat-Treated Flat Glass - Kind HS,  
Kind FT Coated and Uncoated Glass

ASTM D 395 (1998) Rubber Property - Compression Set

ASTM E 119 (1998) Fire Tests of Building Construction  
and Materials

ASTM E 773 (1997) Accelerated Weathering of Sealed  
Insulating Glass Units

ASTM E 774 (1997) Classification of the Durability of  
Sealed Insulating Glass Units

ASTM E 1300 (1998) Determining the Minimum Thickness and  
Type of Glass Required to Resist a Specified  
Load

AMERICAN SOCIETY OF CIVIL ENGINEERS (ASCE)

ASCE 7 (1995) Minimum Design Loads for Buildings and  
Other Structures

CODE OF FEDERAL REGULATIONS (CFR)

16 CFR 1201 Safety Standard for Architectural Glazing  
Materials

GLASS ASSOCIATION OF NORTH AMERICA (GANA)

GANA Glazing Manual (1997) Glazing Manual

GANA Standards Manual (1995) Engineering Standards Manual

1.2 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only. When used, a designation following the "G" designation identifies the office that will review the submittal for the Government. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

SD-03 Product Data

Insulating Glass; G  
Glazing Accessories; G

Manufacturer's descriptive product data, handling and storage recommendations, installation instructions, and cleaning instructions.

SD-04 Samples

Insulating Glass; G

Two 8 x 10 inch samples of each of the following: insulating glass units.

SD-07 Certificates

Insulating Glass; G

Certificates stating that the glass meets the specified requirements. Labels or manufacturers marking affixed to the glass will be accepted in lieu of certificates.

1.3 SYSTEM DESCRIPTION

Glazing systems shall be fabricated and installed watertight and airtight to withstand thermal movement and wind loading without glass breakage, gasket failure, deterioration of glazing accessories, and defects in the work.



Glazed panels shall comply with the safety standards, as indicated in accordance with ANSI Z97.1. Glazed panels shall comply with indicated wind/snow loading in accordance with ASTM E 1300.

#### 1.4 DELIVERY, STORAGE AND HANDLING

Glazing compounds shall be delivered to the site in the manufacturer's unopened containers. Glass shall be stored indoors in a safe, well ventilated dry location in accordance with manufacturer's instructions, and shall not be unpacked until needed for installation. Glass shall not be stored on site over 1 month.

#### 1.5 PROJECT/SITE CONDITIONS

Glazing work shall not be started until outdoor temperature is above 5 degrees C (40 degrees F) and rising, unless procedures recommended by glass manufacturer and approved by Resident engineer are made to warm the glass and rabbet surfaces. Ventilation shall be provided to prevent condensation of moisture on glazing work during installation. Glazing work shall not be performed during damp or raining weather.

#### 1.6 WARRANTY

##### 1.6.1 Insulating Glass

Manufacturer shall warrant the insulating glass to be free of fogging or film formation on the internal glass surfaces caused by failure of the hermetic seal for a period of 10 years from Date of Substantial Completion. Warranty shall be signed by manufacturer.

### PART 2 PRODUCTS

#### 2.1 ROLLED GLASS

##### 2.1.1 Wired Glass

Wired glass shall be Type II flat type, Class 1 - translucent, Quality q8 - glazing, Form 1 - wired and polished both sides, conforming to ASTM C 1036. Wire mesh shall be polished stainless steel square mesh. Wired glass for fire-rated windows shall bear an identifying UL label or the label of a nationally recognized testing agency, and shall be rated for 45 minutes when tested in accordance with NFPA 257. Wired glass for fire-rated doors shall be tested as part of a door assembly in accordance with NFPA 252.

#### 2.2 INSULATING GLASS

Insulating glass shall be Class A preassembled units of dual-seal construction consisting of lites of glass separated by an aluminum, spacer and dehydrated space conforming to ASTM E 773 and ASTM E 774. Spacer shall be roll-formed, with bent or tightly welded or keyed and sealed joints to completely seal the spacer periphery and eliminate moisture and hydrocarbon vapor transmission into airspace through the corners. Primary seal shall be compressed polyisobutylene and the secondary seal shall be a specially formulated silicone. Glass types shall be as noted in the glazing schedule.

## 2.3 HEAT-TREATED GLASS

Heat-treated glass shall conform to the following requirements.

### 2.3.1 Clear Tempered Glass

Tempered glass shall be kind FT fully tempered transparent flat type, Class 1-clear, Condition A uncoated surface, Quality q3 - glazing select, 89 percent visible light transmittance, 0.96 shading coefficient conforming to ASTM C 1048 and GANA Standards Manual. Color shall be clear

### 2.3.2 Tinted Tempered Glass

Tinted tempered glass shall be kind FT fully tempered transparent flat type, Class 2-tinted, Condition A uncoated surface, Quality q3 - glazing select, 76 percent light transmittance, 0.71 shading coefficient conforming to ASTM C 1048 and GANA Standards Manual. Color shall match Solar Green (PPG).

## 2.4 GLAZING ACCESSORIES

### 2.4.1 Preformed Tape

Preformed tape shall be elastomeric rubber extruded into a ribbon of a width and thickness suitable for specific application. Tape shall be of type which will remain resilient, have excellent adhesion, and be chemically compatible to glass, metal, or wood.

### 2.4.2 Sealant

Sealant shall be elastomeric conforming to ASTM C 920, Type S or M, Grade NS, Class 12.5, Use G, of type chemically compatible with setting blocks, preformed sealing tape and sealants used in manufacturing insulating glass. Color of sealant shall be match frame color.

### 2.4.3 Glazing Gaskets

Glazing gaskets shall be extruded with continuous integral locking projection designed to engage into metal glass holding members to provide a watertight seal during dynamic loading, building movements and thermal movements. Glazing gaskets for a single glazed opening shall be continuous one-piece units with factory-fabricated injection-molded corners free of flashing and burrs. Glazing gaskets shall be in lengths or units recommended by manufacturer to ensure against pull-back at corners. Glazing gasket profiles shall be as indicated on drawings.

#### 2.4.3.1 Fixed Glazing Gaskets

Fixed glazing gaskets shall be closed-cell (sponge) smooth extruded compression gaskets of cured elastomeric virgin neoprene compounds conforming to ASTM C 509, Type 2, Option 1.

#### 2.4.3.3 Aluminum Framing Glazing Gaskets

Glazing gaskets for aluminum framing shall be permanent, elastic, non-shrinking, non-migrating, watertight and weathertight.

#### 2.4.4 Setting and Edge Blocking

Neoprene setting blocks shall be dense extruded type conforming to ASTM D 395, Method B, Shore A durometer between 70 and 90. Edge blocking shall be Shore A durometer of 50 (+ or - 5). Silicone setting blocks shall be required when blocks are in contact with silicone sealant. Profiles, lengths and locations shall be as required and recommended in writing by glass manufacturer.

### PART 3 EXECUTION

#### 3.1 PREPARATION

Openings and framing systems scheduled to receive glass shall be examined for compliance with, GANA Glazing Manual and glass manufacturer's recommendations including size, squareness, offsets at corners, presence and function of weep system, face and edge clearance requirements and effective sealing between joints of glass-framing members. Detrimental materials shall be removed from glazing rabbet and glass surfaces and wiped dry with solvent. Glazing surfaces shall be dry and free of frost.

#### 3.2 INSTALLATION

Glass and glazing work shall be performed in accordance with, GANA Glazing Manual, glass manufacturer's instructions and warranty requirements. Glass shall be installed with factory labels intact and removed only when instructed. Edges and corners shall not be ground, nipped or cut after leaving factory. Springing, forcing or twisting of units during installation will not be permitted.

#### 3.3 CLEANING

Upon completion of project, outside surfaces of glass shall be washed clean and the inside surfaces of glass shall be washed and polished in accordance with glass manufacturer's recommendations.

#### 3.4 PROTECTION

Glass work shall be protected immediately after installation. Glazed openings shall be identified with suitable warning tapes, cloth or paper flags, attached with non-staining adhesives. Glass units which are broken, chipped, cracked, abraded, or otherwise damaged during construction activities shall be removed and replaced with new units.

#### 3.5 GLAZING SCHEDULE

Glazing Type I - Insulated Glass Unit: Exterior pane of tinted tempered glass, interior pane of clear tempered glass.

01062/BERGER/ABAM  
FY02 Tactical Equipment Complex  
Fort Lewis, Washington

Glazing Type II - Tempered Glass: Single pane of  $\frac{1}{4}$  inch thick clear tempered glass.

Glazing Type III - Wire Glass: Single pane of  $\frac{1}{4}$  inch thick wire glass.

-- End Of Section --

SECTION 09250

GYPSUM WALLBOARD

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by basic designation only.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM A 853	(1993; R 1998) Steel Wire, Carbon, for General Use
ASTM C 36/C 36M	(1999) Gypsum Wallboard
ASTM C 79/C 79M	(1997) Treated Core and Nontreated Core Gypsum Sheathing Board
ASTM C 578	(1995) Standard Specification for Rigid, Cellular Polystyrene Thermal Insulation
ASTM C 475	(1994) Joint Compound and Joint Tape for Finishing Gypsum Board
ASTM C 630/C 630M	(1996a) Water-Resistant Gypsum Backing Board
ASTM C 645	(2000) Nonstructural Steel Framing Members
ASTM C 754	(1999a) Installation of Steel Framing Members to Receive Screw-Attached Gypsum Panel Products
ASTM C 840	(1999) Application and Finishing of Gypsum Board
ASTM C 1002	(1998) Steel Drill Screws for the Application of Gypsum Panel Products or Metal Plaster Bases
ASTM C 1047	(1999) Accessories for Gypsum Wallboard and Gypsum Veneer Base
ASTM C 1177/C 1177M	(1999) Glass Mat Gypsum Substrate for Use as Sheathing
ASTM C 1178/C 1178M	(1999) Glass Mat Water-Resistant Gypsum Backing Panel

GYPSUM ASSOCIATION (GA)GA 214 (1996) Recommended Levels of Gypsum Board Finish

GA 216 (1996) Application and Finishing of Gypsum Board

GA 600 (1997) Fire Resistance Design Manual

UNDERWRITERS LABORATORIES (UL)

UL Fire Resist Dir (1999) Fire Resistance Directory (2 Vol.)

1.2 SYSTEM DESCRIPTION

1.2.1 Fire-Rated Construction

Joints of fire-rated gypsum board enclosures shall be closed and sealed in accordance with UL test requirements or GA requirements. Penetrations through rated partitions and ceilings shall be sealed tight in accordance with tested systems. Fire ratings shall be as indicated.

1.3 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only. When used, a designation following the "G" designation identifies the office that will review the submittal for the Government. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

SD-03 Product Data

Rigid Insulation; G  
Gypsum Board; G  
Steel Framing; G  
Fire-Resistant Assemblies; G

Manufacturer's catalog data.

1.4 QUALIFICATIONS

Manufacturer shall specialize in manufacturing the types of material specified and shall have a minimum of 5 years of documented successful experience. Installer shall specialize in the type of gypsum board work required and shall have a minimum of 3 years of documented successful experience.

1.5 DELIVERY, STORAGE AND HANDLING

Materials shall be delivered in original containers bearing the name of manufacturer, contents, and brand name. Materials shall be stored off the ground in a weathertight structure for protection. Gypsum boards shall be stacked flat, off floor and supported to prevent sagging and warpage. Adhesives and joint materials shall be stored in accordance with

manufacturer's printed instructions. Damaged or deteriorated materials shall be removed from jobsite.

#### 1.6 ENVIRONMENTAL CONDITIONS

Environmental conditions for application and finishing of gypsum board shall be in accordance with ASTM C 840. During the application of gypsum board without adhesive, a room temperature of not less than 4 degrees C (40 degrees F) shall be maintained. During the application of gypsum board with adhesive, a room temperature of not less than 10 degrees C (50 degrees F) shall be maintained for 48 hours prior to application and continuously afterwards until completely dry. Building spaces shall be ventilated to remove water not required for drying joint treatment materials. Drafts shall be avoided during dry hot weather to prevent materials from drying too rapidly.

### PART 2 MATERIALS

#### 2.1 RIGID INSULATION MATERIALS

Rigid Insulation: Extruded Polystyrene Board Insulation, ASTM C 578, Type IV; extruded cellular type polystyrene board with either natural skin or cut cell surfaces; with the following characteristics:

Board Edges: Square.  
Compressive Resistance: 25 psi.  
Water Absorption, maximum: 0.3 percent, volume.  
Flame/Smoke Properties: 5/165 in accordance with ASTM E 84.

#### 2.2 NON-LOADBEARING STUD WALLS

##### 2.2.1 Studs

Studs for non-loadbearing walls shall conform to ASTM C 645. Studs shall be C-shaped, roll formed steel made from G40 hot-dip galvanized coated sheet, thickness as noted on Drawings with minimum uncoated design thickness of 0.0329 inches.

##### 2.2.2 Runner Tracks

Floor and ceiling runner tracks shall conform to ASTM C 645. Tracks shall be prefabricated, U-shaped with minimum 25 mm (1 inch) flanges, unpunched web, thickness to match studs, made from G40 hot-dip galvanized coated sheet.

##### 2.2.3 Z-Furring

Furring members shall be Z-shaped, roll formed steel made from G40 hot-dip galvanized coated sheet, thickness as noted on Drawings with minimum uncoated design thickness of 0.0329 inches. Depth as required to accommodate rigid insulation or as noted on Drawings.

## 2.3 SUSPENDED CEILING FRAMING

Suspended ceiling framing system shall have the capability to support the finished ceiling, light fixtures, air diffusers, and accessories, as shown. The suspension system shall have a maximum deflection of  $L/240$ . Carrying channels shall be formed from minimum 1.40 mm thick cold-rolled steel, 38 x 19 mm. Furring members shall be formed from cold-rolled steel, 22 x 65 mm. Carrying channels and furring members shall be made from hot-dip galvanized coated sheet.

## 2.4 GYPSUM BOARD

Gypsum board shall have square-cut ends, tapered or beveled edges and shall be maximum possible length. Gypsum board thickness shall be 5/8 inch.

### 2.4.1 Fire-Rated Gypsum Board

Fire-rated gypsum board shall conform to ASTM C 36/C 36M, and shall be Type X, 1200 mm wide.

### 2.4.2 Moisture-Resistant Gypsum Board

Water-resistant gypsum board shall conform to ASTM C 630/C 630M, Type X, with water-resistant paper faces, paintable surfaces, and shall be 1200 mm width and maximum permissible length.

### 2.4.3 Exterior Sheathing Board

Glass mat gypsum sheathing shall conform to ASTM C 1177/C 1177M, shall have a water-resistant core with water and mold/mildew resistant fiberglass faces embedded into the core and shall have square edges 48 inches wide by 5/8 inch thick.

### 2.4.4 Water-Resistant Gypsum Backing Panel

Glass mat water-resistant gypsum backing panels shall conform to ASTM C 1178/C 1178M, shall have a water-resistant core with water and mold/mildew resistant fiberglass faces imbedded into the core and shall have square edges 48 inches wide by 5/8 inch thick.

## 2.5 TRIM, MOLDINGS, AND ACCESSORIES

### 2.5.1 Taping and Embedding Compound

Taping and embedding compound shall conform to ASTM C 475. Compound shall be specifically formulated and manufactured for use in embedding tape at gypsum wallboard joints and fastener heads, and shall be compatible with tape and substrate.

### 2.5.2 Finishing or Topping Compound

Finishing or topping compound shall conform to ASTM C 475. Compound shall be specifically formulated and manufactured for use as a finishing compound for gypsum board.



### 2.5.3 All-Purpose Compound

All-purpose compound shall be specifically formulated and manufactured to use as a taping and finishing compound, and shall be compatible with tape and substrate.

### 2.5.4 Joint Tape

Joint tape shall conform to ASTM C 475 and shall be as recommended by gypsum board manufacturer.

### 2.5.5 Trim, Control Joints, Beads, Stops and Nosings

Items used to protect edges, corners, and to provide architectural features shall be in accordance with ASTM C 1047.

## 2.6 FASTENINGS AND ADHESIVES

### 2.6.1 Screws

Screws shall conform to ASTM C 1002. Screws shall be self-drilling and self-tapping steel, Type S for light-gauge steel framing.

### 2.6.2 Hangers

Suspended ceiling runner channel hangers shall be soft, annealed steel wire not less than No. 8 SWG, conforming to ASTM A 853, coated with zinc.

### 2.6.3 Wire and Clip Type Fastenings

Tie wire, clips, rings, and other fastenings shall be corrosion-resisting steel conforming to ASTM A 580/A 580M, composition 302, 304, or 316, Condition A, except that walls, partitions, and other vertical surfaces not incorporated in ceiling construction may be erected with soft, annealed steel conforming to ASTM A 853.

#### 2.6.3.1 Tie Wire

Tie wire for constructing partitions and vertical furring, for securing metal lath to supports, and for lacing shall be not less than No. 18 SWG. Tie wire for other applications shall be not less than No. 16 SWG.

#### 2.6.3.2 Clips

Clips used in lieu of tie wire for securing the furring channels to the runner channels in ceiling construction shall be made from strip not less than 3 mm thick or shall be hairpin clip, formed of wire not less than 0.4 mm nominal diameter. Other clips and rings or fastenings of similar materials shall be equivalent in holding power to that provided by tie wire for the specific application.

### PART 3 EXECUTION

#### 3.1 RIGID INSULATION INSTALLATION AT FRAMED WALLS

Install boards vertically between steel Z-furring members over entire face of wall. Butt edges and ends tightly to adjacent boards, Z-furring members and to protrusions. Cut and fit insulation tightly to protrusions or interruptions to the insulation plane.

#### 3.2 INTERIOR WALL FRAMING

Steel framing and furring members shall be installed in accordance with ASTM C 754. Members shall be in alignment with spacings not to exceed the maximum spacings indicated on drawings. Runners shall be aligned accurately at the floor and ceiling and securely anchored.

##### 3.2.1 Wall Openings

The framing system shall provide for the installation and anchorage of the required subframes or finish frames for wall openings at doors, pass-through openings, and access panels. Partitions abutting continuous suspended ceilings shall be strengthened for rigidity at rough openings of more than 750 mm wide. Provide two studs at each jamb of all openings. Double studs shall be fastened together with screws and secured to floor and overhead runners.

##### 3.2.2 Wall Control Joints

Control joints for expansion and contraction in the walls shall be constructed with double studs installed 13 mm apart in interior walls or wall furrings where indicated on drawings. Control joint spacing shall not exceed 9 m. Ceiling-height door frames may be used as vertical control joints. Door frames of less than ceiling height may be used as control joints only if standard control joints extend to ceiling from both corners of top of door frame. Control joints between studs shall be filled with firesafing insulation in fire rated partitions.

##### 3.2.3 Backing

Backing shall be provided for surface-mounted items/equipment and wherever finish trim or surface panels require nails for attachment; provide preservative pressure treated backing at bottom of shower walls 12 inches high to provide solid surface for application of waterproof membrane by Section 09310. Coordinate size and location with other trades. Backing shall be solid 2x6 wood (minimum) #2 and Better Douglas Fir, and shall be cut to fit between framing members and flush with the face of stud. Backing shall be rigidly anchored to the framing members. Under no circumstances will accessories or other wall mounted equipment be anchored directly to gypsum wallboard.

#### 3.3 SUSPENDED CEILING FRAMING

Suspended ceiling system framing shall be installed in accordance with ASTM C 754.

### 3.3.1 Hangers

Hangers shall be spaced not more than 1200 mm along runner channels and 900 mm in the other direction or 1050 mm in both directions unless otherwise indicated. Locations of hanger wires shall be coordinated with other work. Hangers at ends of runner channels shall be located not more than 150 mm from wall. Hanger wire shall be looped around bottom chord of open-web steel joists, or secured to structural elements with suitable fasteners. Sags or twists which develop in the suspended system shall be adjusted. Damaged or faulty parts shall be replaced.

### 3.3.2 Main Runners

Main runner channels shall be installed in accordance with ASTM C 754. Hanger wires shall be double strand saddle-tied to runner channels and the ends of hanger wire shall be twisted three times around itself. Main runners shall be located to within 150 mm of the paralleling wall to support the ends of cross furring. Main runners shall not come in contact with abutting masonry or concrete walls. Where main runners are spliced, ends shall be overlapped 300 mm with flanges of channels interlocked, and shall be securely tied at each end of splice with wire looped twice around the channels.

### 3.3.3 Furring Channels

Furring channels shall be spaced in accordance with ASTM C 754. Furring channels shall be secured to the runner channels and to structural supports at each crossing with tie wire, hairpin clips, or equivalent fastenings. Furring channels shall be located within 50 mm of parallel walls and beams, and shall be cut 13 mm short of abutting walls.

### 3.3.4 Ceiling Openings

Support members shall be provided as required at ceiling openings for access panels, recessed light fixtures, and air supply or exhaust. Support members shall be not less than 38 mm main runner channels and vertically installed suspension wires or straps shall be located to provide at least the minimum support specified herein for furring and wallboard attachment. Intermediate structural members not a part of the structural system, shall be provided for attachment or suspension of support members.

### 3.3.5 Light Fixtures and Air Diffusers

Light fixtures and air diffusers shall be supported directly from suspended ceiling runners. Wires shall be provided at appropriate locations to carry the weight of recessed or surface mounted light fixtures and air diffusers.

### 3.3.6 Control Joints

Ceiling control joints for expansion and contraction shall be located where indicated on drawings. A control joint or intermediate blocking shall be installed where ceiling framing members change direction.

#### 3.3.6.1 Interior Ceilings Without Perimeter Relief

Control joints shall be installed so that linear dimensions between control joints shall not exceed 9 m in either direction nor more than 84 square meters.

### 3.4 APPLICATION OF GYPSUM BOARD

Gypsum board shall be installed in accordance with ASTM C 840, GA 214 and GA 216 and as specified. Paragraph 17.3.1 GENERAL of ASTM C 840 which permits usage of water resistant gypsum board as a base for adhesive application of ceramic or plastic tile on ceilings, does not apply. Edges and ends of gypsum boards shall be cut to obtain neat fitting joints. End joints of adjoining boards shall be staggered, and shall be staggered on opposite sides of wall. Boards shall be applied with moderate contact without forcing in place. Holes for pipes, fixtures or other small openings shall be cut with a tool which will provide a neat fit. Screws shall be driven so that the heads are slightly below the plane of paper face. Fracturing the paper face or damaging the core shall be avoided. Trim shall be installed at external and internal angles formed by the intersecting gypsum board surfaces with other surfaces. Corner beads shall be installed to vertical and horizontal corners in accordance with manufacturer's published instructions. Boards of maximum practical length shall be used so that an absolute minimum number of end joints occur. Gypsum board partitions in rooms with ceiling heights less than 3 m shall have full height boards installed vertically with no end joints in the gypsum installation.

#### 3.4.1 Two-Ply Gypsum Board

Second layer of gypsum board shall be applied perpendicular to first layer with joints staggered and secured with mechanical fasteners.

#### 3.4.2 Moisture-Resistant Gypsum Board

Water-resistant gypsum board shall be installed at the locations indicated.

#### 3.4.3 Exterior Gypsum Sheathing

Exterior glass mat gypsum sheathing shall be flashed at openings so that water intrusion will not contact the sheathing. Vertical end and edge joints shall abut over the centers of framing members and shall be offset a minimum of one framing space between adjacent rows of gypsum sheathing. Sheathing shall be installed in accordance with manufacturer's instructions.

### 3.5 TRIM, MOLDINGS, AND ACCESSORIES INSTALLATION

Trim, moldings and accessories shall be installed in accordance with GA 216.

### 3.6 GYPSUM BOARD FINISH

Gypsum board shall be finished in accordance with ASTM C 840, GA 214 and GG 216. Concealed areas above ceilings and behind plywood panels shall be finished to Level 1 in accordance with GA 214. Water resistant gypsum backing board, ASTM C 1178/C 1178M, to receive ceramic tile shall be

01062/BERGER/ABAM  
FY02 Tactical Equipment Complex  
Fort Lewis, Washington

finished to Level 2 in accordance with GA 214. Unless otherwise specified, all gypsum board walls, partitions and ceilings shall be finished to Level 5 in accordance with GA 214.

### 3.7 FIRE-RESISTANT ASSEMBLIES

Gypsum wallboard construction for fire-rated assemblies shall be in accordance with UL Fire Resist Dir, or GA 600 for the design number indicated on drawings.

### 3.8 PATCHING

Surface defects and damage shall be corrected as required to leave gypsum board smooth, uniform in appearance, and ready to receive finish as specified.

-- End of Section -

01062/BERGER/ABAM  
FY02 Tactical Equipment Complex  
Fort Lewis, Washington

This page intentionally blank.

SECTION 09310

CERAMIC TILE

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by basic designation only.

AMERICAN NATIONAL STANDARDS INSTITUTE (ANSI)

ANSI A108.1A	(1992) Installation of Ceramic Tile in the Wet-Set Method, with Portland Cement Mortar
ANSI A108.1B	(1992) Installation of Ceramic Tile on a Cured Portland Cement Mortar Setting Bed with Dry-Set or Latex Portland Cement Mortar
ANSI A108.4	(1992) Installation of Ceramic Tile with Organic Adhesives or Water Cleanable Tile Setting Epoxy Adhesive
ANSI A108.5	(1992) Installation of Ceramic Tile with Dry-Set Portland Cement Mortar or Latex-Portland Cement Mortar
ANSI A108.10	(1992) Installation of Grout in Tilework
ANSI A118.1	(1992) Dry-Set Portland Cement Mortar
ANSI A118.4	(1992) Latex-Portland Cement Mortar
ANSI A118.6	(1992) Ceramic Tile Grouts
ANSI A136.1	(1992) Organic Adhesives for Installation of Ceramic Tile
ANSI A137.1	(1988) Ceramic Tile

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM A 185	(1997) Steel Welded Wire Fabric, Plain, for Concrete Reinforcement
ASTM C 33	(1997) Concrete Aggregates
ASTM C 144	(1997) Aggregate for Masonry Mortar
ASTM C 150	(1997) Portland Cement

ASTM C 241	(1990) Abrasion Resistance of Stone Subjected to Foot Traffic
ASTM C 373	(1988; R 1994) Water Absorption, Bulk Density, Apparent Porosity, and Apparent Specific Gravity of Fired Whiteware Products
ASTM C 648	(1998) Breaking Strength of Ceramic Tile
ASTM C 1026	(1987; R 1996) Measuring the Resistance of Ceramic Tile to Freeze-Thaw Cycling
ASTM C 1027	(1984; R 1990) Determining Visible Abrasion Resistance of Glazed Ceramic Tile
ASTM C 1028	(1996) Determining the Static Coefficient of Friction of Ceramic Tile and Other Like Surfaces by the Horizontal Dynamometer Pull-Meter Method
ASTM C 1178/C 1178M	(1996) Glass Mat Water-Resistant Gypsum Backing Panel

MARBLE INSTITUTE OF AMERICA (MIA)

MIA Design Manual	(1991) Design Manual IV Dimensional Stone
-------------------	---

TILE COUNCIL OF AMERICA (TCA)

TCA Hdbk	(1997) Handbook for Ceramic Tile Installation
----------	---

## 1.2 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only. When used, a designation following the "G" designation identifies the office that will review the submittal for the Government. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

SD-03 Product Data

Tile; G  
Setting-Bed; G  
Mortar, Grout, and Adhesive; G

Manufacturer's catalog data.

Manufacturers preprinted installation and cleaning instructions.



SD-04 Samples

Tile; G

Samples of sufficient size to show color range, pattern, type and joints.

SD-07 Certificates

Tile; G

Mortar, Grout, and Adhesive; G

Certificates indicating conformance with specified requirements.  
A master grade certificate shall be furnished for tile.

1.3 DELIVERY AND STORAGE

Materials shall be delivered to the project site in manufacturer's original unopened containers with seals unbroken and labels and hallmarks intact. Materials shall be kept dry, protected from weather, and stored under cover in accordance with manufacturer's instructions.

1.4 ENVIRONMENTAL REQUIREMENTS

Ceramic tile work shall not be performed unless the substrate and ambient temperature is at least 10 degrees C and rising. Temperature shall be maintained above 10 degrees C while the work is being performed and for at least 7 days after completion of the work. When temporary heaters are used they shall be vented to the outside to avoid carbon dioxide damage to new tile work.

1.5 WARRANTY

Manufacturer's standard performance guarantees or warranties that extend beyond a 1-year period shall be provided.

PART 2 PRODUCTS

2.1 TILE

Tile shall be standard grade conforming to ANSI A137.1. Containers shall be grade sealed. Seals shall be marked to correspond with the marks on the signed master grade certificate. Tile shall be impact resistant with a minimum breaking strength for wall tile of 41 kg and 113 kg for floor tile in accordance with ASTM C 648. Water absorption shall be 0.50 maximum percent in accordance with ASTM C 373. Floor tile shall have a minimum coefficient of friction of 0.60 wet and dry in accordance with ASTM C 1028. Floor tile shall be Class IV-Heavy Traffic, durability classification as rated by the manufacturer when tested in accordance with ASTM C 1027 for abrasion resistance as related to foot traffic.

#### 2.1.1 Mosaic Tile

Ceramic mosaic tile and trim shall be unglazed with cushion edges porcelain unpolished with sharply formed face. Tile size shall be 51 x 51 mm. Color shall be in accordance with Section 09915 COLOR SCHEDULE.

#### 2.1.2 Glazed Wall Tile

Glazed wall tile and trim shall be cushion edged with bright glaze. Tile shall 108 mm x 108 mm. Provide matching covered wall base (not top set) with inside and outside corners, and outside corner trim. Color shall be in accordance with Section 09915 COLOR SCHEDULE.

### 2.2 SETTING-BED MATERIALS

The setting-bed materials shall be composed of the following:

#### 2.2.1 Aggregate for Concrete Fill

Aggregate shall conform to ASTM C 33. Maximum size of coarse aggregate shall not be greater than one-half the thickness of concrete fill.

#### 2.2.2 Portland Cement

Cement shall conform to ASTM C 150.

#### 2.2.3 Sand

Sand shall conform to ASTM C 144.

#### 2.2.4 Reinforcing Wire Fabric

Wire fabric shall conform to ASTM A 185. Wire shall be either 50 x 50 mm mesh, 16/16 wire or 38 x 50 mm mesh, 16/13 wire.

### 2.3 WATER

Water shall be potable.

### 2.4 MORTAR, GROUT, AND ADHESIVE

Mortar, grout, and adhesive shall conform to the following:

#### 2.4.1 Latex-Portland Cement Mortar

ANSI A118.4.

#### 2.4.2 Ceramic Tile Grout

ANSI A118.6; latex-Portland cement grout

#### 2.4.3 Organic Adhesive

ANSI A136.1, Type I.

## 2.5 MARBLE THRESHOLDS

Marble thresholds shall be of size required by drawings or conditions. Marble shall be Group A as classified by MIA Design Manual. Marble shall have a fine sand-rubbed finish and shall be gray in color as approved by the Resident Engineer. Marble abrasion shall be not less than 12.0 when tested in accordance with ASTM C 241.

## PART 3 EXECUTION

### 3.1 PREPARATORY WORK AND WORKMANSHIP

Surface to receive tile shall be inspected and shall conform to the requirements of ANSI A108.1A or ANSI A108.1B for surface conditions for the type setting bed specified and for workmanship. Variations of surface to be tiled shall fall within maximum values shown below:

TYPE	WALLS	FLOORS
Organic Adhesives	3 mm in 2.4 meters	
Latex Portland Cement Mortar		3 mm in 3 meters

TYPE	WALLS	FLOORS
Organic Adhesives	3 mm in 2.4 meters	
Latex Portland Cement Mortar		3 mm in 3 meters

### 3.2 GENERAL INSTALLATION REQUIREMENTS

Tile work shall not be started until roughing in for mechanical and electrical work has been completed and tested, and built-in items requiring membrane waterproofing have been installed and tested. Floor tile installation shall not be started in spaces requiring wall tile until after wall tile has been installed. Tile in colors and patterns indicated shall be applied in the area shown on the drawings. Tile shall be installed with the respective surfaces in true even planes to the elevations and grades shown. Special shapes shall be provided as required for sills, jambs, recesses, offsets, external corners, and other conditions to provide a complete and neatly finished installation. Tile bases and coves shall be solidly backed with mortar.

### 3.3 INSTALLATION OF WALL TILE

Wall tile in toilet rooms: Install in accordance with the TCA Hdbk, Method W242. Wall tile in shower rooms: Install in accordance with TCA HDBK, Method 241.

#### 3.3.1 Workable or Cured Mortar Bed

Tile shall be installed over a workable mortar bed or a cured mortar bed at the option of the Contractor. A 0.102 mm (4 mil) polyethylene membrane, metal lath, and scratch coat shall also be installed. Workable mortar bed,

materials, and installation of tile shall conform to ANSI A108.1A. Cured mortar bed and materials shall conform to ANSI A108.1B.

### 3.3.2 Organic Adhesive

Organic adhesive installation of ceramic tile shall conform to ANSI A108.4.

### 3.3.3 Ceramic Tile and Grout

Ceramic tile grout shall be prepared and installed in accordance with ANSI A108.10.

## 3.4 INSTALLATION OF FLOOR TILE

Floor tile in shower rooms: Install in accordance with TCA HDBK, Method F121. Shower receptors shall be installed in accordance with TCA HDBK, Method B414. Floor tile in toilet rooms: Install in accordance with TCA HDBK, Method F122.

### 3.4.1 Workable or Cured Mortar Bed

Floor tile shall be installed over a workable mortar bed or a cured mortar bed at the option of the Contractor. Workable mortar bed materials and installation shall conform to ANSI A108.1A. Cured mortar bed and materials shall conform to ANSI A108.1B.

### 3.4.2 Latex-Portland Cement

Latex-Portland cement mortar shall be used to install tile directly over properly cured, plane, clean concrete slabs in accordance with ANSI A108.5. Latex Portland cement shall be used when installing porcelain ceramic tile.

### 3.4.3 Ceramic Tile Grout

Ceramic Tile grout shall be prepared and installed in accordance with ANSI A108.10.

### 3.4.4 Waterproofing

Install reinforced, liquid applied waterproof membrane in accordance with manufacturer's installation instructions. Apply to dry, properly prepared concrete floor substrate, turn membrane up walls 305 mm minimum, with waterproof membrane on wall overlapping floor waterproofing.

### 3.4.5 Concrete Setting Bed

Concrete setting bed shall be 3500 psi concrete, mixed to as dry a consistency as practicable. The fill shall be spread, tamped, and screeded to a true plane, and pitched to drains or leveled as shown. Concrete fill shall be thoroughly damp cured before application of setting-bed material. Setting bed shall be reinforced with one layer of reinforcement, with the uncut edges lapped the width of one mesh and the cut ends and edges lapped not less than 50 mm. Laps shall be tied together with 1.3 mm (18 gauge) wire every 250 mm along the finished edges and every 150 mm along the cut

ends and edges. The reinforcement shall be supported and secured in the centers of concrete fills. The mesh shall be continuous; except where expansion joints occur, mesh shall be cut and discontinued across such joints. Reinforced concrete fill shall be provided under the setting-bed where the distance between the under-floor surface and the finished tile floor surface is 50 mm or greater, and shall be of such thickness that the mortar setting-bed over the concrete fill shall be not less nor more than the thickness required in the specified TCA Hdbk methods.

### 3.5 INSTALLATION OF MARBLE THRESHOLDS

Thresholds shall be installed at all transitions from ceramic tile to other flooring material in a manner similar to that of the ceramic tile floor. Thresholds shall be the full width of the opening. Head joints at ends shall not exceed 6 mm in width and shall be grouted full as specified for ceramic tile.

### 3.6 EXPANSION JOINTS

Joints shall be formed as indicated and sealed with elastomeric sealant as specified in Section 07900 JOINT SEALING.

#### 3.6.1 Walls

Expansion joints shall be provided at control joints in backing material. Wherever backing material changes, an expansion joint shall be installed to separate the different materials.

#### 3.6.2 Floors

Expansion joints shall be provided over construction joints, control joints, and expansion joints in concrete slabs. Expansion joints shall be provided where tile abuts restraining surfaces such as perimeter walls, curbs and columns and at intervals of 7.2 to 10.8 m each way in large interior floor areas and 3.6 to 4.8 m each way in large exterior areas or areas exposed to direct sunlight or moisture. Expansion joints shall extend through setting-beds and fill.

### 3.7 CLEANING AND PROTECTING

Upon completion, tile surfaces shall be thoroughly cleaned in accordance with manufacturer's approved cleaning instructions. Acid shall not be used for cleaning glazed tile. Floor tile with resinous grout or with factory mixed grout shall be cleaned in accordance with instructions of the grout manufacturer. After the grout has set, tile wall surfaces shall be given a protective coat of a noncorrosive soap or other approved method of protection. Tiled floor areas shall be covered with building paper before foot traffic is permitted over the finished tile floors. Board walkways shall be laid on tiled floors that are to be continuously used as passageways by workmen. Damaged or defective tiles shall be replaced.

-- End Of Section --

01062/BERGER/ABAM  
FY02 Tactical Equipment Complex  
Fort Lewis, Washington

This page intentionally blank.

SECTION 09510

ACOUSTICAL CEILINGS

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by basic designation only.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM C 635	(1995) Manufacture, Performance, and Testing of Metal Suspension Systems for Acoustical Tile and Lay-In Panel Ceilings
ASTM C 636	(1996) Installation of Metal Ceiling Suspension Systems for Acoustical Tile and Lay-In Panels
ASTM E 580	(1996) Application of Ceiling Suspension Systems for Acoustical Tile and Lay In Panels in Areas Requiring Seismic Restraint
ASTM E 1264	(1990) Standard Classification for Acoustical Ceiling Products
ASTM E 1414	(1991a) Standard Test for Airborne Sound Attenuation Between Rooms Sharing a Common Ceiling Plenum

COE TECHNICAL INSTRUCTIONS (TI)

TI 809-04	(1998) Seismic Design for Buildings
-----------	-------------------------------------

1.2 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only. When used, a designation following the "G" designation identifies the office that will review the submittal for the Government. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

SD-03 Product Data

Acoustical Ceiling Systems; G

Manufacturer's descriptive data, catalog cuts, and installation instructions. Submittals which do not provide adequate data for the product evaluation will be rejected.

#### SD-04 Samples

##### Acoustical Units; G

Two samples of each type of acoustical unit and each type of suspension grid tee section showing texture, finish, and color.

### 1.3 GENERAL REQUIREMENTS

Acoustical treatment shall consist of sound controlling units mechanically mounted on a ceiling suspension system. The unit size, texture, finish, and color shall be as specified. The Contractor has the option to substitute inch-pound (I-P) Recessed Light Fixtures (RLF) for metric RLF. If the Contractor opts to furnish I-P RLF, other ceiling elements like acoustical ceiling tiles, air diffusers, air registers and grills, shall also be I-P products. The Contractor shall coordinate the whole ceiling system with other details, like the location of access panels and ceiling penetrations, etc., shown on the drawings. If I-P products are used, the Contractor shall be responsible for all associated labor and materials and for the final assembly and performance of the specified work and products.

### 1.4 DELIVERY AND STORAGE

Materials shall be delivered to the site in the manufacturer's original unopened containers with brand name and type clearly marked. Materials shall be carefully handled and stored in dry, watertight enclosures. Immediately before installation, acoustical units shall be stored for not less than 24 hours at the same temperature and relative humidity as the space where they will be installed in order to assure proper temperature and moisture acclimation.

### 1.5 ENVIRONMENTAL REQUIREMENTS

A uniform temperature of not less than 16 degrees C nor more than 29 degrees C and a relative humidity of not more than 70 percent shall be maintained before, during, and after installation of acoustical units.

### 1.6 SCHEDULING

Interior finish work such as plastering, concrete and terrazzo work shall be complete and dry before installation. Mechanical, electrical, and other work above the ceiling line shall be completed and heating, ventilating, and air conditioning systems shall be installed and operating in order to maintain temperature and humidity requirements.

### 1.7 WARRANTY

Manufacturer's standard performance guarantees or warranties that extend beyond a one year period shall be provided. Standard performance guarantee or warranty shall contain an agreement to repair or replace acoustical panels that fail within the warranty period. Failures include, but are not limited to, sagging and warping of panels; rusting and manufacturers defects of grid system.



## 1.8 EXTRA MATERIALS

Spare tiles of each color shall be furnished at the rate of 10 tiles for each 1000 tiles installed. Tiles shall be from the same lot as those installed.

## PART 2 PRODUCTS

### 2.1 ACOUSTICAL UNITS

Acoustical units shall conform to ASTM E 1264, Class A, and the following requirements:

#### 2.1.1 Units for Exposed-Grid System

Type: IV (mineral fiber with membrane-faced overlay)

Form: 2

Minimum NRC: 0.70 when tested on mounting No. E-400.

Pattern: E

Nominal size: 60.96 x 121.92 cm.

Edge detail: Beveled tegular.

Finish: Factory-applied standard white finish.

Minimum LR coefficient: 0.89

Minimum CAC: 35

### 2.2 SUSPENSION SYSTEM

Suspension system shall be standard exposed-grid and shall conform to ASTM C 635 for intermediate-duty systems. Surfaces exposed to view shall be steel with a factory-applied white color baked-enamel finish. Wall molding shall have a flange of not less than 23.8125 mm. Standard corners shall be provided. Suspended ceiling framing system shall have the capability to support the finished ceiling, light fixtures, air diffusers, and accessories, as shown. The suspension system shall have a maximum deflection of 1/360 of span length. Seismic details shall conform to the guidance in TI 809-04 and ASTM E 580.

### 2.3 HANGERS

Hangers shall be galvanized steel wire. Hangers and attachment shall support a minimum 136 kg ultimate vertical load without failure of supporting material or attachment.

## 2.4 FINISHES

Acoustical units and suspension system members shall have manufacturer's standard textures, patterns and finishes as specified. Ceiling suspension system components shall be treated to inhibit corrosion.

## 2.5 COLORS AND PATTERNS

Colors and patterns for acoustical units and suspension system components shall be as specified in Section 09915 COLOR SCHEDULE.

## PART 3 EXECUTION

### 3.1 INSTALLATION

Acoustical work shall be provided complete with necessary fastenings, clips, and other accessories required for a complete installation. Mechanical fastenings shall not be exposed in the finished work. Hangers shall be laid out for each individual room or space. Hangers shall be placed to support framing around beams, ducts, columns, grilles, and other penetrations through ceilings. Main runners and carrying channels shall be kept clear of abutting walls and partitions. At least two main runners shall be provided for each ceiling span. Wherever required to bypass an object with the hanger wires, a sub-suspension system shall be installed, so that all hanger wires will be plumb.

#### 3.1.1 Suspension System

Suspension system shall be installed in accordance with ASTM C 636 and as specified herein. There shall be no hanger wires or other loads suspended from underside of steel decking.

##### 3.1.1.1 Plumb Hangers

Hangers shall be plumb and shall not press against insulation covering ducts and pipes.

##### 3.1.1.2 Splayed Hangers

Where hangers must be splayed (sloped or slanted) around obstructions, the resulting horizontal force shall be offset by bracing, countersplaying, or other acceptable means.

#### 3.1.2 Wall Molding

Wall molding shall be provided where ceilings abut vertical surfaces. Wall molding shall be secured not more than 75 mm from ends of each length and not more than 400 mm on centers between end fastenings.

#### 3.1.3 Acoustical Units

Acoustical units shall be installed in accordance with the approved installation instructions of the manufacturer. Edges of acoustical units shall be in close contact with metal supports, with each other, and in true

01062/BERGER/ABAM  
FY02 Tactical Equipment Complex  
Fort Lewis, Washington

alignment. Acoustical units shall be arranged so that units less than one-half width are minimized.

### 3.2 CLEANING

Following installation, dirty or discolored surfaces of acoustical units shall be cleaned and left free from defects. Units that are damaged or improperly installed shall be removed and new units provided as directed.

-- End of Section -

01062/BERGER/ABAM  
FY02 Tactical Equipment Complex  
Fort Lewis, Washington

This page intentionally blank.

SECTION 09650

RESILIENT FLOORING

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by basic designation only.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM D 4078	(1992; R 1996) Water Emulsion Floor Polish
ASTM E 648	(1997) Critical Radiant Flux of Floor-Covering Systems Using a Radiant Heat Energy Source
ASTM E 662	(1995) Specific Optical Density of Smoke Generated by Solid Materials
ASTM F 1066	(1995a) Vinyl Composition Floor Tile

1.2 FIRE RESISTANCE REQUIREMENTS

Flooring in corridors and exits shall have a minimum average critical radiant flux of 0.45 watts per square centimeter when tested in accordance with ASTM E 648. The smoke density rating shall be less than 450 when tested in accordance with ASTM E 662.

1.3 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only. When used, a designation following the "G" designation identifies the office that will review the submittal for the Government. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

SD-03 Product Data

Resilient Flooring and Accessories; G

Manufacturer's descriptive data and installation instructions including cleaning and maintenance instructions.

#### SD-04 Samples

##### Flooring; G

Three samples of each indicated color and type of flooring and base. Sample size shall be minimum 60 x 100 mm.

#### 1.4 DELIVERY AND STORAGE

Materials shall be delivered to the building site in original unopened containers bearing the manufacturer's name, project identification, and handling instructions. Materials shall be stored in a clean dry area with temperature maintained above 21 degrees C for 2 days prior to installation, and shall be stacked according to manufacturer's recommendations. Materials shall be protected from the direct flow of heat from hot-air registers, radiators and other heating fixtures and appliances.

#### 1.5 ENVIRONMENTAL REQUIREMENTS

Areas to receive resilient flooring shall be maintained at a temperature above 21 degrees C and below 38 degrees C for 2 days before application, during application and 2 days after application. A minimum temperature of 13 degrees C shall be maintained thereafter.

#### 1.6 SCHEDULING

Resilient flooring application shall be scheduled after the completion of other work which would damage the finished surface of the flooring.

#### 1.7 WARRANTY

Manufacturer's standard performance guarantees or warranties that extend beyond a one year period shall be provided.

#### 1.8 EXTRA MATERIALS

Extra flooring material of each color and pattern shall be furnished at the rate of 5 tiles for each 1000 tiles installed. Extra materials shall be from the same lot as those installed. Extra base material composed of 6 m of each color shall be furnished.

### PART 2 PRODUCTS

#### 2.1 VINYL-COMPOSITION TILE

Vinyl-composition tile shall conform to ASTM F 1066, Class 2, (through pattern tile), Composition 1, asbestos-free, and shall be 30.48 cm square and 3.175 mm thick. Tile shall have the color and pattern uniformly distributed throughout the thickness of the tile. Flooring in any one continuous area shall be from the same lot and shall have the same shade and pattern.

## 2.2 STATIC DISSIPATIVE TILE

Vinyl-composition tile shall conform to ASTM F 1066, Class 2, (through pattern tile), Composition 1, asbestos-free, and shall be 30.48 cm square and 3.175 mm thick. Tile shall have the color and pattern uniformly distributed throughout the thickness of the tile. Flooring in any one continuous area shall be from the same lot and shall have the same shade and pattern. Tile shall have the following electrical properties:

### 2.2.1 Electrical Properties

Electrical Resistance per ASTM F 150 - Point to Point  $10^6 - 10^9$  ohms.

Electrical Resistance per ASTM F 150 - Surface to Ground  $10^6 - 10^9$  ohms.

Static Generation per AATCC-134 - Less than 100 volts with conductive footwear at 20% R.H.

Static Decay per Federal Test Method 4046{101C} - 5000 volts to zero in less than 0.2 seconds.

### 2.2.2 Adhesive For Static Dissipative Tile

Adhesive shall be the type recommended by the tile manufacturer to achieve electrical properties.

### 2.2.3 Copper Grounding Strips For Static Dissipative Tile

5.08 cm by 60.96 cm copper grounding strips, size, type and gauge recommended by tile manufacturer.

### 2.2.4 Floor Polish For Static Dissipative Tile

Provide static dissipative floor polish recommended by the tile manufacturer to achieve electrical properties

## 2.3 RESILIENT BASE

Base shall be manufacturers standard rubber coved style. Base shall be 101.6 mm high and a minimum 3.175 mm thick; provide only in rolls of 30.48 meters length or more. Job Formed corners shall be furnished.

## 2.4 TRANSITION STRIP

A rubber transition strip tapered to meet abutting material shall be provided.

## 2.5 ADHESIVE

Adhesive for flooring and wall base shall be as recommended by the flooring manufacturer.

## 2.6 POLISH

Polish shall conform to ASTM D 4078.

## 2.7 MANUFACTURER'S COLOR AND TEXTURE

Color and texture shall be in accordance with Section 09915 COLOR SCHEDULE.

# PART 3 EXECUTION

## 3.1 EXAMINATION/VERIFICATION OF CONDITIONS

The Contractor shall examine and verify that site conditions are in agreement with the design package and shall report all conditions that will prevent a proper installation. The Contractor shall not take any corrective action without written permission from the Government.

## 3.2 SURFACE PREPARATION

Subfloor surface shall be in a smooth, true, level plane, free of any ridges or unevenness. Before any work under this section is begun, remove any ridges or bumps in subfloor, repair any defects such as rough or scaling concrete, fill any low spots or uneven surfaces, grind down any high spots, and repair all damaged portions of concrete slabs as recommended by the flooring manufacturer. Only cementitious type subfloor fillers approved by flooring manufacturer and not adversely affected by moisture shall be used. Remove any concrete curing compounds, other than the type that does not adversely affect adhesion, entirely removed from the slabs. Remove paint, varnish, oils, release agents, sealers, waxes, and adhesives and any other material that has any adverse affect on the adhesion or appearance of the flooring, as recommended by the flooring manufacturer. Floor shall be free of any foreign materials and vacuumed clean.

## 3.3 MOISTURE TEST

The suitability of the concrete subfloor for receiving the resilient flooring with regard to moisture content shall be determined by a moisture test as recommended by the flooring manufacturer.

## 3.4 INSTALLATION OF VINYL COMPOSITION TILE

Tile flooring shall be installed with adhesive in accordance with the manufacturer's installation instructions. Tile lines and joints shall be kept square, symmetrical, tight, and even. Edge width shall vary as necessary to maintain full-size tiles in the field, but no edge tile shall be less than one-half the field tile size, except where irregular shaped rooms make it impossible. Flooring shall be cut to, and fitted around, all permanent fixtures, built-in furniture and cabinets, pipes, and outlets. Edge tile shall be cut, fitted, and scribed to walls and partitions after field flooring has been applied.



### 3.5 INSTALLATION OF STATIC DISSIPATIVE TILE

Static Dissipative Tile flooring shall be installed with recommended adhesive in accordance with the manufacturer's installation instructions to achieve the static dissipative qualities specified. Tile lines and joints shall be kept square, symmetrical, tight, and even. Edge width shall vary as necessary to maintain full-size tiles in the field, but no edge tile shall be less than one-half the field tile size, except where irregular shaped rooms make it impossible. Flooring shall be cut to, and fitted around, all permanent fixtures, built-in furniture and cabinets, pipes, and outlets. Edge tile shall be cut, fitted, and scribed to walls and partitions after field flooring has been applied.

#### 3.5.1 Installaton Of Copper Grounding Strips For Static Dissipative Tile

Install copper grounding strips in accordance with tile manufacturer's instructions. Locate one strips approximately every 7.62 m around the entire perimeter of each room in which static dissipative tile is scheduled, coordinate locations with electrical connections by Division 16.

#### 3.5.2 Installation Of Floor Polish For Static Dissipative Tile

Thoroughly clean and apply two coats of static dissipative polish to tile as recommended by the tile manufacturer to maintain electrical properties

### 3.6 INSTALLATION OF RESILIENT BASE

Wall base shall be installed with adhesive in accordance with the manufacturer's written instructions. Install base in continuous, unbroken lengths with joints located only at inside corners. Base joints shall be tight and base shall be even with adjacent resilient flooring. Voids along the top edge of base at masonry walls shall be filled with caulk.

### 3.7 CLEANING

Immediately upon completion of installation of tile in a room or an area, flooring and adjacent surfaces shall be cleaned to remove all surplus adhesive. After installation, flooring shall be washed with a cleaning solution, rinsed thoroughly with clear cold water, and, except static control vinyl tile, given two coats of polish in accordance with manufacturers written instructions. After each polish coat, floors shall be buffed to an even luster with an electric polishing machine.

### 3.8 PROTECTION

From the time of laying until acceptance, flooring shall be protected from damage as recommended by the flooring manufacturer. Flooring which becomes damaged, loose, broken, or curled shall be removed and replaced.

-- End Of Section --

01062/BERGER/ABAM  
FY02 Tactical Equipment Complex  
Fort Lewis, Washington

This page intentionally blank.

SECTION 09680

CARPET

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by basic designation only.

AMERICAN ASSOCIATION OF TEXTILE CHEMISTS AND COLORISTS (AATCC)

AATCC TM 16	(1998) Test Method: Colorfastness to Light
AATCC TM 134	(1996) Test Method: Electrostatic Propensity of Carpets
AATCC TM 165	(1999) Test Method: Colorfastness to Crocking: Carpets - AATCC Crockmeter Method

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM D 297	(1993; R 1998) Rubber Products - Chemical Analysis
ASTM D 418	(1993; R 1997) Pile Yarn Floor Covering Construction
ASTM D 1423	(1999) Twist in Yarns by the Direct-Counting Method
ASTM D 3278	(1996e1) Test Methods for Flash Point of Liquids by Small Scale Closed-Cup Apparatus
ASTM D 5252	(1998a) Standard Practice for the Operation of the Hexapod Drum Tester
ASTM D 5417	(1999) Standard Practice for Operation of the Vettermann Drum Tester
ASTM E 648	(1999) Critical Radiant Flux of Floor-Covering Systems Using a Radiant Heat Energy Source

CARPET AND RUG INSTITUTE (CRI)

CRI 104	(1996) Commercial Carpet Installation Standard
---------	--

CODE OF FEDERAL REGULATIONS (CFR)

16 CFR 1630	Standard for the Surface Flammability of Carpet and Rugs (FF 1-70)
40 CFR 247	Guidelines for Procurement of Products that contain Recycled Material

GERMANY INSTITUTE FOR STANDARDIZATION (DIN)

DIN 54318	(1986) Machine-Made Textile Floor Coverings; Determination of Dimensional Changes Due to the Effects of Varied Water and Heat Conditions; Identical with ISO 2551 Edition 1981
-----------	--

1.2 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only. When used, a designation following the "G" designation identifies the office that will review the submittal for the Government. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

SD-03 Product Data

Carpet ; G

Manufacturer's catalog data and printed documentation stating physical characteristics, durability, resistance to fading, and flame resistance characteristics for each type of carpet material and installation accessory.

Surface Preparation ; G  
Installation ; G

Three copies of the manufacturer's printed installation instructions for the carpet, including preparation of substrate, seaming techniques, and recommended adhesives and tapes.

SD-04 Samples

Carpet ; G  
Molding ; G

a. Carpet: Two "Production Quality" samples 450 x 450 mm of each carpet proposed for use, showing quality, pattern, and color specified.

b. Vinyl or Aluminum Moldings: Two pieces of each type at least 300 mm long.

SD-06 Test Reports

Moisture and Alkalinity Tests ; G

Test reports of moisture and alkalinity content of concrete slab stating date of test, person conducting the test, and the area tested.

SD-10 Operation and Maintenance Data

Carpet ; G

Cleaning and Protection ; G

Carpet manufacturer's maintenance instructions describing recommended type of cleaning equipment and material, spotting and cleaning methods, and cleaning cycles.

1.3 REGULATORY REQUIREMENTS

Carpet and adhesives shall bear the Carpet and Rug Institute (CRI) Indoor Air Quality (IAQ) label or demonstrate compliance with testing criteria and frequencies through independent laboratory test results. Carpet type bearing the label will indicate that the carpet has been tested and meets the criteria of the CRI IAQ Carpet Testing Program, and minimizes the impact on indoor air quality. Contractor shall procure carpet in accordance with 40 CFR 247, shall submit a report stating that the carpet contains recycled materials and indicating the actual percentage of recycled material. Contractor shall, as much as possible, select material manufacturers that reduce pollutant and waste, recycle waste, reuse resources and scrap, and reclaim flooring materials instead of disposing into a landfill. Where possible, product shall be purchased locally to reduce emissions of fossil fuels from transporting.

1.4 DELIVERY AND STORAGE

Materials shall be delivered to the site in the manufacturer's original wrappings and packages clearly labeled with the manufacturer's name, brand name, size, dye lot number, and related information. Materials shall be stored in a clean, dry, well ventilated area, protected from damage and soiling, and shall be maintained at a temperature above 16 degrees C for 2 days prior to installation.

1.5 ENVIRONMENTAL REQUIREMENTS

Areas in which carpeting is to be installed shall be maintained at a temperature above 16 degrees C for 2 days before installation, during installation, and for 2 days after installation. A minimum temperature of 13 degrees C shall be maintained thereafter for the duration of the contract. Traffic or movement of furniture or equipment in carpeted area shall not be permitted for 24 hours after installation. Other work which would damage the carpet shall be completed prior to installation of carpet.

## 1.6 WARRANTY

Manufacturer's standard performance guarantees or warranties including minimum ten (10) year wear warranty, two (2) year material and workmanship and ten (10) year tuft bind and delamination.

## 1.7 EXTRA MATERIAL

Extra material from same dye lot consisting of full width continuous broadloom shall be provided for future maintenance. A minimum of 1 percent of total square meters (square yards) of each carpet type, pattern, and color shall be provided.

## PART 2 PRODUCTS

### 2.1 CARPET

Carpet shall be first quality; free of visual blemishes, streaks, poorly dyed areas, fuzzing of pile yarn, spots or stains, and other physical and manufacturing defects. Carpet materials and treatments shall be reasonably non-allergenic and free of other recognized health hazards. All grade carpets shall have a static control construction which gives adequate durability and performance.

#### 2.1.1 Physical Characteristics

Carpet shall comply with the following:

- a. Carpet Construction: Loop Pile.
- b. Type: Broadloom 3.6 m minimum usable carpet width
- c. Pile Type: Multilevel loop.
- d. Pile Fiber: 100 percent Dupont Antron Legacy Nylon
- e. Pile or Wire Height: 6.35 and 4.78 mm in accordance with ASTM D 418 (Multilevel Loop).
- f. Gauge or Pitch: 1/12 in accordance with ASTM D 418.
- g. Stitches or Rows/Wires: Minimum 58 per cm.
- h. Finished Pile Yarn Weight: Minimum 1.322 kg/m<sup>2</sup>. This does not include weight of backings. Weight shall be determined in accordance with ASTM D 418.
- i. Dye Method: Yarn (or Skein) dyed.
- j. Backing Materials: Primary backing materials shall be woven polypropylene with conductive anti-static. Secondary backing shall be woven polypropylene.

#### 2.1.2 Performance Requirements

- a. ARR (Appearance Retention Rating): Carpet shall be tested and have the minimum 3.5-4.0 (Severe) ARR when tested in accordance with either the ASTM D 5252 (Hexapod) or ASTM D 5417 (Vettermann) test methods using the number of cycles for short and long term tests as specified.
- b. Static Control: Static control shall be provided to permanently control static buildup to less than 3.0 kV when tested at 20 percent relative humidity and 21 degrees C in accordance with AATCC TM 134.
- c. Flammability and Critical Radiant Flux Requirements: Carpet shall comply with 16 CFR 1630. Carpet shall have a minimum average critical radiant flux of 0.68 watts per square centimeter when tested in accordance with ASTM E 648.
- d. Tuft Bind: Tuft bind force required to pull a tuft or loop free from carpet backing shall be a minimum 40 N average force for loop pile.
- e. Colorfastness to Crocking: Dry and wet crocking shall comply with AATCC TM 165 and shall have a Class 4 minimum rating on the AATCC Color Transference Chart for all colors.
- f. Colorfastness to Light: Colorfastness to light shall comply with AATCC TM 16, Test Option E "Water-Cooled Xenon-Arc Lamp, Continuous Light" and shall have a minimum 4 grey scale rating after 40 hours.
- g. Delamination Strength: Delamination strength for tufted carpet with a secondary back shall be minimum of 440 N/m.

#### 2.2 ADHESIVES AND CONCRETE PRIMER

Adhesives and concrete primers for installation of carpet shall be waterproof, nonflammable, meet local air-quality standards, and shall be as required by the carpet manufacturer. Seam adhesive shall be waterproof, nonflammable, and nonstaining as recommended by the carpet manufacturer. Adhesives flashpoint shall be minimum 60 degrees C in accordance with ASTM D 3278.

#### 2.3 MOLDING

Vinyl molding shall be heavy-duty and designed for the type of carpet being installed. Floor flange shall be a minimum 50 mm wide. Color shall match rubber base.

#### 2.4 COLOR, TEXTURE, AND PATTERN

Color, texture, and pattern shall be in accordance with Section 09915 COLOR SCHEDULE.

## PART 3 EXECUTION

### 3.1 SURFACE PREPARATION

Subfloor surface shall be in a smooth, true, level plane, free of any ridges or unevenness. Before any work under this section is begun, remove any ridges or bumps in subfloor, repair any defects such as rough or scaling concrete, fill any low spots or uneven surfaces, grind down any high spots, and repair all damaged portions of concrete slabs as recommended by the flooring manufacturer. Only cementitious type subfloor fillers approved by carpet manufacturer and not adversely affected by moisture shall be used. Remove any concrete curing compounds, other than the type that does not adversely affect adhesion, entirely removed from the slabs. Remove paint, varnish, oils, release agents, sealers, waxes, and adhesives and any other material that has any adverse affect on the adhesion or appearance of the flooring, as recommended by the flooring manufacturer. Floor shall be free of any foreign materials and vacuumed clean. Before beginning work, sub floor shall be tested with glue and carpet to determine "open time" and bond.

### 3.2 MOISTURE AND ALKALINITY TESTS

Concrete slab shall be tested for moisture content and excessive alkalinity in accordance with CRI 104.

### 3.3 PREPARATION OF CONCRETE SUBFLOOR

Installation of the carpeting shall not commence until concrete substrate is at least 90 days old. The concrete surfaces shall be prepared in accordance with instructions of the carpet manufacturer. Type of concrete sealer, when required, shall be compatible with the carpet.

### 3.4 INSTALLATION

Installation shall be in accordance with the manufacturer's instructions and CRI 104. Edges of carpet meeting hard surface flooring shall be protected with molding. Installation shall be in accordance with the molding manufacturer's instructions.

#### 3.4.1 Broadloom Installation

Broadloom carpet shall be installed direct glue down and shall be smooth, uniform, and secure, with a minimum of seams. Seams shall be uniform, unnoticeable, and treated with a seam adhesive. Run carpet full length of room/area in single piece, butt (end) seams are not allowed. Side seams shall be run toward the light where practical and where such layout does not increase the number of seams. Breadths shall be installed parallel, with carpet pile in the same direction. Patterns shall be accurately matched. Cut outs, as at door jambs, columns and ducts shall be neatly cut and fitted securely. Seams at doorways shall be located parallel to and centered directly under doors. Seams shall not be made perpendicular to doors or at pivot points. Seams at changes in directions of corridors shall follow the wall line parallel to the carpet direction. Corridors with widths less than 1.8 m shall have the carpet laid lengthwise down the corridors.



### 3.5 CLEANING AND PROTECTION

#### 3.5.1 Cleaning

After installation of the carpet, debris, scraps, and other foreign matter shall be removed. Soiled spots and adhesive shall be removed from the face of the carpet with appropriate spot remover. Protruding face yarn shall be cut off and removed. Carpet shall be vacuumed clean.

#### 3.5.2 Protection

The installed carpet shall be protected from soiling and damage with heavy, reinforced, nonstaining kraft paper, plywood, or hardboard sheets. Edges of kraft paper protection shall be lapped and secured to provide a continuous cover. Traffic shall be restricted for at least 45 hours. Protective covering shall be removed when directed by the Resident Engineer.

### 3.6 REMNANTS

Remnants remaining from the installation, consisting of scrap pieces more than 600 mm in dimension with more than 0.6 square meters total, shall be provided. Non-retained scraps shall be removed from site and recycled appropriately.

-- End of Section -

01062/BERGER/ABAM  
FY02 Tactical Equipment Complex  
Fort Lewis, Washington

This page intentionally blank.

SECTION 09900

PAINTING, GENERAL

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by basic designation only.

AMERICAN CONFERENCE OF GOVERNMENTAL INDUSTRIAL HYGIENISTS (ACGIH)

ACGIH Limit Values	(1999) Threshold Limit Values for Chemical Substances and Physical Agents and Biological Exposure Indices
--------------------	---

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM C 150	(1998a) Portland Cement
ASTM D 3273	(1994) Resistance to Growth of Mold on the Surface of Interior Coating in an Environmental Chamber
ASTM D 3274	(1995) Evaluating Degree of Surface Disfigurement of Paint Films by Microbial (Fungal or Algal) Growth or Soil and Dirt Accumulation
ASTM D 4214	(1998) Evaluating Degree of Chalking of Exterior Paint Films
ASTM D 4258	(1999) Surface Cleaning Concrete for Coating

COMMERCIAL ITEM DESCRIPTIONS (CID)

CID A-A-1500	(Rev A; Notice 1) Sealer, Surface (Latex Block Filler)
CID A-A-1546	(Rev A; Canc. Notice 1)) Rubbing Varnish
CID A-A-1632	(Basic) Varnish, Asphalt
CID A-A-1788	(Canc. Notice 1)) Varnish, Oil; Interior
CID A-A-2246	(Rev B) Paint, Latex
CID A-A-2247	(Basic) Paint, Latex (Semigloss, Interior)
CID A-A-2248	(Basic) Paint, Latex, (Flat, Interior)

CID A-A-2335	(Canc. Notice 1) Sealer, Surface (Varnish Type, Wood and Cork Floors)
CID A-A-2336	(Rev A) Primer Coating (Alkyd, Exterior Wood, White and Tints)
CID A-A-2339	(Canc. Notice 1) Stain (Wood, Solvent-Dye Type)
CID A-A-2542	Sealer, Terrazzo and Concrete Floors, Waterbased
CID A-A-2834	(Basic) Urethane, Waterborne (Low VOC, Clear)
CID A-A-2867	Coating, Polyurethane, Single Component Moisture Cure, Alipathic
CID A-A-2962	(Rev A) Enamel, Alkyd (Metric)
CID A-A-2994	Primer Coating, Interior, for Walls and Wood

FEDERAL AVIATION ADMINISTRATION (FAA)

FAA AC 70/7460-1	(Rev J) Obstruction Marking and Lighting
------------------	--

FEDERAL SPECIFICATIONS (FS)

FS TT-C-542	(Rev E) Coating, Polyurethane, Oil-Free, Moisture Curing
FS TT-C-555	(Rev B; Am 1) Coating, Textured (for Interior and Exterior Masonry Surfaces)
FS TT-E-2784	(Rev A) Enamel (Acrylic-Emulsion, Exterior Gloss and Semigloss) (Metric)
FS TT-P-28	(Rev G; Notice 1) Paint, Aluminum, Heat Resisting (1200 Degrees F.)
FS TT-S-708	(Rev A; Am 2; Notice 1) Stain, Oil; Semi-Transparent, Wood, Exterior
FS TT-S-001992	(Basic; Notice 1) Stain, Latex, Exterior for Wood Surfaces

MAPLE FLOORING MANUFACTURERS ASSOCIATION (MFMA)

MFMA-03	(1997) Floor Sealer and Finish List and Specifications for Heavy Duty and Gymnasium Sealers and Finishes for Maple, Beech and Birch Floors: MFMA Floor Finish List Number 16
---------	--

THE SOCIETY FOR PROTECTIVE COATINGS (SSPC)

SSPC Paint 5	(1995) Zinc Dust, Zinc Oxide and Phenolic Varnish Paint
SSPC Paint 18	(1991) Chlorinated Rubber Intermediate Coat Paint
SSPC Paint 20	(1991) Zinc-Rich Primers (Type I - "Inorganic" and Type II - "Organic")
SSPC Paint 23	(1991) Latex Primer for Steel surfaces
SSPC Paint 25	(1991) Red Iron Oxide, Zinc Oxide, Raw Linseed Oil and Alkyd Primer (Without Lead and Chromate Pigments)
SSPC SP 1	(1982) Solvent Cleaning
SSPC SP 2	(1995) Hand Tool Cleaning
SSPC SP 3	(1995) Power Tool Cleaning
SSPC SP 6/NACE 3	(1994) Commercial Blast Cleaning
SSPC SP 7/NACE 4	(1994) Brush-Off Blast Cleaning

1.2 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only. When used, a designation following the "G" designation identifies the office that will review the submittal for the Government. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

SD-03 Product Data

Paint; G

Manufacturer's current printed product description, material safety data sheets (MSDS) and technical data sheets for each coating system. Detailed mixing, thinning and application instructions, minimum and maximum application temperature, and curing and drying times between coats for epoxy, moisture-curing polyurethane, and liquid glaze coatings. Detailed application instructions for textured coatings shall be provided.

SD-04 Samples

Paint Color Samples; G

22 X 28 cm color samples for each different paint color specified in Section 09915 COLOR SCHEDULE.

#### SD-07 Certificates

Lead; G  
Mildewcide and Insecticide; G  
Volatile Organic Compound (VOC) Content; G

Certificate stating that paints for interior use contain no mercurial mildewcide or insecticide. Certificate stating that paints proposed for use contain not more than 0.06 percent lead by weight of the total nonvolatile. Certificate stating that paints proposed for use meet Federal VOC regulations and those of the of the local Air Pollution Control Districts having jurisdiction over the geographical area in which the project is located.

#### 1.3 PACKAGING, LABELING, AND STORING

Paints shall be in sealed containers that legibly show the designated name, formula or specification number, batch number, color, quantity, date of manufacture, manufacturer's formulation number, manufacturer's directions including any warnings and special precautions, and name of manufacturer. Pigmented paints shall be furnished in containers not larger than 20 liters. (5 gallons.) Paints and thinner shall be stored in accordance with the manufacturer's written directions and as a minimum stored off the ground, under cover, with sufficient ventilation to prevent the buildup of flammable vapors and at temperatures between 4 and 35 degrees C. (40 and 95 degrees F.) Paints shall be stored on the project site or segregated at the source of supply sufficiently in advance of need to allow 30 days for testing.

#### 1.4 APPROVAL OF MATERIALS

When samples are tested, approval of materials will be based on tests of the samples; otherwise, materials will be approved based on test reports furnished with them. If materials are approved based on test reports furnished, samples will be retained by the Government for testing should the materials appear defective during or after application. In addition to any other remedies under the contract the cost of retesting defective materials will be at the Contractor's expense.

#### 1.5 ENVIRONMENTAL CONDITIONS

Unless otherwise recommended by the paint manufacturer, the ambient temperature shall be between 7 and 35 degrees C when applying coatings other than water-thinned, epoxy, and moisture-curing polyurethane coatings. Water-thinned coatings shall be applied only when ambient temperature is between 10 and 32 degrees C. Epoxy, and moisture-curing polyurethane coatings shall be applied only within the minimum and maximum temperatures recommended by the coating manufacturer. Moisture-curing polyurethane shall not be applied when the relative humidity is below 30 percent.

#### 1.6 SAFETY AND HEALTH

Work shall comply with applicable Federal, State, and local laws and regulations, and with the ACCIDENT PREVENTION PLAN, including the Activity Hazard Analysis as specified in the CONTRACT CLAUSES. The Activity Hazard

Analysis shall include analyses of the potential impact of painting operations on painting personnel and on others involved in and adjacent to the work zone.

#### 1.6.1 Worker Exposures

Exposure of workers to hazardous chemical substances shall not exceed limits established by ACGIH Limit Values, or as required by a more stringent applicable regulation.

#### 1.6.2 Toxic Compounds

Toxic products having ineffective physiological warning properties, such as no or low odor or irritation levels, shall not be used unless approved by the Resident engineer.

#### 1.6.3 Training

Workers having access to an affected work area shall be informed of the contents of the applicable material data safety sheets (MDSS) and shall be informed of potential health and safety hazard and protective controls associated with materials used on the project. An affected work area is one which may receive mists and odors from the painting operations. Workers involved in preparation, painting and clean-up shall be trained in the safe handling and application, and the exposure limit, for each material which the worker will use in the project. Personnel having a need to use respirators and masks shall be instructed in the use and maintenance of such equipment.

#### 1.6.4 Coordination

Work shall be coordinated to minimize exposure of building occupants, other Contractor personnel, and visitors to mists and odors from preparation, painting and clean-up operations.

### PART 2 PRODUCTS

#### 2.1 PAINT

The term "paint" as used herein includes emulsions, enamels, paints, stains, varnishes, sealers, cement-emulsion filler, and other coatings, whether used as prime, intermediate, or finish coat. Paint shall conform to the requirements listed in the painting schedules at the end of this section, except when the required amount of a material of a particular batch is 200 liters( 50 gallons) or less, an approved first-line proprietary paint material with similar intended formulation, usage and color to that specified may be used. Additional requirements are as follows:

##### 2.1.1 Colors and Tints

Paint colors shall match colors specified in Section 09915 COLOR SCHEDULE. Manufacturer's standard color is for identification of color only. Tinting of epoxy and urethane paints shall be done by the manufacturer. The color of the undercoats shall vary slightly from the color of the next coat.

#### 2.1.2 Mildewcide and Insecticide

Exterior paint shall contain a mildewcide that will not adversely affect the color, texture, or durability of the coating. The mildewcide shall be incorporated into the paint by the manufacturer and shall attain a surface disfigurement rating of 8 or greater when tested in accordance with ASTM D 3273 and evaluated in accordance with ASTM D 3274. Mercurial mildewcide shall not be used in interior paint. Insecticides shall not be used in paint.

#### 2.1.3 Lead

Paints containing lead in excess of 0.06 percent by weight of the total nonvolatile content (calculated as lead metal) shall not be used.

#### 2.1.4 Chromium

Paints containing zinc chromate or strontium chromate pigments shall not be used.

#### 2.1.5 Volatile Organic Compound (VOC) Content

Paints shall comply with applicable federal, state and local laws enacted to insure compliance with Federal Clean Air Standards and shall conform to the restrictions of the local air pollution control authority.

### PART 3 EXECUTION

#### 3.1 PROTECTION OF AREAS NOT TO BE PAINTED

Items not to be painted which are in contact with or adjacent to painted surfaces shall be removed or protected prior to surface preparation and painting operations. Items removed prior to painting shall be replaced when painting is completed. Following completion of painting, workmen skilled in the trades involved shall reinstall removed items. Surfaces contaminated by coating materials shall be restored to original condition.

#### 3.2 SURFACE PREPARATION

Surfaces to be painted shall be prepared in accordance with the paint manufacturer's instructions and shall be clean and free of foreign matter before application of paint or surface treatments. Oil and grease shall be removed prior to mechanical cleaning. Cleaning shall be programmed so that dust and other contaminants will not fall on wet, newly painted surfaces. Exposed ferrous metals such as nail heads on or in contact with surfaces to be painted with water-thinned paints, shall be spot-primed with a suitable corrosion-inhibitive primer capable of preventing flash rusting and compatible with the coating specified for the adjacent areas.

##### 3.2.1 Concrete, Stucco and Masonry Surfaces

Concrete, stucco and masonry surfaces shall be allowed to dry at least 30 days before painting, except concrete slab on grade which shall be allowed to cure 90 days before painting. Surfaces shall be cleaned in accordance



with ASTM D 4258. Glaze, efflorescence, laitance, dirt, grease, oil, asphalt, surface deposits of free iron and other foreign matter shall be removed prior to painting. Surfaces to receive polyurethane or epoxy coatings shall be acid-etched or mechanically abraded as specified by the coating manufacturer, rinsed with water, allowed to dry, and treated with the manufacturer's recommended conditioner prior to application of the first coat.

### 3.2.2 Ferrous Surfaces

Ferrous surfaces including those that have been shop-coated, shall be solvent-cleaned or detergent-washed in accordance with SSPC SP 1. Surfaces that contain loose rust, loose mill scale, and other foreign substances shall be cleaned mechanically with hand tools according to SSPC SP 2, power tools according to SSPC SP 3 or by sandblasting according to SSPC SP 7/NACE 4. Shop-coated ferrous surfaces shall be protected from corrosion by treating and touching up corroded areas immediately upon detection.

### 3.2.3 Nonferrous Metallic Surfaces

Galvanized, aluminum and aluminum-alloy, lead, copper, and other nonferrous metal surfaces shall be solvent-cleaned or detergent-washed in accordance with SSPC SP 1.

### 3.2.4 Gypsum Board Surfaces

Gypsum board surfaces shall be dry and shall have all loose dirt and dust removed by brushing with a soft brush, rubbing with a cloth, or vacuum-cleaning prior to application of the first-coat material. A damp cloth or sponge may be used if paint will be water-based.

### 3.2.5 Mastic-Type Surfaces

Mastic-type surfaces shall be prepared by removing foreign material.

### 3.2.6 Wood Surfaces

Wood surfaces shall be cleaned of foreign matter. Moisture content of the wood shall not exceed 12 percent as measured by a moisture meter, unless otherwise authorized. Wood surfaces adjacent to surfaces to receive water-thinned paints shall be primed and/or touched up before applying water-thinned paints. Small, dry seasoned knots shall be scraped, cleaned, and given a thin coat of commercial knot sealer, before application of the priming coat. Pitch on large, open, unseasoned knots and all other beads or streaks of pitch shall be scraped off, or, if it is still soft, removed with mineral spirits or turpentine, and the resinous area shall be thinly coated with knot sealer. Finishing nails shall be set, and all holes and surface imperfections shall be primed. After priming, holes and imperfections in finish surfaces shall be filled with putty or plastic wood filler, colored to match the finish coat if natural finish is required, allowed to dry, and sanded smooth. Putty or wood filler shall be compatible with subsequent coatings.

### 3.3 MIXING AND THINNING

When thinning is approved as necessary to suit surface, temperature, weather conditions, or application methods, paints may be thinned in accordance with the manufacturer's directions. When thinning is allowed, paints shall be thinned immediately prior to application with not more than 0.125 L of suitable thinner per liter. The use of thinner shall not relieve the Contractor from obtaining complete hiding, full film thickness, or required gloss. Thinning shall not cause the paint to exceed limits on volatile organic compounds. Paints of different manufacturers shall not be mixed.

### 3.4 APPLICATION

Painting practices shall comply with applicable federal, state and local laws enacted to insure compliance with Federal Clean Air Standards. Unless otherwise specified or recommended by the paint manufacturer, paint may be applied by brush, roller, or spray. At the time of application, paint shall show no signs of deterioration. Uniform suspension of pigments shall be maintained during application. Each coat of paint shall be applied so dry film shall be of uniform thickness and free from runs, drops, ridges, waves, pinholes or other voids, laps, brush marks, and variations in color, texture, and finish. Hiding shall be complete. Rollers for applying paints and enamels shall be of a type designed for the coating to be applied and the surface to be coated. Special attention shall be given to insure that all edges, corners, crevices, welds, and rivets receive a film thickness equal to that of adjacent painted surfaces. Paints, except water-thinned types, shall be applied only to surfaces that are completely free of moisture as determined by sight or touch.

#### 3.4.1 Ventilation

Affected areas shall be ventilated during paint application so that workers exposure to chemical substances shall not exceed limits as established by ACGIH Limit Values, or as required by a more stringent applicable regulation. Interior work zones having a volume of 280 cubic meters or less shall be ventilated at a minimum of 2 air exchanges per hour. Ventilation in larger work zones shall be maintained by means of mechanical exhaust. Solvent vapors shall be exhausted outdoors, away from air intakes and workers. Return air inlets in the work zone shall be temporarily sealed before start of work until the coatings have dried.

#### 3.4.2 Respirators

Operators and personnel in the vicinity of operating paint sprayers shall wear respirators.

#### 3.4.3 First Coat

The first coat on plaster, gypsum wallboard, and other surfaces shall include repeated touching up of suction spots or overall application of primer or sealer to produce uniform color and gloss. Excess sealer shall be wiped off after each application.

#### 3.4.4 Timing

Surfaces that have been cleaned, pretreated, and otherwise prepared for painting shall be given a coat of the specified first coat as soon as practical after such pretreatment has been completed, but prior to any deterioration of the prepared surface. Sufficient time shall elapse between successive coats to permit proper drying. This period shall be modified as necessary to suit weather conditions. Oil-based or oleoresinous solvent-type paints shall be considered dry for recoating when the paint feels firm, does not deform or feel sticky under moderate pressure of the thumb, and the application of another coat of paint does not cause the undercoat to lift or lose adhesion. Manufacturer's instructions for application, curing and drying time between coats of two-component systems shall be followed.

#### 3.4.5 Fillers

Concrete and masonry surface voids shall be filled; however, surface irregularities need not be completely filled. The dried filler shall be uniform and free of pinholes. Filler shall not be applied over caulking compound.

##### 3.4.5.1 Latex Filler

Latex filler, CID A-A-1500, shall be applied according to the manufacturer's instructions. Surface voids shall be filled and excess filler shall be removed from the surface with a rubber squeegee. The filler shall be allowed to dry the length of time specified by the manufacturer prior to applying successive coats of paint.

#### 3.4.6 Ferrous-Metal Primer

Primer for ferrous-metal shall be applied to ferrous surfaces to receive paint other than asphalt varnish prior to deterioration of the prepared surface. The semitransparent film applied to some pipes and tubing at the mill is not to be considered a shop coat, but shall be overcoated with the specified ferrous-metal primer prior to application of finish coats.

### 3.5 PIPE COLOR CODE MARKING

Pipes in exposed areas and in accessible pipe spaces shall be provided with color band and titles adjacent to all valves, except those provided at plumbing fixtures, at not more than 12 meter spacing on straight pipe runs, adjacent to change in direction, and on both sides where pipes pass through walls or floors. Color code marking shall be of the color listed in TABLE I and the size listed in TABLE II. The arrows shall be installed adjacent to each band to indicate the direction of flow in the pipe. The legends shall be printed in upper-case black letters as listed in TABLE I. Letter sizes shall be as listed in TABLE II. Marking shall be painted or applied using colored, pressure-sensitive adhesive markers of standard manufacture. Paint shall be as specified for insulated and uninsulated piping.

TABLE I. COLOR CODES FOR MARKING PIPE

Material	Band	Letters and Arrow*	Legend
Cold water (potable)	Green	White	POTABLE WATER
Fire protection water	Red	White	FIRE PR. WATER
Fire Sprinkler Water	Red	White	FIRE SPR. WATER
Hot water (domestic)	Green	White	H.W.
Hot water re-circulating (domestic)	Green	White	H.W.R.
High temp. water supply	Yellow	Black	H.T.W.S.
High temp. water return	Yellow	Black	H.T.W.R.
Boiler feed water	Yellow	Black	B.F.
Low temp. water supply (heating)	Yellow	Black	L.T.W.S.
Low temp. water return (heating)	Yellow	Black	L.T.W.R.
Condenser water supply	Green	White	COND. W.S.
Condenser water return	Green	White	COND. W.R.
Chilled water supply	Green	White	C.H.W.S.
Chilled water return	Green	White	C.H.W.R.
Treated water	Green	White	TR. WATER
Chemical feed	Yellow	Black	CH. FEED
Compressed air	Blue	White	COMP. AIR
Natural gas	Yellow	Black	NAT. GAS
Propane Gas	Yellow	Black	PROP. GAS
Refrigerants	Blue	White	REFRIGERANT
Fuel oil	Yellow	Black	FUEL OIL
Steam	Yellow	Black	STEAM
Condensate	Yellow	Black	CONDENSATE
Hydraulic fluid under 4.1 Mpa	Green	White	HYDRAULIC FLUID-____Mpa
Hydraulic fluid 4.1 Mpa and Greater	Yellow	Black	HYDRAULIC FLUID-____Mpa

TABLE II. COLOR CODE MARKING SIZES

Outside Diameter of Pipe Covering (mm)	Width of Color Band (mm)	Arrow Length x Width (mm)	Size of Legend Letters and Numerals (mm)
Less than 38	200	200 x 57	13
38 to 60	200	200 x 57	19
60 to 150	300	200 x 57	31
200 to 225	600	300 x 110	63
Over 250	800	300 x 115	88

### 3.6 SURFACES TO BE PAINTED

Surfaces listed in the painting schedules at the end of this section, other than those listed in paragraph SURFACES NOT TO BE PAINTED, shall be painted as scheduled.

### 3.7 SURFACES NOT TO BE PAINTED

Surfaces in the following areas shall not to be painted: pre-finished metal, glass, infrared heating units, fire rating labels on doors and frames. In addition, surfaces of hardware, fittings, and other factory finished items shall not be painted.

### 3.8 CLEANING

Cloths, cotton waste and other debris that might constitute a fire hazard shall be placed in closed metal containers and removed at the end of each day. Upon completion of the work, staging, scaffolding, and containers shall be removed from the site or destroyed in an approved manner. Paint and other deposits on adjacent surfaces shall be removed and the entire job left clean and acceptable.

### 3.9 PAINTING SCHEDULES

The following painting schedules identify the surfaces to be painted and prescribe the paint to be used and the number of coats of paint to be applied. Contractor options are indicated by -----or----- between optional systems or coats.

01062/BERGER/ABAM  
FY02 Tactical Equipment Complex  
Fort Lewis, Washington

EXTERIOR PAINTING SCHEDULE

<u>Surface</u>	<u>First Coat</u>	<u>Second Coat</u>	<u>Third Coat</u>
CMU, Concrete,	Huls America AQUA-TRETE concentrate (clear sealer)		
Ferrous Metal	SSPC Paint 25	CID A-A-2962 Type I Grade C	CID A-A-2962 Type 1 Grade C
Galvanized Metal	FS TT-E-2784 Type III	FS TT-E-2784 Type (as selected)	FS TT-E-2784 Type (as selected)

INTERIOR PAINTING SCHEDULE

<u>Surface</u>	<u>First Coat</u>	<u>Second Coat</u>	<u>Third Coat</u>
Gypsum Board, Concrete,	CID A-A-2994 Type II	CID A-A-2247	CID A-A-2247
Concrete Masonry Units requiring a smooth finish	CID A-A-1500	CID A-A-2247	CID A-A-2247

01062/BERGER/ABAM  
 FY02 Tactical Equipment Complex  
 Fort Lewis, Washington

Concrete Floors	CID A-A-2542 Type I	None	None
Gypsum Board in shower	CID A-A-2994	FS TT-E-2784 Type II	FS TT-E-2784
Ferrous Metal	SSPC Paint 25	CID A-A-2962 Type I	CID A-A-2962 Type I
Ferrous Metal factory-primed mechanical and electrical equipment.		CID A-A-2962 Type I	CID A-A-2962 Type I
Galvanized Metal	SSPC Paint 5	CID A-A-2962 Type I Grade C	CID A-A-2962 Type I Grade C
Wood	CID A-A-2994 Type I	CID A-A-2246	CID A-A-2246
Ferrous Metal: Electrical Conduit runs: Metallic tubing uninsulated ducts and pipes, pipe hangers, louvers, grilles, fire extinguisher cabinets, door vision panel frames and air outlets, in areas having painted adjacent surfaces.	SSPC Paint 23	CID A-A-2962 Type I Grade C	CID A-A-2962 Type I Grade C
Facing of vapor barrier jackets of presized or adhesive finished cloth cover insulation on pipes, ducts, and equipment.	Two coats of paint to match adjacent areas	None	None

-- End of Section --

01062/BERGER/ABAM  
FY02 Tactical Equipment Complex  
Fort Lewis, Washington

This page intentionally blank.



SECTION 09915

COLOR SCHEDULE

PART 1 GENERAL

1.1 GENERAL

This section covers only the color of the exterior and interior materials and products that are exposed to view in the finished construction. The word "color" as used herein includes surface color and pattern. Requirements for quality and method of installation are covered in other appropriate sections of the specifications. Specific locations where the various materials are required are shown on the drawings. Items not designated for color in this section may be specified in other sections. When color is not designated for items, the Contractor shall propose a color for approval.

1.2 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only. When used, a designation following the "G" designation identifies the office that will review the submittal for the Government. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

SD-04 Samples

Color Schedule;

7 sets of color boards, 90 days after the Contractor is given Notice to proceed, complying with the following requirements:

- a. Color boards shall reflect all actual finish textures, patterns, and colors required for this contract.
- b. Materials shall be labeled with the finish type, manufacturer's name, pattern, and color reference.
- c. Samples shall be on size A4 or 215.9 by 279.4 mm boards with a maximum spread of size A1 or 647.7 by 838.2 mm for foldouts.
- d. Samples for this color board are required in addition to samples requested in other specification sections.
- e. Color boards shall be submitted to the following addresses:  
Architects BCRA Tsang, 2106 Pacific Avenue, Suite 300, Tacoma,  
Washington 98402. Phone: 253-627-4367.

## PART 2 PRODUCTS

Where color is shown as being specific to one manufacturer, an equivalent color by another manufacturer may be submitted for approval. Manufacturers and materials specified are not intended to limit the selection of equal colors from other manufacturers.

The color schedule lists the colors, patterns and textures required for exterior and interior finishes, including both factory applied and field applied colors.

### 2.2.1 Exterior Walls

Exterior wall colors shall apply to exterior wall surfaces including recesses at entrances and projecting vestibules. Conduit shall be painted to closely match the adjacent surface color. Wall color shall be provided to match the colors listed below.

#### a. Concrete Masonry Units:

1. Field color: Mutual Materials, split face block, color Khaki.
2. Accent color: Mutual Materials, split face block, color Cocoa.
3. CMU-3: Mutual Materials, smooth face block, color Khaki.

#### b. Mortar: Davis colors, mortar color #61205

### 2.2.2 Exterior Trim

Exterior trim shall be provided to match the colors listed below.

- a. Doors and Door Frames: To match Sherwin Williams, Sonora Rose SW 2159
- b. Windows: Clear Anodized Aluminum Finish, Architectural Class II AA-M12.C22-A31, Clear Anodic coating by Summit/Marlin
- c. Metal Wall Panel: IMSA Building Products, Paint finish Dura Tech 5000, Color Parchment, HR-36
- d. Fascia: to match roof color & finish.
- e. Downspouts, Trim, Gutter, Louvers, and Flashings: to match roof color & finish.
- f. Guardrails: To match Sherwin Williams, Sonora Rose SW 2159.
- g. Soffits and Ceilings: To match wall panel.

- h. Caulking and Sealants: Match adjacent surfaces. Dust expansion joints to match typical mortar joint color.

#### 2.2.3 Exterior Roof

Roof color shall apply to exterior roof surfaces including sheet metal flashings and copings, mechanical units, roof trim, pipes, conduits, electrical appurtenances, and similar items. Roof color shall be provided to match the colors listed below.

- a. Metal: IMSA Building Products INC, Color Colonial Red, Dura Tech 5000.

#### 2.2.4 Interior Floor Finishes

Flooring materials shall be provided to match the colors listed below.

- a. Carpet: Masland Contract, style: Strata, color:7417-14707 Shale
- b. Vinyl Composition Tile:
  - 1. VCT-1, Field Tile: Mannington Commercial, Brushwork, 717 Venetian Silk, 304.8 x 304.8 mm tiles.
  - 2. VCT-2, Accent Tile: Mannington Commercial, Brushwork, 715 Baltic Green, 304.8 x 304.8 mm tiles
- c. Ceramic Tile: Daltile, Keystones, Brownstone Range D156
- d. Grout: Mapel 09 Gray/Gris
- e. Static Dissipative Tile: Armstrong, Excelon SDT, 51950 Marble Beige
- f. Concrete: Concrete sealers at exposed concrete floor surfaces shall conform to the requirements of Section 07190 WATER REPELANTS

#### 2.2.5 Interior Base Finishes

Base materials shall be provided to match the colors listed below.

- a. Resilient Base and Edge Strips:
  - RB-1, Roppe, 191 Camel (At Carpet & VCT Floors)
  - RB-2, Roppe, 150 Dark Gray (At Concrete Floors)
- b. Ceramic Tile: Daltile, Keystones, Brownstone Range D156
- c. Grout: Mapel 09 Gray/Gris

#### 2.2.6 Interior Wall Finishes

Interior wall color shall apply to the entire wall surface, including reveals, vertical furred spaces, grilles, diffusers, electrical and access panels, and piping and conduit adjacent to wall surfaces unless otherwise specified. Items not specified in other paragraphs shall be painted to match adjacent wall surface. Wall materials shall be provided to match the colors listed below.

- a. Paint:
  - 1. P-1: Sherwin Williams, Gourmet Mushroom SW 1142
  - 2. P-2: Sherwin Williams, Canvas Tan SW 1129
  - 3. P-3: Sherwin Williams, Craft Brown SW 1090
  - 4.
- b. Ceramic Tile Field: Daltile D135 Almond, 107.95 x 107.95 mm tile.
- c. Ceramic Tile Accent: Daltile K-174 Mexican Sand, 107.95 x 107.95 mm tile.
- d. Ceramic Tile Grout: Mapel 94 Straw/Paja.

#### 2.2.7 Interior Ceiling Finishes

Ceiling colors shall apply to ceiling surfaces including soffits, furred down areas, grilles, diffusers, registers, and access panels. Ceiling color shall also apply to joist, underside of roof deck, and conduit and piping where joists and deck are exposed and required to be painted. Ceiling materials shall be provided to match the colors listed below.

- a. Acoustical Tile and Grid:
  - Tile: Armstrong Ultima 609.6 x 1219.2 mm Beveled Tegular
  - Grid: 23.8125 mm Beveled Tegular
- b. Paint: P-2, Sherwin Williams, Canvas Tan SW 1129
- c. Structural Framing: P-2, Sherwin Williams, Canvas Tan SW 1129
- d. Metal Deck: P-2, Sherwin Williams, Canvas Tan SW 1129
- e. Wire Mesh: Factory finish.
- f. Concrete: P-2, Sherwin Williams, Canvas Tan SW 1129.

#### 2.2.8 Interior Trim

Interior trim shall be provided to match the colors listed below.

- a. Doors: P-3, Sherwin Williams, Craft Brown, SW 1090
- b. Door Frames: P-3, Sherwin Williams, Craft Brown, SW 1090
- c. Windows (mullion, muntin, sash, trim, and stool): Factory finished, clear anodized aluminum.

01062/BERGER/ABAM  
FY02 Tactical Equipment Complex  
Fort Lewis, Washington

- d. Window Sills: Plastic laminate, Natural Limestone, MT300 Suede
- e. Fire Extinguisher Cabinets: Match adjacent wall color.
- f. Ladders: P-3, Sherwin Williams, Craft Brown, SW 1090.

#### 2.2.9 Interior Window Treatment

Window treatments shall be provided to match the colors listed below.

- a. Horizontal Blinds: Levolor 25.4 mm, Riviera Dust Guard.  
Color-1441 Galleria.

#### 2.2.10 Interior Miscellaneous

Miscellaneous items shall be provided to match the colors listed below.

- a. Toilet Partitions and Urinal Screen: Santana, Poly-marble HD,  
Sandstone 525.
- b. Corner Guards: Stainless steel.
- c. Wall Switch Handles and Standard Receptacle Bodies: Almond.
- d. Electrical Device Cover Plates and Panels: Almond.
- e. Casework: Laminate Pionite, AG351 Suede, Slate Crepe.
- f. Fiberglass Reinforced Panel: Kemlite Glasbord-P Class C Fire-  
Rated 66 Silver
- g. Metal rolling counter door: Atlas color #RAL 7006

### PART 3 EXECUTION

Not applicable.

-- End of Section -

01062/BERGER/ABAM  
FY02 Tactical Equipment Complex  
Fort Lewis, Washington

This page intentionally blank.

SECTION 10100

VISUAL DISPLAY BOARDS

PART 1 GENERAL

1.1 REFERENCES

ANSI A208.1	Wood Particleboard; 1993.
ASTM A 424	Standard Specification for Steel, Sheet, for Porcelain Enameling; 1996.

1.2 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only. When used, a designation following the "G" designation identifies the office that will review the submittal for the Government. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

SD-03 Product Data

Chalkboards; G  
Tackboards; G

Manufacturer's data composed of catalog cuts, brochures, product information, and maintenance instructions.

SD-04 Samples

Chalkboard Surface; G  
Tackboard Vinyl; G

Three samples of each color specified.

1.3 QUALITY ASSURANCE

Manufacturer Qualifications: Company specializing in manufacturing the products specified in this section with minimum five years experience.

PART 2 PRODUCTS

2.1. MARKERBOARDS

Porcelain enamel on steel, laminated to core.

2.1.1 Color

Colors and textures shall match the products specified in SECTION 09915 COLOR SCHEDULE.

2.1.2 Metal Face Sheet

Porcelain Enameled Steel Sheet conforming with ASTM A 424, Type I, commercial quality, with fired-on vitreous finish, 0.61 mm (24 gage).

2.1.3 Core

Particleboard conforming to ANSI A208.1, wood chips, set with waterproof resin binder, sanded faces, 12.7 mm, laminated to face sheet using adhesive recommended by manufacturer.

2.1.4 Backing

Aluminum foil sheet, 0.127 mm thick, laminated to core.

2.1.5 Size

As indicated on drawings.

2.1.6 Frame

Extruded aluminum, clear anodized natural finish, with concealed fasteners. Frame all four sides of each board unit. Provide continuous tray at bottom to hold markers, with round corners at ends.

2.1.7 Mounting

Mount with concealed mounting clips.

2.2 TACKBOARDS:

Vinyl coated fabric laminated to fiberboard.

2.2.1 Fabric

Vinyl coated fabric, 508.6 grams/sq. meter total weight, 447.6 grams/sq. meter finish weight, 54 inches roll width, color and texture to match product specified in SECTION 09915 COLOR SCHEDULE. Laminate to core using adhesive recommended by manufacturer.

2.2.2 Core

Particleboard conforming to ANSI A208.1, wood chips, set with waterproof resin binder, sanded faces, 6.35 mm thick, with 6.35 mm thick sheet cork laminated to particleboard using adhesive recommended by manufacturer.



01062/BERGER/ABAM  
FY02 Tactical Equipment Complex  
Fort Lewis, Washington

#### 2.2.3 Size

As indicated on drawings.

#### 2.2.4 Frame

Extruded aluminum, clear anodized natural finish, with concealed fasteners. Frame all four sides of each board unit. Provide continuous tray at bottom to hold markers, with round corners at ends.

#### 2.2.5 Mounting

Mount with concealed mounting clips.

### PART 3 EXECUTION

#### 3.1 EXAMINATION

Prior to fabrication, field verify measurements where boards are to be mounted. Verify that internal wall backing is ready to receive.

#### 3.2 INSTALLATION

Install boards plumb and level in accordance with manufacturer's instructions, secure units to wall using concealed clip fasteners, install with tight hairline joints.

#### 3.3 CLEANING

Clean board surfaces in accordance with manufacturer's instructions.

-- End of Section --

01062/BERGER/ABAM  
FY02 Tactical Equipment Complex  
Fort Lewis, Washington

This page intentionally blank.

SECTION 10160

TOILET PARTITIONS

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by basic designation only.

COMMERCIAL ITEM DESCRIPTIONS (CID)

CID A-A-60003 Partitions, Toilet, Complete

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM A 167 (1996) Stainless and Heat-Resisting Chromium-Nickel Steel Plate, Sheet, and Strip

NATIONAL ASSOCIATION OF ARCHITECTURAL METAL MANUFACTURERS (NAAMM)

NAAMM AMP 500 Manual (1998) Metal Finishes Manual for Architectural and Metal Products

NATIONAL FIRE PROTECTION ASSOCIATION (NFPA)

NFPA 80 (1999) Fire Doors and Fire Windows

1.2 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only. When used, a designation following the "G" designation identifies the office that will review the submittal for the Government. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

SD-02 Shop Drawings

Approved Detail Drawings ; G

Drawings showing plans, elevations, details of construction, hardware, reinforcing, fittings, mountings, and anchorings.

SD-03 Product Data

Toilet Partition System ; G

Manufacturer's technical data and catalog cuts including installation and cleaning instructions.

SD-04 Samples

Toilet Partition System ; G

Manufacturer's color samples.

1.3 SYSTEM DESCRIPTION

Toilet partition system, including toilet enclosures and urinal screens, shall be a complete and usable system of panels, hardware, and support components. The partition system shall be provided by a single manufacturer and shall be a standard product as shown in the most recent catalog data. The partition system shall be as shown on the approved detail drawings.

1.4 DELIVERY, STORAGE, AND HANDLING

Components shall be delivered to the jobsite in the manufacturer's original packaging with the brand, item identification, and project reference clearly marked. Components shall be stored in a dry location that is adequately ventilated; free from dust, water, or other contaminants; and shall have easy access for inspection and handling.

1.5 WARRANTY

Manufacturer's standard performance guarantees or warranties that extend beyond a 1 year period shall be provided.

PART 2 PRODUCTS

2.1 TOILET ENCLOSURES

Toilet enclosures shall conform to CID A-A-60003, C, overhead braced. Width, length, and height of toilet enclosures shall be as shown. Panels shall be high density polyethylene (HDPE), solid full thickness 25.4 mm thick, with integral color.

2.2 URINAL SCREENS

Urinal screens shall conform to CID A-A-60003, Type III, Style A, floor supported and wall attached. Screen panels shall be same as specified for toilet enclosures. Width and height of urinal screens shall be as shown.

2.3 HARDWARE

Hardware for the toilet partition system shall be stainless steel.

2.4 COLORS

Color of finishes for toilet partition system components shall match color specified in Section 09915 COLOR SCHEDULE.

01062/BERGER/ABAM  
FY02 Tactical Equipment Complex  
Fort Lewis, Washington

### PART 3 EXECUTION

#### 3.1 INSTALLATION

Toilet partitions shall be installed straight and plumb in accordance with approved manufacturer's instructions with horizontal lines level and rigidly anchored to the supporting construction. Anchor securely to solid backing in framed walls. Drilling and cutting for installation of anchors shall be at locations that will be concealed in the finished work.

#### 3.2 ADJUSTING AND CLEANING

Adjust doors for proper latching and operation. Doors shall have a uniform vertical edge clearance of approximately 5 mm and shall rest open at approximately 30 degrees when unlatched. Toilet partitions shall be cleaned in accordance with approved manufacturer's instructions and shall be protected from damage until accepted.

-- End of Section -

01062/BERGER/ABAM  
FY02 Tactical Equipment Complex  
Fort Lewis, Washington

This page intentionally blank.

SECTION 10260

WALL AND CORNER PROTECTION

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by basic designation only.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM A 167 (1996) Stainless and Heat-Resisting Chromium-Nickel Steel Plate, Sheet, and Strip

NATIONAL ASSOCIATION OF ARCHITECTURAL METAL MANUFACTURERS (NAAMM)

NAAMM AMP 500 Manual (1988) Metal Finishes Manual for Architectural and Metal Products

NATIONAL FIRE PROTECTION ASSOCIATION (NFPA)

NFPA 80 (1999) Fire Doors and Fire Windows

1.2 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only. When used, a designation following the "G" designation identifies the office that will review the submittal for the Government. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

SD-03 Product Data

Corner Guards ; G

Manufacturer's descriptive data, catalog cuts, installation instructions, and recommended cleaning instructions.

1.3 DELIVERY AND STORAGE

Materials shall be delivered to the project site in manufacturer's original unopened containers with seals unbroken and labels and trademarks intact. Materials shall be kept dry, protected from weather and damage, and stored under cover. Materials shall be stored at approximately 21 degrees C ( 70 degrees F) for at least 48 hours prior to installation.

1.4 WARRANTY

Manufacturer's standard performance guarantees or warranties that extend beyond a 1 year period shall be provided.

## PART 2 PRODUCTS

### 2.1 GENERAL

To the maximum extent possible, corner guards shall be the standard products of a single manufacturer and shall be furnished as detailed. Drawings show general configuration of products required, and items differing in minor details from those shown will be acceptable.

### 2.2 CORNER GUARDS

#### 2.2.2 Stainless Steel Corner Guards

Stainless steel corner guards shall be fabricated of 1.58 mm thick material conforming to ASTM A 167, type 302 or 304 with No. 4 finish. Corner guards shall be 218.44 cm high. Corner guard shall be formed to dimensions shown. Provide countersunk holes for screw attachment.

##### 2.2.2.1 Adhesive

Provide adhesive recommended by manufacturer for attachment to each type of substrate.

##### 2.2.2.2 Screws

Oval head stainless steel screws, size and type as recommended by corner guard manufacturer for type of substrate.

## PART 3 EXECUTION

### 3.1 INSTALLATION

#### 3.1.1 Corner Guards and Wall Guards (Bumper Guards)

Material shall be mounted at location indicated in accordance with manufacturer's recommendations using recommended adhesive and screws securely attached to solid backing or framing member.

-- End of Section --



SECTION 10523

FIRE EXTINGUISHERS

PART 1 GENERAL

1.1 REFERENCES

NATIONAL FIRE PROTECTION ASSOCIATION (NFPA)

NFPA 10 (1994) Standard for Portable Fire  
Extinguishers

1.2 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only. When used, a designation following the "G" designation identifies the office that will review the submittal for the Government. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

SD-03 Product Data

Fire Extinguishers; G  
Fire Extinguisher Cabinets; G

Manufacturer's catalog data

1.3 DELIVERY, HANDLING, AND STORAGE

Materials shall be protected from weather, soil, and damage during delivery, storage, and construction.

Materials shall be delivered in their original packages, containers, or bundles bearing the brand name and the name of the material.

1.4 WARRANTY

Manufacturer's standard performance guarantees or warranties that extend beyond a 1 year period shall be provided.

PART 2 PRODUCTS

2.1 TYPES

Fire Extinguishers shall conform to NFPA 10.

Fire extinguishers shall be stored-pressure type.

Fire extinguishers classified as Class 2A:10B:C shall be dry-chemical type.

Fire extinguishers classified as Class D shall be dry-powder type.

## 2.2 MATERIAL

Extinguisher shell shall be enameled steel.

## 2.3 SIZE

Class 2A:10B:C extinguishers shall be 2.3 kilogram, minimum.

Class D extinguishers shall be 4.5 kilogram.

## 2.4 ADJUNCTS

Forged brass valve

Safety release

Antifreeze

Pressure gage

## 2.5 CABINETS

### 2.5.1 Material

Cabinets shall be steel with backed primer coating.

### 2.5.2 Type

Cabinet shall be semi-recessed the maximum amount allowed by the wall depth it is mounted in.

Provide fire rated cabinets for all cabinets located in fire rated walls; fire rating of cabinet shall equal or exceed the fire rating of the wall.

### 2.5.3 Size

Dimensions of cabinets shall of adequate size to accommodate the specified fire extinguishers.

### 2.5.4 Door

Door shall be flush steel with full height vertical slot opening glazed with heat tempered safety glass. Provide continuous hinge allowing 180 degree swing of door, adjustable roller catch, and chrome-plated pull handle.

## 2.6 WALL BRACKETS

Fire extinguishers shall have spring-clip brackets.

Wall bracket and Accessories shall be as approved.

01062/BERGER/ABAM  
FY02 Tactical Equipment Complex  
Fort Lewis, Washington

## PART 3 EXECUTION

### 3.1 INSTALLATION

Fire Extinguishers shall be installed where indicated. Exact locations shall be verified prior to installation.

Installation of extinguishers shall comply with the manufacturer's recommendations.

Extinguishers shall be fully charged and ready for operation upon installation.

### 3.2 Cleaning

Surfaces of the work, and adjacent surfaces soiled as a result of the work, shall be cleaned in an approved manner. Equipment, surplus materials, and rubbish from the work shall be removed from the site.

-- End Of Section -

01062/BERGER/ABAM  
FY02 Tactical Equipment Complex  
Fort Lewis, Washington

This page intentionally blank.

SECTION 10800

TOILET ACCESSORIES

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by basic designation only.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM C 1036 (1991) Flat Glass

COMMERCIAL ITEM DESCRIPTIONS (CID)

CID A-A-2380 (Rev A) Dispenser, Paper Towel

CID A-A-2398 (Rev B) Curtain, Shower and Window (Metric - SI)

1.2 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only. When used, a designation following the "G" designation identifies the office that will review the submittal for the Government. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

SD-03 Product Data

Finishes; G  
Accessory Items; G

Manufacturer's descriptive data and catalog cuts indicating materials of construction, fasteners proposed for use for each type of wall construction, mounting instructions, operation instructions, and cleaning instructions.

1.3 DELIVERY, STORAGE, AND HANDLING

Toilet accessories shall be wrapped for shipment and storage, delivered to the job site in manufacturer's original packaging, and stored in a clean, dry area protected from construction damage and vandalism.

1.4 WARRANTY

Manufacturer's standard performance guarantees or warranties that extend beyond a 1 year period shall be provided.

## PART 2 PRODUCTS

### 2.1 MANUFACTURED UNITS

Toilet accessories shall be provided where indicated in accordance with paragraph SCHEDULE. Each accessory item shall be complete with the necessary mounting plates and shall be of sturdy construction with corrosion resistant surface.

#### 2.1.1 Anchors and Fasteners

Anchors and fasteners shall be capable of developing a restraining force commensurate with the strength of the accessory to be mounted and shall be suited for use with the supporting construction. Exposed fasteners shall be of tamperproof design and shall be finished to match the accessory.

#### 2.1.2 Finishes

Except where noted otherwise, finishes on metal shall be provided as follows:

Metal	Finish
Stainless steel	No. 4 satin finish
Carbon steel, copper alloy, and brass	Chromium plated, bright

### 2.2 ACCESSORY ITEMS

Accessory items shall conform to the requirements specified below.

#### 2.2.1 Grab Bar (GB)

Grab bar shall be 18 gauge, 38.1 mm OD Type 304 stainless steel. Grab bar shall be form and length as indicated. Concealed mounting flange shall have mounting holes concealed behind removable escutcheon. Grab bar shall have peened non-slip surface. Installed bars shall be capable of withstanding a 2.225 kN (500 pound) vertical load without coming loose from the fastenings and without obvious permanent deformation. Space between wall and grab bar shall be 38 mm.

#### 2.2.2 Framed Mirrors

Stainless steel angle frame mirror, 19 mm by 19 mm Type 304 18 gauge with welded corners grounded smooth and flush, provide stainless steel shelf where noted. Glass for mirrors shall be Type I transparent flat type, Class 1-clear. Glazing Quality ql 6 mm thick conforming to ASTM C 1036. Glass shall be coated on one surface with silver coating, copper protective coating, and mirror backing paint. Silver coating shall be highly adhesive pure silver coating of a thickness which shall provide reflectivity of 83 percent or more of incident light when viewed through 6 mm thick glass, and shall be free of pinholes or other defects. Copper protective coating shall

be pure bright reflective copper, homogeneous without sludge, pinholes or other defects, and shall be of proper thickness to prevent "adhesion pull" by mirror backing paint. Mirror backing paint shall consist of two coats of special scratch and abrasion-resistant paint and shall be baked in uniform thickness to provide a protection for silver and copper coatings which will permit normal cutting and edge fabrication. Provide galvanized steel back with concealed mounting.

#### 2.2.3 Combination Paper Towel Dispenser/Waste Receptacle Units (PTDWR)

Dispenser/receptacle shall be recessed and shall have a capacity of 600 sheets of C-fold, single-fold, or quarter-fold towel. Waste receptacle shall be designed to be locked in unit and removable for service. Locking mechanism shall be tumbler key lock. Waste receptacle shall have a capacity of 12 gallons. Unit shall be fabricated of not less than 0.8 mm stainless steel welded construction with all exposed surfaces having a satin finish. Waste receptacle that accepts reusable liner standard for unit manufacturer shall be provided.

#### 2.2.4 Sanitary Napkin Disposer (SND)

Sanitary napkin disposal shall be constructed of Type 304 stainless steel with removable leak-proof receptacle for disposable liners. Fifty disposable liners of the type standard with the manufacturer shall be provided. Receptacle shall be retained in cabinet by tumbler lock. Disposer shall be provided with a door for inserting disposed napkins, and shall be recessed.

#### 2.2.5 Soap Dispenser (SD)

Soap dispenser shall be surface mounted, liquid type consisting of a vertical Type 304 stainless steel tank with holding capacity of 1.2 L with a corrosion-resistant all-purpose valve that dispenses liquid soaps, lotions, detergents and antiseptic soaps.

#### 2.2.6 Towel Pin (TP)

Towel pin shall have concealed wall fastenings, and a pin integral with or permanently fastened to wall flange. Maximum projection shall be 100 mm. Design shall be consistent with design of other accessory items. Finish shall be satin.

#### 2.2.7 Toilet Tissue Dispenser (TTD)

Toilet tissue holder shall be double roll, surface mounted with heavy duty satin finish cast aluminum bracket, tumbler lock and ABS plastic spindles.

#### 2.2.8 Toilet Seat Cover Dispenser (TSCD)

Toilet seat cover dispensers shall be Type 304 stainless steel and shall be recessed mounted. Dispenser shall have a minimum capacity of 500 seat covers.

01062/BERGER/ABAM  
FY02 Tactical Equipment Complex  
Fort Lewis, Washington

### PART 3 EXECUTION

#### 3.1 INSTALLATION

Toilet accessories shall be securely fastened to the supporting construction in accordance with the manufacturer's approved instructions. Accessories shall be protected from damage from the time of installation until acceptance.

#### 3.2 CLEANING

Material shall be cleaned in accordance with manufacturer's recommendations. Alkaline or abrasive agents shall not be used. Precautions shall be taken to avoid scratching or marring of surfaces.

-- End Of Section --



SECTION 11019

MISCELLANEOUS EQUIPMENT

PART 1 GENERAL

1.1 GENERAL

1.1.1 Standard Products

Materials and equipment shall be the standard products of a manufacturer regularly engaged in the manufacture of the products and shall essentially duplicate items that have been in satisfactory use for at least 2 years prior to bid opening. Equipment shall be supported by a service organization that is, in the opinion of the Resident engineer, reasonably convenient to the site.

1.1.2 Nameplates

As a minimum, each piece of equipment shall have the manufacturer's name, address, type or style, model or serial number, rated capacity, and catalog number on a plate secured to the equipment.

1.2 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only. When used, a designation following the "G" designation identifies the office that will review the submittal for the Government. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

1.3 DELIVERY, STORAGE, AND HANDLING

Equipment shall be wrapped for shipment and storage, delivered to the job site in manufacturer's original packaging, and stored in a clean, dry area protected from construction damage and vandalism.

1.4 WARRANTY

Manufacturer's standard performance guarantees or warranties that extend beyond a 1 year period shall be provided.

PART 2 PRODUCTS

2.1 Cold Water Pressure Washer as specified on Sheet 1 found on page 3 in this Section.

2.2 Pallet Racks as specified on Sheet 2 found on page 4 in this Section.

2.3 Rotary Four-Post Vehicle Lift as specified on Sheet 3 found on page 5 in this Section.

01062/BERGER/ABAM  
FY02 Tactical Equipment Complex  
Fort Lewis, Washington

2.4 Outboard Test Tank as specified on Sheet 4 found on page 6 in this Section.

2.5 Outboard Display Stand as specified on Sheet 5 found on page 7 in this Section.

Refer to Part 3 of this section.

01062/BERGER/ABAM  
 FY02 Tactical Equipment Complex  
 Fort Lewis, Washington

<b>U. S. Army Engineer District, Seattle Corps of Engineers</b>			<b>SHEET: 1</b>
<b>FY02 SOCOM PN 47119</b>			<b>DATE: August 06, 2001</b>
<b>STATION: Fort Lewis, Washington</b>			
<b>FACILITY: Tactical Equipment Complex</b>			
<b>ITEM: Pressure Washer</b>			<b>ITEM CODE: PW1</b>
<b>FSC GRP:</b>	<b>PART:</b>	<b>EXP: DATE:</b>	<b>GSA # :</b>
	<b>SECTION:</b>		
<b>MANUFACTURER:</b> Hydro Tek  <b>CONTRACTOR:</b> Dalco, Inc. 16000 Mill Creek Blvd. Mill Creek, WA 98012  <b>LOCAL REP:</b> Bill Dahl			<b>ORDERING ADDRESS:</b> Po to: Dalco, Inc. 16000 Mill Creek Blvd. Mill Creek, WA 98012  Phone:425.338.0328 Fax:  <b>PHONE NUMBER:</b> 425.338.0328
ANY VARIANCE OR MODIFICATION OF THIS SPECIFICATION MUST BE COORDINATED THROUGH SEATTLE DISTRICT CORPS OF ENGINEERS.			
<b>CONTACT:</b> Karen Peterson, Seattle Corps of Engineers			
<b>DESCRIPTION:</b>	<b>QTY:</b>		
Item Description: Cold Pressure Washer/Model CW21004-E3/E4 Dimensions: 178# /32"x19 x 16"  <b>Note: See attached sheet for specifications</b>  Delivery and Installation:  <b>Shipping Instructions:</b> Ship directly to user. User to provide address.  Side Mark: Fort Lewis TEC/(RMP)	1- As indicated on drawing at RMP building		
<b>ROOM LOCATION:</b>			
<b>FOB/REMARKS:</b>			
FOB Factory			

01062/BERGER/ABAM  
 FY02 Tactical Equipment Complex  
 Fort Lewis, Washington

<b>U. S. Army Engineer District, Seattle Corps of Engineers</b>		<b>SHEET: 2</b>	
<b>FY02 SOCOM PN 47119</b>		<b>DATE: August 06, 2001</b>	
<b>STATION: Fort Lewis, Washington</b>			
<b>FACILITY:</b> Tactical Equipment Complex			
<b>ITEM:</b> Pallet Rack		<b>ITEM CODE:</b> PR1	
<b>FSC GRP:</b>	<b>PART:</b>	<b>EXP: DATE:</b>	<b>GSA # :</b>
	<b>SECTION:</b>		
<b>MANUFACTURER:</b> Equipto		<b>ORDERING ADDRESS:</b> Po to: Equipto 4819 Maple Avenue Dallas, TX 75219 c/o Scott Gorski  Phone: 800.884.6563 Fax: 503.668.4878	
<b>CONTRACTOR:</b>			
<b>LOCAL REP:</b> Scott Gorski		<b>PHONE NUMBER:</b> 800.884.6563	
ANY VARIANCE OR MODIFICATION OF THIS SPECIFICATION MUST BE COORDINATED THROUGH SEATTLE DISTRICT CORPS OF ENGINEERS.			
<b>CONTACT:</b> Karen Peterson, Seattle Corps of Engineers			
<b>DESCRIPTION:</b>		<b>QTY:</b>	
Item Description: Pallet Rack 1 Dimensions: 42"d x 16'h Finish: Powder coated paint  <b>Note: See attached sheet for specifications</b>  Delivery and Installation:  <b>Shipping Instructions:</b> Ship directly to user. User to provide address.  Side Mark: Fort Lewis TEC/115 (PBO) (WB1)		As indicated on drawings in PBO building	
<b>ROOM LOCATION:</b>			
115/(PBO)			
<b>FOB/REMARKS:</b> freight included in price			

01062/BERGER/ABAM  
FY02 Tactical Equipment Complex  
Fort Lewis, Washington

<b>U. S. Army Engineer District, Seattle Corps of Engineers</b>			<b>SHEET: 3</b>
<b>FY02 SOCOM PN 47119</b>			<b>DATE: August 06, 2001</b>
<b>STATION: Fort Lewis, Washington</b>			
<b>FACILITY: Tactical Equipment Complex</b>			
<b>ITEM: Vehicle Lift</b>			<b>ITEM CODE: VL1</b>
<b>FSC GRP:</b>	<b>PART:</b>	<b>EXP: DATE:</b>	<b>GSA # :</b>
	<b>SECTION:</b>		
<b>MANUFACTURER:</b> Rotary Lift			<b>ORDERING ADDRESS:</b> Po to: Northwest Sales Group, Inc. 5718 1st Ave S. PO Box 80364 Seattle, WA 98108
<b>CONTRACTOR:</b>			Phone: 206.762.5111 Fax: 206.762.5546
<b>LOCAL REP:</b> Jim Beaver			<b>PHONE NUMBER:</b> 206.762.5111
ANY VARIANCE OR MODIFICATION OF THIS SPECIFICATION MUST BE COORDINATED THROUGH SEATTLE DISTRICT CORPS OF ENGINEERS.			
<b>CONTACT:</b> Karen Peterson, Seattle Corps of Engineers			
<b>DESCRIPTION:</b>	<b>QTY:</b>		
Item Description: Four-post vehicle lift/model #SM123-EL2 Dimensions:	2-		
<b>Note: See attached sheet for specifications</b>	As indicated on drawings in RMP building		
Delivery and Installation:			
<b>Shipping Instructions:</b> Ship directly to user. User to provide address.			
Side Mark: Fort Lewis TEC/(RMP)			
<b>ROOM LOCATION:</b>			
<b>FOB/REMARKS:</b> freight included in price			

01062/BERGER/ABAM  
 FY02 Tactical Equipment Complex  
 Fort Lewis, Washington

<b>U. S. Army Engineer District, Seattle Corps of Engineers</b>		<b>SHEET: 4</b>	
<b>FY02 SOCOM PN 47119</b>		<b>DATE: August 06, 2001</b>	
<b>STATION: Fort Lewis, Washington</b>			
<b>FACILITY:</b> Tactical Equipment Complex			
<b>ITEM:</b> Outboard Test Tank		<b>ITEM CODE:</b> OT1	
<b>FSC GRP:</b>	<b>PART:</b>	<b>EXP: DATE:</b>	<b>GSA # :</b>
	<b>SECTION:</b>		
<b>MANUFACTURER:</b> Specialty Motors Mfg.		<b>ORDERING ADDRESS:</b> Po to: Specialty Motors Mfg. PO Box 157 Longview, WA 98632	
<b>CONTRACTOR:</b>		Phone: 800.426.8644 Fax: 360.423.3144	
<b>LOCAL REP:</b> Sharon Gottfryd		<b>PHONE NUMBER:</b> 800.426.8644	
ANY VARIANCE OR MODIFICATION OF THIS SPECIFICATION MUST BE COORDINATED THROUGH SEATTLE DISTRICT CORPS OF ENGINEERS.			
<b>CONTACT:</b> Karen Peterson, Seattle Corps of Engineers			
<b>DESCRIPTION:</b>	<b>QTY:</b>		
Item Description: Outboard Test Tank Model TT-90-HYD	1 ea		
Dimensions:			
Item Description: Recycle System/Model RS-1	1 ea		
<b>Note: See attached sheet for specifications</b>	As indicated on drawings in RMP building		
Delivery and Installation:			
<b>Shipping Instructions:</b> Ship directly to user. User to provide address.			
Side Mark: Fort Lewis TEC/(RMP)			
<b>ROOM LOCATION:</b>			
<b>FOB/REMARKS:</b>			

01062/BERGER/ABAM  
 FY02 Tactical Equipment Complex  
 Fort Lewis, Washington

<b>U. S. Army Engineer District, Seattle Corps of Engineers</b>			<b>SHEET: 5</b>
<b>FY02 SOCOM PN 47119</b>			<b>DATE: August 06, 2001</b>
<b>STATION: Fort Lewis, Washington</b>			
<b>FACILITY:</b> Tactical Equipment Complex			
<b>ITEM:</b> Outboard Display Stand			<b>ITEM CODE:</b> OS1
<b>FSC GRP:</b>	<b>PART:</b>	<b>EXP. DATE:</b>	<b>GSA # :</b>
	<b>SECTION:</b>		
<b>MANUFACTURER:</b> Specialty Motors Mfg.  <b>CONTRACTOR:</b>   <b>LOCAL REP:</b> Sharon Gottfryd			<b>ORDERING ADDRESS:</b> Po to: Specialty Motors Mfg. PO Box 157 Longview, WA 98632  Phone: 800.426.8644 Fax: 360.423.3144  <b>PHONE NUMBER:</b> 800.426.8644
ANY VARIANCE OR MODIFICATION OF THIS SPECIFICATION MUST BE COORDINATED THROUGH SEATTLE DISTRICT CORPS OF ENGINEERS.			
<b>CONTACT:</b> Karen Peterson, Seattle Corps of Engineers			
<b>DESCRIPTION:</b>		<b>QTY:</b>	
Item Description: Outboard Display Stand with Casters/Model OBD-8 Dimensions:  <b>Note: See attached sheet for specifications</b>  Delivery and Installation:  <b>Shipping Instructions:</b> Ship directly to user. User to provide address.  Side Mark: Fort Lewis TEC/(RMP)		1 ea As indicated on drawings in RMP building.	
<b>ROOM LOCATION:</b>			
<b>FOB/REMARKS:</b>			

01062/BERGER/ABAM  
FY02 Tactical Equipment Complex  
Fort Lewis, Washington

PART 3 EXECUTION

3.1 INSTALLATION

Installation shall be as indicated and in accordance with manufacturer's installation instructions. Miscellaneous equipment and accessories shall operate easily and perform reliably. Unsatisfactory operation shall result in correction adjustment, or reinstallation until satisfactory performance and operation is achieved and installation is acceptable to the Resident Engineer.

-- End of Section --



SECTION 11020

SECURITY VAULT DOOR

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by basic designation only.

FEDERAL SPECIFICATIONS (FS)

FS AA-D-00600

(Rev B) Door, Vault, Security

1.2 GENERAL REQUIREMENTS

The vault door unit shall be a steel security-vault type door with frame, day gate, and ramp type threshold, and shall be a standard product of a manufacturer specializing in this type of fabrication.

1.3 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only. When used, a designation following the "G" designation identifies the office that will review the submittal for the Government. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

SD-03 Product Data

Vault Door and Frame

Manufacturer's catalog data including catalog cuts and brochures. The data shall show that the proposed vault door unit conforms with the requirements in FS AA-D-00600, and has been tested and approved by the General Services Administration (GSA).

SD-07 Certificates

Vault Door and Frame

Certification shall state that vault-door units that do not bear the GSA label are constructed to Class 5 standards.

1.4 DELIVERY AND STORAGE

Door and frame assemblies shall be delivered to the jobsite in a protective covering with the brand and name clearly marked thereon. Materials delivered to the jobsite shall be inspected for damage, and unloaded with a minimum of handling. Storage shall be in a dry location with adequate ventilation, free from dust, water, and other contaminants, and which

permits easy access for inspection and handling. Door assemblies shall be stored off the floor on nonabsorptive strips or wood platforms. Damage to doors and frames shall be prevented during handling. Damaged items that cannot be restored to like-new condition shall be replaced.

## PART 2 PRODUCTS

### 2.1 VAULT DOOR AND FRAME

Design and construction of the door and frame assembly shall conform to FS AA-D-00600. The door shall be Class 5, Type IIR - right opening swing without optical device and IIL - left opening swing without optical device (refer to Drawings for door swing), Style K - key change combination lock.

### 2.2 DAY GATE

The day gate shall be the manufacturer's standard product designed for use with the vault door furnished, and shall provide access control and visual security. The gate shall be hinged on the same side as the vault door, shall swing into the vault, and shall have a locking device operable from outside by key and from inside by knob or handle.

## PART 3 EXECUTION

### 3.1 INSTALLATION

The vault door assembly shall be installed in strict compliance with the printed instructions and drawings provided by the manufacturer. The day gate shall be installed in a manner that will not interfere with operation of the release handle on the inside of the vault door. After installation, the door, the locking mechanism, and the inner escape device shall be adjusted for proper operation.

-- End of Section --

SECTION 11162

LOADING DOCK LEVELER

PART 1 GENERAL

1.1 GENERAL REQUIREMENTS

1.1.1 Standard Products

Materials and equipment shall be the standard products of a manufacturer regularly engaged in the manufacture of the products and shall essentially duplicate items that have been in satisfactory use for at least 2 years prior to bid opening. Equipment shall be supported by a service organization that is, in the opinion of the Resident engineer, reasonably convenient to the site.

1.1.2 Nameplates

As a minimum, each loading dock leveler shall have the manufacturer's name, address, type or style, model or serial number, rated capacity, and catalog number on a plate secured to the equipment.

1.1.3 Verification of Dimensions

After becoming familiar with all details of the work, the Contractor shall verify all dimensions in the field, and shall advise the Resident engineer of any discrepancy before performing the work.

1.2 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only. When used, a designation following the "G" designation identifies the office that will review the submittal for the Government. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

SD-02 Shop Drawings

Loading Dock Levelers; G

Drawings with complete wiring, schematic diagrams, and any other details required to demonstrate that the system has been coordinated and will properly function as a unit. Detail drawings shall show proposed layout and anchorage of equipment and appurtenances. Detail drawings shall show the concrete pit details including flush edge angles, dock bumpers, and sloped pit bottom; method of mounting and anchoring; and location of control stations and disconnect switches. For edge-of-dock levelers, drawings shall show details of required pit or foundation construction and dock bumpers and structural shapes installation, in lieu of concrete pit details.

SD-03 Product Data

Loading Dock Levelers; G

Data including a complete list of equipment and materials, manufacturer's descriptive and technical literature, performance charts and curves, catalog cuts, and installation instructions.

SD-10 Operation and Maintenance Data

Loading Dock Levelers; G

Six copies of operation and six copies of maintenance manuals for the equipment furnished. One complete set shall be furnished prior to performance testing and the remainder shall be furnished upon acceptance. Operating manuals shall detail the step-by-step procedures required for system startup, operation, and shutdown. Operating manuals shall include the manufacturer's name, model number, parts list, and brief description of all equipment and their basic operating features. Maintenance manuals shall list routine maintenance procedures, possible breakdowns and repairs, and troubleshooting guides. Maintenance manuals shall include piping and equipment layout and simplified wiring and control diagrams of the system as installed. After approval of the detail drawings, and not later than 2 months prior to the date of beneficial occupancy, spare parts data for each different item of material and equipment specified are required. The data shall include a complete list of parts and supplies, with current unit prices and source of supply and a list of the parts recommended by the manufacturer to be replaced after 1 and 3 year(s) of service.

1.3 DELIVERY AND STORAGE

Equipment delivered and placed in storage shall be stored with protection from the weather, humidity and temperature variation, dirt and dust, or other contaminants.

PART 2 PRODUCTS

2.1 LOADING DOCK LEVELERS

Loading dock levelers shall be permanent type, and shall be designed to handle 13,608 kg gross dynamic load.

2.1.1 Type

Loading dock leveler shall be electrohydraulic type with electric motor and hydraulic pump operating a hydraulic cylinder that adjusts dock leveler board position.

2.1.2 Operating Range

The outer end of each loading dock leveler shall be adjustable in height, providing a board whose incline can be adjusted to suit the height of truck

and trailer beds. Each board end shall have a minimum of 25.4 cm of vertical adjustment. Height adjustments shall be divided 12.7 cm above and 12.7 cm below the dock level to provide height above grade as shown on civil drawing.

### 2.1.3 Automatic Safety Device

#### 2.1.3.1 Electrohydraulic

A hydraulic tamper proof check valve shall be provided to prevent a drop of more than 76 mm at the outer end of the board, should the truck or trailer be moved away leaving the board unsupported. This safety device shall be effective with any load on the board up to the fully dynamic rated capacity of the loading dock leveler.

### 2.1.4 Configuration/Dimensions

The live load carrying surface of the leveler shall be as follows:  
BO Building - 226 cm wide hydraulic edge of dock leveler (special).  
RMP Building - 211 cm wide hydraulic edge of dock leveler.

### 2.1.5 Motor

Each electrohydraulic loading dock leveler shall be equipped with a totally enclosed non-ventilated (TENV) squirrel cage induction electric motor, three phase, 208 volts, 60 Hz, which shall not exceed its rated capacity under full load conditions of the loading dock leveler.

### 2.1.6 Controls

Each electrohydraulic loading dock leveler shall be equipped with a power unit installed under the leveler proper as an integral part of the loading dock leveler. Each loading dock leveler shall be controlled by a heavy duty push button station with an "UP" button and "DOWN" button. To prevent accidental operation and damage, each button shall be recessed in its station or protected by a projected peripheral collar. Station push button shall be indelibly identified by means of cast or etched letters on the station. Push button station shall be of rugged design and positive in operation; no less than NEMA Type 4 enclosure shall be furnished. Buttons shall be constant pressure type so that operation will cease immediately on release of button. Electrical work shall conform to Section 16415 ELECTRICAL WORK, INTERIOR.

### 2.1.7 Dock Bumpers

A minimum of two high-impact resistant molded rubber or laminated rubber dock bumpers shall be furnished with each loading dock leveler.

## 2.2 OPERATION

Continuous pressure on the operating button shall cause the outer end of the board to raise and thus permit the operator to adjust the board incline as required to suit the level of the bed of a particular truck or trailer. Control shall activate board automatically to raise to maximum height and

lower to rest on truck or trailer bed. The operator may interrupt cycle to lower board to resting position when desired. End lip on board shall extend hydraulically, automatically during board operation or by separate control button on panel. Dock leveler shall automatically return to storage position when truck or trailer moves away.

## 2.3 CORROSION PROTECTION AND PAINTING

### 2.3.1 Fasteners

Bolts, screws, nuts, and washers shall be coated with hot-dip zinc or made of corrosion resistant metal.

### 2.3.2 Ferrous Metal Surfaces

Ferrous metal surfaces, including coated ferrous and inaccessible ferrous surfaces, (but not including bearings, gear contact surfaces, parts protected by lubrication, or other surfaces not usually painted or coated) shall be cleaned, shot panned, and the base metal protected with an application of 99.9% pure zinc coating with a thickness of 0.010 to 0.012 IAW ANSI/ANS C2.18-93 and the base metal protected with an application of Rustoleum paint with a thickness of 0.062 to 0.075 mm (2.5 to 3 mils) followed by a final coat of standard primer with a thickness of 0.062 to 0.075 mm (2.5 to 3 mils).

### 2.3.3 Nonferrous Parts

Nonferrous parts shall be protected against corrosion as necessary.

### 2.3.4 Dissimilar Metals

Dissimilar metals, which may be subject to electrolysis upon contact, shall be separated by electrolytically inactive material.

## PART 3 EXECUTION

### 3.1 INSTALLATION

Installation shall be as indicated and in accordance with manufacturer's installation instructions. Loading dock leveler and accessories shall operate easily and perform reliably. Unsatisfactory operation shall result in correction adjustment, or reinstallation until satisfactory performance and operation is achieved and installation is acceptable to the Resident Engineer.

-- End of Section --

SECTION 12320

CABINETS AND COUNTERTOPS

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by basic designation only.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM D 570	(1995) Water Absorption of Plastics
ASTM D 638	(1997) Tensile Properties of Plastics
ASTM D 2583	(1995) Indentation Hardness of Rigid Plastics by Means of a Barcol Impressor
ASTM E 84	(1997a) Surface Burning Characteristics of Building Materials

BUILDERS HARDWARE MANUFACTURERS ASSOCIATION (BHMA)

BHMA A156.9	(1994) Cabinet Hardware
-------------	-------------------------

ARCHITECTURAL WOODWORK INSTITUTE

AWI ARCHITECTURAL WOODWORK QUALITY STANDARDS	(1997) Section 1600 Modular Cabinets
---	--------------------------------------

NATIONAL ELECTRICAL MANUFACTURERS ASSOCIATION (NEMA)

NEMA LD 3	(1995) High-Pressure Decorative Laminates
-----------	---

1.2 DESIGN

Cabinets shall be wood, factory-fabricated and finished in the manufacturer's standard sizes and finishes of the type, design, and configuration indicated. Cabinets shall be constructed as specified and shall meet the requirements of AWI Architectural Woodwork Quality Standards. Wall and base cabinet assemblies shall consist of individual units joined into continuous sections. Fastenings shall be accomplished to permit removal and replacement of individual units without affecting the remainder of the installation. Drawers shall be removable and shall be equipped with position stops to avoid accidental complete withdrawals. Shelves shall be fixed or adjustable as indicated.

### 1.3 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only. When used, a designation following the "G" designation identifies the office that will review the submittal for the Government. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

#### SD-02 Shop Drawings

Installation; G

Drawings showing each type of cabinet and related item, and clearly indicating the complete plan, location, and elevations of the cabinets and accessories and pertinent details of construction, fabrication, and attachments.

#### SD-03 Product Data

Cabinets; G

Countertops and Back splash; G

Manufacturer's printed data, catalog cuts, installation and cleaning instructions.

#### SD-04 Samples

PVC Edging; G

Plastic Laminate; G

In lieu of individual samples, complete minimum size cabinets may be furnished as samples. Mock-up units are not acceptable. Samples shall be of sufficient size to show color, pattern, and method of assembly.

- a. Countertop and back splash - One section, containing both.
- b. Door and drawer front - One of each, with hardware mounted.
- c. Plastic laminate color samples approximately 50 x 75 mm size.
- d. PCV edging color samples approximately 8 cm long piece.

### 1.4 DELIVERY AND STORAGE

Cabinets shall be delivered to the job site wrapped in a protective covering. Cabinets shall be stored in accordance with manufacturer's recommendations in an adequately ventilated, dry location that is free of dust, water, or other contaminants and in a manner to permit access for inspection and handling. Cabinets shall be handled carefully to prevent damage to the surfaces. Damaged items that cannot be restored to like-new condition shall be replaced.



## PART 2 PRODUCTS

### 2.1 CABINETS

Provide factory-built plastic laminate faced cabinets, flush design, solid PCV edging. Wall and base cabinets shall be of the same construction and same outside appearance. Door design shall be solid flush face from vendors standard styles. Corner cabinets shall be equipped with notched shelving. Shelves shall be fully adjustable. Adjustable shelves shall be capable of adjusting on approximately 25.4 mm increments. Shelves shall be supported by self-locking clips. Shelves shall be minimum 19.05 mm thick 13 mm 20 kg density particle board. Doors and drawer fronts shall be 20 kg density particle board.

#### 2.1.1 Frameless Type Cabinets

The cabinets shall be of frameless design and construction. Cabinets shall be constructed of minimum 19.05 mm thick, 20 kg density particle board end and floor panels. Cabinet back shall be constructed of minimum 12.7 mm thick, 20 kg density particle board. Hanging rails shall be doweled and glued to end panels, then fastened and hot melt glued to cabinet back. Top and bottom corners shall be braced with either hardwood blocks glued together with water resistant glue and nailed in place, or fastened with metal or plastic corner braces.

### 2.2 COUNTERTOPS AND BACKSPLASH

#### 2.2.1 High-Pressure Laminated Plastic Clad Countertops

Clad countertop and back splash shall be fabricated as one integral unit 19.05 mm thick, 20 kg density particle board core and shall have waterproof, butt-jointed counter top/back splash construction and plastic laminate front edge. Back splash shall be height shown, 101.6 mm minimum. Edging and trim shall consist of plastic laminate cut and fitted to all exposed edges. End splashes constructed of 19.05 mm thick, 20 kg density particle board core shall be supplied. Continuous sheets of longest lengths practicable shall be provided. Joints in surface sheeting shall be tight and flush and held to a practicable minimum. When the countertop and back splash are two separate units, GP50 plastic laminate shall be used. Plastic laminate shall conform to the requirements of NEMA LD 3 and plastic laminate adhesive shall be contact type applied to both surfaces.

### 2.3 FINISH

#### 2.3.1 PVC Edgebanding

Apply 3mm thick extruded vinyl to all cabinet, door, drawer and shelf edges, hot met glue applied at factory.

#### 2.3.2 Plastic Laminate Cabinet Finish

Exposed exterior faces of cabinets shall be clad with a plastic laminate conforming to NEMA LD3 and the following:

1. Vertical Applications: GP-33 (7.62 mm thick)
2. Horizontal Applications: GP-50 (12.7 mm thick)

#### 2.3.3 Interior Cabinet Liner

Cabinet interior surfaces shall be finished with a melamine laminate. Particle board shelves shall be covered on both sides with a melamine laminate finish. Melamine laminate shall conform to the requirements of NEMA LD 3 and laminate adhesive shall be contact type applied to both surfaces.

#### 2.3.4 Backer Sheets

Backer Sheets of high pressure plastic laminate, shall conform to NEMA LD 3, Grade BK20 and shall be applied to the underside/backside of all core material.

1. Laminate Backing Sheet (concealed) BK20 (5.08 mm thick) backing grade, undecorated plastic laminate.
2. Laminate backing sheet (exposed): BK20 (5.08 mm thick) match color/appearance of interior liner.

#### 2.4 HARDWARE

Hardware shall conform to BHMA A156.9, shall be suitable for cabinet use, and shall include all miscellaneous hardware for a complete installation. Door hinges shall be heavy-duty 5 knuckle pin type hinge with minimum of 4 screws in each leaf, brushed chrome finish. Drawer slides shall be epoxy coated steel with nylon rollers, 75 lb. rated. Pulls shall be 7.9375 mm diameter metal wire pull, 101.6 mm hole spacing, brushed chrome finish, door catches shall be magnetic type with 3.18 kg pull.

#### 2.5 COLOR, TEXTURE, AND PATTERN

Design, color, and finish shall be as specified in Section 09915 COLOR SCHEDULE.

### PART 3 EXECUTION

#### 3.1 INSTALLATION

Cabinets shall be installed level, plumb, and true to line, and shall be attached to the walls or floors with suitable devices to securely anchor each unit. Countertops, accessories, and hardware shall be installed as indicated on the drawings. Installation shall be in accordance with the manufacturer's approved printed instructions. The inner edge of sink cut-outs in laminated plastic tops shall be painted with a coat of semi-gloss enamel paint and sink flanges shall be set in a bed of sealant. Closer and filler strips shall be provided as required to close all gaps and void

01062/BERGER/ABAM  
FY02 Tactical Equipment Complex  
Fort Lewis, Washington

spaces. Prior to final acceptance, doors shall be aligned, and hardware shall be adjusted.

### 3.2 CLEANING

Cabinet and countertop surfaces shall be cleaned in accordance with manufacturer's instructions.

-- End of Section -

01062/BERGER/ABAM  
FY02 Tactical Equipment Complex  
Fort Lewis, Washington

This page intentionally blank.

SECTION 12490

WINDOW TREATMENT

PART 1 WORK DESCRIPTION

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by basic designation only.

FEDERAL SPECIFICATIONS (FS)

FS AA-V-00200 (Rev B) Venetian Blinds

1.2 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only. When used, a designation following the "G" designation identifies the office that will review the submittal for the Government. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

SD-03 Product Data

Window Treatments; G

Manufacturer's data composed of catalog cuts, brochures, product information, and maintenance instructions.

SD-04 Samples

Slats; G

Three samples of each type and color of slat specified. Blind slats shall be 152.4 mm in length for each color.

1.3 GENERAL

Window treatment shall be provided, complete with necessary brackets, fittings, and hardware. Each window treatment type shall be a complete unit provided in accordance with paragraph WINDOW TREATMENT PLACEMENT SCHEDULE. Equipment shall be mounted and operated as indicated. Windows to receive a treatment shall be completely covered. The Contractor shall take measurements at the building and shall be responsible for the proper fitting and hanging of the equipment.

1.4 DELIVERY, STORAGE, AND HANDLING

Components shall be delivered to the jobsite in the manufacturer's original packaging with the brand or company name, item identification, and project reference clearly marked. Components shall be stored in a dry location that is adequately ventilated and free from dust, water, or other contaminants

and shall have easy access for inspection and handling. Materials shall be stored flat in a clean dry area with temperature maintained above 10 degrees C. (50 degrees F.)

#### 1.5 FIELD MEASUREMENTS

The Contractor shall become familiar with details of the work, verify dimensions in the field, and shall advise the Resident engineer of any discrepancy before performing the work.

#### 1.6 WARRANTY

Manufacturer's standard performance guarantees or warranties that extend beyond a 1 year period shall be provided.

### PART 2 PRODUCTS

#### 2.1 WINDOW BLINDS

Each blind, including hardware, accessory items, mounting brackets and fastenings, shall be provided as a complete unit produced by one manufacturer. All parts shall be one color unless otherwise shown, and match the color of the blind slat. Steel features shall be treated for corrosion resistance.

##### 2.1.1 Horizontal Blinds

Horizontal blinds shall conform to FS AA-V-00200 Type II (25 mm slats). Blind units shall be capable of nominally 180 degree partial tilting operation and full-height raising. Blinds shall be inside mount.

##### 2.1.1.1 Head Channel and Slats

Head channel shall be steel or aluminum nominal 0.61 mm for Type II. Slats shall be aluminum, not less than 0.1905 mm thick prior to coating, and of sufficient strength to prevent sag or bow in the finished blind. A sufficient amount of slats shall be provided to assure proper control, uniform spacing, and adequate overlap.

##### 2.1.1.2 Controls

The slats shall be tilted by a transparent tilting wand, hung vertically by its own weight, and shall swivel for easy operation. The tilter control shall be of enclosed construction. Moving parts and mechanical drive shall be made of compatible materials which do not require lubrication during normal expected life. The tilter shall tilt the slats to any desired angle and hold them at that angle so that any vibration or movement of ladders and slats will not drive the tilter and change the angle of slats. A mechanism shall be included to prevent over tightening. The wand shall be of sufficient length to reach to within 1500 mm of the floor.

#### 2.1.1.3 Intermediate Brackets

Intermediate brackets shall be provided for installation of blinds over 152 cm wide and shall be installed as recommended by the manufacturer.

#### 2.2 COLOR

Color shall be in accordance with Section 09915 COLOR SCHEDULE.

### PART 3 EXECUTION

#### 3.1 WINDOW TREATMENT PLACEMENT SCHEDULE

Window covering shall be provided at all exterior windows, except at windows located above 243.84 cm:

#### 3.2 INSTALLATION

Installation shall be in accordance with the approved detail drawings and manufacturer's installation instructions. Units shall be level, plumb, secure, and at proper height and location relative to window units. The Contractor shall furnish and install supplementary or miscellaneous items in total, including clips, brackets, or anchorages incidental to or necessary for a sound, secure, and complete installation. Installation shall not be initiated until completion of room painting and finishing operations. Upon completion of the installation, window treatments shall be adjusted for form and appearance, shall be in proper operating condition, and shall be free from damage or blemishes. Damaged units shall be repaired or replaced by the Contractor as directed by the Resident Engineer.

-- End of Section --

01062/BERGER/ABAM  
FY02 Tactical Equipment Complex  
Fort Lewis, Washington

This page intentionally blank.



SECTION 13720

ELECTRONIC SECURITY SYSTEM

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by basic designation only.

AMERICAN NATIONAL STANDARDS INSTITUTE (ANSI)

ANSI X3.92	(1981; R 1993) Data Encryption Algorithm
ANSI X3.154	(1988; R 1994) Office Machines and Supplies - Alphanumeric Machines-Keyboards Arrangement

CODE OF FEDERAL REGULATIONS (CFR)

47 CFR 15	Radio Frequency Devices
47 CFR 68	Connection of Terminal Equipment to the Telephone Network

ELECTRONIC INDUSTRIES ALLIANCE (EIA)

EIA ANSI/EIA/TIA-232-F	(1997) Interface Between Data Terminal Equipment and Data Circuit-Terminating Equipment Employing Serial Binary Data Interchange
EIA ANSI/TIA/EIA-568-A	(1995; Addendum 3 1998) Commercial Building Telecommunications Cabling Standard

INSTITUTE OF ELECTRICAL AND ELECTRONICS ENGINEERS (IEEE)

IEEE C2	(1997) National Electrical Safety Code
IEEE C62.41	(1991; R 1995) Surge Voltages in Low-Voltage AC Power Circuits
IEEE Std 142	(1991) IEEE Recommended Practice for Grounding of Industrial and Commercial Power Systems

INTERNATIONAL TELECOMMUNICATION UNION (ITU)

- |          |  |
|----------|--|
| ITU V.34 | (1994) Data Communication Over the Telephone Network A Modem Operating at Data Signaling Rates up to 28,000 bits for use on the General Switched Telephone Network and on Leased Point-to-Point Two-Wire Telephone Type Circuits |
| ITU V.42 | (1993) Data Communications Over the Telephone Network Error-Correcting Procedures for DCEs Using Asynchronous-to-Synchronous Conversion  |

NATIONAL ELECTRICAL MANUFACTURERS ASSOCIATION (NEMA)

- |            |   |
|------------|---|
| NEMA 250   | (1997) Enclosures for Electrical Equipment (1000 Volts Maximum) |
| NEMA ICS 1 | (1993) Industrial Control and Systems                           |

NATIONAL FIRE PROTECTION ASSOCIATION (NFPA)

- |         |                                 |
|---------|---------------------------------|
| NFPA 70 | (1999) National Electrical Code |
|---------|---------------------------------|

UNDERWRITERS LABORATORIES (UL)

- |         |  |
|---------|--|
| UL 294  | (1999) Access Control System Units   |
| UL 681  | (1999) Installation and Classification of Burglar and Holdup Alarm Systems |
| UL 796  | (1999) Printed-Wiring Boards   |
| UL 1037 | (1999) Antitheft Alarms and Devices  |
| UL 1076 | (1995; Rev thru Feb 1999) Proprietary Burglar Alarm Units and Systems      |

1.2 SYSTEM DESCRIPTION

The Contractor shall provide an Electronic Security System (ESS) as described and shown including installation of any Government Furnished Equipment. All computing devices, as defined in 47 CFR 15, shall be certified to comply with the requirements for Class A computing devices and labeled as set forth in 47 CFR 15. Electronic equipment shall comply with 47 CFR 15.

1.2.1 Central Station

The central station shall be configured to provide operator interface, interaction, dynamic and real time monitoring, display, and control. The central station shall control system networks to interconnect all system components including subordinate or separate control stations, enrollment stations and field equipment. The system shall be able to manage up to 16,000 uniquely identifiable inputs and outputs.

#### 1.2.2 Systems Networks

System networks shall interconnect all components of the system. These networks shall include communications between a central station and any subordinate or separate station, enrollment stations, local annunciation stations, portal control stations or redundant central stations. The systems network shall provide totally automatic communication of status changes, commands, field initiated interrupts and any other communications required for proper system operation. System communication shall not require operator initiation or response. System communication shall return to normal after any partial or total network interruption such as power loss or transient upset. The system shall automatically annunciate communication failures to the operator with identification of the communication link that has experienced a partial or total failure. A communications controller may be used as an interface between the central station display systems and the field device network. The communications controller shall provide those functions needed to attain the specified network communications performance.

##### 1.2.2.1 Field Device Network

The field device network shall provide communication between a central control station and field devices of the system. The field device network shall be configured as shown in the drawings. Field devices shall consist of alarm annunciation local processors and entry control local processors. Each field device shall be interrogated during each interrogation cycle. The field device network shall provide line supervision that detects and annunciates communications interruptions or compromised communications between any field device and the central station.

##### 1.2.3 Field Equipment

Field equipment shall include local processors, sensors and controls. Local processors shall serve as an interface between the central station and sensors and controls. Data exchange between the central station and the local processors shall include down-line transmission of commands, software and databases to local processors. The up line data exchange from the local processor to the central station shall include status data such as intrusion alarms, status reports and entry control records. Local processors are categorized as alarm annunciation or entry control.

##### 1.2.4 Overall System Reliability Requirements

The system, including all components and appurtenances, shall be configured and installed to yield a mean time between failure (MTBF) of at least 10,000 hours.

##### 1.2.5 Error Detection and Retransmission

A cyclic code error detection method shall be used between local processors and the central station, which shall detect single and double bit errors, burst errors of 8 bits or less, and at least 99 percent of all other multibit and burst error conditions. Interactive or product error detection codes alone will not be acceptable. A message shall be in error if 1 bit is received incorrectly. The system shall retransmit messages with detected errors. A 2-digit decimal number shall be operator assignable to each

communication link representing the number of retransmission attempts. When the number of consecutive retransmission attempts equals the assigned quantity, the central station shall print a communication failure alarm message. The system shall monitor the frequency of data transmission failure for display and logging.

#### 1.2.6 System Definitions

##### 1.2.6.1 Intrusion Alarm

An alarm resulting from the detection of a specified target, caused by an attempt to intrude into the protected area, or when entry into an entry controlled area is attempted without successfully using entry control procedures.

##### 1.2.6.2 Nuisance Alarm

An alarm resulting from the detection of an appropriate alarm stimulus, but which does not represent an attempt to intrude into the protected area.

##### 1.2.6.3 Environmental Alarm

An alarm during environmental conditions which exceed those specified.

##### 1.2.6.4 False Alarm

An alarm when there is no alarm stimulus.

##### 1.2.6.5 Duress Alarm

An alarm condition which results from a set of pre-established conditions such as entering a special code into a keypad or by activating a switch. This alarm category shall take precedence over other alarm categories.

##### 1.2.6.6 Guard Tour Alarm

An alarm resulting from a guard being either early or late at a specified check-in location.

##### 1.2.6.7 Fail-Safe Alarm

An alarm resulting from detection of diminished functional capabilities.

##### 1.2.6.8 Power Loss Alarm

An alarm resulting from a loss of primary power.

##### 1.2.6.9 Entry Control Alarm

An alarm resulting from improper use of entry control procedures or equipment.

#### 1.2.7.10 Identifier

A card credential, keypad personal identification number or code, biometric characteristic or any other unique identification entered as data into the entry control database for the purpose of identifying an individual. Identifiers shall be used by the electronic security system for the purpose of validating passage requests for areas equipped with entry control equipment.

#### 1.2.6.11 Entry Control Devices

Any equipment which gives a user the means to input identifier data into the entry control system for verification.

#### 1.2.6.12 Facility Interface Device

A facility interface device shall be any type of mechanism which is controlled in response to passage requests and allows passage through a portal.

#### 1.2.7 Probability of Detection

Each zone shall have a continuous probability of detection greater than 90 percent and shall be demonstrated with a confidence level of 95 percent. This probability of detection is defined as 49 successful detections out of 50 tests or 96 successful detections out of 100 tests.

#### 1.2.8 Standard Intruder

The system shall be able to detect an intruder that weighs 100 pounds or less and is 5 feet tall or less. The intruder shall be dressed in a long-sleeved shirt, slacks and shoes unless environmental conditions at the site require protective clothing.

##### 1.2.8.1 Standard Intruder Movement

Standard intruder movement is defined as any movement such as walking, running, crawling, rolling, or jumping through a protected zone in the most advantageous manner for the intruder.

#### 1.2.9 False Alarm Rate

##### 1.2.9.1 Interior

A false alarm rate of no more than 1 false alarm per sensor per 30 days at the specified probability of detection shall be provided.

##### 1.2.9.2 Exterior

A false alarm rate of no more than 1 false alarm per sensor per 5 days at the specified probability of detection shall be provided.

#### 1.2.10 Error and Throughput Rates

Error and throughput rates shall be single portal performance rates obtained when processing individuals 1 at a time.

##### 1.2.10.1 Type I Error Rate

Type I error rate is defined as an error where the system denies entry to an authorized, enrolled individual. The rate shall be less than 1 percent.

##### 1.2.10.2 Type II Error Rate

Type II error rate is defined as an error where the system grants entry to an unauthorized individual. The entry control Type II error rate shall be less than [0.1] [0.01] [0.001] percent.

#### 1.2.11 System Throughput

At the specified error rates, the system throughput rate through a single portal shall be as shown.

#### 1.2.12 Passage

Passage is defined as ingress and/or egress past an entry control device, or through a portal. Entry control procedures and equipment shall be implemented for passage through each portal as shown.

#### 1.2.13 Detection Resolution

The system shall have detection resolution sufficient to locate intrusions at each device and zone; and tampering at individual devices.

#### 1.2.14 Electrical Requirements

Electrically powered ESS equipment shall operate on [120][240] volt [60][50] Hz ac sources as shown. Equipment shall be able to tolerate variations in the voltage source of plus or minus 10 percent, and variations in the line frequency of plus or minus 2 percent with no degradation of performance.

#### 1.2.15 Power Line Surge Protection

Equipment connected to alternating current circuits shall be protected from power line surges. Equipment protection shall withstand surge test waveforms described in IEEE C62.41. Fuses shall not be used for surge protection.

#### 1.2.16 Sensor and Device Wiring and Communication Circuit Surge Protection

Inputs shall be protected against surges induced on device wiring. Outputs shall be protected against surges induced on control and device wiring installed outdoors and as shown. Communications equipment shall be protected against surges induced on any communications circuit. Cables and conductors, except fiber optics, which serve as communications circuits from console to field equipment, and between field equipment, shall have surge protection circuits installed at each end. Protection shall be furnished at

equipment, and additional triple electrode gas surge protectors rated for the application on each wireline circuit shall be installed within 3 feet of the building cable entrance. Fuses shall not be used for surge protection. The inputs and outputs shall be tested in both normal mode and common mode using the following two waveforms:

- a. A 10 microsecond rise time by 1000 microsecond pulse width waveform with a peak voltage of 1500 Volts and a peak current of 60 amperes.
- b. An 8 microsecond rise time by 20 microsecond pulse width waveform with a peak voltage of 1000 Volts and a peak current of 500 amperes.

#### 1.2.17 Power Line Conditioners

A power line conditioner shall be furnished for the console equipment and each local processor. The power line conditioners shall be of the ferro-resonant design, with no moving parts and no tap switching, while electrically isolating the secondary from the power line side. The power line conditioners shall be sized for 125 percent of the actual connected kVA load. Characteristics of the power line conditioners shall be as follows:

- a. At 85 percent load, the output voltage shall not deviate by more than plus or minus 1 percent of nominal when the input voltage fluctuates between minus 20 percent to plus 10 percent of nominal.
- b. During load changes of zero to full load, the output voltage shall not deviate by more than plus or minus 3 percent of nominal. Full correction of load switching disturbances shall be accomplished within 5 cycles, and 95 percent correction shall be accomplished within 2 cycles of the onset of the disturbance.
- c. Total harmonic distortion shall not exceed 3-1/2 percent at full load.

#### 1.2.18 System Reaction

##### 1.2.18.1 System Response

The field device network shall provide a system end-to-end response time of 4 second or less for every device connected to the system. Alarms shall be annunciated at the central station within 1 second of the alarm occurring at a local processor or device controlled by a local processor, and within 100 milliseconds if the alarm occurs at the central station. Alarm and status changes shall be displayed within 100 milliseconds after receipt of data by the central station. All graphics shall be displayed, including graphics generated map displays, on the console monitor within 5 seconds of alarm receipt at the security console. This response time shall be maintained during system heavy load.

##### 1.2.18.2 System Heavy Load Definition

For the purpose of system heavy load definition, the system shall consist of central station equipment, communication controller and required local processors. System heavy load conditions are defined as the occurrence of

alarms at the rate of 10 alarms per second distributed evenly among all local processors in the system. The alarm printer shall continue to print out all occurrences, including time of occurrence, to the nearest second.

#### 1.2.19 Environmental Conditions

##### 1.2.19.1 Interior, Controlled Environment

System components, except the console equipment installed in interior locations, having controlled environments shall be rated for continuous operation under ambient environmental conditions of 36 to 122 degrees F dry bulb and 20 to 90 percent relative humidity, non-condensing.

##### 1.2.19.2 Interior, Uncontrolled Environment

System components installed in interior locations having uncontrolled environments shall be rated for continuous operation under ambient environmental conditions of minus 0 to 122 degrees F dry bulb and 10 to 95 percent relative humidity, non-condensing.

#### 1.3 DELIVERY OF TECHNICAL DATA AND COMPUTER SOFTWARE

All items of computer software and technical data (including technical data which relates to computer software), which is specifically identified in this specification shall be delivered in accordance with the CONTRACT CLAUSES, SPECIAL CONTRACT REQUIREMENTS, and in accordance with the Contract Data Requirements List (CDRL), DD FORM 1423, which is attached to and thereby made a part of this contract. All data delivered shall be identified by reference to the particular specification paragraph against which it is furnished.

##### 1.3.1 Group I Technical Data Package

###### 1.3.1.1 System Drawings

The data package shall include the following:

- a. System block diagram.
- b. Console installation, block diagrams, and wiring diagrams.
- c. Local processor installation, typical block, and wiring diagrams.
- d. Local processor physical layout and schematics.
- e. Device wiring and installation drawings.
- f. Details of connections to power sources, including power supplies and grounding.
- g. Details of surge protection device installation.
- h. Sensor detection patterns.



- i. Details of interconnections with CCTV system.

#### 1.3.1.2 Manufacturer's Data

The data package shall include manufacturer's data for all materials and equipment, including terminal devices, local processors and central station equipment provided under this specification.

#### 1.3.1.3 System Description and Analyses

The data package shall include system descriptions, analyses, and calculations used in sizing equipment specified. Descriptions and calculations shall show how the equipment will operate as a system to meet the performance of this specification. The data package shall include the following:

- a. Central processor memory size.
- b. Communication speeds and protocol descriptions.
- c. Hard disk size and configuration.
- d. Floppy disk size and configuration.
- e. Alarm response time calculations.
- f. Command response time calculations.
- g. Start-up operations.
- h. Expansion capability and method of implementation.
- i. Sample copy of each report specified.
- j. Color photographs representative of typical graphics.
- k. System throughput calculation.

#### 1.3.1.4 Software Data

The software data package shall consist of descriptions of the operation and capability of system, and application software as specified.

#### 1.3.1.5 Overall System Reliability Calculations

The overall system reliability calculations data package shall include all manufacturer's reliability data and calculations required to show compliance with the specified reliability in accordance with paragraph, OVERALL SYSTEM RELIABILITY REQUIREMENTS.

#### 1.3.1.6 Certifications

Specified manufacturer's certifications shall be included with the data package certification.

#### 1.3.1.7 Key Control Plan

The Contractor shall provide a key control plan. The key control plan shall include the following:

- a. Procedures that will be used to log and positively control all keys during installation.
- b. A listing of all keys and where they are used.
- c. A listing of all persons allowed access to the keys.

#### 1.3.2 Group II Technical Data Package

The Contractor shall prepare a report of "Current Site Conditions" to the Government documenting changes to the site, or conditions that affect performance of the system to be installed. The Contractor shall provide specification sheets, or written functional requirements to support the findings, and a cost estimate to correct those site changes or conditions. The Contractor shall not correct any deficiency without written permission from the Government.

#### 1.3.3 Group III Technical Data Package

The Contractor shall prepare test procedures and reports for the pre-delivery test.

#### 1.3.4 Group IV Technical Data Package

The Contractor shall prepare test procedures and reports for the performance verification test and the endurance test. The Contractor shall deliver the performance verification test and endurance test procedures to the Government for approval.

##### 1.3.4.1 Operation and Maintenance Manuals

A draft copy of the operation and maintenance manuals, as specified for the Group V technical data package, shall be delivered to the Government prior to beginning the performance verification test for use during site testing.

##### 1.3.4.2 Training Documentation

Lesson plans and training manuals for the training phases, including type of training to be provided, and a list of reference material, shall be delivered for approval.

#### 1.3.4.3 Data Entry

The Contractor shall enter all data needed to make the system operational. The Contractor shall deliver the data to the Government on data entry forms, utilizing data from the contract documents, Contractor's field surveys, and other pertinent information in the Contractor's possession required for complete installation of the data base. The Contractor shall identify and request from the Government, any additional data needed to provide a complete and operational ESS. The completed forms shall be delivered to the Government for review and approval at least 30 days prior to the Contractor's scheduled need date.

#### 1.3.4.4 Graphics

Where graphics are required and are to be delivered with the system, the Contractor shall create and install the graphics needed to make the system operational. The Contractor shall utilize data from the contract documents, Contractor's field surveys, and other pertinent information in the Contractor's possession to complete the graphics. The Contractor shall identify and request from the Government, any additional data needed to provide a complete graphics package. Graphics shall have sufficient level of detail for the system operator to assess the alarm. The Contractor shall supply hard copy, color examples at least 8 x 10 inches in size, of each type of graphic to be used for the completed system. The graphics examples shall be delivered to the Government for review and approval at least 30 days prior to the Contractor's scheduled need date.

#### 1.3.5 Group V Technical Data Package

Final copies of the manuals as specified, bound in hardback, loose-leaf binders, shall be delivered to the Government within 30 days after completing the endurance test. The draft copy used during site testing shall be updated with any changes required prior to final delivery of the manuals. Each manual's contents shall be identified on the cover. The manual shall include names, addresses, and telephone numbers of each subcontractor installing equipment and systems, and nearest service representative for each item of equipment. The manuals shall have a table of contents and tab sheets. Tab sheets shall be placed at the beginning of each chapter or section and at the beginning of each appendix. The final copies delivered after completion of the endurance test shall include modifications made during installation, checkout, and acceptance. The number of copies of each manual to be delivered shall be as specified on DD FORM 1423.

##### 1.3.5.1 Functional Design Manual

The functional design manual shall identify the operational requirements for the system and explain the theory of operation, design philosophy, and specific functions. A description of hardware and software functions, interfaces, and requirements shall be included for all system operating modes.

#### 1.3.5.2 Hardware Manual

A manual describing all equipment furnished including:

- a. General description and specifications.
- b. Installation and checkout procedures.
- c. Equipment electrical schematics and layout drawings.
- d. System schematics and layout drawings.
- e. Alignment and calibration procedures.
- f. Manufacturer's repair parts list indicating sources of supply.
- g. Interface definition.

#### 1.3.5.3 Software Manual

The software manual shall describe the functions of all software and shall include all other information necessary to enable proper loading, testing, and operation. The manual shall include:

- a. Definition of terms and functions.
- b. Use of system and applications software.
- c. Procedures for system initialization, start-up and shutdown.
- d. Alarm reports.
- e. Reports generation.
- f. Data base format and data entry requirements.
- g. Directory of all disk files.
- h. Description of all communication protocols, including data formats, command characters, and a sample of each type of data transfer.

#### 1.3.5.4 Operator's Manual

The operator's manual shall fully explain all procedures and instructions for the operation of the system, including:

- a. Computers and peripherals.
- b. System start-up and shutdown procedures.
- c. Use of system, and applications software.
- d. Recovery and restart procedures.

- e. Graphic alarm presentation.
- f. Use of report generator and generation of reports.
- g. Data entry.
- h. Operator commands.
- i. Alarm and system messages and printing formats.
- j. System entry requirements.

#### 1.3.5.5 Maintenance Manual

The maintenance manual shall include descriptions of maintenance for all equipment including inspection, periodic preventive maintenance, fault diagnosis, and repair or replacement of defective components.

#### 1.3.5.6 Final System Drawings

The Contractor shall maintain a separate set of drawings, elementary diagrams and wiring diagrams of the system to be used for final system drawings. This set shall be accurately kept up-to-date by the Contractor with all changes and additions to the ESS and shall be delivered to the Government with the final endurance test report. In addition to being complete and accurate, this set of drawings shall be kept neat and shall not be used for installation purposes. Final drawings submitted with the endurance test report shall be finished drawings on vellum and CD-ROM.

### 1.4 TESTING

#### 1.4.1 General

The Contractor shall perform pre-delivery testing, site testing, and adjustment of the completed ESS. The Contractor shall provide personnel, equipment, instrumentation, and supplies necessary to perform testing. Written notification of planned testing shall be given to the Government at least 14 days prior to the test; notice shall not be given until after the Contractor has received written approval of the specific test procedures.

#### 1.4.2 Test Procedures and Reports

Test procedures shall explain in detail, step-by-step actions and expected results, demonstrating compliance with the requirements specified. Test reports shall be used to document results of the tests. Reports shall be delivered to the Government within 7 days after completion of each test.

### 1.5 TRAINING

#### 1.5.1 General

The Contractor shall conduct training courses for designated personnel in the maintenance and operation of the system as specified. The training shall be oriented to the specific system being installed. Training manuals shall be delivered for each trainee with 2 additional copies delivered for

archiving at the project site. The manuals shall include an agenda, defined objectives for each lesson, and a detailed description of the subject matter for each lesson. The Contractor shall furnish audio-visual equipment and other training materials and supplies. Where the Contractor presents portions of the course by audio-visual material, copies of the audio-visual material shall be delivered to the Government either as a part of the printed training manuals or on the same media as that used during the training sessions. A training day is defined as 8 hours of classroom instruction, including 2 15-minute breaks and excluding lunchtime, Monday through Friday, during the daytime shift in effect at the training facility. For guidance in planning the required instruction, the Contractor shall assume that attendees will have a high school education or equivalent, and are familiar with ESS. Approval of the planned training schedule shall be obtained from the Government at least 30 days prior to the training.

#### 1.5.2 Operator's Training I

The first course shall be taught at the project site for a period of 5 consecutive training days at least 3 months prior to the scheduled performance verification test. A maximum of 12 personnel shall attend this course. Upon completion of this course, each student, using appropriate documentation, shall be able to perform elementary operations with guidance and describe the general hardware architecture and functionality of the system. This course shall include:

- a. General System hardware architecture.
- b. Functional operation of the system.
- c. Operator commands.
- d. Data base entry.
- e. Reports generation.
- f. Alarm reporting.
- g. Diagnostics.

#### 1.5.3 Operator's Training II

The second course shall be taught at the project site for a period of 5 consecutive training days during or after the Contractor's field testing, but before commencing the performance verification test. A maximum of 12 personnel shall attend the course. No part of the training given during this course will be counted toward completion of the performance verification test. The course shall include instruction on the specific hardware configuration of the installed system and specific instructions for operating the installed system. Upon completion of this course, each student shall be able to start the system, operate the system, recover the system after a failure, and describe the specific hardware architecture and operation of the system.

#### 1.5.4 Operator's Training III

The third course shall be taught while the endurance test is in progress for a total of 16 hours of instruction per student, in time blocks of 4 hours. A maximum of 12 personnel shall attend the course. The schedule of instruction shall allow for each student to receive individual instruction for a 4-hour period in the morning (or afternoon) of the same weekday. The Contractor shall schedule his activities during this period so that the specified amount of time will be available during the endurance test for instructing the students. The course shall consist of hands-on training under the constant monitoring of the instructor. The instructor shall be responsible for determining the appropriate password to be issued to the student commensurate with each student's acquired skills at the beginning of each of these individual training sessions. Upon completion of this course, the students shall be fully proficient in the operation of the system.

#### 1.5.5 System Manager Training

3 system managers shall be trained for at least 3 consecutive days. The system manager training shall consist of the operator's training and the following:

- a. Enrollment/disenrollment.
- b. Assignments of identifier data.
- c. Assign operator password/levels.
- d. Change database configuration.
- e. Modify graphics.
- f. Print special or custom reports.
- g. System backup.
- h. Any other functions necessary to manage the system.

#### 1.5.6 Maintenance Personnel Training

The system maintenance course shall be taught at the project site after completion of the endurance test for a period of 5 training days. A maximum of 5 personnel, designated by the Government, will attend the course. The training shall include:

- a. Physical layout of each piece of hardware.
- b. Troubleshooting and diagnostics procedures.
- c. Repair instructions.
- d. Preventive maintenance procedures and schedules.

- e. Calibration procedures. Upon completion of this course, the students shall be fully proficient in the maintenance of the system.

## 1.6 LINE SUPERVISION

### 1.6.1 Signal and Data Transmission System (DTS) Line Supervision

All signal and DTS lines shall be supervised by the system. The system shall supervise the signal lines by monitoring the circuit for changes or disturbances in the signal, and for conditions as described in UL 1076 for line security equipment. The system shall initiate an alarm in response to a current change of [5] [10] percent or greater. The system shall also initiate an alarm in response to opening, closing, shorting, or grounding of the signal and DTS lines.

### 1.6.2 Data Encryption

The system shall incorporate data encryption equipment on data transmission circuits as shown. The algorithm used for encryption shall be the Data Encryption Standard (DES) algorithm described in ANSI X3.92.

## 1.7 DATA TRANSMISSION SYSTEM

The Contractor shall provide DTS as specified in Section 13851 and as shown.

## 1.8 MAINTENANCE AND SERVICE

### 1.8.1 Warranty Period

The Contractor shall provide services required and equipment necessary to maintain the entire system in an operational state as specified, for a period of 1 year after formal written acceptance of the system, and shall provide necessary material required for performing scheduled adjustments or other nonscheduled work.

### 1.8.2 Description of Work

The adjustment and repair of the system includes all computer equipment, software updates, communications transmission equipment and DTS, local processors, sensors and entry control, facility interface, and support equipment. Responsibility shall be limited to Contractor installed equipment. The manufacturer's required adjustments and other work as necessary shall be provided.

### 1.8.3 Personnel

Service personnel shall be certified in the maintenance and repair of similar types of equipment and qualified to accomplish work promptly and satisfactorily. The Government shall be advised in writing of the name of the designated service representative, and of any change in personnel.



#### 1.8.4 Schedule of Work

The Contractor shall perform 2 minor inspections at 6 month intervals (or more often if required by the manufacturer), and 2 major inspections offset equally between the minor inspections to effect quarterly inspection of alternating magnitude.

##### 1.8.4.1 Minor Inspections

Minor inspections shall include visual checks and operational tests of console equipment, peripheral equipment, local processors, sensors, and electrical and mechanical controls. Minor inspections shall also include mechanical adjustments, new ribbons, and other necessary adjustments on printers.

##### 1.8.4.2 Major Inspections

Major inspections shall include work described under paragraph Minor Inspections and the following work:

- a. Clean all system equipment and local processors, including interior and exterior surfaces.
- b. Perform diagnostics on all equipment.
- c. Check, walk test, and calibrate each sensor.
- d. Run all system software diagnostics and correct all diagnosed problems.
- e. Resolve any previous outstanding problems.
- f. Purge and compress data bases.

##### 1.8.4.3 Scheduled Work

Scheduled work shall be performed during regular working hours, Monday through Friday, excluding federal holidays.

##### 1.8.5 Emergency Service

The Government will initiate service calls when the system is not functioning properly. Qualified personnel shall be available to provide service to the complete system. The Government shall be furnished with a telephone number where the service supervisor can be reached at all times. Service personnel shall be at site within 2 hours after receiving a request for service. The system shall be restored to proper operating condition within 8 hours after service personnel arrive onsite.

##### 1.8.6 Operation

Performance of scheduled adjustments and repair shall verify operation of the system as demonstrated by the applicable tests of the performance verification test.

#### 1.8.7 Records and Logs

The Contractor shall keep records and logs of each task, and shall organize cumulative records for each component, and for the complete system chronologically. A continuous log shall be maintained for all devices. The log shall contain all initial settings. Complete logs shall be kept and shall be available for inspection on site, demonstrating that planned and systematic adjustments and repairs have been accomplished for the system.

#### 1.8.8 Work Requests

The Contractor shall separately record each service call request, as received. The form shall include the serial number identifying the component involved, its location, date and time the call was received, specific nature of trouble, names of service personnel assigned to the task, instructions describing what has to be done, the amount and nature of the material to be used, the time and date work started, and the time and date of completion. The Contractor shall deliver a record of the work performed within 5 days after work is accomplished.

#### 1.8.9 System Modifications

The Contractor shall make any recommendations for system modification in writing to the Government. System modifications shall not be made without prior approval of the Government. Any modifications made to the system shall be incorporated into the operation and maintenance manuals, and other documentation affected.

#### 1.8.10 Software

The Contractor shall provide a description of all software updates to the Government, who will then decide whether or not they are appropriate for implementation. After notification by the Government, the Contractor shall implement the designated software updates and verify operation in the system. These updates shall be accomplished in a timely manner, fully coordinated with system operators, and shall be incorporated into the operation and maintenance manuals, and software documentation. There shall be at least 1 scheduled update near the end of the first year's warranty period, at which time the Contractor shall install and validate the latest released version of the Contractor's software.

### PART 2 PRODUCTS

#### 2.1 MATERIALS REQUIREMENTS

##### 2.1.1 Materials and Equipment

Units of the same type of equipment shall be products of a single manufacturer. All material and equipment shall be new and currently in production. Each major component of equipment shall have the manufacturer's model and serial number in a conspicuous place. System equipment shall conform to UL 294 and UL 1076.

## 2.1.2 Field Enclosures

### 2.1.2.1 Interior Sensor

Sensors to be used in an interior environment shall be housed in an enclosure that provides protection against dust, falling dirt, and dripping noncorrosive liquids.

### 2.1.2.2 Interior Electronics

System electronics to be used in an interior environment shall be housed in enclosures which meet the requirements of NEMA 250 Type 12.

### 2.1.3 Nameplates

Laminated plastic nameplates shall be provided for local processors. Each nameplate shall identify the local processor and its locations within the system. Laminated plastic shall be 1/8 inch thick, white black center core. Nameplates shall be a minimum of 1 x 3 inches, with minimum 1/4 inch high engraved block lettering. Nameplates shall be attached to components of the system shall have the manufacture's name, address, type or style, model or serial number, and catalog number on a corrosion resistant plate secured to the item of equipment. Nameplates will not be required for devices smaller than 1 x 3 inches.

### 2.1.4 Tamper Provisions

#### 2.1.4.1 Tamper Switches

Enclosures, cabinets, housings, boxes, and fittings having hinged doors or removable covers and which contain circuits or connections of the system and its power supplies, shall be provided with cover operated, corrosion-resistant tamper switches, arranged to initiate an alarm signal when the door or cover is moved. The enclosure and the tamper switch shall function together and shall not allow direct line of sight to any internal components before the switch activates. Tamper switches shall be inaccessible until the switch is activated; have mounting hardware concealed so that the location of the switch cannot be observed from the exterior of the enclosure; be connected to circuits which are under electrical supervision at all times, irrespective of the protection mode in which the circuit is operating; shall be spring-loaded and held in the closed position by the door or cover; and shall be wired so that they break the circuit when the door or cover is disturbed.

a. Nonsensor Enclosures: Tamper switches on nonsensor enclosures which must be opened to make routine maintenance adjustments to the system and to service the power supplies shall be push/pull-set, automatic reset type.

b. Sensor Enclosures: Tamper switches on sensor enclosures which must be opened to make routine maintenance adjustments to the sensor shall be provided.

#### 2.1.4.2 Enclosure Covers

Covers of pull and junction boxes provided to facilitate initial installation of the system need not be provided with tamper switches if they contain no splices or connections, but shall be protected by tack welding or brazing the covers in place or by tamper resistant security fasteners. Labels shall be affixed to such boxes indicating they contain no connections.

#### 2.1.5 Locks and Key-Lock Switches

##### 2.1.5.1 Locks

Locks shall be provided on system enclosures for maintenance purposes. Locks shall be UL listed, [round-key type with 3 dual, 1 mushroom, 3 plain pin tumblers] [or] [conventional key type lock having a combination of 5 cylinder pin and 5-point 3 position side bar]. Keys shall be stamped "U.S. GOVT. DO NOT DUP." The locks shall be arranged so that the key can only be withdrawn when in the locked position. Maintenance locks shall be keyed alike and only 2 keys shall be furnished for all of these locks. These keys shall be controlled in accordance with the key control plan as specified in paragraph Key Control Plan.

##### 2.1.5.2 Key-Lock-Operated Switches

Key-lock-operated switches required to be installed on system components shall be UL listed, [round-key type, with 3 dual, 1 mushroom, and 3 plain pin tumblers] [or] [conventional key type lock having a combination of 5 cylinder pin and 5-point 3 position side bar]. Keys shall be stamped "U.S. GOVT. DO NOT DUP." Key-lock-operated switches shall be 2 position, with the key removable in either position. All key-lock-operated switches shall be keyed differently and only 2 keys shall be furnished for each key-lock-operated-switch. These keys shall be controlled in accordance with the key control plan as specified in paragraph Key Control Plan.

##### 2.1.5.3 Construction Locks

If the Contractor requires locks during installation and construction, a set of temporary locks shall be used. The final set of locks installed and delivered to the Government shall not include any of the temporary locks.

#### 2.1.6 System Components

System components shall be designed for continuous operation. Electronic components shall be solid state type, mounted on printed circuit boards conforming to UL 796. Printed circuit board connectors shall be plug-in, quick-disconnect type. Power dissipating components shall incorporate safety margins of not less than 25 percent with respect to dissipation ratings, maximum voltages, and current carrying capacity. Control relays and similar switching devices shall be solid state type or sealed electro-mechanical.

#### 2.1.6.1 Modularity

Equipment shall be designed for increase of system capability by installation of modular components. System components shall be designed to facilitate maintenance through replacement of modular subassemblies and parts.

#### 2.1.6.2 Maintainability

Components shall be designed to be maintained using commercially available tools and equipment. Components shall be arranged and assembled so they are accessible to maintenance personnel. There shall be no degradation in tamper protection, structural integrity, EMI/RFI attenuation, or line supervision after maintenance when it is performed in accordance with manufacturer's instructions. The system shall be configured and installed to yield a mean time to repair (MTTR) of not more than 8 hours. Repair time is the clock time from when maintenance personnel gain entrance to the system and begin work, until the system is fully functional.

#### 2.1.6.3 Interchangeability

The system shall be constructed with off-the-shelf components which are physically, electrically and functionally interchangeable with equivalent components as complete items. Replacement of equivalent components shall not require modification of either the new component or of other components with which the replacement items are used. Custom designed or one-of-a-kind items shall not be used. Interchangeable components or modules shall not require trial and error matching in order to meet integrated system requirements, system accuracy, or restore complete system functionality.

#### 2.1.6.4 Product Safety

System components shall conform to applicable rules and requirements of NFPA 70 and UL 294. System components shall be equipped with instruction plates including warnings and cautions describing physical safety, and special or important procedures to be followed in operating and servicing system equipment.

#### 2.1.7 Controls and Designations

Controls and designations shall be as specified in NEMA ICS 1.

#### 2.1.8 Special Test Equipment

The Contractor shall provide all special test equipment, special hardware, software, tools, and programming or initialization equipment needed to start or maintain any part of the system and its components. Special test equipment is defined as any test equipment not normally used in an electronics maintenance facility.

#### 2.1.9 Alarm Output

The alarm output of each sensor shall be a single pole double throw (SPDT) contact rated for a minimum of 0.25 A at 24 Volts dc.

## 2.2 CENTRAL STATION HARDWARE

The central station computer shall be a standard unmodified digital computer of modular design. The CPU word size shall be 64 bits or larger. The operating speed of the processor shall be at least 150 MHZ.

### 2.2.1 Memory

The computer shall contain at least 32 megabytes of usable installed memory, expandable to a minimum of 256 megabytes without additional chassis or power supplies.

### 2.2.2 Power Supply

The power supply shall have a minimum capacity of 250 Watts.

### 2.2.3 Real Time Clock (RTC)

A RTC shall be provided. Accuracy shall be within plus or minus 1 minute per month. The RTC shall maintain time in a 24-hour format including seconds, minutes, hours, date, and month and shall be resettable by software. The clock shall continue to function for a period of 1 year without power.

### 2.2.4 Serial Ports

a. Two EIA ANSI/EIA/TIA-232-F serial ports shall be provided for general use.

b. Adjustable data transmission rates from 9600 to 57.6 Kbps shall be selectable under program control.

c. Sixteen additional EIA ANSI/EIA/TIA-232-F serial ports shall be provided as part of a communications coprocessor. The coprocessor word size shall be 32 bytes or larger and the operating speed of the coprocessor shall be at least 66 MHZ. Communications with the field equipment shall be managed by this device. Multiplexed serial ports shall be expandable to 48 ports with 8 character transmit and receive buffers to each port. Total buffer size shall be a minimum of 1 megabyte.

### 2.2.5 Parallel Port

An enhanced parallel port shall be provided.

### 2.2.6 Color Monitor

The monitor shall be no less than 17 inches, with a minimum resolution of 1280 by 1024 pixels, noninterlaced, and a maximum dot pitch of 0.28 millimeters. The video card shall support at least 256 colors at a resolution of 1280 by 1024 at a minimum refresh rate of 70 Hz.

#### 2.2.7 Keyboard A101

A keyboard having a minimum 64 character, standard ASCII character, based on ANSI X3.154 shall be furnished.

#### 2.2.8 Enhancement Hardware

Enhancement hardware such as special function keyboards, special function keys, touch screen devices, or mouse shall be provided for frequently used operator commands such as: Help, Alarm Acknowledge, Place Zone In Access, Place Zone In Secure, System Test, Print Reports, Change Operator, Security Lighting Controls, and Display Graphics.

#### 2.2.9 Disk Storage

A hard disk with controller having a maximum average access time of 10 milliseconds shall be provided. The hard disk shall provide a minimum of 2.0 gigabytes of formatted storage. Additionally, a PCMCIA slot with a removable 500 megabyte hard drive shall be provided.

#### 2.2.10 Floppy Disk Drives

A high density floppy disk drive and controller in 3-1/2 inch size shall be provided.

#### 2.2.11 Magnetic Tape System

A 4 mm cartridge magnetic tape system shall be provided. The system capacity shall be 8.0 gigabytes minimum per tape. Each tape shall be computer grade, in a rigid cartridge with spring-loaded cover and write-protect.

#### 2.2.12 Modem

A modem shall be provided and operate at 28,800 bps, full duplex on circuits using asynchronous communications. Modem shall have error detection, auto answer/autodial, and call-in-progress detection. The modem shall meet the requirements of ITU V.34, ITU V.42 for error correction and ITU V.42 for data compression standards, and shall be suitable for operating on unconditioned voice grade telephone lines in conformance with 47 CFR 68.

#### 2.2.13 Audible Alarm

The manufacturer's standard audible alarm shall be provided.

#### 2.2.14 Mouse

A mouse with a minimum resolution of 400 dots per inch shall be provided.

#### 2.2.15 CD-ROM Drive

A CD-ROM drive having a nominal storage capacity of 650 megabytes shall be provided. The CD-ROM drive shall have the following minimum characteristics:

- a. Data Transfer Rate: 1.2 Mbps.
- b. Average Access Time: 150 milliseconds.
- c. Cache memory: 256 Kbytes.
- d. Data throughput: 1 Mbyte/second, minimum.

#### 2.2.16 Dot Matrix Alarm Printer

A dot matrix alarm printer shall be provided and interconnected to the central station equipment. The dot matrix alarm printer shall have a minimum 96 character, standard ASCII character set, based on ANSI X3.154 and with graphics capability. The printer shall be able to print in both red and black without ribbon change. The printers shall have adjustable sprockets for paper width up to 11 inches, print at least 80 columns per line and have a minimum speed of 200 characters per second. Character spacing shall be selectable at 10, 12 or 17 characters per inch. The printers shall utilize sprocket-fed fan fold paper. The units shall have programmable control of top-of-form. Twenty-five thousand sheets of printer paper and 12 ribbons shall be provided after successful completion of the endurance test.

#### 2.2.17 Report Printer

A report printer shall be provided and interconnected to the central station equipment. The printer shall be a laser printer with printer resolution of at least 600 dots per inch. The printer shall have at least 2 megabytes of RAM. Printing speed shall be at least 8 pages per minute with a 100 sheet paper cassette and with automatic feed. Two thousand sheets of paper and 5 toner cartridges shall be furnished after successful completion of the endurance test.

#### 2.2.18 Controllers

Controllers required for operation of specified peripherals, serial, and parallel ports shall be provided.

### 2.3 INTERIOR SENSORS AND CONTROL DEVICES

#### 2.3.1 Balanced Magnetic Switch (BMS)

The BMS shall detect a 1/4 inch of separating relative movement between the magnet and the switch housing. Upon detecting such movement, the BMS shall transmit an alarm signal to the alarm annunciation system.

##### 2.3.1.1 BMS Subassemblies

The BMS shall consist of a switch assembly and an actuating magnet assembly. The switch mechanism shall be of the balanced magnetic type. Each switch shall be provided with an overcurrent protective device, rated to limit current to 80 percent of the switch capacity. Switches shall be rated for a minimum lifetime of 1,000,000 operations. The magnet assembly shall house the actuating magnet.



#### 2.3.1.2 Housing

The housings of surface mounted switches and magnets shall be made of nonferrous metal and shall be weatherproof. The housings of recess mounted switches and magnets shall be made of nonferrous metal or plastic.

#### 2.3.1.3 Remote Test

A remote test capability shall be provided. The remote test shall be initiated when commanded by the alarm annunciation system. The remote test shall activate the sensor's switch mechanism causing an alarm signal to be transmitted to the alarm annunciation system. The remote test shall simulate the movement of the actuating magnet relative to the switch subassembly.

#### 2.3.1.4 Vertical File Sensor Switch

The Vertical file sensor switch shall be surface mount type with self adhesive tape similar to the Sentrol 1035 Series.

#### 2.3.2 Ultrasonic Motion Sensor

The ultrasonic motion sensor shall detect Doppler shifts in an ultrasonic signal. An alarm signal shall be transmitted to the alarm annunciation system upon detecting such Doppler shifts. The sensor shall detect a standard intruder moving within the sensor's detection pattern at a speed of 0.3 to 7.5 feet per second. The ultrasonic signal shall be in the 25 to 33 KHz range. The sensor's coverage pattern shall be as shown. The sensitivity of the sensor shall be adjustable by controls within the sensor. The controls shall not be accessible when the sensor housing is in place. The sensor shall be adjustable to obtain the coverage shown.

##### 2.3.2.1 Test Indicator, Ultrasonic System

The ultrasonic motion sensor shall be equipped with an LED walk test indicator. The walk test indicator shall not be visible during normal operations. When visible, the walk test indicator shall light when the sensor detects an intruder. The sensor shall either be equipped with a manual control, located within the sensor's housing, to enable/disable the test indicator or the test indicator shall be located within the sensor housing so that it can only be seen when the housing is open or removed.

##### 2.3.2.2 Remote Test, Ultrasonic System

A remote test capability shall be provided. The remote test hardware may be integral to the sensor or a separate piece of equipment. The remote test shall be initiated when commanded by the alarm annunciation system. The remote test shall excite the sensing element and associated electronics causing an alarm signal to be transmitted to the alarm annunciation system. The sensor stimulation generated by the remote test hardware shall simulate a standard intruder moving within the sensor's detection pattern.

## 2.4 ENTRY CONTROL DEVICES

### 2.4.1 Keypads

Entry control keypads shall use a unique combination of alphanumeric and other symbols as an identifier. Keypads shall contain an integral alphanumeric/special symbols keyboard with symbols arranged in [ascending ASCII code ordinal sequence] [random scrambled order]. Communications protocol shall be compatible with the local processor.

#### 2.4.1.1 Keypad Display

Keypads shall include an LED or other type of visual indicator display and provide [visual] [visual and audible] status indications and user prompts. The display shall indicate power on/off, and whether user passage requests have been accepted or rejected. The design of the keypad display or keypad enclosure shall limit the maximum horizontal and vertical viewing angles of the keypad. The maximum horizontal viewing angle shall be plus and minus 5 degrees or less off a vertical plane perpendicular to the plane of the face of the keypad display. The maximum vertical viewing angle shall be plus and minus 15 degrees or less off a horizontal plane perpendicular to the plane of the face of the keypad display.

#### 2.4.1.2 Keypad Response Time

The keypad shall respond to passage requests by generating a signal to the local processor. The response time shall be 800 milliseconds or less from the time the last alphanumeric symbol is entered until a response signal is generated.

#### 2.4.1.3 Keypad Power

The keypad shall be powered from the source as shown and shall not dissipate more than 150 Watts.

#### 2.4.1.4 Keypad Mounting Method

Keypads shall be suitable for surface, semi-flush, pedestal, or weatherproof mounting as required.

#### 2.4.1.5 Keypad Duress Codes

Keypads shall provide a means for users to indicate a duress situation by entering a special code.

## 2.4.2 Portal Control Devices

### 2.4.2.1 Electromagnetic Lock

Electromagnetic locks shall contain no moving parts and shall depend solely upon electromagnetism to secure a portal by generating at least 1200 pounds of holding force. The electromagnetic lock shall release automatically in case of power failure and shall require manual reset to resume normal function. The lock shall interface with the local processors without external, internal or functional alteration of the local processor. The

electromagnetic lock shall incorporate an end of line resistor to facilitate line supervision by the system.

a. Armature: The electromagnetic lock shall contain internal circuitry to eliminate residual magnetism and inductive kickback. The actuating armature shall operate on 12 or 24 Volts dc and shall not dissipate more than 12 Watts. The holding current shall be not greater than 500 milliamperes. The actuating armature shall take not more than 300 milliseconds to change the status of the lock from fully secure to fully open or fully open to fully secure.

b. Tamper Resistance: The electromagnetic lock mechanism shall be encased in hardened guard barriers to deter forced entry.

c. Mounting Method: The door electromagnetic lock shall be suitable for use with single and double door with mortise or rim type hardware as shown, and shall be compatible with right or left hand mounting.

#### 2.4.2.2 Entry Booth

Entry booths shall be constructed as an integral part of the physical structure of the boundary for the area or facility to which entry is being controlled. In case of power failure, the entry booth shall automatically lock the high security side door's electric strike or other facility interface release device and shall automatically open the low security side door's electric strike or other facility interface release device. Entry booths shall be designed and configured for direct connection to the central station and shall include a local processor. The entry booth local processor subsystem shall support paired card readers on a single entry booth for anti-passback functions.

a. Local Alarm Annunciation: The entry booth local processor subsystem shall provide local alarm annunciation for all system equipment located within the entry booth itself and its associated portals/zones and terminal devices. The entry booth local processor subsystem shall provide a means to enable and disable this feature from the central station under operator control.

b. Terminal and Facility Interface Device Support: The entry booth local processor subsystem shall support the full range of system terminal and facility interface devices as specified.

c. Response Times: The entry booth local processor subsystem shall respond to a central station interrogation within 100 milliseconds. The entry booth local processor shall respond to valid passage requests from its associated terminal devices by generating a signal to the appropriate electric strike or other type of facility interface within 100 milliseconds after verification.

d. Autonomous Local Control: In the event of a communication loss, the entry booth local processor subsystem shall automatically convert to autonomous local control and monitoring of its associated card readers, keypads, electric door strikes, and other terminal devices or facility interface devices and shall automatically revert to central control upon restoration of communications. Entry control transactions occurring during

the communications outage shall be recorded and retained in local memory and reported to the central data base files upon restoration of communications. The entry booth shall begin the report to the central station's database within 10 seconds after communications have been restored.

e. Entry Booth Local Processor Subsystem Capacities: As a minimum, the entry booth local processor subsystem shall have sufficient capacity to control and monitor a combination of 6 electric door strikes, card readers, keypads, or other entry control terminal and facility interface devices. The entry booth local processor subsystem shall provide capacity to store a subset of the entry control reference file database sufficient to support the enrollees requiring entry through each booth, and including personal, entry authorization, and identifier data for each enrollee as needed to support passage requests. The local processor subsystem shall make identification decisions and control portals so that all entry control functions are done at the local panel. The entry booth local processor subsystem shall provide a local transaction history file with capacity to store at least 1,000 entry control transactions without losing any data.

f. Diagnostics: The entry booth local processor subsystem shall incorporate built-in diagnostics implemented in software/firmware, hardware or both. Each time the entry booth local processor subsystem is started up or re-booted it shall automatically execute a series of built-in tests and report equipment malfunctions, configuration errors, and inaccuracies to the central station. The system shall annunciate a fail-safe alarm if the local processor fails the built-in diagnostics. Diagnostic aids shall be provided within the entry booth local processor subsystem to aid in system set-up, maintenance, and troubleshooting.

g. Memory Type and Size: The design of the memory into which enrollee entered data is stored shall ensure storage of entered data for a minimum of 1 year in the absence of power from sources external to the entry booth.

h. Tamper Protection: The local processor subsystem shall monitor all service entry panels for tamper. Tamper lines shall not be accessible except through tamper protected entry panels. Entry panels shall have key locks. The booth shall have the capability to be taken off-line for service.

i. Entry Booth Configuration: Entry booths shall be closed-in structures suitable for occupancy by 1 person and shall incorporate: a personnel passage area, equipment bay, a low security entry/exit door and a high security entry/exit door. Entry booths shall be configured with paired card readers keypads, 1 each, on the high security entry/exit door and low security entry/exit door; a key release switch outside the low security door; a glass break type emergency release switch. Both doors to the entry booth shall be normally secured.

j. Entry Booth Operation: The entry booth shall be designed to allow passage requests to be initiated from only 1 door at a time. The person shall enter the booth by presenting valid credential card to the card reader or keypad identification code data to the keypad device. An unsuccessful attempt to enter the booth shall generate an entry denial alarm. The booth shall incorporate a personal identity verification device as specified, and the person shall be granted egress from the booth after successful personal

identity verification. If the person fails the personal identity verification test, the entry booth shall confine the person and generate an entry control alarm. The local processor subsystem shall compare all data presented to the entry booth terminal devices with its local reference database file contents, and grant the person's passage request if all data is valid. If a tamper alarm is generated by any of the equipment associated with the subject entry booth while a person is inside, the person shall be confined. Operating the glass break type emergency release switch shall command the entry door electric strike or other type of facility interface release to the fully open position, or with a delay after the egress door has been confirmed secured. Once inside the entry booth and prior to initiation of the personal identity verification test, the person may exit through the door used for entry.

k. Display Type: Entry booths shall include an LED or other type of visual indicator display and provide visual status indications and person prompts. The display shall indicate power on/off, and whether enrollee passage requests have been accepted or rejected. There shall be 3 status lights outside each door. They shall indicate entry booth status by marking the green light as READY; the amber light as BUSY; and the red light as INOPERATIVE.

## 2.5 WIRE AND CABLE

The Contractor shall provide all wire and cable not indicated as Government furnished equipment. Wiring shall meet NFPA 70 standards.

### 2.5.1 Above Ground Sensor Wiring

Sensor wiring shall be 20 AWG minimum, twisted and shielded, 2, 3, 4, or 6 pairs to match hardware. Multiconductor wire shall have an outer jacket of PVC.

### 2.5.2 Direct Burial Sensor Wiring

Sensor wiring shall be 20 AWG minimum, twisted and shielded, 2, 3, 4, or 6 pairs to match hardware. The construction of the direct burial cable shall be as specified in Section 16792 WIRELINE DATA TRANSMISSION SYSTEM.

### 2.5.3 Local Area Network (LAN) Cabling

LAN cabling shall be in accordance with EIA ANSI/TIA/EIA-568-A, category 5.

## PART 3 EXECUTION

### 3.1 GENERAL REQUIREMENTS

The Contractor shall install all system components, including Government furnished equipment, and appurtenances in accordance with the manufacturer's instructions, IEEE C2 and as shown. The contractor shall furnish necessary interconnections, services, and adjustments required for a complete and operable system as specified and shown. Control signal, communications, and data transmission line grounding shall be installed as necessary to preclude ground loops, noise, and surges from adversely affecting system operation.

### 3.1.1 Installation

The contractor shall install the system in accordance with the standards for safety, NFPA 70, UL 681, UL 1037 and UL 1076, and the appropriate installation manual for each equipment type. Components within the system shall be configured with appropriate service points to pinpoint system trouble in less than 20 minutes. Minimum size of conduit shall be 1/2 inch. DTS shall not be pulled into conduits or placed in raceways, compartments, outlet boxes, junction boxes, or similar fittings with other building wiring. Flexible cords or cord connections shall not be used to supply power to any components of the system, except where specifically noted. All other electrical work shall be as specified in Section 16415 and as shown.

### 3.1.2 Enclosure Penetrations

Enclosure penetrations shall be from the bottom unless the system design requires penetrations from other directions. Penetrations of interior enclosures involving transitions of conduit from interior to exterior, and penetrations on exterior enclosures shall be sealed with rubber silicone sealant to preclude the entry of water. The conduit riser shall terminate in a hot-dipped galvanized metal cable terminator. The terminator shall be filled with an approved sealant as recommended by the cable manufacturer, and in a manner that does not damage the cable.

### 3.1.3 Cold Galvanizing

Field welds and/or brazing on factory galvanized boxes, enclosures, conduits, etc., shall be coated with a cold galvanized paint containing at least 95 percent zinc by weight.

### 3.1.4 Current Site Conditions

The Contractor shall verify that site conditions are in agreement with the design package. The Contractor shall report any changes in the site, or conditions that will affect performance of the system to the Government in a report as defined in paragraph Group II Technical Data Package. The Contractor shall not take any corrective action without written permission from the Government.

### 3.1.5 Installation Software

The Contractor shall load software as specified and required for an operational system, including data bases and specified programs. Upon successful completion of the endurance test, the Contractor shall provide original and backup copies on CD-ROM of all accepted software, including diagnostics.

### 3.2 SYSTEM STARTUP

Satisfaction of the requirements below does not relieve the Contractor of responsibility for incorrect installations, defective equipment items, or collateral damage as a result of Contractor work/equipment. The Contractor shall not apply power to the system until after:

a. System equipment items and DTS have been set up in accordance with manufacturer's instructions.

b. A visual inspection of the system has been conducted to ensure that defective equipment items have not been installed and that there are no loose connections.

c. System wiring has been tested and verified as correctly connected.

d. System grounding and transient protection systems have been verified as properly installed.

e. Power supplies to be connected to the system have been verified as the correct voltage, phasing, and frequency.

### 3.3 SUPPLEMENTAL CONTRACTOR QUALITY CONTROL

### 3.4 TESTING

#### 3.4.1 General Requirements for Testing

The Contractor shall provide personnel, equipment, instrumentation, and supplies necessary to perform site testing. The Government will witness all performance verification and endurance testing. Written permission shall be obtained from the Government before proceeding with the next phase of testing. Original copies of all data produced during predelivery, performance verification and endurance testing, shall be turned over to the Government at the conclusion of each phase of testing, prior to Government approval of the test.

#### 3.4.2 Predelivery Testing

The Contractor shall assemble the test system as specified, and perform tests to demonstrate that performance of the system complies with specified requirements in accordance with the approved predelivery test procedures. The tests shall take place during regular daytime working hours on weekdays. Model numbers of equipment tested shall be identical to those to be delivered to the site. Original copies of all data produced during predelivery testing, including results of each test procedure, shall be delivered to the Government at the conclusion of predelivery testing, prior to Government approval of the test. The test report shall be arranged so that all commands, stimuli, and responses are correlated to allow logical interpretation.

### 3.4.3 Test Setup

The predelivery test setup shall include the following:

- a. All central station equipment.
- b. At least 1 of each type DTS link, but not less than 2 links, and associated equipment to provide a fully integrated system.
- c. The number of local processors shall equal the amount required by the site design.
- d. At least 1 of each type sensor used.
- e. Enough sensor simulators to provide alarm signal inputs to the system equal to the number of sensors required by the design. The alarm signals shall be manually or software generated.
- f. At least 1 of each type of terminal device used.
- g. At least 1 of each type of portal configuration with all facility interface devices as specified or shown.
- h. Equipment as specified in Section 16751 CLOSED CIRCUIT TELEVISION SYSTEMS when required.
- i. The Contractor shall prepare test procedures and reports for the predelivery test, and shall deliver the predelivery test procedures to the Government for approval. The final predelivery test report shall be delivered after completion of the predelivery test.

### 3.4.4 Contractor's Field Testing

The Contractor shall calibrate and test all equipment, verify DTS operation, place the integrated system in service, and test the integrated system. Ground rods installed by the Contractor shall be tested as specified in IEEE Std 142. The Contractor shall deliver a report describing results of functional tests, diagnostics, and calibrations, including written certification to the Government that the installed complete system has been calibrated, tested, and is ready to begin performance verification testing. The report shall also include a copy of the approved performance verification test procedure.

### 3.4.5 Performance Verification Test

The Contractor shall demonstrate that the completed system complies with the contract requirements. Using approved test procedures, all physical and functional requirements of the project shall be demonstrated and shown. The performance verification test, as specified, shall not be started until after receipt by the Contractor of written permission from the Government, based on the Contractor's written report. The report shall include certification of successful completion of testing as specified in paragraph Contractor's Field Testing, and upon successful completion of training as specified. The Government may terminate testing at any time when the system fails to perform as specified. Upon termination of testing by the



Government or by the Contractor, the Contractor shall commence an assessment period as described for Endurance Testing Phase II. Upon successful completion of the performance verification test, the Contractor shall deliver test reports and other documentation as specified to the Government prior to commencing the endurance test.

#### 3.4.6 Endurance Test

a. General: The Contractor shall demonstrate system reliability and operability at the specified throughput rates for each portal, and the Type I and Type II error rates specified for the completed system. The contractor shall calculate false alarm rates and the system shall yield false alarm rates within the specified maximums at the specified probability of detection. The endurance test shall be conducted in phases as specified. The endurance test shall not be started until the Government notifies the Contractor, in writing, that the performance verification test is satisfactorily completed, training as specified has been completed, and correction of all outstanding deficiencies has been satisfactorily completed. The Contractor shall provide 1 operator to operate the system 24 hours per day, including weekends and holidays, during Phase I and Phase III endurance testing, in addition to any Government personnel that may be made available. The Government may terminate testing at any time the system fails to perform as specified. Upon termination of testing by the Government or by the Contractor, the Contractor shall commence an assessment period as described for Phase II. The Contractor shall verify the operation of each terminal device during the last day of the test. Upon successful completion of the endurance test, the Contractor shall deliver test reports and other documentation as specified to the Government prior to acceptance of the system.

b. Phase I Testing: The test shall be conducted 24 hours per day for 15 consecutive calendar days, including holidays, and the system shall operate as specified. The Contractor shall make no repairs during this phase of testing unless authorized by the Government in writing. If the system experiences no failures during Phase I testing, the Contractor may proceed directly to Phase III testing after receipt by the Contractor of written permission from the Government.

c. Phase II Assessment: After the conclusion of Phase I, the Contractor shall identify all failures, determine causes of all failures, repair all failures, and deliver a written report to the Government. The report shall explain in detail the nature of each failure, corrective action taken, results of tests performed, and shall recommend the point at which testing should be resumed. After delivering the written report, the Contractor shall convene a test review meeting at the jobsite to present the results and recommendations to the Government. The meeting shall not be scheduled earlier than 5 business days after receipt of the report by the Government. As a part of this test review meeting, the Contractor shall demonstrate that all failures have been corrected by performing appropriate portions of the performance verification test. Based on the Contractor's report and the test review meeting, the Government will determine the restart date, or may require that Phase I be repeated. If the retest is completed without any failures, the Contractor may proceed directly to Phase III testing after receipt by the Contractor of written permission from the Government.

d. Phase III Testing: The test shall be conducted 24 hours per day for 15 consecutive calendar days, including holidays, and the system shall operate as specified. The Contractor shall make no repairs during this phase of testing unless authorized by the Government in writing.

e. Phase IV Assessment: After the conclusion of Phase III, the Contractor shall identify all failures, determine causes of failures, repair failures, and deliver a written report to the Government. The report shall explain in detail the nature of each failure, corrective action taken, results of tests performed, and shall recommend the point at which testing should be resumed. After delivering the written report, the Contractor shall convene a test review meeting at the jobsite to present the results and recommendations to the Government. The meeting shall not be scheduled earlier than 5 business days after receipt of the report by the Government. As a part of this test review meeting, the Contractor shall demonstrate that all failures have been corrected by repeating appropriate portions of the performance verification test. Based on the Contractor's report and the test review meeting, the Government will determine the restart date, and may require that Phase III be repeated. The Contractor shall not commence any required retesting until after receipt of written notification by Government. After the conclusion of any retesting which the Government may require, the Phase IV assessment shall be repeated as if Phase III had just been completed.

f. Exclusions: The Contractor will not be held responsible for failures in system performance resulting from the following:

- (1) An outage of the main power in excess of the capability of any backup power source, provided that the automatic initiation of all backup sources was accomplished and that automatic shutdown and restart of the ESS performed as specified.
- (2) Failure of a Government furnished communications circuit, provided that the failure was not due to Contractor furnished equipment, installation, or software.
- (3) Failure of existing Government owned equipment, provided that the failure was not due to Contractor furnished equipment, installation, or software.
- (4) The occurrence of specified nuisance alarms.
- (5) The occurrence of specified environmental alarms.

### 3.5 RELIABILITY CALCULATION

This exponential calculation depends on the test duration and assumes that the Mean Time Between Failures (MTBF) does not change after each repair; and that the probability of failure is constant throughout the useful life of the component regardless of how many failures the system has experienced. This calculation does not account for effects of aging.

### 3.5.1 Definition of Reliability

System reliability is calculated in terms of overall MTBF where the component reliability furnished by vendors is already expressed as MTBF. The mathematical combination of the component MTBF values is defined as the system reliability,  $R(t)$ ; the probability that the system will perform its function during a given time period under specified conditions. In this calculation, each component reliability is determined; the component reliabilities are combined as dictated by the system configuration; and the overall MTBF is computed as follows:

$R(t) = e(-t/MTBF)$ ; where:

MTBF = mean time between failure

t = duration of test period

e = base of natural logarithms

When  $t/MTBF$  is less than 0.1, the reliability can be approximated as follows:

$R(t) = 1 - (t/MTBF)$ : A specific reliability value can be interpreted by noting that a value of  $R(t)$  greater than  $1/e$  (which equals 0.37) indicates that the MTBF value is greater than the test duration.

### 3.5.2 Series and Parallel Components

Components are in series if failure of 1 component causes a system failure. Reliability of components in series is a product of the individual reliabilities:

$R = 1 - (r_1)(r_2)(r_3)...(r_n)$ . If components in a system are redundant (parallel), reliability is computed as follows:

$R = 1 - \{(1-r_1)(1-r_2)...(1-r_n)\}$ . If a system has parallel components, an equivalent series reliability is computed for each set of parallel components. The reliability of the system is then computed as the product of series and equivalent series reliabilities.

### 3.5.3 Calculation Procedure

The Contractor shall prepare a table showing the following data:

- a. Name and quantity of each component.
- b. Each component identified as series or parallel. (For example, if there are 2 printers, the failure of 1 will not cause a system failure).
- c. MTBF for each component.
- d. Single unit reliability:  $R = e(-t/MTBF)$ , where t = 1,000 hour test period.

e. Total Component Reliability (TCR) where  $TCR = R_n$ , and  $n$  = number of components. For parallel components,  $TCR = 1 - (1-R)^n$ , where  $n$  = number of components.

f. Cumulative Reliability (CUMR) is the product of total component reliability; for example:  $CUMR_4 = (TCR_1) (TCR_2) (TCR_3) (TCR_4) = (CUMR_3) (TCR_4)$

g. Cumulative MTBF =  $-1,000 / \text{LN} (CUMR)$ ; where  $\text{LN} (CUMR)$  is the natural logarithm of (CUMR). As an example:  $CUM.MTBF = -1,000 / \text{LN} (CUMR_4)$

#### 3.5.4 Sample Calculations

MTBF is not calculated for sensors and controls. Input/Output functions are part of the local processor. Any Input/Output failure not attributable to sensors and controls constitutes a local processor failure and is thus reflected in the local processor MTBF. MTBF for other components are based on the lowest values provided by vendors. The calculation shall be based on the following configuration:

- a. All central station equipment.
- b. Data Transmission System (DTS) equipment associated with one DTS circuit, but excluding the circuit itself.
- c. Sixteen local processors with all the functions as specified in paragraph Local Processor.
- d. Four representative types of devices, per local processor.

-- End of Section --

SECTION 13851

FIRE DETECTION AND ALARM SYSTEM, ADDRESSABLE

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by basic designation only.

AMERICAN NATIONAL STANDARDS INSTITUTE (ANSI)

ANSI S3.41 (1990; R 1996) Audible Emergency Evacuation Signals

CODE OF FEDERAL REGULATIONS (CFR)

47 CFR 15 Radio Frequency Devices

INSTITUTE OF ELECTRICAL AND ELECTRONICS ENGINEERS (IEEE)

IEEE C62.41 (1991; R 1995) Surge Voltages in Low-Voltage AC Power Circuits

NATIONAL FIRE PROTECTION ASSOCIATION (NFPA)

NFPA 70 (1999) National Electrical Code

NFPA 72 (1996; Errata Oct 96, Dec 96; TIA 96-1, 96-2, 96-3) National Fire Alarm Code

NFPA 90A (1996) Installation of Air Conditioning and Ventilating Systems

NFPA 1221 (1994) Installation, Maintenance and Use of Public Fire Service Communication Systems

UNDERWRITERS LABORATORIES (UL)

UL 6 (1997) Rigid Metal Conduit

UL 38 (1994; Rev Nov 1994) Manually Actuated Signaling Boxes for Use with Fire-Protective Signaling Systems

UL 268 (1996; Rev thru Jun 1998) Smoke Detectors for Fire Protective Signaling Systems

UL 268A (1998) Smoke Detectors for Duct Applications

UL 464	(1996; Rev May 1997) Audible Signal Appliances
UL 797	(1993; Rev thru Mar 1997) Electrical Metallic Tubing
UL 864	(1996) Control Units for Fire-Protective Signaling Systems
UL 1242	(1996; Rev Mar 1998) Intermediate Metal Conduit
UL 1971	(1995; Rev thru May 1997) Signaling Devices for the Hearing Impaired

## 1.2 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only. When used, a designation following the "G" designation identifies the office that will review the submittal for the Government. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

### SD-02 Shop Drawings

#### Fire Alarm Reporting System ; G, RE

Detail drawings, prepared and signed by a Registered Professional Engineer or a NICET Level 3 Fire Alarm Technician, consisting of a complete list of equipment and material, including manufacturer's descriptive and technical literature, catalog cuts, and installation instructions. Note that the contract drawings show layouts based on typical detectors. The Contractor shall check the layout based on the actual detectors to be installed and make any necessary revisions in the detail drawings. The detail drawings shall also contain complete wiring and schematic diagrams for the equipment furnished, equipment layout, and any other details required to demonstrate that the system has been coordinated and will properly function as a unit. Detailed point-to-point wiring diagram shall be prepared and signed by a Registered Professional Engineer or a NICET Level 3 Fire Alarm Technician showing points of connection. Diagram shall include connections between system devices, appliances, control panels, supervised devices, and equipment that is activated or controlled by the panel.

### SD-03 Product Data

#### Storage Batteries ; G, RE

Substantiating battery calculations for supervisory and alarm power requirements. Ampere-hour requirements for each system component and each panel component, and the battery recharging period shall be included.

#### Voltage Drop

Voltage drop calculations for notification appliance circuits to indicate that sufficient voltage is available for proper appliance operation.

#### Special Tools and Spare Parts

Spare parts data for each different item of material and equipment specified, not later than 3 months prior to the date of beneficial occupancy. Data shall include a complete list of parts and supplies with the current unit prices and source of supply and a list of the parts recommended by the manufacturer to be replaced after 1 year of service.

#### Technical Data and Computer Software ; G, RE

Technical data which relates to computer software.

#### Training ; G, RE

Lesson plans, operating instructions, maintenance procedures, and training data, furnished in manual format, for the training courses. The operations training shall familiarize designated government personnel with proper operation of the fire alarm system. The maintenance training course shall provide the designated government personnel adequate knowledge required to diagnose, repair, maintain, and expand functions inherent to the system.

#### Testing ; G, RE

Detailed test procedures, prepared and signed by a Registered Professional Engineer or a NICET Level 3 Fire Alarm Technician, for the fire detection and alarm system 60 days prior to performing system tests.

#### SD-06 Test Reports

##### Testing ; G, RE

Test reports, in booklet form, showing field tests performed to prove compliance with the specified performance criteria, upon completion and testing of the installed system. Each test report shall document readings, test results and indicate the final position of controls. The Contractor shall include the NFPA 72 Certificate of Completion and NFPA 72 Inspection and Testing Form, with the appropriate test reports.

#### SD-07 Certificates

##### Equipment

Certified copies of current approvals or listings issued by an independent test lab if not listed by UL, FM or other nationally recognized testing laboratory, showing compliance with specified NFPA standards.

##### Qualifications

Proof of qualifications for required personnel. The installer shall submit proof of experience for the Professional Engineer, fire alarm technician, and the installing company.

#### SD-10 Operation and Maintenance Data

##### Technical Data and Computer Software ; G, RE

Six copies of operating manual outlining step-by-step procedures required for system startup, operation, and shutdown. The manual shall include the manufacturer's name, model number, service manual, parts list, and complete description of equipment and their basic operating features. Six copies of maintenance manual listing routine maintenance procedures, possible breakdowns and repairs, and troubleshooting guide. The manuals shall include conduit layout, equipment layout and simplified wiring, and control diagrams of the system as installed. The manuals shall include complete procedures for system revision and expansion, detailing both equipment and software requirements. Original and backup copies of all software delivered for this project shall be provided, on each type of media utilized. Manuals shall be approved prior to training.

### 1.3 GENERAL REQUIREMENTS

#### 1.3.1 Standard Products

Material and equipment shall be the standard products of a manufacturer regularly engaged in the manufacture of the products for at least 2 years prior to bid opening. Equipment shall be supported by a service organization that can provide service within 24 hours of notification.

#### 1.3.2 Nameplates

Major components of equipment shall have the manufacturer's name, address, type or style, voltage and current rating, and catalog number on a noncorrosive and nonheat-sensitive plate which is securely attached to the equipment.

#### 1.3.3 Keys and Locks

Locks shall be keyed alike. Four keys for the system shall be provided.



#### 1.3.4 Tags

Tags with stamped identification number shall be furnished for keys and locks.

#### 1.3.5 Verification of Dimensions

After becoming familiar with details of the work, the Contractor shall verify dimensions in the field and shall advise the Contracting Officer of any discrepancy before performing the work.

#### 1.3.6 Compliance

The fire detection and alarm system and the central reporting system shall be configured in accordance with NFPA 72; exceptions are acceptable as directed by the Contracting Officer. The equipment furnished shall be compatible and be UL listed, FM approved, or approved or listed by a nationally recognized testing laboratory in accordance with the applicable NFPA standards.

#### 1.3.7 Qualifications

##### 1.3.7.1 Engineer and Technician

a. Registered Professional Engineer with verification of experience and at least 4 years of current experience in the design of the fire protection and detection systems.

b. National Institute for Certification in Engineering Technologies (NICET) qualifications as an engineering technician in fire alarm systems program with verification of experience and current NICET certificate.

c. The Registered Professional Engineer may perform all required items under this specification. The NICET Fire Alarm Technician shall perform only the items allowed by the specific category of certification held.

##### 1.3.7.2 Installer

The installing Contractor shall provide the following: Fire Alarm Technicians to perform the installation of the system. A Fire Alarm Technician with a minimum of 4 years of experience shall perform/supervise the installation of the fire alarm system. Fire Alarm Technicians with a minimum of 2 years of experience shall be utilized to assist in the installation and terminate fire alarm devices, cabinets and panels. An electrician shall be allowed to install wire or cable and to install conduit for the fire alarm system. The Fire Alarm technicians installing the equipment shall be factory trained in the installation, adjustment, testing, and operation of the equipment specified herein and on the drawings.

##### 1.3.7.3 Design Services

Installations requiring designs or modifications of fire detection, fire alarm, or fire suppression systems shall require the services and review of a qualified fire protection engineer. For the purposes of meeting this

requirement, a qualified fire protection engineer is defined as an individual meeting one of the following conditions:

- a. An engineer having a Bachelor of Science or Masters of Science Degree in Fire Protection Engineering from an accredited university engineering program, plus a minimum of 2 years' work experience in fire protection engineering.
- b. A registered professional engineer (P.E.) in fire protection engineering.
- c. A registered PE in a related engineering discipline and member grade status in the National Society of Fire Protection Engineers.
- d. An engineer with a minimum of 10 years' experience in fire protection engineering and member grade status in the National Society of Fire Protection Engineers.

#### 1.4 SYSTEM DESIGN

##### 1.4.1 Operation

The fire alarm and detection system shall be a complete, supervised fire alarm reporting system. The system shall be activated into the alarm mode by actuation of any alarm initiating device. The system shall remain in the alarm mode until the initiating device is reset and the fire alarm control panel is reset and restored to normal. Alarm initiating devices shall be connected to initiating device circuits (IDC), Style B, in accordance with NFPA 72. Alarm notification appliances shall be connected to notification appliance circuits (NAC), Style Z in accordance with NFPA 72. A looped conduit system shall be provided so that if the conduit and all conductors within are severed at any point, all IDC, NAC and SLC will remain functional. The conduit loop requirement is not applicable to the signal transmission link from the local panels (at the protected premises) to the Supervising Station (fire station, fire alarm central communication center). Textual, audible, and visual appliances and systems shall comply with NFPA 72. Fire alarm system components requiring power, except for the control panel power supply, shall operate on 24 Volts dc. Addressable system shall be microcomputer (microprocessor or microcontroller) based with a minimum word size of eight bits and shall provide the following features:

- a. Sufficient memory to perform as specified and as shown for addressable system.
- b. Individual identity of each addressable device for the following conditions: alarm; trouble; open; short; and appliances missing/failed remote detector - sensitivity adjustment from the panel for smoke detectors
- c. Capability of each addressable device being individually disabled or enabled from the panel.
- d. Each SLC shall be sized to provide 40 percent addressable expansion without hardware modifications to the panel.

#### 1.4.2 Operational Features

The system shall have the following operating features:

- a. Monitor electrical supervision of IDC, SLC, and NAC. Smoke detectors shall have combined alarm initiating and power circuits.
- b. Monitor electrical supervision of the primary power (ac) supply, battery voltage, placement of alarm zone module (card, PC board) within the control panel, and transmitter tripping circuit integrity.
- c. A trouble buzzer and trouble LED/LCD (light emitting diode/liquid crystal diode) to activate upon a single break, open, or ground fault condition which prevents the required normal operation of the system. The trouble signal shall also operate upon loss of primary power (ac) supply, low battery voltage, removal of alarm zone module (card, PC board), and disconnection of the circuit used for transmitting alarm signals off-premises. A trouble alarm silence switch shall be provided which will silence the trouble buzzer, but will not extinguish the trouble indicator LED/LCD. Subsequent trouble and supervisory alarms shall sound the trouble signal until silenced. After the system returns to normal operating conditions, the trouble buzzer shall again sound until the silencing switch returns to normal position, unless automatic trouble reset is provided.
- d. A one person test mode. Activating an initiating device in this mode will activate an alarm for a short period of time, then automatically reset the alarm, without activating the transmitter during the entire process.
- e. A transmitter disconnect switch to allow testing and maintenance of the system without activating the transmitter but providing a trouble signal when disconnected and a restoration signal when reconnected.
- f. Evacuation alarm silencing switch which, when activated, will silence alarm devices, but will not affect the zone indicating LED/LCD nor the operation of the transmitter. This switch shall be over-ridden upon activation of a subsequent alarm from an unalarmed device and the NAC devices will be activated.
- g. Electrical supervision for circuits used for supervisory signal services (i.e., sprinkler systems, valves, etc.). Supervision shall detect any open, short, or ground.
- h. Confirmation or verification of all smoke detectors. The control panel shall interrupt the transmission of an alarm signal to the system control panel for a factory preset period. This interruption period shall be adjustable from 1 to 60 seconds and be factory set at 20 seconds. Immediately following the interruption period, a confirmation period shall be in effect during which time an alarm signal, if present, will be sent immediately to the

control panel. Fire alarm devices other than smoke detectors shall be programmed without confirmation or verification.

i. The fire alarm control panel shall provide supervised addressable relays for HVAC shutdown. An override at the HVAC panel shall not be provided.

j. Provide one person test mode - Activating an initiating device in this mode will activate an alarm for a short period of time, then automatically reset the alarm, without activating the transmitter during the entire process.

k. The fire alarm control panel shall monitor the fire sprinkler system, or other fire protection extinguishing system.

l. The control panel and field panels shall be software reprogrammable to enable expansion or modification of the system without replacement of hardware or firmware. Examples of required changes are: adding or deleting devices or zones; changing system responses to particular input signals; programming certain input signals to activate auxiliary devices.

m. Zones for IDC and NAC shall be arranged as indicated on the contract drawings.

#### 1.4.3 Alarm Functions

An alarm condition on a circuit shall automatically initiate the following functions:

a. Transmission of signals over the station radio fire reporting system. The signal shall be common for any device.

b. Visual indications of the alarmed devices on the fire alarm control panel display and on the remote audible/visual display.

c. Continuous sounding or operation of alarm notification appliances throughout the building as required by ANSI S3.41.

d. Deactivation of the air handling units throughout the building.

#### 1.4.4 Primary Power

Operating power shall be provided as required by paragraph Power Supply for the System. Transfer from normal to emergency power or restoration from emergency to normal power shall be fully automatic and not cause transmission of a false alarm. Loss of ac power shall not prevent transmission of a signal via the fire reporting system upon operation of any initiating circuit.

#### 1.4.5 Battery Backup Power

Battery backup power shall be through use of rechargeable, sealed-type storage batteries and battery charger.

#### 1.4.6 Interface With other Equipment

Interfacing components shall be furnished as required to connect to subsystems or devices which interact with the fire alarm system, such as supervisory or alarm contacts in suppression systems, operating interfaces for smoke control systems, door releases, etc.

#### 1.5 TECHNICAL DATA AND COMPUTER SOFTWARE

Technical data and computer software (meaning technical data which relates to computer software) which is specifically identified in this project, and which may be defined/required in other specifications, shall be delivered, strictly in accordance with the CONTRACT CLAUSES. Data delivered shall be identified by reference to the particular specification paragraph against which it is furnished. Data to be submitted shall include complete system, equipment, and software descriptions. Descriptions shall show how the equipment will operate as a system to meet the performance requirements of this contract. The data package shall also include the following:

- (1) Identification of programmable portions of system equipment and capabilities.
- (2) Description of system revision and expansion capabilities and methods of implementation detailing both equipment and software requirements.
- (3) Provision of operational software data on all modes of programmable portions of the fire alarm and detection system.
- (4) Description of Fire Alarm Control Panel equipment operation.
- (5) Description of auxiliary and remote equipment operations.
- (6) Library of application software.
- (7) Operation and maintenance manuals as specified in SD-19 of the Submittals paragraph.

#### 1.6 DELIVERY AND STORAGE

Equipment delivered and placed in storage shall be stored with protection from the weather, humidity and temperature variation, dirt, dust, and any other contaminants.

### PART 2 PRODUCTS

#### 2.1 CONTROL PANEL

Control Panel shall comply with the applicable requirements of UL 864. Panel shall be modular, installed in a surface mounted steel cabinet with hinged door and cylinder lock. Control panel shall be a clean, uncluttered, and orderly assembled panel containing components and equipment required to provide the specified operating and supervisory functions of the system. The panel shall have prominent rigid plastic, phenolic or metal

identification plates for LED/LCDs, zones, SLC, controls, meters, fuses, and switches. Nameplates for fuses shall also include ampere rating. The LED/LCD displays shall be located on the exterior of the cabinet door or be visible through the cabinet door. Control panel switches shall be within the locked cabinet. A suitable means (single operation) shall be provided for testing the control panel visual indicating devices (meters or LEDs/LCDs). Meters and LEDs shall be plainly visible when the cabinet door is closed. Signals and LEDs/LCDs shall be provided to indicate by zone any alarm, supervisory or trouble condition on the system. Each IDC shall be powered and supervised so that a signal on one zone does not prevent the receipt of signals from other devices. Loss of power, including batteries, shall not require the manual reloading of a program. Upon restoration of power, startup shall be automatic, and shall not require any manual operation. The loss of primary power or the sequence of applying primary or emergency power shall not affect the transmission of alarm, supervisory or trouble signals. Visual annunciation shall be provided for LED/LCD visual display as an integral part of the control panel and shall identify with a word description and id number each device. Cabinets shall be provided with ample gutter space to allow proper clearance between the cabinet and live parts of the panel equipment. If more than one modular unit is required to form a control panel, the units shall be installed in a single cabinet large enough to accommodate units. Cabinets shall be painted red.

#### 2.1.1 Remote System Audible/Visual Display

Audible appliance shall have a minimum sound level output rating of 85 dBA at 3.05 m and operate in conjunction with the panel integral display. The audible device shall be silenced by a system silence switch on the remote system. The audible device shall be silenced by the system silence switch located at the remote location, but shall not extinguish the visual indication. The remote LED/LCD visual display shall provide identification, consisting of the word description and id number for each device as displayed on the control panel. A rigid plastic, phenolic or metal identification sign which reads "Fire Alarm System Remote Display" shall be provided at the remote audible/visual display. The remote visual appliance located with the audible appliance shall not be extinguished until the trouble or alarm has been cleared.

#### 2.1.2 Circuit Connections

Circuit conductors entering or leaving the panel shall be connected to screw-type terminals with each conductor and terminal marked for identification.

#### 2.1.3 System Expansion and Modification Capabilities

Any equipment and software needed by qualified technicians to implement future changes to the fire alarm system shall be provided as part of this contract.

## 2.2 STORAGE BATTERIES

Storage batteries shall be provided and shall be 24 Vdc sealed, lead-calcium type requiring no additional water. The batteries shall have ample capacity, with primary power disconnected, to operate the fire alarm system for a period of 72 hours. Following this period of battery operation, the batteries shall have ample capacity to operate all components of the system, including all alarm signaling devices in the total alarm mode for a minimum period of 15 minutes. Batteries shall be located in a separate battery cabinet. Batteries shall be provided with overcurrent protection in accordance with NFPA 72. Separate battery cabinets shall have a lockable, hinged cover similar to the fire alarm panel. The lock shall be keyed the same as the fire alarm control panel. Cabinets shall be painted to match the fire alarm control panel.

## 2.3 BATTERY CHARGER

Battery charger shall be completely automatic, 24 Vdc with high/low charging rate, capable of restoring the batteries from full discharge (18 Volts dc) to full charge within 48 hours. A pilot light indicating when batteries are manually placed on a high rate of charge shall be provided as part of the unit assembly, if a high rate switch is provided. Charger shall be located in control panel cabinet or in a separate battery cabinet.

## 2.4 ADDRESSABLE MANUAL FIRE ALARM STATIONS

Addressable manual fire alarm stations shall conform to the applicable requirements of UL 38. Manual stations shall be connected into signal line circuits. Stations shall be installed on flush mounted outlet boxes. Manual stations shall be mounted at 1220 mm. Stations shall be double action type. Stations shall be finished in red, with raised letter operating instructions of contrasting color. Stations requiring the breaking of glass or plastic panels for operation are not acceptable. Stations employing glass rods are not acceptable. The use of a key or wrench shall be required to reset the station. Gravity or mercury switches are not acceptable. Switches and contacts shall be rated for the voltage and current upon which they operate. Addressable pull stations shall be capable of being field programmed, shall latch upon operation and remain latched until manually reset. Stations shall have a separate screw terminal for each conductor. Surface mounted boxes shall be matched and painted the same color as the fire alarm manual stations.

## 2.5 FIRE DETECTING DEVICES

Fire detecting devices shall comply with the applicable requirements of NFPA 72, NFPA 90A, UL 268, UL 268A. The detectors shall be provided as indicated. Detector base shall have screw terminals for making connections. No solder connections will be allowed. Detectors located in concealed locations (above ceiling, raised floors, etc.) shall have a remote visible indicator LED/LCD. Addressable fire detecting devices, except flame detectors, shall be dynamically supervised and uniquely identified in the control panel. All fire alarm initiating devices shall be individually addressable, except where indicated.

#### 2.5.1 Smoke Detectors

Smoke detectors shall be designed for detection of abnormal smoke densities. Smoke detectors shall be photoelectric type. Detectors shall contain a visible indicator LED/LCD that shows when the unit is in alarm condition. Detectors shall not be adversely affected by vibration or pressure. Detectors shall be the plug-in type in which the detector base contains terminals for making wiring connections. Detectors that are to be installed in concealed (above false ceilings, etc.) locations shall be provided with a remote indicator LED/LCD suitable for mounting in a finished, visible location.

##### 2.5.1.1 Photoelectric Detectors

Detectors shall operate on a light scattering concept using an LED light source. Failure of the LED shall not cause an alarm condition. Detectors shall be factory set for sensitivity and shall require no field adjustments of any kind. Detectors shall have an obscuration rating in accordance with UL 268. Addressable smoke detectors shall be capable of having the sensitivity being remotely adjusted by the control panel.

##### 2.5.1.2 Duct Detectors

Duct-mounted photoelectric smoke detectors shall be furnished and installed where indicated and in accordance with NFPA 90A. Units shall consist of a smoke detector as specified in paragraph Photoelectric Detectors, mounted in a special housing fitted with duct sampling tubes. Detector circuitry shall be mounted in a metallic enclosure exterior to the duct. Detectors shall have a manual reset. Detectors shall be rated for air velocities that include air flows between 2.5 and 20 m/s. Detectors shall be powered from the fire alarm panel. Sampling tubes shall run the full width of the duct. The duct detector package shall conform to the requirements of NFPA 90A, UL 268A, and shall be UL listed for use in air-handling systems. The control functions, operation, reset, and bypass shall be controlled from the fire alarm control panel. Lights to indicate the operation and alarm condition; and the test and reset buttons shall be visible and accessible with the unit installed and the cover in place. Detectors shall have auxiliary contacts to provide control, interlock, and shutdown functions specified in Section 15950 HEATING, VENTILATING AND AIR CONDITIONING (HVAC) CONTROL SYSTEMS. The detectors shall be supplied by the fire alarm system manufacturer to ensure complete system compatibility.

#### 2.6 NOTIFICATION APPLIANCES

Audible appliances shall conform to the applicable requirements of UL 464. Devices shall be connected into notification appliance circuits. Devices shall have a separate screw terminal for each conductor. Audible appliances shall generate a unique audible sound from other devices provided in the building and surrounding area. Surface mounted audible appliances shall be painted red. Recessed audible appliances shall be installed with a grill that is painted red.



#### 2.6.1 Alarm Horns

Horns shall be surface mounted, with the matching mounting back box recessed vibrating type suitable for use in an electrically supervised circuit. Horns shall produce a sound rating of at least 85 dBA at 3.05 m. Horns used in exterior locations shall be specifically listed or approved for outdoor use and be provided with metal housing gasketed and protective grilles.

#### 2.6.2 Visual Notification Appliances

Visual notification appliances shall conform to the applicable requirements of UL 1971 and the contract drawings. Appliances shall have clear high intensity optic lens, xenon flash tubes, and output white light. Strobe flash rate shall be between 1 to 3 flashes per second and a minimum of 75 candela. Strobe shall be semi-flush mounted.

#### 2.6.3 Combination Audible/Visual Notification Appliances

Combination audible/visual notification appliances shall provide the same requirements as individual units except they shall mount as a unit in standard backboxes. Units shall be factory assembled. Any other audible notification appliance employed in the fire alarm systems shall be approved by the Contracting Officer.

### 2.7 FIRE DETECTION AND ALARM SYSTEM PERIPHERAL EQUIPMENT

#### 2.7.1 Conduit

Conduit and fittings shall comply with NFPA 70, UL 6, UL 1242, and UL 797.

#### 2.7.2 Wiring

Wiring shall conform to NFPA 70. Wiring for 120 Vac power shall be No. 12 AWG minimum. The SLC wiring shall be copper cable in accordance with the manufacturers requirements. Wiring for fire alarm dc circuits shall be No. 16 AWG minimum. Voltages shall not be mixed in any junction box, housing, or device, except those containing power supplies and control relays. System field wiring shall be solid copper and installed in metallic conduit or electrical metallic tubing, except that rigid plastic conduit may be used under slab-on-grade. Conductors shall be color coded. Conductors used for the same functions shall be similarly color coded. Wiring code color shall remain uniform throughout the circuit. Pigtail or T-tap connections to initiating device circuits, supervisory alarm circuits, and notification appliance circuits are prohibited. T-tapping using screw terminal blocks is allowed for style 5 addressable systems.

#### 2.7.3 Special Tools and Spare Parts

Software, connecting cables and proprietary equipment, necessary for the maintenance, testing, and reprogramming of the equipment shall be furnished to the Contracting Officer. Two spare fuses of each type and size required shall be furnished. Two percent of the total number of each different type of detector, but no less than two each, shall be furnished.

## 2.8 TRANSMITTERS

### 2.8.1 Radio Alarm Transmitters

Transmitters shall be compatible with proprietary supervising station receiving equipment. Each radio alarm transmitter shall be the manufacturer's recognized commercial product, completely assembled, wired, factory tested, and delivered ready for installation and operation. Transmitters shall be provided in accordance with applicable portions of NFPA 72, NFPA 1221, and 47 CFR 15. Transmitter electronics module shall be contained within the physical housing as an integral, removable assembly. The proprietary supervising station receiving equipment is King Fisher and the transceiver shall be fully compatible with this equipment. At the contractor's option, and if UL listed, the transmitter may be housed in the same panel as the fire alarm control panel.

#### 2.8.1.1 Transmitter Power Supply

Each radio alarm transmitter shall be powered by a combination of locally available 120-volt ac power and a sealed, lead-calcium battery.

a. Operation: Each transmitter shall operate from 120-volt ac power. In the event of 120-volt ac power loss, the transmitter shall automatically switch to battery operation. Switchover shall be accomplished with no interruption of protective service, and shall automatically transmit a trouble message. Upon restoration of ac power, transfer back to normal ac power supply shall also be automatic.

b. Battery Power: Transmitter standby battery capacity shall provide sufficient power to operate the transmitter in a normal standby status for a minimum of 72 hours and be capable of transmitting alarms during that period.

#### 2.8.1.2 Radio Alarm Transmitter Housing

Transmitter housing shall be NEMA Type 1. The housing shall contain a lock that is keyed identical to the fire alarm system for the building. Radio alarm transmitter housing shall be factory painted with a suitable priming coat and not less than two coats of a hard, durable weatherproof enamel.

#### 2.8.1.3 Antenna

The Contractor shall provide omnidirectional, coaxial, halfwave dipole antennas for radio alarm transmitters with a driving point impedance to match transmitter output. The antenna and antenna mounts shall be corrosion resistant and designed to withstand wind velocities of 161 km/h. Antennas shall not be mounted to any portion of the building roofing system.

## PART 3 EXECUTION

### 3.1 INSTALLATION

All work shall be installed as shown and in accordance with the manufacturer's diagrams and recommendations, unless otherwise specified.

Smoke detectors shall not be installed until construction is essentially complete and the building has been thoroughly cleaned.

#### 3.1.1 Power Supply for the System

A single dedicated circuit connection for supplying power from a branch circuit to each building fire alarm system shall be provided. The power shall be supplied as shown on the drawings. The power supply shall be equipped with a locking mechanism and marked in red with the words "FIRE ALARM CIRCUIT CONTROL".

#### 3.1.2 Wiring

Conduit size for wiring shall be in accordance with NFPA 70. Wiring for the fire alarm system shall not be installed in conduits, junction boxes, or outlet boxes with conductors of lighting and power systems. Not more than two conductors shall be installed under any device screw terminal. The wires under the screw terminal shall be straight when placed under the terminal then clamped in place under the screw terminal. The wires shall be broken and not twisted around the terminal. Circuit conductors entering or leaving any mounting box, outlet box enclosure, or cabinet shall be connected to screw terminals with each terminal and conductor marked in accordance with the wiring diagram. Connections and splices shall be made using screw terminal blocks. The use of wire nut type connectors in the system is prohibited. Wiring within any control equipment shall be readily accessible without removing any component parts. The fire alarm equipment manufacturer's representative shall be present for the connection of wiring to the control panel.

#### 3.1.3 Control Panel

The control panel and its assorted components shall be mounted so that no part of the enclosing cabinet is less than 300 mm nor more than 2000 mm above the finished floor. Manually operable controls shall be between 900 and 1100 mm above the finished floor. Panel shall be installed to comply with the requirements of UL 864.

#### 3.1.4 Detectors

Detectors shall be located and installed in accordance with NFPA 72. Detectors shall be connected into signal line circuits or initiating device circuits as indicated on the drawings. Detectors shall be at least 300 mm from any part of any lighting fixture. Detectors shall be located at least 900 mm from diffusers of air handling systems. Each detector shall be provided with appropriate mounting hardware as required by its mounting location. Detectors which mount in open space shall be mounted directly to the end of the stubbed down rigid conduit drop. Conduit drops shall be firmly secured to minimize detector sway. Where length of conduit drop from ceiling or wall surface exceeds 900 mm, sway bracing shall be provided. Detectors installed in concealed locations (above ceiling, raised floors, etc.) shall have a remote visible indicator LED/LCD in a finished, visible location.

### 3.1.5 Notification Appliances

Notification appliances shall be mounted 2003 mm above the finished floor or 150 mm below the ceiling, whichever is lower.

### 3.1.6 Annunciator Equipment

Annunciator equipment shall be mounted where indicated on the drawings.

## 3.2 OVERVOLTAGE AND SURGE PROTECTION

### 3.2.1 Power Line Surge Protection

All equipment connected to alternating current circuits shall be protected from surges per IEEE C62.41 B3 combination waveform and NFPA 70. Fuses shall not be used for surge protection. The surge protector shall be rated for a maximum let thru voltage of 350 Volts ac (line-to-neutral) and 350 Volt ac (neutral-to-ground).

### 3.2.2 Low Voltage DC Circuits Surge Protection

All IDC, NAC, and communication cables/conductors, except fiber optics, shall have surge protection installed at each point where it exits or enters a building. Equipment shall be protected from surges per IEEE C62.41 B3 combination waveform and NFPA 70. The surge protector shall be rated to protect the 24 Volt dc equipment. The maximum dc clamping voltages shall be 36 V (line-to-ground) and 72 Volt dc (line-to-line).

### 3.2.3 Signal Line Circuit Surge Protection

All SLC cables/conductors, except fiber optics, shall have surge protection/isolation circuits installed at each point where it exits or enters a building. The circuit shall be protected from surges per IEEE C62.41 B3 combination waveform and NFPA 70. The surge protector/isolator shall be rated to protect the equipment.

## 3.3 GROUNDING

Grounding shall be provided by connecting to building ground system.

## 3.4 TESTING

The Contractor shall notify the Contracting Officer at least 10 days before the preliminary and acceptance tests are to be conducted. The tests shall be performed in accordance with the approved test procedures in the presence of the Contracting Officer. The control panel manufacturer's representative shall be present to supervise tests. The Contractor shall furnish instruments and personnel required for the tests.

### 3.4.1 Preliminary Tests

Upon completion of the installation, the system shall be subjected to functional and operational performance tests including tests of each installed initiating and notification appliance, when required. Tests shall

include the meggering of system conductors to determine that the system is free from grounded, shorted, or open circuits. The megger test shall be conducted prior to the installation of fire alarm equipment. If deficiencies are found, corrections shall be made and the system shall be retested to assure that it is functional. After completing the preliminary testing the Contractor shall complete and submit the NFPA 72, Certificate of Completion.

#### 3.4.2 Acceptance Test

Acceptance testing shall not be performed until the Contractor has completed and submitted the Certificate of Completion. Testing shall be in accordance with NFPA 72. The recommended tests in NFPA 72 shall be considered mandatory and shall verify that previous deficiencies have been corrected. The Contractor shall complete and submit the NFPA 72, Inspection and Testing Form. The test shall include all requirements of NFPA 72 and the following:

- a. Test of each function of the control panel.
- b. Test of each circuit in both trouble and normal modes.
- c. Tests of each alarm initiating devices in both normal and trouble conditions.
- d. Tests of each control circuit and device.
- e. Tests of each alarm notification appliance.
- f. Tests of the battery charger and batteries.
- g. Complete operational tests under emergency power supply.
- h. Visual inspection of wiring connections.
- i. Opening the circuit at each alarm initiating device and notification appliance to test the wiring supervisory feature.
- j. Ground fault
- k. Short circuit faults
- l. Stray voltage
- m. Loop resistance

#### 3.5 TRAINING

Training course shall be provided for the operations and maintenance staff. The course shall be conducted in the building where the system is installed or as designated by the Contracting Officer. The training period for systems operation shall consist of 1 training days (8 hours per day) and shall start after the system is functionally completed but prior to final acceptance tests. The training period for systems maintenance shall consist of 1 training days (8 hours per day) and shall start after the system is

10162/BERGER/ABAM  
FY02 Tactical Equipment Complex  
Fort Lewis, Washington

functionally completed but prior to final acceptance tests. The instructions shall cover items contained in the operating and maintenance instructions. In addition, training shall be provided on performance of expansions or modifications to the fire detection and alarm system.

-- End Of Section --

SECTION 13920

FIRE PUMPS

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by basic designation only.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM A 47M	(1999) Ferritic Malleable Iron Castings (Metric)
ASTM A 53	(1999b) Pipe, Steel, Black and Hot-Dipped, Zinc-Coated, Welded and Seamless
ASTM A 193/A 193M	(1999) Alloy-Steel and Stainless Steel Bolting Materials for High-Temperature Service
ASTM A 183	(1983; R 1998) Carbon Steel Track Bolts and Nuts
ASTM A 194/A 194M	(1998b) Carbon and Alloy Steel Nuts for Bolts for High-Pressure and High-Temperature Service
ASTM A 536	(1999e1) Ductile Iron Castings
ASTM A 795	(1997) Black and Hot-Dipped Zinc-Coated (Galvanized) Welded and Seamless Steel Pipe for Fire Protection Use
ASTM B 42	(1998) Seamless Copper Pipe, Standard Sizes
ASTM B 88M	(1996) Seamless Cooper Water Tube (Metric)
ASTM B 135M	(1996) Seamless Brass Tube (Metric)
ASTM C 533	(1995) Calcium Silicate Block and Pipe Thermal Insulation
ASTM D 3308	(1997) PTFE Resin Skived Tape
ASTM F 436M	(1993) Hardened Steel Washers (Metric)

ASME INTERNATIONAL (ASME)

ASME B16.3	(1992) Malleable Iron Threaded Fittings
------------	---

ASME B16.5	(1996; B16.5a) Pipe Flanges and Flanged Fittings NPS 1/2 thru NPS 24
ASME B16.9	(1993) Factory-Made Wrought Steel Buttwelding Fittings
ASME B16.11	(1996) Forged Fittings, Socket-Welding and Threaded
ASME B16.21	(1992) Nonmetallic Flat Gaskets for Pipe Flanges
ASME B16.26	(1988) Cast Copper Alloy Fittings for Flared Copper Tubes
ASME B16.39	(1998) Malleable Iron Threaded Pipe Unions Classes 150, 250, and 300

AMERICAN WATER WORKS ASSOCIATION (AWWA)

AWWA EWW	(1995) Standard Methods for the Examination of Water and Wastewater
AWWA B300	(1992) Hypochlorites
AWWA B301	(1992) Liquid Chlorine
AWWA C104	(1995) Cement-Mortar Lining for Ductile-Iron Pipe and Fittings for WaterAWWA C110 (1993) Ductile-Iron and Gray-Iron Fittings, 3 In. Through 48 In. (75 mm through 1200 mm), for Water and Other Liquids
AWWA C111	(1995) Rubber-Gasket Joints for Ductile-Iron Pressure Pipe and Fittings
AWWA C151	(1996) Ductile-Iron Pipe, Centrifugally Cast, for Water or Other Liquids
AWWA C500	(1993; C500a) Metal-Sealed Gates Valves for Water Supply Service
AWWA M20	(1973) Manual: Water Chlorination Principles and Practices

FACTORY MUTUAL ENGINEERING AND RESEARCH (FM)

FM P7825a	(1998) Approval Guide Fire Protection
FM P7825b	(1998) Approval Guide Electrical Equipment



01062/BERGER/ABAM  
FY02 Tactical Equipment Complex  
Fort Lewis, Washington

MANUFACTURERS STANDARDIZATION SOCIETY OF THE VALVE AND FITTINGS  
INDUSTRY (MSS)

MSS SP-80 (1997) Bronze Gate, Globe, Angle and Check  
Valves

NATIONAL ELECTRICAL MANUFACTURERS ASSOCIATION (NEMA)

NEMA MG 1 (1998) Motors and Generators

NATIONAL FIRE PROTECTION ASSOCIATION (NFPA)

NFPA 20 (1996; Errata Oct 1996; TIA 96-1)  
Installation of Centrifugal Fire Pumps

NFPA 24 (1995) Installation of Private Fire Service  
Mains and Their Appurtenances

NFPA 37 (1998) Installation and Use of Stationary  
Combustion Engines and Gas Turbines

NFPA 70 (1999) National Electrical Code

NFPA 1963 (1998) Fire Hose Connections

NATIONAL INSTITUTE FOR CERTIFICATION IN ENGINEERING TECHNOLOGIES  
(NICET)

NICET 1014-7 (1995) Program Detail Manual for  
Certification in the Field of Fire Protection  
Engineering Technology (Field Code 003)  
Subfield of Automatic Sprinkler System  
LayoutUNDERWRITERS LABORATORIES (UL)

UL 80 (1996) Steel Inside Tanks for Oil-Burner Fuel

UL 142 (1993; Rev Jul 1998) Steel Aboveground Tanks  
for Flammable and Combustible Liquids

UL 262 (1994; Rev thru Dec 1998) Gate Valves for  
Fire-Protection Service

UL 448 (1994; Rev thru May 1999) Pumps For Fire-  
Protection Service

UL 1247 (1995; Rev thru May 1997) Diesel Engines For  
Driving Centrifugal Fire Pumps

UL Fire Prot Dir (1999) Fire Protection Equipment Directory

## 1.2 GENERAL REQUIREMENTS

Except as modified in this Section or on the drawings, fire pumps shall be installed in conformance with NFPA 20, including all recommendations and advisory portions, which shall be considered mandatory. All reference to the authority having jurisdiction shall be interpreted to mean the Contracting Officer.

## 1.3 SEQUENCE OF OPERATION

### 1.3.1 Primary Fire Pump

Primary fire pump shall automatically operate when the pressure drops to 820 kPa. The fire pump shall automatically stop operating when the system pressure reaches 924 kPa and after the fire pump has operated for the minimum pump run time specified herein.

#### 1.3.1.1 Pressure Maintenance Pump

Pressure maintenance pump shall operate when the system pressure drops to 855 kPa. Pump shall automatically stop when the system pressure reaches 924 kPa and after the pump has operated for the minimum pump run time specified herein.

### 1.3.2 Safety Requirements

Coupling, rotating parts, gears, projecting equipment, etc. shall be fully enclosed or properly guarded so as to prevent possible injury to persons that come in close proximity of the equipment. The Contractor shall conduct testing of the fire pumps in a safe manner and ensure that all equipment is safely secured. Hoses and nozzles used to conduct flow tests shall be in excellent condition and shall be safely anchored and secured to prevent any misdirection of the hose streams.

## 1.4 COORDINATION OF TRADES

Tank supports, piping offsets, fittings, and any other accessories required shall be furnished as specified to provide a complete installation and to eliminate interference with other construction.

## 1.5 DELIVERY AND STORAGE

All equipment delivered and placed in storage shall be housed with protection from the weather, excessive humidity and temperature variations, dirt and dust, or other contaminants. Additionally, all pipes shall be either capped or plugged until installed.

## 1.6 FIELD MEASUREMENTS

After becoming familiar with all details of the work, the Contractor shall verify all dimensions in the field, and shall advise the Contracting Officer of any discrepancy before performing the work.

## 1.7 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only. When used, a designation following the "G" designation identifies the office that will review the submittal for the Government. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

### SD-02 Shop Drawings

#### Installation Requirements; G, RE

Three copies of the Fire Pump Installation Drawings consisting of a detailed plan view, detailed elevations and sections of the pump room, equipment and piping, drawn to a scale of not less than 1:20. Drawings shall indicate equipment, piping, and associated pump equipment to scale. All clearance, such as those between piping and equipment; between equipment and walls, ceiling and floors; and for electrical working distance clearance around all electrical equipment shall be indicated. Drawings shall include a legend identifying all symbols, nomenclatures, and abbreviations. Drawings shall indicate a complete piping and equipment layout including elevations and/or section views of the following:

- a. Fire pumps, controllers, piping, valves, and associated equipment.
- b. Sensing line for each pump including the pressure maintenance pump.
- c. Engine fuel system for diesel driven pumps.
- d. Engine cooling system for diesel driven pumps.
- e. Pipe hangers and sway bracing including support for diesel muffler and exhaust piping.
- f. Restraint of underground water main at entry-and exit-points to the building including details of pipe clamps, tie rods, mechanical retainer glands, and thrust blocks.
- g. A one-line schematic diagram indicating layout and sizes of all piping, devices, valves and fittings.
- h. A complete point-to-point connection drawing of the pump power, control and alarm systems, as well as interior wiring schematics of each controller.

#### As-Built Drawings; FIO

As-built drawings, no later than 14 days after completion of the Final Tests. The Fire Pump Installation Drawings shall be updated to reflect as-built conditions after all related work is completed and shall be on reproducible full-size mylar film.

SD-03 Product Data

Fire Pump Installation Related Submittals; FIO

A list of the Fire Pump Installation Related Submittals, no later than 7 days after the approval of the Fire Protection Specialist and the Manufacturer's Representative.

Installation Requirements; G, RE

Manufacturer's catalog data included with the Fire Pump Installation Drawings for each separate piece of equipment proposed for use in the system. Catalog data shall indicate the name of the manufacturer of each item of equipment, with data annotated to indicate model to be provided. In addition, a complete equipment list that includes equipment description, model number and quantity shall be provided. Catalog data for material and equipment shall include, but not be limited to, the following:

a. Fire pumps, drivers and controllers including manufacturer's certified shop test characteristic curve for each pump. Shop test curve may be submitted after approval of catalog data but shall be submitted prior to the final tests.

b. Pressure maintenance pump and controller.

c. Piping components.

d. Valves, including gate, check, globe and relief valves.

e. Gauges.

f. Hose valve manifold test header and hose valves.

g. Flow meter.

h. Restrictive orifice union.

i. Associated devices and equipment.

Spare Parts; FIO

Spare parts data for each different item of material and equipment specified. The data shall include a complete list of parts and supplies, with current unit prices and source of supply, and a list of parts recommended by the manufacturer to be replaced after 1 year and 3 years of service. A list of special tools and test equipment required for maintenance and testing of the products supplied by the Contractor shall be included.

01062/BERGER/ABAM  
FY02 Tactical Equipment Complex  
Fort Lewis, Washington

Preliminary Test; FIO

Proposed procedures for Preliminary Tests, at least 14 days prior to the proposed start of the tests.

Final Acceptance Test; RE

Proposed procedures for Final Acceptance Test, no later than 14 days prior to the proposed start of the tests.

System Diagrams; G, RE

Proposed diagrams, at least 2 weeks prior to start of related testing. System diagrams that show the layout of equipment, piping, and storage units, and typed condensed sequence of operation, wiring and control diagrams, and operation manuals explaining preventative maintenance procedures, methods of checking the system for normal, safe operation, and procedures for safely starting and stopping the system shall be framed under glass or laminated plastic. After approval, these items shall be posted where directed.

Fire Protection Specialist; G, RE

The name and documentation of certification of the proposed Fire Protection Specialists, no later than 14 days after the Notice to Proceed and prior to the submittal of the fire pump installation drawings.

Manufacturer's Representative; G, RE

The name and documentation of certification of the proposed Manufacturer's Representative, concurrent with submittal of the Fire Protection Specialist Qualifications.

Field Training; G, RE

Proposed schedule for field training submitted at least 14 days prior to the start of related training.

Preliminary Test; G, RE

Proposed date and time to begin Preliminary Tests, submitted with the Preliminary Tests Procedures.

Final Acceptance Test; RE, RE

Proposed date and time to begin Final Acceptance Test, submitted with the Final Acceptance Test Procedures. Notification shall be provided at least 14 days prior to the proposed start of the test. Notification shall include a copy of the Contractor's Material & Test Certificates.

#### SD-06 Test Reports

##### Preliminary Test; G, RE

Three copies of the completed Preliminary Tests Reports, no later than 7 days after the completion of the Preliminary Tests. The Preliminary Tests Report shall include both the Contractor's Material and Test Certificate for Underground Piping and the Contractor's Material and Test Certificate for Aboveground Piping. All items in the Preliminary Tests Report shall be signed by the Fire Protection Specialist and the Manufacturer's Representative.

##### Final Acceptance Test; G, RE

Three copies of the completed Final Acceptance Tests Reports, no later than 7 days after the completion of the Final Acceptance Tests. All items in the Final Acceptance Report shall be signed by the Fire Protection Specialist and the Manufacturer's Representative. Test reports in booklet form (each copy furnished in a properly labeled three ring binder) showing all field tests and measurements taken during the preliminary and final testing, and documentation that proves compliance with the specified performance criteria, upon completion of the installation and final testing of the installed system. Each test report shall indicate the final position of the controls and pressure switches. The test reports shall include the description of the hydrostatic test conducted on the piping and flushing of the suction and discharge piping. A copy of the manufacturer's certified pump curve for each fire pump shall be included in the report.

#### SD-07 Certificates

##### Fire Protection Specialist; G, RE

Concurrent with the Final Acceptance Test Report, certification by the Fire Protection Specialist that the fire pump installation is in accordance with the contract requirements, including signed approval of the Preliminary and Final Acceptance Test Reports.

#### SD-10 Operation and Maintenance Data

##### Fire Pumps; FIO

Six manuals listing step-by-step procedures required for system startup, operation, shutdown, and routine maintenance, at least 14 days prior to field training. The manuals shall include the manufacturer's name, model number, parts list, list of parts and tools that should be kept in stock by the owner for routine maintenance including the name of a local supplier, simplified wiring and controls diagrams, troubleshooting guide, and recommended service organization (including address and telephone number) for each item of equipment.

#### 1.8 FIRE PROTECTION SPECIALIST

Work specified in this section shall be performed under the supervision of and certified by the Fire Protection Specialist. The Fire Protection Specialist shall be an individual who is a registered professional engineer and a Full Member of the Society of Fire Protection Engineers or who is certified as a Level IV Technician by National Institute for Certification in Engineering Technologies (NICET) in the Automatic Sprinkler System Layout subfield of Fire Protection Engineering Technology in accordance with NICET 1014-7. The Fire Protection Specialist shall be regularly engaged in the design and installation of the type and complexity of system specified in the Contract documents, and shall have served in a similar capacity for at least three systems that have performed in the manner intended for a period of not less than 6 months.

#### 1.9 MANUFACTURER'S REPRESENTATIVE

Work specified in this section shall be performed under the supervision of and certified by a representative of the fire pump manufacturer. The Manufacturer's Representative shall be regularly engaged in the installation of the type and complexity of fire pump(s) specified in the Contract documents, and shall have served in a similar capacity for at least three systems that have performed in the manner intended for a period of not less than 6 months.

#### 1.10 REGULATORY REQUIREMENTS

Compliance with referenced NFPA standards is mandatory. This includes advisory provisions listed in the appendices of such standards, as though the word "shall" had been substituted for the word "should" wherever it appears. In the event of a conflict between specific provisions of this specification and applicable NFPA standards, this specification shall govern. Reference to "authority having jurisdiction" shall be interpreted to mean the Contracting Officer.

### PART 2 PRODUCTS

#### 2.1 STANDARD PRODUCTS

Materials and equipment shall be standard products of a manufacturer regularly engaged in the manufacture of such products and shall essentially duplicate items that have been in satisfactory use for at least 2 years prior to bid opening.

#### 2.2 NAMEPLATES

All equipment shall have a nameplate that identifies the manufacturer's name, address, type or style, model or serial number, and catalog number. Pumps and motors shall have standard nameplates securely affixed in a conspicuous place and easy to read. Fire pump shall have nameplates and markings in accordance with UL 448. Diesel driver shall have nameplate and markings in accordance with UL 1247. Electric motor nameplates shall provide the minimum information required by NFPA 70, Section 430-7.

## 2.3 REQUIREMENTS FOR FIRE PROTECTION SERVICE

Materials and Equipment shall have been tested by Underwriters Laboratories, Inc. and listed in UL Fire Prot Dir or approved by Factory Mutual and listed in FM P7825a and FM P7825b. Where the terms "listed" or "approved" appear in this specification, such shall mean listed in UL Fire Prot Dir or FM P7825a and FM P7825b.

## 2.4 UNDERGROUND PIPING COMPONENTS

### 2.4.1 Pipe and Fittings

Underground piping and piping under the building slab shall be ductile iron with a rated working pressure of 1034 kPa conforming to AWWA C151, with cement mortar lining conforming to AWWA C104. Piping more than 1500 mm outside the building walls shall comply with Section 02510 WATER DISTRIBUTION SYSTEM.

### 2.4.2 Fittings and Gaskets

Fittings shall be ductile iron conforming to AWWA C110. Gaskets shall be suitable in design and size for the pipe with which such gaskets are to be used. Gaskets for ductile iron pipe joints shall conform to AWWA C111.

### 2.4.3 Valves and Valve Boxes

Valves shall be gate valves conforming to AWWA C500 or UL 262. Valves shall have cast-iron body and bronze trim. Valve shall open by counterclockwise rotation. Except for post indicator valves, all underground valves shall be provided with an adjustable cast-iron or ductile iron valve box of a size suitable for the valve on which the box is to be used, but not less than 133 mm in diameter. The box shall be coated with bituminous coating. A cast-iron or ductile-iron cover with the word "WATER" cast on the cover shall be provided for each box.

### 2.4.4 Gate Valve and Indicator Posts

Gate valves for underground installation shall be of the inside screw type with counterclockwise rotation to open. Where indicating type valves are shown or required, indicating valves shall be gate valves with an approved indicator post of a length to permit the top of the post to be located 900 mm above finished grade. Gate valves and indicator posts shall be listed in UL Fire Prot Dir or FM P7825a and FM P7825b.

### 2.4.5 Buried Utility Warning and Identification Tape

Detectable aluminum foil plastic-backed tape or detectable magnetic plastic tape manufactured specifically for warning and identification of buried piping shall be provided for all buried piping. Tape shall be detectable by an electronic detection instrument. Tape shall be color-coded for the utility involved and imprinted in bold black letters continuously and repeatedly over the entire tape length. Warning and identification shall be "CAUTION BURIED WATER PIPING BELOW" or similar wording. Code and lettering shall be permanent and unaffected by moisture and other substances contained in the trench backfill material. Tape shall be buried at a depth of 300 mm



below the top surface of earth or the top surface of the subgrade under pavement.

## 2.5 ABOVEGROUND PIPING COMPONENTS

### 2.5.1 Pipe Sizes 65 mm and Larger

#### 2.5.1.1 Pipe

Piping shall be ASTM A 795, Weight Class STD (Standard), Schedule 40 (except for Schedule 30 for pipe sizes 200 mm and greater in diameter), Type E or Type S, Grade A; black steel pipe. Steel pipe shall be joined by means of flanges welded to the pipe or mechanical grooved joints only. Piping shall not be jointed by welding or weld fittings. Suction piping shall be galvanized on the inside per NFPA 20.

#### 2.5.1.2 Grooved Mechanical Joints and Fittings

Joints and fittings shall be designed for not less than 1200 kPa service and shall be the product of the same manufacturer. Fitting and coupling houses shall be malleable iron conforming to ASTM A 47M, Grade 32510; ductile iron conforming to ASTM A 536, Grade 65-45-12. Gasket shall be the flush type that fills the entire cavity between the fitting and the pipe. Nuts and bolts shall be heat-treated steel conforming to ASTM A 183 and shall be cadmium plated or zinc electroplated.

#### 2.5.1.3 Flanges

Flanges shall be ASME B16.5, Class 150 flanges. Flanges shall be provided at valves, connections to equipment, and where indicated.

#### 2.5.1.4 Gaskets

Gaskets shall be AWWA C111, cloth inserted red rubber gaskets.

#### 2.5.1.5 Bolts

Bolts shall be ASTM A 193/A 193M, Grade B8. Bolts shall extend no less than three full threads beyond the nut with bolts tightened to the required torque.

#### 2.5.1.6 Nuts

Nuts shall be ASTM A 194/A 194M, Grade 8.

#### 2.5.1.7 Washers

Washers shall meet the requirements of ASTM F 436M. Flat circular washers shall be provide under all bolt heads and nuts.

## 2.5.2 Piping Sizes 50 mm and Smaller

### 2.5.2.1 Steel Pipe

Steel piping shall be ASTM A 795, Weight Class STD (Standard), Schedule 40, Type E or Type S, Grade A, zinc-coated steel pipe with threaded end connections. Fittings shall be ASME B16.39, Class 150, zinc-coated threaded fittings. Unions shall be ASME B16.39, Class 150, zinc-coated unions.

### 2.5.2.2 Copper Tubing

Copper tubing shall be ASTM B 88M, Type L or K, soft annealed. Fittings shall be ASME B16.26, flared joint fittings. Pipe nipples shall be ASTM B 42 copper pipe with threaded end connections.

## 2.5.3 Pipe Hangers and Supports

Pipe hangers and support shall be UL listed UL Fire Prot Dir or FM approved FM P7825a and FM P7825b and shall be the adjustable type. Finish of rods, nuts, washers, hangers, and supports shall be zinc-plated after fabrication.

## 2.5.4 Valves

Valves shall be UL listed UL Fire Prot Dir or FM approved FM P7825a and FM P7825b for fire protection service. Valves shall have flange or threaded end connections.

### 2.5.4.1 Gate Valves and Control Valves

Gate valves and control valves shall be outside screw and yoke (O.S.&Y.) type which open by counterclockwise rotation. Butterfly-type control valves are not permitted.

### 2.5.4.2 Tamper Switch

The suction control valves, the discharge control valves, valves to test header and flow meter, and the by-pass control valves shall be equipped with valve tamper switches for monitoring by the fire alarm system.

### 2.5.4.3 Check Valve

Check valve shall be clear open, swing type check valve with flange or threaded inspection plate.

### 2.5.4.4 Relief Valve

Relief valve shall be spring operated type conforming to NFPA 20. A means of detecting water motion in the relief lines shall be provided where the discharge is not visible within the pump house.

### 2.5.4.5 Suction Pressure Regulating Valve

Suction pressure regulating valve shall be FM approved FM P7825a and FM P7825b. Suction pressure shall be monitored through a pressure line to the

controlling mechanism of the regulating valve. Valve shall be arranged in accordance with the manufacturer's recommendations.

## 2.6 FIRE PUMP

Fire pump shall be diesel engine driven. Each pump capacity shall be rated at 63 liters per second with a rated net pressure of 586 kPa. Fire pump shall furnish not less than 150 percent of rated flow capacity at not less than 65 percent of rated net pressure. Pump shall be centrifugal horizontal split case fire pump. Horizontal pump shall be equipped with automatic air release devices. The maximum rated pump speed shall be 2100 rpm when driving the pump at rated capacity. Pump shall conform to the requirements of UL 448. Fire pump discharge and suction gauges shall be oil-filled type.

## 2.7 ELECTRIC MOTOR DRIVER

Motor shall conform to NEMA MG 1 and be marked as complying with NEMA Design B standards. Motor wattage shall be of sufficient size so that the nameplate wattage rating will not be exceeded throughout the entire published pump characteristic curve. The motor and fire pump controller shall be fully compatible.

## 2.8 DIESEL ENGINE DRIVER

Diesel engine driver shall conform to the requirements of UL 1247 and shall be UL listed UL Fire Prot Dir or FM approved FM P7825a and FM P7825b for fire pump service. Driver shall be of the make recommended by the pump manufacturer. The engine shall be closed circuit, liquid-cooled with raw water heat exchanger. Diesel engine shall be electric start type taking current from 2 battery units. Engine shall be equipped with a fuel in-line filter-water separator. Engine conditions shall be monitored with engine instrumentation panel that has a tachometer, hour meter, fuel pressure gauge, lubricating oil pressure gauge, water temperature gauge, and ammeter gauge. Engine shall be connected to horizontal-shaft pump by flexible couplings. An engine jacket water heater shall be provided to maintain a temperature of 49 degrees C in accordance with NFPA 20.

### 2.8.1 Engine Capacity

Engine shall have adequate wattage to drive the pump at all conditions of speed and load over the full range of the pump performance curve. The wattage rating of the engine driver shall be as recommended by the pump manufacturer and shall be derated for temperature and elevation in accordance with NFPA 20. Ambient temperature at the pump location shall be 33.8degrees C. Site elevation shall be 85.3 meters above mean sea level (MSL).

### 2.8.2 Exhaust System External to Engine

Exhaust system shall comply with the requirements of NFPA 20 and NFPA 37. An exhaust muffler shall be provided for each diesel engine driver to reduce noise levels less than 95 dBA. A flexible connector with flange connections shall be provided at the engine. Flexible sections shall be stainless steel suitable for diesel-engines exhaust gas at 538 degrees C.

#### 2.8.2.1 Steel Pipe and Fittings

ASTM A 53, Schedule 40, black steel, welding end connections. ASME B16.9 or ASME B16.11 welding fittings shall be of the same material and weight as the piping.

#### 2.8.2.2 Flanges

ASME B16.5, Class 300. Flanges shall be provided at connections to diesel engines, exhaust mufflers, and flexible connections. Gaskets shall be ASME B16.21, composition ring, 1.5875 mm. ASTM A 193/A 193M, Grade B8 bolts and ASTM A 194/A 194M, Grade 8 nuts shall be provided.

#### 2.8.2.3 Piping Insulation

Products containing asbestos will not be permitted. Exhaust piping system including the muffler shall be insulated with ASTM C 533 calcium silicate insulation, minimum of 75 mm. Insulation shall be secured with not less than 9.525 mm width Type 304 stainless steel bands spaced not more than 200 mm on center. An aluminum jacket encasing the insulation shall be provided. The aluminum jacket shall have a minimum thickness of 0.406 mm, a factory-applied polyethylene and kraft paper moisture barrier on the inside surface. The jacket shall be secured with not less than 13 mm wide stainless steel bands, spaced not less than 200 mm on centers. Longitudinal and circumferential seams of the jacket shall be lapped not less than 75 mm. Jackets on horizontal line shall be installed so that the longitudinal seams are on the bottom side of the pipe. The seams of the jacket for the vertical lines shall be placed on the off-weather side of the pipe. On vertical lines, the circumferential seams of the jacket shall overlap so the lower edge of each jacket overlaps the upper edge of the jacket below.

#### 2.9 FIRE PUMP CONTROLLER

Controller shall be the automatic type and UL listed UL Fire Prot Dir or FM approved FM P7825a and FM P7825b for fire pump service. Pump shall be arranged for automatic start and stop, and manual push-button stop. Automatic stopping shall be accomplished only after all starting causes have returned to normal and after a minimum pump run time has elapsed. Controllers shall be completely terminally wired, ready for field connections, and mounted in a NEMA Type 2 drip-proof enclosure arranged so that controller current carrying parts will not be less than 300 mm above the floor. Controller shall be provided with voltage surge arresters installed per NFPA 20. Controller shall be equipped with a bourdon tube pressure switch or a solid state pressure switch with independent high and low adjustments, automatic starting relay actuated from normally closed contacts, visual alarm lamps and supervisory power light. Controller shall be equipped with a thermostat switch with adjustable setting to monitor the pump room temperature and to provide an alarm when temperatures falls below 5 degrees C.

#### 2.9.1 Controller for Diesel Engine Driven Fire Pump

Controller shall require the pump to run for 30 minutes prior to automatic shutdown. Controller shall be equipped with two battery chargers; two ammeters; two voltmeters, one for each set of batteries. Controller shall automatically alternate the battery sets for starting the pumps. Controller shall be equipped with the following supervisory alarm functions:

- a. Engine Trouble (individually monitored)
  - (1) Engine overspeed
  - (2) Low Oil Pressure
  - (3) High Water Temperature
  - (4) Engine Failure to Start
  - (5) Battery
  - (6) Battery Charger/AC Power Failure
- b. Main Switch Mis-set
- c. Pump Running
- d. Pump Room Trouble (individually monitored)
  - (1) Low Fuel
  - (2) Low Pump Room Temperature
  - (3) Low Reservoir Level

Alarms shall be individually displayed in front of panel by lighting of visual lamps, except that individual lamps are not required for pump running and main switch mis-set. Controller shall be equipped with a 7-day electric pressure recorder with 24-hour back-up mounted inside the controller. The pressure recorder shall provide a readout of the system pressure from 0 to 207 Pa, time, and date. The controller shall be equipped with an audible alarm which will activate upon any engine trouble or pump room trouble alarm condition and alarm silence switch. Controller shall be equipped with terminals for field connection of a remote alarm for main switch mis-set, pump running, engine trouble and pump room trouble; and terminals for remote start. When engine emergency overspeed device operates, the controller shall cause the engine to shut down without time delay and lock out until manually reset.

#### 2.10 BATTERIES

Batteries for diesel engine driver shall be sealed lead calcium batteries. Batteries shall be mounted in a steel rack with non-corrosive, non-conductive base, not less than 300 mm above the floor.

## 2.11 PRESSURE SENSING LINE

A completely separate pressure sensing line shall be provided for each fire pump and for the jockey pump. The sensing line shall be arranged in accordance with Figure A-7-5.2.1. of NFPA 20. The sensing line shall be 15 mm H58 brass tubing complying with ASTM B 135M. The sensing line shall be equipped with two restrictive orifice unions each. Restricted orifice unions shall be ground-face unions with brass restricted diaphragms drilled for a 2.4 mm. Restricted orifice unions shall be mounted in the horizontal position, not less than 1.5 m apart on the sensing line. Two test connections shall be provided for each sensing line. Test connections shall consist of two brass 15 mm globe valves and 8 mm gauge connection tee arranged per NFPA 20. One of the test connections shall be equipped with a 0 to 1380 kPa water oil-filled gauge. Sensing line shall be connected to the pump discharge piping between the discharge piping control valve and the check valve.

## 2.12 PRESSURE MAINTENANCE PUMP

Pressure maintenance pump shall be electric motor driven, horizontal shaft, centrifugal type with a rated discharge of 0.63 liters per second at 862 kPa. Pump shall draft from the suction supply side of the suction pipe gate valve of the fire pump and shall discharge into the system at the downstream side of the pump discharge gate valve. An approved indicating gate valve of the outside screw and yoke (O.S.&Y.) type shall be provided in the maintenance pump discharge and suction piping. Oil-filled water pressure gauge and approved check valve in the maintenance pump discharge piping shall be provided. Check valve shall be swing type with removable inspection plate.

### 2.12.1 Pressure Maintenance Pump Controller

Pressure maintenance pump controller shall be arranged for automatic and manual starting and stopping and equipped with a "manual-off-automatic" switch. The controller shall be completely prewired, ready for field connections, and wall-mounted in a NEMA Type 2 drip-proof enclosure. The controller shall be equipped with a bourdon tube pressure switch or a solid state pressure switch with independent high and low adjustments for automatic starting and stopping. A sensing line shall be provided connected to the pressure maintenance pump discharge piping between the control valve and the check valve. The sensing line shall conform to paragraph, PRESSURE SENSING LINE. The sensing line shall be completely separate from the fire pump sensing lines. An adjustable run timer shall be provided to prevent frequent starting and stopping of the pump motor. The run timer shall be set for 2 minutes.

## 2.13 DIESEL FUEL SYSTEM EXTERNAL TO ENGINE

Fuel system shall be provided that meets all requirements and advisory provisions of NFPA 20 and NFPA 37. The fuel tank vent piping shall be equipped with screened weatherproof vent cap. Vents shall be extended to the outside. Each tank shall be equipped with a fuel level gauge. Flexible bronze or stainless steel piping connectors with single braid shall be provided at each piping connection to the diesel engine. Supply, return, and fill piping shall be steel piping, except supply and return piping may

be copper tubing. Fuel lines shall be protected against mechanical damage. Fill line shall be equipped with 16 mesh removable wire screen. Fill lines shall be extended to the exterior. A weatherproof tank gauge shall be mounted on the exterior wall near each fill line for each tank. The fill cap shall be able to be locked by padlock. The engine supply (suction) connection shall be located on the side of the fuel tank so that 5 percent of the tank volume provides a sump volume not useable by the engine. The elevation of the fuel tank shall be such that the inlet of the fuel supply line is located so that its opening is no lower than the level of the engine fuel transfer pump. The bottom of the tank shall be pitched 21 mm per meter to the side opposite the suction inlet connection, and to an accessible 25 mm plugged globe drain valve.

#### 2.13.1 Steel pipe

ASTM A 53, hot-dipped zinc-coated, Schedule 40, threaded connections. Fittings shall be ASME B16.3, zinc-coated, threaded malleable iron fittings. Unions shall be ASME B16.39 zinc-coated, threaded unions.

#### 2.13.2 Diesel Fuel Tanks

UL 80 or UL 142 for aboveground tanks.

#### 2.13.3 Valves

An indicating and lockable ball valve shall be provided in the supply line adjacent to the tank suction inlet connection. A check valve shall be provided in fuel return line. Valves shall be suitable for oil service. Valves shall have union end connections or threaded end connections.

- a. Globe valve: MSS SP-80 Class 125
- b. Check valve: MSS SP-80, Class 125, swing check
- c. Ball valve: Full port design, copper alloy body, 2-position lever handle.

#### 2.14 PUMP BASE PLATE AND PAD

A common base plate shall be provided for each horizontal-shaft fire pump for mounting pump and driver unit. The base plate shall be constructed of cast iron with raised lip tapped for drainage or welded steel shapes with suitable drainage. Each base plate for the horizontal fire pumps shall be provided with a 25 mm galvanized steel drain line piped to the nearest floor drain. Pump units and bases shall be mounted on a raised 140 mm reinforced concrete pad that is an integral part of the reinforced concrete floor.

#### 2.15 HOSE VALVE MANIFOLD TEST HEADER

Hose valve test header shall be connected by ASME B16.5, Class 150 flange inlet connection. Hose valves shall be UL listed UL Fire Prot Dir or FM approved FM P7825a and FM P7825b bronze hose gate valves with 65 mm American National Fire Hose Connection Screw Standard Threads (NH) per NFPA 1963. The number of valves shall be per NFPA 20. Each hose valve shall be

equipped with a cap and chain, and located no more than 900 mm and no less than 600 mm above grade.

#### 2.16 FLOW METER

Meter shall be UL listed UL Fire Prot Dir or FM approved FM P7825a and FM P7825bas flow meters for fire pump installation with direct flow readout device. Flow meter shall be capable of metering any waterflow quantities between 50 percent and 150 percent of the rated flow of the pumps. The flow meter shall be arranged in accordance with Figure A-2-14.2.1 of NFPA 20. The meter throttle valve and the meter control valves shall be O.S.&Y. valves. Automatic air release shall be provided if flow meter test discharge is piped to the pump suction and forms a closed-loop meter arrangement as defined in Figure A-2-14.2.1 of NFPA 20.

#### 2.17 PIPE SLEEVE

A pipe sleeve shall be provided at each location where piping passes through walls, ceilings, roofs, and floors, including pipe entering buildings from the exterior. Sleeves shall be grouted in position during construction. Sleeve shall be of sufficient length to pass through the entire thickness of the wall, ceilings, roofs and floors. The space between the exterior surface of the pipe and the interior surface of the sleeve shall be firmly packed with mineral wool insulation and caulk at both ends with plastic waterproof cement which will dry to a firm but pliable mass, or with a segmented elastomeric seal. Where pipes pass through fire walls or fire floors, a fire seal shall be provided between the pipe and the sleeve in accordance with Section 07840 FIRESTOPPING. Sleeves in masonry and concrete walls, ceiling, roofs and floors shall be hot-dip galvanized steel, ductile-iron, or cast-iron. Other sleeves shall be galvanized steel sheet pipe not less than 4.4 kg per square meter.

#### 2.18 ESCUTCHEON (WALL) PLATES

Escutcheon plates shall be one-piece or split-hinge type metal plates and shall be provided for piping passing through floors, walls, and ceiling in exposed areas. In finished areas, plates shall be polished stainless steel or chromium-plated finish on copper alloy. In unfinished areas, plates shall have painted finish. Plates shall be secured in position.

#### 2.19 DISINFECTING MATERIALS

##### 2.19.1 Liquid Chlorine

Liquid chlorine shall conform to AWWA B301.

##### 2.19.2 Hypochlorites

Calcium hypochlorite and sodium hypochlorite shall conform to AWWA B300.



### PART 3 EXECUTION

#### 3.1 FIRE PUMP INSTALLATION RELATED SUBMITTALS

The Fire Protection Specialist shall prepare a list of the submittals from the Contract Submittal Register that relate to the successful installation the fire pump. The submittals identified on this list shall be accompanied by a letter of approval signed and dated by the Fire Protection Specialist when submitted to the Government.

#### 3.2 INSPECTION BY FIRE PROTECTION SPECIALIST

The Fire Protection Specialist shall inspect the fire pump installation periodically assure that the installation conforms to the contract requirements. The Fire Protection Specialist shall perform a thorough inspection of the fire pump installation, including visual observation of the pump while running shall be conducted. There shall be no excessive vibration, leaks (oil or water), unusual noises, overheating, or other potential problems. Inspection shall include piping and equipment clearance, access, supports, and guards. Any discrepancy shall be brought to the attention of the Contracting Officer in writing, no later than three working days after the discrepancy is discovered. The Fire Protection Specialist shall witness the preliminary and final acceptance tests and, after completion of the inspections and a successful final acceptance test, shall sign test results and certify in writing that the installation the fire pump installation is in accordance with the contract requirements.

#### 3.3 INSTALLATION REQUIREMENTS

Installation, workmanship, fabrication, assembly, erection, examination, inspection and testing shall be in accordance NFPA 20, except as modified herein. In addition, the fire pump and engine shall be installed in accordance with the written instructions of the manufacturer.

#### 3.4 PIPE AND FITTINGS

Piping shall be inspected, tested and approved before burying, covering, or concealing. Fittings shall be provided for changes in direction of piping and for all connections. Changes in piping sizes shall be made using tapered reducing pipe fittings. Bushings shall not be used.

##### 3.4.1 Cleaning of Piping

Interior and ends of piping shall be clean and free of any water or foreign material. Piping shall be kept clean during installation by means of plugs or other approved methods. When work is not in progress, open ends of the piping shall be securely closed so that no water or foreign matter will enter the pipes or fittings. Piping shall be inspected before placing in position.

##### 3.4.2 Threaded Connections

Jointing compound for pipe threads shall be polytetrafluoroethylene (PTFE) pipe thread tape conforming to ASTM D 3308 and shall be applied to male threads only. Exposed ferrous pipe threads shall be provided with one coat

of zinc molybdate primer applied to a minimum of dry film thickness of 0.025 mm.

### 3.4.3 Pipe Hangers and Supports

Additional hangers and supports shall be provided for concentrated loads in aboveground piping, such as for valves and risers.

#### 3.4.3.1 Vertical Piping

Piping shall be supported at each floor, at not more than 3 meters intervals.

#### 3.4.3.2 Horizontal Piping

Horizontal piping supports shall be spaced as follows:

##### MAXIMUM SPACING (METERS)

Nominal Pipe Size (mm)	25 and Under	32	40	50	65	80	90	100	125	150+
Steel Pipe	2	2.4	2.7	3	3.3	3.6	3.9	4.2	4.8	5.0

#### 3.4.4 Underground Piping

Installation of underground piping and fittings shall conform to NFPA 24. Joints shall be anchored in accordance with NFPA 24. Concrete thrust block shall be provided at elbow where pipe turns up towards floor, and the pipe riser shall be restrained with steel rods from the elbow to the flange above the floor. After installation per NFPA 24, rods and nuts shall be thoroughly cleaned and coated with asphalt or other corrosion-retard material approved by the Contracting Officer. Minimum depth of cover shall be 900 mm.

### 3.5 ELECTRICAL WORK

Electric motor and controls shall be in accordance with NFPA 20 and NFPA 70, unless more stringent requirements are specified herein or are indicated on the drawings. Electrical wiring and associated equipment shall be provided in accordance with NFPA 20 and Section 16415 ELECTRICAL WORK, INTERIOR.

### 3.6 PIPE COLOR CODE MARKING

Color code marking of piping shall be as specified in Section 09900 PAINTING, GENERAL.

### 3.7 FLUSHING

The fire pump suction and discharge piping shall be flushed at 120 percent of rated capacity of each pump. Where the pump installation consists of more than one pump, the flushing shall be the total quantity of water flowing when all pumps are discharging at 120 percent of their rated capacities. The new pumps may be used to attain the required flushing volume. Flushing operations shall continue until water is clear, but not less than 10 minutes. The Contractor shall submit a signed and dated flushing certificate before requesting field testing.

### 3.8 FIELD TESTS

#### 3.8.1 Hydrostatic Test

Piping shall be hydrostatically tested at 1551 kPa for a period of 2-hours, or at least 345 kPa in excess of the maximum pressure, when the maximum pressure in the system is in excess of 1207 kPa.

#### 3.8.2 Preliminary Test

The Fire Protection Specialist shall take all readings and measurements. The Manufacturer's Representative, a representative of the fire pump controller manufacturer, and a representative of the diesel engine manufacturer (when supplied) shall witness the complete operational testing of the fire pump and drivers. The fire pump controller manufacturer's representative and the diesel engine manufacturer's representative shall each be an experienced technician employed by the respective manufacturers and capable of demonstrating operation of all features of respective components including trouble alarms and operating features. Fire pumps, drivers and equipment shall be thoroughly inspected and tested to insure that the system is correct, complete, and ready for operation. Tests shall ensure that pumps are operating at rated capacity, pressure and speed. Tests shall include manual starting and running to ensure proper operation and to detect leakage or other abnormal conditions, flow testing, automatic start testing, testing of automatic settings, sequence of operation check, test of required accessories; test of pump alarms devices and supervisory signals, test of pump cooling, operational test of relief valves, and test of automatic power transfer, if provided. Pumps shall run without abnormal noise, vibration or heating. If any component or system was found to be defective, inoperative, or not in compliance with the contract requirements during the tests and inspection, the corrections shall be made and the entire preliminary test shall be repeated.

#### 3.8.3 Final Acceptance Test

The Fire Protection Specialist shall take all readings and measurements. The Manufacturer's Representative, the fire pump controller manufacturer's representative, and the diesel engine manufacturer's representative (when supplied) shall also witness for the final tests. The Contractor shall be responsible for repairing any damage caused by hose streams or other aspects of the test. The final acceptance test shall include the following:

#### 3.8.3.1 Flow Tests

Flow tests using the test header, hoses and playpipe nozzles shall be conducted. Flow tests shall be performed at churn (no flow), 75, 100, 125 and 150 percent capacity for each pump and at full capacity of the pump installation. Flow readings shall be taken from each nozzle by means of a calibrated pitot tube with gauge or other approved measuring equipment. Rpm, suction pressure and discharge pressure reading shall be taken as part of each flow test. Voltage and ampere readings shall taken on each phase as part of each flow test for electric-motor driven pumps.

#### 3.8.3.2 Starting Tests

Pumps shall be tested for automatic starting and sequential starting. Setting of the pressure switches shall be tested when pumps are operated by pressure drop. Tests may be performed by operating the test connection on the pressure sensing lines. As a minimum, each pump shall be started automatically 10 times and manually 10 times, in accordance with NFPA 20. Tests of engine-driven pumps shall be divided equally between both set of batteries. The fire pumps shall be operated for a period of a least 10 minutes for each of the starts. Pressure settings that include automatic starting and stopping of the fire pump shall be indicated on an etched plastic placard, attached to the corresponding pump controller.

#### 3.8.3.3 Battery Changeover

Diesel driven fire pumps shall be tested for automatic battery changeover in event of failure of initial battery units.

#### 3.8.3.4 Alarms

All pump alarms, both local and remote, shall be tested. Supervisory alarms for diesel drivers shall be electrically tested for low oil pressure, high engine jacket coolant temperature, shutdown from overspeed, battery failure and battery charger failure.

#### 3.8.3.5 Miscellaneous

Valve tamper switches shall be tested. Pressure recorder operation relief valve settings, valve operations, operation and accuracy of meters and gauges, and other accessory devices shall be verified.

#### 3.8.4 Correction of Deficiencies

If equipment was found to be defective or non-compliant with contract requirements, the Contractor shall performed corrective actions and repeat the tests. Tests shall be conducted and repeated if necessary until the system has been demonstrated to comply with all contract requirements.

#### 3.8.5 Test Equipment

The Contractor shall provide all equipment and instruments necessary to conduct a complete final test, including 65 mm diameter hoses, playpipe nozzles, pitot tube gauges, portable digital tachometer, voltage and ampere meters, and calibrated oil-filled water pressure gauges. The Contractor

shall provide all necessary supports to safely secure hoses and nozzles during the test. The Contractor shall furnish water for the tests.

#### 3.8.6 Test Documentation

The Manufacturer's Representative shall supply a copy of the manufacturer's certified curve for each fire pump at the time of the test. The Fire Protection Specialist shall record all test results and plot curve of each pump performance during the test. Complete pump acceptance test data of each fire pump shall be recorded. The pump acceptance test data shall be on forms that give the detail pump information such as that which is indicated in Figure A-11-2.6.3(f) of NFPA 20. All test data records shall be submitted in a three ring binder.

#### 3.9 DISINFECTION

After all system components are installed including pumps, piping, and other associated work, and all hydrostatic test(s) are successfully completed, thoroughly flush the pumps and all piping to be disinfected with potable water until there is no visible sign of dirt or other residue. and hydrostatic test are successfully completed, each portion of the piping specified in this Section system to be disinfected shall be thoroughly flushed with potable water until all entrained dirt and other foreign materials have been removed before introducing chlorinating material. The chlorinating material shall be hypochlorites or liquid chlorine. Water chlorination procedure shall be in accordance with AWWA M20. The chlorinating material shall be fed into the sprinkler piping at a constant rate of 50 parts per million (ppm). A properly adjusted hypochlorite solution injected into the system with a hypochlorinator, or liquid chlorine injected into the system through a solution-fed chlorinator and booster pump shall be used. Chlorination application shall continue until the entire system is filled. The water shall remain in the system for a minimum of 24 hours. Each valve in the system shall be opened and closed several times to ensure its proper disinfection. Following the 24-hour period, no less than 25 ppm chlorine residual shall remain in the system. The system shall then be flushed with clean water until the residual chlorine is reduced to less than one part per million. Samples of water in disinfected containers for bacterial examination will be taken from several system locations which are approved by the Contracting Officer. Samples shall be tested for total coliform organisms (coliform bacteria, fecal coliform, streptococcal, and other bacteria) in accordance with AWWA EWW. The testing method shall be either the multiple-tube fermentation technique or the membrane-filter technique. The disinfection shall be repeated until tests indicate the absence of coliform organisms (zero mean coliform density per 100 milliliters) in the samples for at least 2 full days. The system will not be accepted until satisfactory bacteriological results have been obtained.

#### 3.10 FIELD TRAINING

The Fire Protection Specialist and the Manufacturer's Representative shall conduct a training course for operating and maintenance personnel as designated by the Contracting Officer. Training shall be provided for a period of 8 hours of normal working time and shall start after the fire pump installation is functionally complete but prior to the start tests specified

01062/BERGER/ABAM  
FY02 Tactical Equipment Complex  
Fort Lewis, Washington

herein. The field instruction shall cover all of the items contained in the approved Operating and Maintenance Instructions.

-- End of Section --

SECTION 13930

WET PIPE SPRINKLER SYSTEM, FIRE PROTECTION

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by basic designation only.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM A 47M	(1999) Ferritic Malleable Iron Castings Metric)
ASTM A 53	(1999b) Pipe, Steel, Black and Hot-Dipped, Zinc-Coated, Welded and Seamless
ASTM A 135	(1997c) Electric-Resistance-Welded Steel Pipe
ASTM A 183	(1983; R 1998) Carbon Steel Track Bolts and Nuts
ASTM A 536	(1999e1) Ductile Iron Castings
ASTM A 795	(1997) Black and Hot-Dipped Zinc-Coated (Galvanized) Welded and Seamless Steel Pipe for Fire Protection Use

ASME INTERNATIONAL (ASME)

ASME B16.1	(1998) Cast Iron Pipe Flanges and Flanged Fittings
ASME B16.3	(1992) Malleable Iron Threaded Fittings
ASME B16.4	(1998) Cast Iron Threaded Fittings
ASME B16.9	(1993) Factory-Made Wrought Steel Buttwelding Fittings
ASME B16.11	(1996) Forged Fittings, Socket-Welding and Threaded
ASME B16.21	(1992) Nonmetallic Flat Gaskets for Pipe Flanges
ASME B18.2.1	(1996) Square and Hex Bolts and Screws (Inch Series)
ASME B18.2.2	(1987; R 1993) Square and Hex Nuts (Inch Series)

10162/BERGER/ABAM  
FY02 Tactical Equipment Complex  
Fort Lewis, Washington

AMERICAN SOCIETY OF SANITARY ENGINEERING FOR PLUMBING AND SANITARY  
RESEARCH (ASSE)

ASSE 1015 (1993) Double Check Backflow Prevention  
Assembly

AMERICAN WATER WORKS ASSOCIATION (AWWA)

AWWA B300 (1992) Hypochlorites

AWWA B301 (1992) Liquid Chlorine

AWWA C104 (1995) Cement-Mortar Lining for Ductile-Iron  
Pipe and Fittings for Water

AWWA C110 (1993) Ductile-Iron and Gray-Iron Fittings, 3  
In. Through 48 In. (75 mm through 1200 mm),  
for Water and Other Liquids

AWWA C111 (1995) Rubber-Gasket Joints for Ductile-Iron  
Pressure Pipe and Fittings

AWWA C151 (1996) Ductile-Iron Pipe, Centrifugally Cast,  
for Water or Other Liquids

AWWA C203 (1997) Coal-Tar Protective Coatings and  
Linings for Steel Water Pipelines - Enamel  
and Tape - Hot-Applied

FACTORY MUTUAL ENGINEERING AND RESEARCH (FM)

FM P7825a (1998) Approval Guide Fire Protection

FM P7825b (1998) Approval Guide Electrical Equipment

MANUFACTURERS STANDARDIZATION SOCIETY OF THE VALVE AND FITTINGS  
INDUSTRY (MSS)

MSS SP-71 (1997) Cast Iron Swing Check Valves, Flanges  
and Threaded Ends

NATIONAL FIRE PROTECTION ASSOCIATION (NFPA)

NFPA 13 (1999) Installation of Sprinkler Systems

NFPA 24 (1995) Installation of Private Fire Service  
Mains and Their Appurtenances

NFPA 1963 (1998) Fire Hose Connections



10162/BERGER/ABAM  
FY02 Tactical Equipment Complex  
Fort Lewis, Washington

NATIONAL INSTITUTE FOR CERTIFICATION IN ENGINEERING TECHNOLOGIES  
(NICET)

NICET 1014-7 (1995) Program Detail Manual for  
Certification in the Field of Fire Protection  
Engineering Technology (Field Code 003)  
Subfield of Automatic Sprinkler System Layout

UNDERWRITERS LABORATORIES (UL)

UL Bld Mat Dir (1999) Building Materials Directory

UL Fire Prot Dir (1999) Fire Protection Equipment Directory

MILITARY HANDBOOKS (MILHDBK)

1008C Fire Protection for Facilities Engineering,  
Design, and Construction.

1.2 GENERAL REQUIREMENTS

Wet pipe sprinkler system shall be provided in all areas of the building. The sprinkler system shall provide fire sprinkler protection for the entire area. Except as modified herein, the system shall be designed and installed in accordance with the Military Handbook 1008C and NFPA #13, 1999 Edition. Rack sprinklers shall be in accordance with NFPA #13 1999 Edition. Pipe sizes which are not indicated on drawings shall be determined by hydraulic calculation. The Contractor shall design any portions of the sprinkler system that are not indicated on the drawings including locating sprinklers, piping and equipment, and size piping and equipment when this information is not indicated on the drawings or is not specified herein. The design of the sprinkler system shall be based on hydraulic calculations, and the other provisions specified herein.

1.2.1 Hydraulic Design

The system shall be hydraulically designed to discharge a minimum density of 4.07 L/Min per square meter over the Hydraulically most demanding 280 square meters of floor area for the office & common rooms. The rest of the complex shall be Hydraulically designed to discharge a minimum density of 8.15 L/min per square meter over the hydraulically most demanding 280 square meters of floor area. The warehouse portion of the PBO building which will have a minimum density discharge of 15.9 L/min per square meter over the hydraulically most demanding 190 square meters of floor area with (8) heads on (1) level of in-rack sprinklers. Density requirements for the PBO warehouse is based upon Class IV encapsulated commodities with up to 25% by volume, Group "A" plastics stored to 7.0 meters in single row racks on conventional wood pallets with 74 degrees C in-rack sprinklers and 141 degrees C ceiling sprinklers. The minimum pipe size for branch lines in gridded systems shall be 32 mm. Hydraulic calculations shall be in accordance with the Area/Density Method of the Military Handbook 1008C and NFPA #13, 1999 Edition.

#### 1.2.1.1 Hose Demand

An allowance for exterior hose streams of 1892.5 L/min shall be added to the sprinkler system demand at the fire hydrant shown on the drawings closest to the point where the water service enters the building.

#### 1.2.1.2 Basis for Calculations

The design of the system shall be based upon a water supply with a static pressure of 283 kpa, and a flow of 3759 L/min at a residual pressure of 241 kpa. Water supply shall be presumed available the hydrant located at 3rd Division Drive and Mastin Avenue. Hydraulic calculations shall be based upon the Hazen-Williams formula with a "C" value of 120 for steel piping, 150 for copper tubing, 140 for new underground. Hydraulic calculations shall be based on operation of the fire pump(s) provided in Section 13920 FIRE PUMP.

#### 1.2.2 Sprinkler Spacing

Sprinklers shall be uniformly spaced on branch lines. Maximum spacing per sprinkler shall not exceed limits specified in the Military Handbook 1008C or NFPA 13 1999 edition (whichever is more stringent) for light hazard, ordinary hazard and rack storage occupancies.

#### 1.3 COORDINATION OF TRADES

Piping offsets, fittings, and any other accessories required shall be furnished as required to provide a complete installation and to eliminate interference with other construction. Sprinkler shall be installed over and under ducts, piping and platforms when such equipment can negatively effect or disrupt the sprinkler discharge pattern and coverage.

#### 1.4 DELIVERY AND STORAGE

All equipment delivered and placed in storage shall be housed in a manner to preclude any damage from the weather, humidity and temperature variations, dirt and dust, or other contaminants. Additionally, all pipes shall either be capped or plugged until installed.

#### 1.5 FIELD MEASUREMENTS

The Contractor shall become familiar with all details of the work, verify all dimensions in the field, and shall advise the Contracting Officer of any discrepancy before performing the work.

#### 1.6 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only. When used, a designation following the "G" designation identifies the office that will review the submittal for the Government. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES::

#### SD-02 Shop Drawings

##### Sprinkler System Shop Drawings; G, RE.

Three copies of the Sprinkler System Shop Drawings, no later than 21 days prior to the start of sprinkler system installation. The Sprinkler System Shop Drawings shall conform to the requirements established for working plans as prescribed in NFPA 13. Drawings shall include plan and elevation views demonstrating that the equipment will fit the allotted spaces with clearance for installation and maintenance. Each set of drawings shall include the following:

- a. Descriptive index of drawings in the submittal with drawings listed in sequence by drawing number. A legend identifying device symbols, nomenclature, and conventions used.
- b. Floor plans drawn to a scale not less than 1:100 which clearly show locations of sprinklers, risers, pipe hangers, seismic separation assemblies, sway bracing, inspector's test connections, drains, and other applicable details necessary to clearly describe the proposed arrangement. Each type of fitting used and the locations of bushings, reducing couplings, and welded joints shall be indicated.
- c. Actual center-to-center dimensions between sprinklers on branch lines and between branch lines; from end sprinklers to adjacent walls; from walls to branch lines; from sprinkler feed mains, cross-mains and branch lines to finished floor and roof or ceiling. A detail shall show the dimension from the sprinkler and sprinkler deflector to the ceiling in finished areas.
- d. Longitudinal and transverse building sections showing typical branch line and cross-main pipe routing as well as elevation of each typical sprinkler above finished floor.
- e. Details of each type of riser assembly; pipe hanger; sway bracing for earthquake protection, and restraint of underground water main at point-of-entry into the building, and electrical devices and interconnecting wiring.

##### As-Built Shop Drawings; FIO.

As-built shop drawings, at least 14 days after completion of the Final Tests. The Sprinkler System Drawings shall be updated to reflect as-built conditions after all related work is completed and shall be on reproducible full-size mylar film.

#### SD-03 Product Data

##### Fire Protection Related Submittals; FIO.

A list of the Fire Protection Related Submittals, no later than 7 days after the approval of the Fire Protection Specialist.

Load Calculations for Sizing Sway Bracing; G, RE.

For protection against damage from earthquakes, load calculations shall be provided for sizing of sway bracing.

Components and Equipment Data; G, RE.

Manufacturer's catalog data included with the Sprinkler System Drawings for all items specified herein. The data shall be highlighted to show model, size, options, etc., that are intended for consideration. Data shall be adequate to demonstrate compliance with all contract requirements. In addition, a complete equipment list that includes equipment description, model number and quantity shall be provided.

Hydraulic Calculations; G, RE.

Hydraulic calculations, including a drawing showing hydraulic reference points and pipe segments.

Spare Parts; FIO.

Spare parts data shall be included for each different item of material and equipment specified. The data shall include a complete list of parts and supplies, with current unit prices and source of supply, and a list of parts recommended by the manufacturer to be replaced after 1 year and 3 years of service. A list of special tools and test equipment required for maintenance and testing of the products supplied by the Contractor shall be included.

Preliminary Tests Procedures; G, RE.

Proposed procedures for Preliminary Tests, no later than 14 days prior to the proposed start of the tests.

Final Acceptance Test Procedures; G, RE.

Proposed procedures for Final Acceptance Test, no later than 14 days prior to the proposed start of the tests.

On-site Training Schedule; G, RE.

Proposed On-site Training schedule, at least 14 days prior to the start of related training.

Preliminary Tests; G, RE.

Proposed date and time to begin Preliminary Tests, submitted with the Preliminary Tests Procedures.

Final Acceptance Test; G, RE.

Proposed date and time to begin Final Acceptance Test, submitted with the Final Acceptance Test Procedures. Notification shall be provided at least 14 days prior to the proposed start of the test. Notification shall include a copy of the Contractor's Material & Test Certificates.

Fire Protection Specialist Qualifications; G; RE.

The name and documentation of certification of the proposed Fire Protection Specialists, no later than 14 days after the Notice to Proceed and prior to the submittal of the sprinkler system drawings and hydraulic calculations.

Sprinkler System Installer Qualifications; G, RE.

The name and documentation of certification of the proposed Sprinkler System Installer, concurrent with submittal of the Fire Protection Specialist Qualifications.

#### SD-06 Test Reports

Preliminary Tests Report; G; RE.

Three copies of the completed Preliminary Tests Reports, no later than 7 days after the completion of the Preliminary Tests. The Preliminary Tests Report shall include both the Contractor's Material and Test Certificate for Underground Piping and the Contractor's Material and Test Certificate for Aboveground Piping. All items in the Preliminary Tests Report shall be signed by the Fire Protection Specialist.

Final Acceptance Test Report; G, RE.

Three copies of the completed Final Acceptance Tests Reports, no later than 7 days after the completion of the Final Acceptance Tests. All items in the Final Acceptance Report shall be signed by the Fire Protection Specialist.

#### SD-07 Certificates

Fire Protection Specialist Inspection; G, RE.

Concurrent with the Final Acceptance Test Report, certification by the Fire Protection Specialist that the sprinkler system is installed in accordance with the contract requirements, including signed approval of the Preliminary and Final Acceptance Test Reports.

#### SD-10 Operation and Maintenance Data

##### Wet Pipe Sprinkler System; FIO.

Six manuals listing step-by-step procedures required for system startup, operation, shutdown, and routine maintenance, at least 14 days prior to field training. The manuals shall include the manufacturer's name, model number, parts list, list of parts and tools that should be kept in stock by the owner for routine maintenance including the name of a local supplier, simplified wiring and controls diagrams, troubleshooting guide, and recommended service organization (including address and telephone number) for each item of equipment.

#### 1.7 HYDRAULIC CALCULATIONS

Hydraulic calculations shall be as outlined in NFPA 13 the Military Handbook 1008C or which ever is more stringent, except that calculations shall be performed by computer using software intended specifically for fire protection system design using the design data shown on the drawings. Software that uses k-factors for typical branch lines is not acceptable. Calculations shall be based on the water supply data shown on the drawings. Calculations shall substantiate that the design area used in the calculations is the most demanding hydraulically. Water supply curves and system requirements shall be plotted on semi-logarithmic graph paper so as to present a summary of the complete hydraulic calculation. A summary sheet listing sprinklers in the design area and their respective hydraulic reference points, elevations, actual discharge pressures and actual flows shall be provided. Elevations of hydraulic reference points (nodes) shall be indicated. Documentation shall identify each pipe individually and the nodes connected thereto. The diameter, length, flow, velocity, friction loss, number and type fittings, total friction loss in the pipe, equivalent pipe length and Hazen-Williams coefficient shall be indicated for each pipe. For gridded systems, calculations shall show peaking of demand area friction loss to verify that the hydraulically most demanding area is being used. Also for gridded systems, a flow diagram indicating the quantity and direction of flows shall be included. A drawing showing hydraulic reference points (nodes) and pipe designations used in the calculations shall be included and shall be independent of shop drawings.

#### 1.8 FIRE PROTECTION SPECIALIST

Work specified in this section shall be performed under the supervision of and certified by the Fire Protection Specialist. The Fire Protection Specialist shall be an individual who is a registered professional engineer and a Full Member of the Society of Fire Protection Engineers or who is certified as a Level III Technician by National Institute for Certification in Engineering Technologies (NICET) in the Automatic Sprinkler System Layout subfield of Fire Protection Engineering Technology in accordance with NICET 1014-7. The Fire Protection Specialist shall be regularly engaged in the design and installation of the type and complexity of system specified in the Contract documents, and shall have served in a similar capacity for at least three systems that have performed in the manner intended for a period of not less than 6 months.

## 1.9 SPRINKLER SYSTEM INSTALLER QUALIFICATIONS

Work specified in this section shall be performed by the Sprinkler System Installer. The Sprinkler System Installer shall be regularly engaged in the installation of the type and complexity of system specified in the Contract documents, and shall have served in a similar capacity for at least three systems that have performed in the manner intended for a period of not less than 6 months.

## 1.10 REGULATORY REQUIREMENTS

Compliance with referenced NFPA standards is mandatory. This includes advisory provisions listed in the appendices of such standards, as though the word "shall" had been substituted for the word "should" wherever it appears. In the event of a conflict between specific provisions of this specification and applicable NFPA standards, this specification shall govern. Reference to "authority having jurisdiction" shall be interpreted to mean the Contracting Officer.

## PART 2 PRODUCTS

### 2.1 STANDARD PRODUCTS

Materials and equipment shall be standard products of a manufacturer regularly engaged in the manufacture of such products and shall essentially duplicate items that have been in satisfactory use for at least 2 years prior to bid opening.

### 2.2 NAMEPLATES

All equipment shall have a nameplate that identifies the manufacturer's name, address, type or style, model or serial number, and catalog number.

### 2.3 REQUIREMENTS FOR FIRE PROTECTION SERVICE

Materials and Equipment shall have been tested by Underwriters Laboratories, Inc. and listed in UL Fire Prot Dir or approved by Factory Mutual and listed in FM P7825a and FM P7825b. Where the terms "listed" or "approved" appear in this specification, such shall mean listed in UL Fire Prot Dir or FM P7825a and FM P7825b

### 2.4 UNDERGROUND PIPING COMPONENTS

#### 2.4.1 Pipe

Piping from a point 150 mm above the floor to the point of connection to the new water mains shall be ductile iron with a rated working pressure of 1034 kPa conforming to AWWA C151, with cement mortar lining conforming to AWWA C104. Piping more than 1500 mm outside the building walls shall comply with Section 02510 WATER DISTRIBUTION SYSTEM.

#### 2.4.2 Fittings and Gaskets

Fittings shall be ductile iron conforming to AWWA C110. Gaskets shall be suitable in design and size for the pipe with which such gaskets are to be used. Gaskets for ductile iron pipe joints shall conform to AWWA C111.

#### 2.4.3 Gate Valve and Indicator Posts

Gate valves for underground installation shall be of the inside screw type with counter-clockwise rotation to open. Where indicating type valves are shown or required, indicating valves shall be gate valves with an approved indicator post of a length to permit the top of the post to be located 900 mm above finished grade. Gate valves and indicator posts shall be listed in UL Fire Prot Dir or FM P7825a and FM P7825b.

### 2.5 ABOVEGROUND PIPING COMPONENTS

Aboveground piping shall be steel or copper.

#### 2.5.1 Steel Piping Components

##### 2.5.1.1 Steel Pipe

Except as modified herein, steel pipe shall be black as permitted by NFPA 13 and shall conform to applicable provisions of ASTM A 795, ASTM A 53, or ASTM A 135. Pipe in which threads or grooves are cut shall be Schedule 40 or shall be listed by Underwriters' Laboratories to have a corrosion resistance ratio (CRR) of 1.0 or greater after threads or grooves are cut. Pipe shall be marked with the name of the manufacturer, kind of pipe, and ASTM designation.

##### 2.5.1.2 Fittings for Non-Grooved Steel Pipe

Fittings shall be cast iron conforming to ASME B16.4, steel conforming to ASME B16.9 or ASME B16.11, or malleable iron conforming to ASME B16.3. Fittings into which sprinklers, drop nipples or riser nipples (sprigs) are screwed shall be threaded type. Plain-end fittings with mechanical couplings, fittings that use steel gripping devices to bite into the pipe and segmented welded fittings shall not be used.

##### 2.5.1.3 Grooved Mechanical Joints and Fittings

Joints and fittings shall be designed for not less than 1200 kPa service and shall be the product of the same manufacturer. Fitting and coupling houses shall be malleable iron conforming to ASTM A 47M, Grade 32510; ductile iron conforming to ASTM A 536, Grade 65-45-12. Gasket shall be the flush type that fills the entire cavity between the fitting and the pipe. Nuts and bolts shall be heat-treated steel conforming to ASTM A 183 and shall be cadmium plated or zinc electroplated. No grooved fittings or couplings are to be installed above hard ceilings (ceilings other than drop in ceilings) or behind walls for all pipe sizes. Pipe connections for these locations to be made with threaded or flanged fittings.



#### 2.5.1.4 Flanges

Flanges shall conform to NFPA 13 and ASME B16.1. Gaskets shall be non-asbestos compressed material in accordance with ASME B16.21, 1.6 mm thick, and full face or self-centering flat ring type. Bolts shall be squarehead conforming to ASME B18.2.1 and nuts shall be hexagon type conforming to ASME B18.2.2.

#### 2.5.2 Pipe Hangers

Hangers shall be listed in UL Fire Prot Dir or FM P7825a and FM P7825b and of the type suitable for the application, construction, and pipe type and sized to be supported.

#### 2.5.3 Valves

##### 2.5.3.1 Control Valve and Gate Valve

Manually operated sprinkler control valve and gate valve shall be outside stem and yoke (OS&Y) type and shall be listed in UL Bld Mat Dir or FM P7825a and FM P7825b.

##### 2.5.3.2 Check Valve

Check valve 50 mm and larger shall be listed in UL Bld Mat Dir or FM P7825a and FM P7825b. Check valves 100 mm and larger shall be of the swing type with flanged cast iron body and flanged inspection plate, shall have a clear waterway and shall meet the requirements of MSS SP-71, for Type 3 or 4.

#### 2.6 ALARM CHECK VALVE ASSEMBLY

Assembly shall include an alarm check valve, standard trim piping, pressure gauges, bypass, retarding chamber, testing valves, main drain, and other components as required for a fully operational system. In lieu of an alarm check valve, a shot gun riser may be installed consisting of a check valve, flow switch, main drain, pressure gauge and inspector's test valve.

#### 2.7 WATERFLOW ALARM

Electrically operated, exterior-mounted, waterflow alarm bell shall be provided and installed in accordance with NFPA 13. Waterflow alarm bell shall be rated 24 VDC and shall be connected to the Fire Alarm Control Panel (FACP) in accordance with Section 13850 FIRE DETECTION AND ALARM SYSTEM, DIRECT CURRENT LOOP.

#### 2.8 ALARM INITIATING AND SUPERVISORY DEVICES

##### 2.8.1 Sprinkler Waterflow Indicator Switch, Vane Type

Switch shall be vane type with a pipe saddle and cast aluminum housing. The electro-mechanical device shall include a flexible, low-density polyethylene paddle conforming to the inside diameter of the fire protection pipe. The device shall sense water movements and be capable of detecting a sustained flow of 38 L/min or greater. The device shall contain a retard device adjustable from 0 to 90 seconds to reduce the possibility of false alarms

caused by transient flow surges. The switch shall be tamper resistant and contain two SPDT (Form C) contacts arranged to transfer upon removal of the housing cover, and shall be equipped with a silicone rubber gasket to assure positive water seal and a dustproof cover and gasket to seal the mechanism from dirt and moisture.

#### 2.8.2 Valve Supervisory (Tamper) Switch

Switch shall be suitable for mounting to the type of control valve to be supervised open. The switch shall be tamper resistant and contain one set of SPDT (Form C) contacts arranged to transfer upon removal of the housing cover or closure of the valve of more than two rotations of the valve stem.

#### 2.9 FIRE DEPARTMENT CONNECTION

Fire department connection shall be projecting type with cast brass body, matching wall escutcheon lettered "Auto Spkr" with a polished brass finish. The connection shall have two inlets with individual self-closing clappers, caps with drip drains and chains. Female inlets shall have 65 mm diameter American National Fire Hose Connection Screw Threads (NH) per NFPA 1963.

#### 2.10 SPRINKLERS

Sprinklers with internal O-rings shall not be used. Sprinklers shall be used in accordance with their listed spacing limitations. Temperature classification shall be in accordance with the Military Handbook 1008C. Sprinklers in high heat areas including attic spaces or in close proximity to unit heaters shall have temperature classification in accordance with NFPA 13. Orifice of extended coverage sprinklers shall not exceed 13.5 mm.

##### 2.10.1 Pendent Sprinkler

Pendent sprinkler shall be chrome-plated and shall have a nominal 12.7 mm or 13.5 mm orifice.

##### 2.10.2 Semi-Recessed Sprinkler

Semi-Recessed sprinkler shall be of the fusible strut or glass bulb type with nominal 12.7 mm or 13.5 mm orifice. Semi-Recessed sprinklers shall have a polished chrome finish.

##### 2.10.3 Upright Sprinkler

Upright sprinkler shall be brass and shall have a nominal 12.7 mm or 13.5 mm orifice.

##### 2.10.4 Sidewall Sprinkler

Sidewall sprinkler shall have a nominal 12.7 mm orifice. Sidewall sprinkler shall have a polished chrome finish.

## 2.11 DISINFECTING MATERIALS

### 2.11.1 Liquid Chlorine

Liquid chlorine shall conform to AWWA B301.

### 2.11.2 Hypochlorites

Calcium hypochlorite and sodium hypochlorite shall conform to AWWA B300.

## 2.12 ACCESSORIES

### 2.12.1 Sprinkler Cabinet

Spare sprinklers shall be provided in accordance with NFPA 13 and shall be packed in a suitable metal or plastic cabinet. Spare sprinklers shall be representative of, and in proportion to, the number of each type and temperature rating of the sprinklers installed. At least one wrench of each type required shall be provided.

### 2.12.2 Pendent Sprinkler Escutcheon

Semi-Recessed sprinklers shall have a one-piece metallic type escutcheon with a depth of less than 20 mm. The escutcheon shall have a factory finish that matches the semi-recessed sprinkler heads. Pendent sprinklers shall have a two-piece metallic type escutcheon and have a factory finish that matches the pendent sprinkler heads.

### 2.12.3 Pipe Escutcheon

Escutcheon shall be polished chromium-plated zinc alloy, or polished chromium-plated copper alloy. Escutcheons shall be either one-piece or split-pattern, held in place by internal spring tension or set screw.

### 2.12.4 Sprinkler Guard

Guard shall be a steel wire cage designed to encase the sprinkler and protect it from mechanical damage. Guards shall be provided on sprinklers installed below 2,438 mm above finished floor.

### 2.12.5 Identification Sign

Valve identification sign shall be minimum 150 mm wide x 50 mm high with enamel baked finish on minimum 1.214 mm steel or 0.6 mm aluminum with red letters on a white background or white letters on red background. Wording of sign shall include, but not be limited to "main drain," "auxiliary drain," "inspector's test," "alarm test," "alarm line," and similar wording as required to identify operational components.

## 2.14 DOUBLE-CHECK VALVE BACKFLOW PREVENTION ASSEMBLY

Double-check backflow prevention assembly shall comply with ASSE 1015. The assembly shall have a bronze, cast-iron or stainless steel body with flanged ends. The assembly shall include pressure gauge test ports and OS&Y shutoff valves on the inlet and outlet, 2-positive-seating check valve for

continuous pressure application, and four test cocks. Assemblies shall be rated for working pressure of 1207 kPa. The maximum pressure loss shall be 40 kPa at a flow rate equal to the sprinkler water demand, at the location of the assembly. A test port for a pressure gauge shall be provided both upstream and downstream of the double check backflow prevention assembly valves.

## PART 3 EXECUTION

### 3.1 FIRE PROTECTION RELATED SUBMITTALS

The Fire Protection Specialist shall prepare a list of the submittals from the Contract Submittal Register that relate to the successful installation of the sprinkler systems(s). The submittals identified on this list shall be accompanied by a letter of approval signed and dated by the Fire Protection Specialist when submitted to the Government.

### 3.2 INSTALLATION REQUIREMENTS

The installation shall be in accordance with the applicable provisions of NFPA 13, NFPA 24 and publications referenced therein. Installation of in-rack sprinklers shall comply with applicable provisions of NFPA 13.

### 3.3 INSPECTION BY FIRE PROTECTION SPECIALIST

The Fire Protection Specialist shall inspect the sprinkler system periodically during the installation to assure that the sprinkler system is being provided and installed in accordance with the contract requirements. The Fire Protection Specialist shall witness the preliminary and final tests, and shall sign the test results. The Fire Protection Specialist, after completion of the system inspections and a successful final test, shall certify in writing that the system has been installed in accordance with the contract requirements. Any discrepancy shall be brought to the attention of the Contracting Officer in writing, no later than three working days after the discrepancy is discovered.

### 3.4 ABOVEGROUND PIPING INSTALLATION

#### 3.4.1 Protection of Piping Against Earthquake Damage

The system piping shall be protected against damage from earthquakes. Seismic protection shall include flexible and rigid couplings, sway bracing, seismic separation assemblies where piping crosses building seismic separation joints, and other features as required by NFPA 13 for protection of piping against damage from earthquakes.

#### 3.4.2 Piping in Exposed Areas

Exposed piping shall be installed so as not to diminish exit access widths, corridors or equipment access. Exposed horizontal piping, including drain piping, shall be installed to provide maximum headroom.

### 3.4.3 Piping in Finished Areas

In areas with suspended or dropped ceilings and in areas with concealed spaces above the ceiling, piping shall be concealed above ceilings. Piping shall be inspected, tested and approved before being concealed. Risers and similar vertical runs of piping in finished areas shall be concealed.

### 3.4.4 Pendent Sprinklers

Drop nipples to pendent sprinklers shall consist of minimum 25 mm pipe with a reducing coupling into which the sprinkler shall be threaded. Hangers shall be provided on arm-overs to drop nipples supplying pendent sprinklers when the arm-over exceeds 300 mm. Where sprinklers are installed below suspended or dropped ceilings, drop nipples shall be cut such that sprinkler ceiling plates or escutcheons are of a uniform depth throughout the finished space. The outlet of the reducing coupling shall not extend more than 25 mm below the underside of the ceiling. On pendent sprinklers installed below suspended or dropped ceilings, the distance from the sprinkler deflector to the underside of the ceiling shall not exceed 100 mm. Recessed pendent sprinklers shall be installed such that the distance from the sprinkler deflector to the underside of the ceiling shall not exceed the manufacturer's listed range and shall be of uniform depth throughout the finished area.

#### 3.4.4.1 Pendent Sprinkler Locations

Pendent sprinklers in suspended ceilings shall be a minimum of 150 mm from ceiling grid.

### 3.4.5 Upright Sprinklers

Riser nipples or "sprigs" to upright sprinklers shall contain no fittings between the branch line tee and the reducing coupling at the sprinkler. Riser nipples exceeding 750 mm in length shall be individually supported.

### 3.4.6 Pipe Joints

Pipe joints shall conform to NFPA 13, except as modified herein. Not more than four threads shall show after joint is made up. Welded joints will be permitted, only if welding operations are performed as required by NFPA 13 at the Contractor's fabrication shop, not at the project construction site. Flanged joints shall be provided where indicated or required by NFPA 13. Grooved pipe and fittings shall be prepared in accordance with the manufacturer's latest published specification according to pipe material, wall thickness and size. Grooved couplings and fittings shall be from the same manufacturer.

### 3.4.7 Reducers

Reductions in pipe sizes shall be made with one-piece tapered reducing fittings. The use of grooved-end or rubber-gasketed reducing couplings will not be permitted. When standard fittings of the required size are not manufactured, single bushings of the face type will be permitted. Where used, face bushings shall be installed with the outer face flush with the face of the fitting opening being reduced. Bushings shall not be used in

elbow fittings, in more than one outlet of a tee, in more than two outlets of a cross, or where the reduction in size is less than 15 mm.

#### 3.4.8 Pipe Penetrations

Cutting structural members for passage of pipes or for pipe-hanger fastenings will not be permitted. Pipes that must penetrate concrete or masonry walls or concrete floors shall be core-drilled and provided with pipe sleeves. Each sleeve shall be Schedule 40 galvanized steel, ductile iron or cast iron pipe and shall extend through its respective wall or floor and be cut flush with each wall surface. Sleeves shall provide required clearance between the pipe and the sleeve per NFPA 13. The space between the sleeve and the pipe shall be firmly packed with mineral wool insulation. Where pipes penetrate fire walls, fire partitions, or floors, pipes shall be fire stopped in accordance with Section 07840 FIRESTOPPING. In penetrations that are not fire-rated or not a floor penetration, the space between the sleeve and the pipe shall be sealed at both ends with plastic waterproof cement that will dry to a firm but pliable mass or with a mechanically adjustable segmented elastomer seal.

#### 3.4.9 Escutcheons

Escutcheons shall be provided for pipe penetration of ceilings and walls. Escutcheons shall be securely fastened to the pipe at surfaces through which piping passes.

#### 3.4.10 Inspector's Test Connection

Unless otherwise indicated, test connection shall consist of 25 mm pipe connected at the riser as a combination test and drain valve; a test valve located approximately 2 meters above the floor; a smooth bore brass outlet equivalent to the smallest orifice sprinkler used in the system; and a painted metal identification sign affixed to the valve with the words "Inspector's Test." The discharge orifice shall be located outside the building wall directed so as not to cause damage to adjacent construction or landscaping during full flow discharge.

#### 3.4.11 Drains

Main drain piping shall be provided to discharge at a safe point outside the building. Auxiliary drains shall be provided as required by NFPA 13. When the capacity of trapped sections of pipe is less than 18 liters, the auxiliary drain shall consist of a valve not smaller than 12 mm and a plug or nipple and cap. When the capacity of trapped sections of piping is more than 18 liters, the auxiliary drain shall consist of two 19 mm valve or larger with a plug. Tie-in drains shall be provided for multiple adjacent trapped branch pipes and shall be a minimum of 25 mm in diameter. Tie-in drain lines shall be pitched a minimum of 13 mm per 3 mm.

#### 3.4.12 Installation of Fire Department Connection

Connection shall be mounted on the exterior wall approximately 900 mm above finished grade. The piping between the connection and the check valve shall be provided with an automatic drip in accordance with NFPA 13 and arranged to drain to the outside.

#### 3.4.13 Identification Signs

Signs shall be affixed to each control valve, inspector test valve, main drain, auxiliary drain, test valve, and similar valves as appropriate or as required by NFPA 13. Hydraulic design data nameplates shall be permanently affixed to each sprinkler riser as specified in NFPA 13.

#### 3.5 UNDERGROUND PIPING INSTALLATION

The fire protection water main shall be laid, and joints anchored, in accordance with NFPA 24. Minimum depth of cover shall be 900 mm. The supply line shall terminate inside the building with a flanged piece, the bottom of which shall be set not less than 150 mm above the finished floor. A blind flange shall be installed temporarily on top of the flanged piece to prevent the entrance of foreign matter into the supply line. A concrete thrust block shall be provided at the elbow where the pipe turns up toward the floor. In addition, joints shall be anchored in accordance with NFPA 24 using pipe clamps and steel rods from the elbow to the flange above the floor and from the elbow to a pipe clamp in the horizontal run of pipe. Buried steel components shall be provided with a corrosion protective coating in accordance with AWWA C203. Piping more than 1500 mm outside the building walls shall meet the requirements of Section 02510 WATER DISTRIBUTION SYSTEM.

#### 3.6 EARTHWORK

Earthwork shall be performed in accordance with applicable provisions of Section 0315 EXCAVATION, FILLING AND BACKFILLING FOR BUILDINGS.

#### 3.7 ELECTRICAL WORK

Except as modified herein, electric equipment and wiring shall be in accordance with Section 16415 ELECTRICAL WORK, INTERIOR. Alarm signal wiring connected to the building fire alarm control system shall be in accordance with Section 13851 FIRE ALARM AND DETECTION SYSTEM, ADDRESSABLE. All wiring for supervisory and alarm circuits shall be #14 AWG solid copper installed in metallic tubing or conduit. Wiring color code shall remain uniform throughout the system.

#### 3.8 PIPE COLOR CODE MARKING

Color code marking of piping shall be as specified in Section 09900 PAINTING, GENERAL.

#### 3.9 PRELIMINARY TESTS

The system, including the underground water mains, and the aboveground piping and system components, shall be tested to assure that equipment and components function as intended. The underground and aboveground interior piping systems and attached appurtenances subjected to system working pressure shall be tested in accordance with NFPA 13 and NFPA 24. Upon completion of specified tests, the Contractor shall complete certificates as specified in paragraph SUBMITTALS.

### 3.9.1 Underground Piping

#### 3.9.1.1 Flushing

Underground piping shall be flushed in accordance with NFPA 24. This includes the requirement to flush the lead-in connection to the fire protection system at a flow rate not less than the calculated maximum water demand rate of the system.

#### 3.9.1.2 Hydrostatic Testing

New underground piping shall be hydrostatically tested in accordance with NFPA 24. The allowable leakage shall be measured at the specified test pressure by pumping from a calibrated container. The amount of leakage at the joints shall not exceed 1.89 liters per hour per 100 gaskets or joints, regardless of pipe diameter.

### 3.9.2 Aboveground Piping

#### 3.9.2.1 Hydrostatic Testing

Aboveground piping shall be hydrostatically tested in accordance with NFPA 13 at not less than 1400 kPa or 350 kPa in excess of maximum system operating pressure and shall maintain that pressure without loss for 2 hours. There shall be no drop in gauge pressure or visible leakage when the system is subjected to the hydrostatic test. The test pressure shall be read from a gauge located at the low elevation point of the system or portion being tested.

#### 3.9.2.2 Backflow Prevention Assembly Forward Flow Test

Each backflow prevention assembly shall be tested at system flow demand, including all applicable hose streams, as specified in NFPA 13. The Contractor shall provide all equipment and instruments necessary to conduct a complete forward flow test, including 65 mm diameter hoses, playpipe nozzles, calibrated pressure gauges, and pitot tube gauge. The Contractor shall provide all necessary supports to safely secure hoses and nozzles during the test. At the system demand flow, the pressure readings and pressure drop (friction) across the assembly shall be recorded. A metal placard shall be provided on the backflow prevention assembly that lists the pressure readings both upstream and downstream of the assembly, total pressure drop, and the system test flow rate. The pressure drop shall be compared to the manufacturer's data.

### 3.9.3 Testing of Alarm Devices

Each alarm switch shall be tested by flowing water through the inspector's test connection. Each water-operated alarm device shall be tested to verify proper operation.

### 3.9.4 Main Drain Flow Test

Following flushing of the underground piping, a main drain test shall be made to verify the adequacy of the water supply. Static and residual pressures shall be recorded on the certificate specified in paragraph



10162/BERGER/ABAM  
FY02 Tactical Equipment Complex  
Fort Lewis, Washington

SUBMITTALS. In addition, a main drain test shall be conducted each time after a main control valve is shut and opened.

### 3.10 FINAL ACCEPTANCE TEST

Final Acceptance Test shall begin only when the Preliminary Test Report has been approved. The Fire Protection Specialist shall conduct the Final Acceptance Test and shall provide a complete demonstration of the operation of the system. This shall include operation of control valves and flowing of inspector's test connections to verify operation of associated waterflow alarm switches. After operation of control valves has been completed, the main drain test shall be repeated to assure that control valves are in the open position. In addition, the representative shall have available copies of as-built drawings and certificates of tests previously conducted. The installation shall not be considered accepted until identified discrepancies have been corrected and test documentation is properly completed and received.

### 3.11 ON-SITE TRAINING

The Fire Protection Specialist shall conduct a training course for operating and maintenance personnel as designated by the Contracting Officer. Training shall be provided for a period of 4 hours of normal working time and shall start after the system is functionally complete but prior to the Preliminary Tests and Final Acceptance Test. The On-Site Training shall cover all of the items contained in the approved Operating and Maintenance Instructions.

-- End of Section --

10162/BERGER/ABAM  
FY02 Tactical Equipment Complex  
Fort Lewis, Washington

This page intentionally blank.

SECTION 14602

CRANES, SINGLE-GIRDER BRIDGE

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by basic designation only.

AMERICAN BEARING MANUFACTURERS ASSOCIATION (AFBMA)

AFBMA Std 9 (1990) Load Ratings and Fatigue Life for Ball Bearings

AFBMA Std 11 (1990) Load Ratings and Fatigue Life for Roller Bearings

AMERICAN GEAR MANUFACTURERS ASSOCIATION (AGMA)

AGMA 9005-D (1994) Industrial Gear Lubrication

AMERICAN INSTITUTE OF STEEL CONSTRUCTION (AISC)

AISC Pub No. S329 (1985; Appx A Jun 1994) Allowable Stress Design Specification for Structural Joints Using ASTM A 325 or A 490 Bolts

AMERICAN NATIONAL STANDARDS INSTITUTE (ANSI)

ANSI C80.1 (1995) Rigid Steel Conduit - Zinc Coated

ANSI MH27.1 (1996) Cranes and Monorail Systems, Underhung

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM A 36/A 36M (1997a) Carbon Structural Steel

ASTM A 325 (1997) Structural Bolts, Steel, Heat Treated, 120/105 ksi Minimum Tensile Strength

ASTM A 490 (1997) Heat-Treated Steel Structural Bolts, 150 ksi Minimum Tensile Strength

ASTM B 209 (1996) Aluminum and Aluminum-Alloy Sheet and Plate

ASTM B 633 (1998) Electro-deposited Coatings of Zinc on Iron and Steel

ASTM E 10 (1998) Brinell Hardness of Metallic Materials

01062/BERGER/ABAM  
FY02 Tactical Equipment Complex  
Fort Lewis, Washington

ASME INTERNATIONAL (ASME)

ASME B30.16 (1999) Overhead Hoists (Under hung)  
ASME HST-4M (1991; R 1996) Overhead Electric Wire Rope  
Hoists

AMERICAN WELDING SOCIETY (AWS)

AWS D1.1 (1998) Structural Welding Code - Steel  
AWS D14.1 (1997) Welding Industrial and Mill Cranes and  
Other Material Handling Equipment

FEDERAL SPECIFICATIONS (FS)

FS RR-C-271 (Rev D; Am 1) Chains and Attachments, Welded  
and Weldless  
FS RR-W-410 (Rev D; Am 1) Wire Rope and Strand

MATERIAL HANDLING INDUSTRY (MHI)

MHI CMAA 74 (1994) Top Running and Under Running, Single  
Girder Electric Overhead Traveling Cranes  
Utilizing Under Running Trolley Hoist

NATIONAL ELECTRICAL MANUFACTURERS ASSOCIATION (NEMA)

NEMA ICS 6 (1993) Industrial Control and Systems:  
Enclosures  
NEMA KS 1 ((1996) Enclosed and Miscellaneous  
Distribution Equipment Switches (600 Volts  
Maximum)  
NEMA WC 3 (1992; Rev 1) Rubber-Insulated Wire and Cable  
for the Transmission and Distribution of  
Electrical Energy

NATIONAL FIRE PROTECTION ASSOCIATION (NFPA)

NFPA 70 (1999) National Electrical Code

SOCIETY OF AUTOMOTIVE ENGINEERS (SAE)

SAE J 534 (1998) Lubrication Fittings

UNDERWRITERS LABORATORIES (UL)

UL 50 (1995; Rev thru Nov 1997) Enclosures for  
Electrical Equipment  
UL 355 (1996; Rev thru Jul 1998) Cord Reels

UL 674 (1994; Rev thru Oct 1998) Electric Motors and  
Generators for Use in Division I Hazardous  
(Classified) Locations

## 1.2 SYSTEM DESCRIPTION

### 1.2.1 General Requirements

#### 1.2.1.1 Standard Products

Materials and equipment shall be standard products of manufacturers regularly engaged in the fabrication of cranes and hoists and shall essentially duplicate items which have been in satisfactory use for at least 2 years prior to bid opening. Any company licensed by a crane and hoist manufacturer to manufacture cranes and hoists bearing their name shall have the design and components approved by the licensor prior to submission to the Government for approval.

#### 1.2.1.2 Nameplates

Each major component of equipment shall have the manufacturer's name, address, type or style, model or catalog number, and serial number on a metal plate secured to the equipment.

#### 1.2.1.3 Verification of Dimensions

The Contractor shall verify all dimensions in the field and shall advise the Resident engineer of any discrepancy before performing any work.

#### 1.2.1.4 Welding

Welding shall be in accordance with qualified procedures using AWS D14.1 as modified herein. Written welding procedures shall specify the Contractor's standard dimensional tolerances for deviation from camber and sweep and such tolerances shall not exceed those specified in AWS D14.1. All welding shall be performed indoors. Welders and welding operators shall be qualified in accordance with AWS D1.1 or AWS D14.1. Allowable stress values shall be in accordance with MHI CMAA 74. Welding shall be in accordance with AWS D1.1.

### 1.2.2 Design Criteria

The crane shall be designed to provide maximum coverage of area between grids 4 and 5 and between grids A and B in RMP building and to match the runway dimensions and support beams shown. The hook lift height shall not be less than 5.7 m above floor level.

#### 1.2.2.1 Classification

The crane shall be designed and constructed to MHI CMAA 74 Class C, service requirements for indoor operation.

#### 1.2.2.2 Hoist Characteristics

Hoist shall be an electric-wire-rope hoist of type, class, control, suspension, lift, and operating characteristics specified. Each hoist shall have the capacity, lift-height, suspension, power source, and operating characteristics indicated and as follows:

- a. Hoist capacity shall be 2.27 metric tons.
- b. Hoist shall be a standard lift with a minimum lift of 5.68 meters.
- c. The hoist shall be the lug-suspension type mounted on an integrated electric-motor-driven hoist trolley.
- d. The hoist and suspension shall be the standard headroom type. The hoist and suspension shall be the minimum headroom type. Each hoist shall be standard headroom or minimum headroom type as indicated.
- e. Components of the hoist shall be designed and constructed for safety of operation and durability of components. Replacement parts shall be interchangeable and readily accessible.

#### 1.2.2.3 Bridge Crane Characteristics

The bridge crane shall be top running single-girder overhead traveling crane utilizing an under running trolley hoist. Bridge crane travel speed shall be 48.77 meters per minute, maximum speed shall be adjustable (VFD) variable.

#### 1.2.2.4 Capacity Plates

Two capacity plates shall be provided, one for each side of the bridge. Each plate shall be lettered to indicate the total rated hoisting capacity of the crane. All lettering shall be of sufficient size to be easily read from the floor. Each lower load block shall be marked with the hoist rated capacity.

#### 1.2.3 Definitions

##### 1.2.3.1 Capacity

Capacity shall mean the rated load in metric tons, specified by the manufacturer for the hoist and marked plainly on the hoist and load block so as to be clearly legible. In determining the applied load, the weight of the handling devices shall be included.

##### 1.2.3.2 Hoisting Speed

Hoisting speed shall mean the velocity in mm/s at which the hoist will lift the rated load. Actual lifting speed shall be within plus or minus 10 percent of the manufacturer's rating.

#### 1.2.3.3 Bridge Crane Travel Speed

Bridge crane travel speed shall mean the velocity in mm/s at which the bridge crane will travel carrying with the rated load. Actual travel speed shall be within plus or minus 10 percent of the manufacturer's rating.

#### 1.2.3.4 Rated Lift

Rated lift shall mean the distance between the upper and lower elevations of travel of the load block.

#### 1.2.3.5 Headroom

Headroom shall be measured with the load hook in the highest position with full load which is the distance between the saddle of the load hook and the top of the bottom flange for all flat, wheel-bearing flange surfaces.

#### 1.2.3.6 Trolley Speed

Trolley speed shall mean the velocity in mm/s at which a motor-driven trolley with hoist will travel carrying the rated load on level track; actual speed shall be within plus or minus 10 percent of the manufacturer's rating.

### 1.3 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only. When used, a designation following the "G" designation identifies the office that will review the submittal for the Government. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

#### SD-02 Shop Drawings

##### Wiring and Schematic diagrams; G

Detailed drawings shall be submitted containing complete wiring and schematic diagrams and any other details required to demonstrate that the system has been coordinated and will properly function as a unit. Drawings shall show proposed layout, anchorage of equipment and appurtenances, and equipment relationship to other parts of the work including clearances for maintenance and operation.

#### SD-03 Product Data

##### Hoist Hook Assembly; G Bridge Crane System; G

A complete list of equipment and materials, including manufacturer's descriptive data and technical literature, performance charts and curves, catalog cuts, and installation instructions shall be submitted.

Hoist; G

Manufacturer's catalog data shall be submitted showing the equipment and accessories to be provided.

Spare Parts; G

Spare parts data shall be submitted and shall include a complete list of parts and supplies, with current unit prices and source of supply.

Bridge Crane System; G  
Hoist; G

Diagrams, instructions, and other sheets proposed for posting shall be submitted.

SD-06 Test Reports

Acceptance Testing; G

Test reports in booklet form shall be submitted showing all field tests performed to adjust each component and all field tests performed to prove compliance with the specified performance criteria, upon completion and testing of the installed system. The report shall include the information as required by paragraph ACCEPTANCE TESTING.

SD-07 Certificates

Hoist; G

Certification shall be submitted attesting that a sample hoist of each type specified has been factory tested for the tests specified.

SD-10 Operation and Maintenance Data

Operation Manuals; G.

Six copies of operation manuals shall be furnished for the equipment furnished. Operation manuals shall detail the step-by-step procedures required for system startup, operation, and shutdown. Operation manuals shall include the manufacturer's name, model number, parts list, and brief description of all equipment and their operating features. Operation manuals shall include a copy of the acceptance test report for information and future reference. Operation manuals shall include an overall description of the system describing any unique features that may need special attention.



Maintenance Manuals; G.

Six copies of maintenance manuals shall be furnished for the equipment furnished. Maintenance manuals shall list routine maintenance procedures, possible breakdowns and repairs, and troubleshooting guides. Maintenance manuals shall include piping, layout diagrams, equipment layout diagrams, and wiring and control diagrams of the system as installed. Maintenance manuals shall include a spare parts list of manufacturers recommended spare parts that should be maintained onsite and any long lead time items should be clearly identified. Maintenance manuals shall contain replacement part numbers for the entire assembly.

1.4 DELIVERY AND STORAGE

Equipment delivered shall be placed in indoor storage, protected from the weather, humidity and temperature variations, dirt and dust, or other contaminants.

PART 2 PRODUCTS

2.1 ELECTRIC HOIST

2.1.1 General

Electric hoist shall be of capacity, lift, type, suspension, headroom, and materials specified. Each unit shall be factory wired and ready for operation. Load-carrying parts of the hoist shall be designed so that the calculated static stress of the material, based on the rated capacity, will not exceed 20 percent of the average theoretical strength of the material. Each hoist shall be factory lubricated and shall be complete and ready for operation with the specified hoist controls and accessories.

2.1.2 Types of Electric Hoists

2.1.2.1 Electric Wire-Rope Hoists

Electric wire-rope hoists shall be equipped with the specified standard wire-rope and hook assembly as determined by the manufacturer.

2.1.3 Hoist Speed

Each electric wire-rope hoist speed shall be two-speed at 5.486 meters per minute and 1.372 meters per minute.

#### 2.1.4 Lift Speed

Hoists shall be designed for low-hoisting and lowering-speed application at the specified lift and for accurate load positioning. Hoist speeds shall not exceed the following:

CAPACITY IN METRIC TONS	HOIST TYPE	MAX. LIFT SPEED, METERS PER MINUTE	LOW LIFT SPEED, METERS PER MINUTE
2.27	Wire	5.486	1.372

A tolerance of  $\pm 1.5$  m/s is acceptable.

#### 2.2 HOIST MECHANICAL EQUIPMENT

##### 2.2.1 Wire-Rope Hoist

##### 2.2.2.1 Hoist Wire Rope

Wire rope for standard applications shall be extra flexible, preformed, extra improved or improved plow steel IWRC 6x37 standard crane rope ANSI B30.2.0 and CMAA Specification No. 70.

Wire rope shall be anchored to drum or dead end. Anchoring shall be of captive type, easily detached for changing and repair. Wire rope shall have a factor of safety of not less than 5, based on the minimum ultimate tensile strength of the material.

##### 2.2.2.2 Hoist-Rope Drum

Wire-rope drum shall be hardened steel or special grade alloy ductile iron. Minimum diameter of the drum shall be 20 times the diameter of the hoisting rope for hoists with a capacity of 900 kg or less and 24 times the diameter of the hoisting rope for hoists over 900 kg capacity. Drum shall have accurate, machine-cut grooves, cut to full depth of wire-rope diameter, with rounded corners of dimension as required for the specified lift. In addition, the drum shall have not less than two complete turns of rope around it when the hook is in its lowest position. Groove diameter and pitch centers shall be 0.78 mm greater than diameter of rope. Drum shall be flanged at each end and shall have enclosed tops and sides to preclude cable binding and jamming. Cable reeving shall be arranged for double reeving. Hook shall remain centered under the drum at all times.

##### 2.2.2.3 Hoist Load Block and Sheaves

The cable load block shall be an enclosed, safety type that will shroud the sheave and protect the operator. The sheave assembly shall be mounted on a steel axle and carried on sealed, pre-lubricated anti-friction bearings. Wire-rope sheaves shall be machine-grooved, hardened steel, or cast iron with chilled groove surfaces. The pitch diameter for running sheaves shall be not less than 18 times the diameter of the wire rope, and the diameter of the idler and equalizer sheaves shall be not less than 16 times the diameter of the rope used.

#### 2.2.2 Hoist Hook Assembly

Hook assembly for electric hoists shall be carried on anti-friction bearings to permit free swivel under rated capacity load without twisting load chain or wire. Each hook shall have a spring-loaded safety latch. Each hook assembly shall include a machined and threaded shaft and swivel lock nut with an effective locking device to prevent nut from backing off.

#### 2.2.3 Hoist Gear Assembly

##### 2.3.3.1 Gears

Gears shall be spur, helical, spiral, or bevel-type, accurately machined, and conforming to AGMA standards for this type of service.

##### 2.3.3.2 Gear Shafts

Gear shafts shall be manufactured from high-carbon steel or alloy steel, machined and ground for accurate fit, and splined for fitting to the mating gear.

##### 2.3.3.3 Gear Train Assembly

Gear train assembly shall be totally enclosed in the hoist frame casting and shall operate in a sealed oil bath. Frame casting shall be provided with lubrication fittings and inspection ports.

#### 2.2.4 Hoist Bearings

##### 2.2.4.1 Anti-friction Bearings

Bearings in the hoist mechanism of electric- or air-powered hoists shall be anti-friction bearings.

##### 2.2.4.2 Factory Sealed Bearings

Sprocket bearings, motor bearings, and load-block bearings shall be pre-lubricated factory sealed bearings.

#### 2.2.5 Hoist Lubrication

Adequate lubrication shall be provided for moving parts of the hoist and trolley. Lubricant shall be designed for use in an ambient temperature of 12.22 degrees C to 42.78 degrees C. Hoist reduction gearing with electric motor drive shall operate in an oil bath. Lubrication and mechanism housing shall prevent leaking and shall prevent lubricant from coming into contact with electric motors and equipment. Lubricant shall conform to AGMA 9005-D.

#### 2.2.6 Hoist Frame and Housing

Operating parts of the hoist shall be mounted and enclosed in a sealed, factory-painted metal frame of malleable iron, cast steel, welded steel, or aluminum. Welded or bolted frames shall carry loads on the fabricated pieces. Welds or bolts shall be used only to hold the fabricated parts in position.

#### 2.2.7 Hoist Paint Finish

Each hoist and accessory shall receive a factory-applied paint finish. Hooks shall not be painted.

### 2.3 TROLLEYS

#### 2.3.1 Paint

Each trolley assembly shall be factory-painted, designed specifically for use with the specified hoist, and shall be furnished by the hoist manufacturer. Paint finish shall be the same type and quality specified for the hoist.

#### 2.3.2 Wheels

##### 2.3.2.1 Load Distribution

Each trolley assembly shall have not less than four wheels. Sufficient wheels shall be provided to properly distribute the load. The load on a wheel shall not exceed  $544.31 \frac{DW}{kg}$  where D equals the diameter of the wheel in (cm) and W equals the width of the rail head or the nominal length of bearing on the tread.

##### 2.3.2.2 Design and Type

Wheels shall be single-flange type manufactured from forged alloy steel with machined, hardened treads and flanges, or high-strength cast or nodular iron with machined flanges and treads. Wheels shall be designed to operate on sloped or flat flange I-beams.

##### 2.3.2.3 Bearings

Trolley wheels shall be carried on sealed, permanently lubricated, anti-friction bearings designed for axial and thrust loading. Bearings shall conform to the applicable requirements of AFBMA Std 9 and AFBMA Std 11. Bearings shall have an L-10 life of 3,000 hours or more, as defined by AFBMA Std 9 or AFBMA Std 11 as applicable.

#### 2.3.3 Side Plates, Pins, and Axles

##### 2.3.3.1 Side Plates

Side plates shall be fabricated from structural-quality rolled-steel plate milled to the required profile with integral bosses where necessary to support equalizing pins; side plates shall be fitted with steel end bumpers.

##### 2.3.3.2 Pins and Axles

Equalizing pins and axles shall be heat-treated alloy steel, machined and finish ground to the required size.

#### 2.3.4 Gearing

##### 2.3.4.1 Gears

Gears shall be cut from heat-treated alloy steel accurately machined into spur, helical, and pinion gears, conforming to AGMA requirements.

##### 2.3.4.2 Drive Pinions

Drive pinions shall be carburized alloy steel, malleable iron, or bronze, with cut or cast teeth, conforming to AGMA requirements.

#### 2.3.5 Safety Hangers or Lugs

Safety hangers or lugs shall be steel and shall be integral with, or fastened to, each hoist frame or to trolley frame. They shall ride free above the bottom flange of the beam. Hanger shall be of sufficient capacity to hold the hoist, fully loaded, in the I-beam in case of wheel or axle failure. Safety factor of each part of trolley assembly shall be not less than 5, based on the ultimate strength of the material used.

#### 2.4 TROLLEY TYPE

##### 2.4.1 Motorized Trolley Only

##### 2.4.2 Gears

Trolleys shall have gears provided on not less than two wheels to permit propelling the hoist along the rail by a gear mechanism operated by a hand chain and wheel.

##### 2.4.3 Electric-Motor-Driven Trolleys

Trolley shall be an electric-motor-driven geared type conforming to NFPA 70, the specified general trolley requirements, and the requirements specified.

Trolley drive shall be an electric-motor-driven, tractor type conforming to the specified general trolley requirements. Motor shall drive through a totally enclosed gear train.

Trolley shall have 2 speeds; speeds shall be not more than 17.068 meters per minute for high speed, 8.534 meters per minute for slow speed.

#### 2.5 BRIDGE STRUCTURAL ITEMS

##### 2.5.1 Bolts, Nuts, and Washers

Bolts, nuts, and washers shall conform to ASTM A 325 bolts. High-strength bolted connections shall conform to the requirements of AISC Pub No. S329, except that ASTM A 490 bolts shall not be used. No galvanized bolts shall be used.

#### 2.5.2 Bridge Girders

Bridge girders shall be welded structural steel box sections, wide-flange beams, standard I-Beams, reinforced beams or sections fabricated from rolled plates and shapes.

#### 2.5.3 End Ties and Bridge Girder End Connections

End connections shall be made using high-strength bolts.

#### 2.5.4 Bridge End Trucks

End trucks shall be fabricated from structural steel providing a rigid structure and shall be of the rotating or fixed-axle type. A means shall be provided to prevent the crane from dropping more than 25 mm in case of axle failure.

#### 2.5.5 Runway Rails

The runway rails for the bridge travel shall be of the size recommended by the crane manufacturer and shall be in accordance with MHI CMAA 74.

### 2.6 BRIDGE MECHANICAL EQUIPMENT

#### 2.6.1 Bridge Drives

Bridge drives shall consist of motor or motors driving through a suitable reduction unit or units to the wheels located at each end of the bridge.

#### 2.6.2 Bridge Crane Gear Assembly

##### 2.6.2.1 Gears

Gears shall be spur, helical, spiral, or bevel type, accurately machined, and conforming to AGMA standards for this type of service.

##### 2.6.2.2 Gear Shafts

Gear shafts shall be manufactured from high-carbon steel or alloy steel, machined and ground for accurate fit, and splined for fitting to the mating gear.

##### 2.6.2.3 Gear Train Assembly

Gear train assembly shall be totally enclosed in the drive housing and shall operate in a sealed oil bath. The drive housing shall be provided with lubrication fittings and inspection ports.

#### 2.6.3 Bridge Brakes

Bridge brakes are specified in paragraph BRAKES.

#### 2.6.4 Bridge Wheels

##### 2.6.4.1 Wheels

The wheels shall be made of rolled or forged steel. The wheel treads and flanges shall be rim toughened to between 320 and 370 Brinell hardness number. Bridge wheels shall be double-flanged. Bridge wheels shall have straight treads.

The bridge assembly shall have not less than four wheels. Sufficient wheels shall be provided to properly distribute the load. The load on a wheel shall not exceed  $544 \text{ DW kg}$  where D equals the diameter of the wheel in mm and W equals the width of the rail head or the nominal length of bearing on the tread.

##### 2.6.4.2 Bearings

Wheels shall be carried on sealed, permanently lubricated, anti-friction bearings designed for axial and thrust loading. Bearings shall conform to the applicable requirements of the AFBMA Std 9 or AFBMA Std 11. Bearings shall have an L-10 life of 3,000 hours or more, as defined by AFBMA Std 9 or AFBMA Std 11 as applicable.

#### 2.7 ELECTRICAL

Materials and installation, including electrical wiring, contact conductors, controls, over current protection, and grounding shall meet the requirements of NFPA 70 and applicable UL and NEMA standards and specified requirements.

##### 2.7.1 Power Supply

Electrical power for operation of the crane will be supplied from the nominal 480 volt, 3 phase, 60-Hz alternating-current (a-c) power distribution system.

##### 2.7.1.1 Bridge Incoming Power Supply

a. Power for the crane shall be through a 3 bar semi-enclosed buss bar system. The contact conductor system shall be furnished complete with collector and all necessary accessories for mounting the contact assembly. D.O.W. 110 amp or equivalent.

b. Collector shall have two individually spring-loaded conductor contact shoes for each phase or shall have no exposed current carrying surfaces for each main conductor and shall be articulated, if necessary, to maintain full contact against the contact conductor. Contact shoes shall be of graphite bronze or other suitable material as approved by the Resident engineer, and shall be suitable for use with contact conductors furnished. The collector mounting shall provide means for adjustment as required to make proper contact and to travel properly on the contact conductors. Supporting wheels, if required, shall be provided with self-lubricating bearings.

c. Festoon Conductors - Power shall be brought to the crane by means of a "Festoon" system consisting of flexible power cable supported by cable trolleys running on a steel messenger cable, an I-beam rail, or a channel. The power cable shall be Type G, 75 degree C, 600-volt insulation and heavy-duty neoprene or chlorosulfonated polyethylene jacket. The cable shall be sized as required by NFPA 70. The cable shall conform to the applicable requirements of NEMA WC 3, Part 7, and shall have class H or class K stranding. Cable conductors shall be terminated at both ends with terminal lugs on terminal blocks in terminal boxes. Cable ends shall have strain relief devices to protect the cable terminations.

#### 2.7.1.2 Trolley Power Supply

Power may be brought to the trolley by a festoon system.

a. Festoon system shall consist of flexible power cable supported by cable trolleys running on a steel messenger cable, an I-beam rail, or a channel. The power cable shall be type G, 75-degree C, 600-volt insulation and heavy-duty neoprene or chlorosulfonated polyethylene jacket. The cable shall be sized as required by NFPA 70. The cable shall conform to the applicable requirements of NEMA WC 3, Part 7, and shall have class H or class K stranding. Cable conductors shall be terminated at both ends with terminal lugs on terminal blocks in terminal boxes. Cable ends shall have strain relief devices to protect the cable terminations.

#### 2.7.2 Motor Controller

Motor controller shall be a reversing-type magnetic starter with or VFD with thermal-overload protection, molded case circuit breaker, and control transformer operated by a pushbutton control station. Controller and control station shall be mechanically or electrically interlocked to preclude possibility of operating opposing control circuits simultaneously.

##### 2.7.2.1 Contractor Fingers

Contractor fingers shall be adjustable and shall have renewable tips.

##### 2.7.2.2 Transformer

Transformer shall reduce the control-circuit voltage to 120 volts AC.

##### 2.7.2.3 Enclosure for Mounting

Motor controller shall be mounted in either a gasketed cast metal or sheet metal enclosure, as required or noted, with hinged door conforming to the requirements of UL 50. Motor controller enclosures, complying with NEMA ICS 6, shall be NEMA, Type 4.



### 2.7.3 Pendant Control Station

Each hoist shall have a pendant-mounted conductor cable and pushbutton station with a strain-reliever chain or cable permanently attached to the hoist frame and integral with the pendant conductor cable. The control station shall be a full-guarded, momentary-contact, pushbutton type with each button clearly marked to indicate its function. A separate button or a single button providing steps for each speed of multi-speed hoists or trolleys shall be provided. The pushbuttons shall return to the off (normally open contacts) position when pressure is released by operator. The pushbutton station shall be grounded to the hoist. The strain reliever chain or cable shall not be used as a grounding circuit.

### 2.7.4 Mainline Disconnect Switch

A mainline disconnect switch shall be provided and shall be a surface-mounted, heavy-duty, single-throw, air-break, enclosed type conforming to NEMA KS 1 as indicated. Disconnect switch shall be non-fused. Enclosure shall be NEMA Type 3.

### 2.7.5 Hoist Limit Switches

Adjustable upper-limit switch shall be provided to prevent over travel of the hook or load block in the hoisting direction. Limit switch shall be arranged to stop the hoist motor and apply the motor brake before reaching the uppermost safe limit of travel.

### 2.7.6 Hoist Motors

Hoist motor shall be a high-starting torque, high-slip, 30-minute time rated, reversible electric motor specifically designed for hoist duty and capable of operating at the specified duty class, capacity, and speed. The motor shall be 480-volts, 3-phase, 60-hertz and horsepower as recommended by manufacturer for capacity and lift speed of hoist. The hoist motors shall be provided with Class B insulation. Enclosure shall be fitted with a UL-approved drain and breather and shall be certified and labeled in accordance with UL 674, Class 1, Groups C and D.

### 2.7.7 Bridge Trolley Motors

Bridge Trolley motors shall be two-speed conforming to the requirements for hoist motors except they may be NEMA design B (high torque and slip not required).

### 2.7.8 Motor Brake

Motor brake shall be an externally adjustable, electrically operated and shall apply automatically when the power is off. The brake shall be capable of holding 125 percent of the rated load from any operating speed. The brake shall hold a static load equal to 150 percent of the rated capacity of the hoist.

## 2.7.9 Conduit and Wire

### 2.7.9.1 Conduit

Conduit between feeder enclosure and disconnect switches and fixed control stations shall be zinc-coated rigid-steel conduit, couplings, elbows, bends, and nipples conforming to ANSI C80.1. Zinc coating shall be an electro-deposited coating conforming to ASTM B 633.

### 2.7.9.2 Wire

Building wire for use in conduits, raceways, and wire ways in wet or dry locations shall be single-conductor, 600-volt, heat- and moisture-resistant Type RHW or THW with a maximum temperature rating of 75 degrees C, or cross-linked thermosetting, polyethylene insulation with a temperature rating of 90 degrees C.

## PART 3 EXECUTION

### 3.1 ERECTION

Erection shall be in accordance with the manufacturer's instructions.

### 3.2 ONSITE ELECTRIFICATION SYSTEM TESTS

Electrification system shall be given continuity and insulation tests after the installation has been completed but before equipment is energized. Contractor shall provide necessary test equipment, labor, and personnel to perform the tests as specified. Electrification system equipment shall be completely isolated from all extraneous electrical connections. Substation and switchboard feeder breakers, circuit breakers in panel boards, and other disconnecting devices shall be used to isolate the equipment under test. Insulation tests on equipment and wiring shall be conducted using a 1,000-volt, insulation-testing instrument. Readings shall be recorded every minute and until three equal and consecutive readings are obtained. The resistance between phase conductors and between phase conductors and ground shall be not less than 1 megohm. Test data shall be recorded and shall include megohm readings versus time. Final acceptance shall depend upon satisfactory performance under test. Electrification system shall not be energized until recorded test data of the electrification system tests are approved.

### 3.3 ACCEPTANCE TESTING

Acceptance testing shall comply with the following paragraphs.

#### 3.3.1 Acceptance Test

The Contractor shall provide all personnel necessary to conduct the tests including but not limited to operators, riggers, rigging gear, and test weights. Testing shall be performed in the presence of Resident engineer. The Contractor shall notify the Resident engineer 10 days prior to testing operations.

#### 3.3.1.1 Test Sequence

The equipment shall be tested according to the applicable paragraphs of this procedure in the sequence provided.

#### 3.3.1.2 Test Data

Operating and startup current measurements shall be recorded for electrical equipment (motors and coils) using appropriate instrumentation. Speed measurements shall be recorded as required by the facility evaluation tests (normally at 100-percent load). Recorded values shall be compared with design specifications or manufacturer's recommended values; abnormal differences shall be explained in the remarks and submitted for approval or appropriate adjustments performed. In addition, high temperatures or abnormal operation of any equipment or machinery shall be noted, investigated, and corrected. Hoist and trolley speeds should be recorded during each test cycle.

#### 3.3.1.3 Equipment Monitoring

During the load test, improper operation or poor condition of safety devices, electrical components, mechanical equipment, and structural assemblies shall be monitored. Observed defects critical to continued testing shall be reported immediately to the Resident engineer and testing shall be suspended until the deficiency is corrected. During and immediately following each load test, the following inspections shall be made:

- a. Inspect for evidence of bending, warping, permanent deformation, cracking, or malfunction of structural components.
- b. Inspect for evidence of slippage in wire-rope sockets and fittings.
- c. Check for overheating in brake operation; check for proper stopping. All safety devices, including emergency stop switches and POWER OFF pushbuttons, shall be tested and inspected separately to verify proper operation of the brakes.
- d. Check for abnormal noise or vibration and overheating in machinery drive components.
- e. Check wire rope sheaves and drum spooling for proper operation, freedom of movement, abnormal noise, or vibration.
- f. Check electrical drive components for proper operation, freedom from chatter, noise, or overheating.

#### 3.3.1.4 Hooks

Hooks shall be measured for hook-throat spread before and after load test. A throat dimension base measurement shall be established by installing two tram points and measuring the distance between these tram points (to within 0.4 mm. This base dimension shall be recorded. The distance between tram points shall be measured before and after load test. An increase in the

throat opening by more than 1 percent from the base measurement shall be cause for rejection.

#### 3.4.1.5 Hoist Operating and Limit Switch Test

The load hook shall be raised through the full range of normal travel at rated speed and other speeds of the crane. In slow speed only, proper operation of upper switch shall be verified. The test shall be repeated a sufficient number of times (minimum of three) to demonstrate proper operation. Brake action shall be tested in each direction.

#### 3.4.1.6 Trolley Travel

The trolley shall be operated the full distance of the bridge rails exercising all drive speed controls in each direction. Brake operation shall be verified in each direction. In slow speed, the trolley bumpers shall contact the trolley stops located on the rails.

#### 3.4.1.7 Hoist Loss of Power No-Load Test

The hooks shall be raised to a height of approximately 2 m or less. While slowly lowering the hook, the main power source shall be disconnected verifying that the hook will not lower and that the brake will set.

#### 3.4.1.8 Travel Loss of Power No-Load Test

With the hook raised to clear obstructions and the trolley traveling in slow speed, the main power source shall be disconnected, verifying that the trolley will stop and that the brake will set.

### 3.3.2 Load Test

#### 3.3.2.1 Hoist

Unless otherwise indicated, the following tests shall be performed using a test load of 125 percent of rated load.

a. Dynamic Load Test: The test load shall be raised and lowered through the full-range while operating in each speed. The machinery shall be completely stopped at least once in each direction to ensure proper brake operation.

b. Hoist Loss of Power Test: After raising the test load to approximately 2 m above ground level and while slowly lowering the test load, the main power source and the control pushbutton shall be released verifying that the brake will set and that the test load will stop lowering.

c. Trolley Dynamic Load Test: While operating the trolley the full distance of the rails in each direction with test load on the hook (one cycle), the proper functioning of drive speed control points and proper brake action shall be tested.

01062/BERGER/ABAM  
FY02 Tactical Equipment Complex  
Fort Lewis, Washington

#### 3.4 MANUFACTURER'S SERVICES

Services of a manufacturer's representative who is experienced in the installation, adjustment, erection, and operation of the equipment specified shall be provided. The representative shall supervise the installation, adjustment, and testing of the equipment.

#### 3.5 FIELD TRAINING

A field training course shall be provided for designated operating staff members. Training shall be provided for a total period of 4 hours of normal working time and shall start after the system is functionally complete but prior to final acceptance tests. Field training shall cover all of the items contained in the operating and maintenance instructions. The Resident Engineer shall be given at least 2 weeks advance notice of such training.

-- End of Section -

01062/BERGER/ABAM  
FY02 Tactical Equipment Complex  
Fort Lewis, Washington

This page intentionally blank.

SECTION 15190

GAS PIPING SYSTEMS

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by basic designation only.

AMERICAN GAS ASSOCIATION (AGA)

AGA Manual (1994; Addenda/Correction Jan 1996) A.G.A.  
Plastic Pipe Manual for Gas Service

AMERICAN NATIONAL STANDARDS INSTITUTE (ANSI)

ANSI Z21.45 (1995) Flexible Connectors of Other Than All-Metal Construction for Gas Appliances

ANSI Z21.69 (1992; Z21.69a) Connectors for Movable Gas Appliances

AMERICAN PETROLEUM INSTITUTE (API)

API Spec 6D (1994; Supple 1 Jun 1996; Supple 2 Dec 1997)  
Pipeline Valves (Gate, Plug, Ball, and Check Valves)

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM A 53 Welded and seamless steel pipe (black and galvanized)

ASTM A 539 (1999) Electric-Resistance-Welded Coiled Steel Tubing for Gas and Fuel Oil Lines

ASME INTERNATIONAL (ASME)

ASME B1.20.1 (1983; R 1992) Pipe Threads, General Purpose (Inch)

ASME B16.3 (1998) Malleable Iron Threaded Fittings

ASME B16.5 (1996; B16.5a) Pipe Flanges and Flanged Fittings NPS 1/2 thru NPS 24

ASME B16.9 (1993) Factory-Made Wrought Steel Buttwelding Fittings

ASME B16.11 (1996) Forged Fittings, Socket-Welding and Threaded

ASME B16.33	(1990) Manually Operated Metallic Gas Valves for Use in Gas Piping Systems Up to 125 psig (Sizes 1/2 through 2)
ASME B31.1	(1998) Power Piping
ASME B31.2	(1968) Fuel Gas Piping
ASME B36.10M	(1996) Welded and Seamless Wrought Steel Pipe
ASME BPV IX	(1998) Boiler and Pressure Vessel Code; Section IX, Welding and Brazing Qualifications

MANUFACTURERS STANDARDIZATION SOCIETY OF THE VALVE AND FITTINGS  
INDUSTRY (MSS)

MSS SP-25	(1998) Standard Marking System for Valves, Fittings, Flanges and Unions
MSS SP-58	(1993) Pipe Hangers and Supports - Materials, Design and Manufacture
MSS SP-69	(1996) Pipe Hangers and Supports - Selection and Application

NATIONAL FIRE PROTECTION ASSOCIATION (NFPA)

NFPA 54	(1999) National Fuel Gas Code
NFPA 70	(1999) National Electrical Code

UNDERWRITERS LABORATORIES (UL)

UL Gas&Oil Dir	(1999) Gas and Oil Equipment Directory
----------------	--

1.2 GENERAL REQUIREMENTS

1.2.1 Welding

Piping shall be welded in accordance with qualified procedures using performance qualified welders and welding operators. Procedures and welders shall be qualified in accordance with ASME BPV IX. Welding procedures qualified by others, and welders and welding operators qualified by another employer may be accepted as permitted by ASME B31.1. The Contracting Officer shall be notified at least 24 hours in advance of tests and the tests shall be performed at the work site if practicable. The Contracting Officer shall be furnished with a copy of qualified procedures and a list of names and identification symbols of qualified welders and welding operators. The welder or welding operator shall apply his assigned symbol near each weld he makes as a permanent record. Structural members shall be welded in accordance with Section 05090 WELDING, STRUCTURAL.



#### 1.2.2 Standard Products

Materials and equipment shall be the standard products of a manufacturer regularly engaged in the manufacture of the products and shall essentially duplicate items that have been in satisfactory use for at least 2 years prior to bid opening. Asbestos or products containing asbestos shall not be used. Manufacturer's descriptive data and installation instructions shall be submitted for approval for compression-type mechanical joints used in joining dissimilar materials and for insulating joints. Valves, flanges and fittings shall be marked in accordance with MSS SP-25.

#### 1.2.3 Verification of Dimensions

The Contractor shall become familiar with all details of the work, verify all dimensions in the field, and shall advise the Contracting Officer of any discrepancy before performing the work.

#### 1.3 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only. When used, a designation following the "G" designation identifies the office that will review the submittal for the Government. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

##### SD-02 Shop Drawings

Gas Piping System; FIO.

Drawings showing location, size and all branches of pipeline; location of all required shutoff valves; and instructions necessary for the installation of connectors and supports.

##### SD-03 Product Data

Qualifications; FIO.

Qualified procedures and a list of names and identification symbols of qualified welders and welding operators.

##### SD-6 Test Reports

Testing; FIO.

Pressure Tests; FIO.

Pressure Tests for Liquified Petroleum Gas; FIO.

Test With Gas; FIO.

Test reports in booklet form tabulating test and measurements performed. The reports shall be dated after award of this contract, shall state the contractor's name and address, shall name the project and location, and shall list the specific requirements which are being certified.

## PART 2 PRODUCTS

### 2.1 PIPE AND FITTINGS

#### 2.1.1 Steel Pipe, Joints, and Fittings

Steel pipe shall conform to ASME B36.10M and ASTM A-53 Grade B steel. Malleable-iron threaded fittings shall conform to ASME B16.3. Steel pipe flanges and flanged fittings including bolts, nuts, and bolt pattern shall be in accordance with ASME B16.5. Wrought steel butt welding fittings shall conform to ASME B16.9. Socket welding and threaded forged steel fittings shall conform to ASME B16.11.

#### 2.1.2 Steel Tubing, Joints and Fittings

Steel tubing shall conform to ASTM A 539. Tubing joints shall be made up with gas tubing fittings recommended by the tubing manufacturer.

#### 2.1.3 Sealants for Steel Pipe Threaded Joints

Joint sealing compound shall be listed in UL Gas & Oil Dir, Class 20 or less. Tetrafluoroethylene tape shall conform to UL Gas & Oil Dir.

#### 2.1.4 Identification

Pipe flow markings and metal tags shall be provided as required.

#### 2.1.5 Pipe Threads

Pipe threads shall conform to ASME B1.20.1.

#### 2.1.6 Escutcheons

Escutcheons shall be chromium-plated steel or chromium-plated brass, either one piece or split pattern, held in place by internal spring tension or set screw.

#### 2.1.7 Gas Transition Fittings

Gas transition fittings shall be manufactured steel fittings approved for jointing metallic and thermoplastic or fiberglass pipe. Approved transition fittings are those that conform to AGA Manual requirements for transitions fittings.

#### 2.1.8 Flexible Connectors

Flexible connectors for connecting gas utilization equipment to building gas piping shall conform to ANSI Z21.45. Flexible connectors for movable food service equipment shall conform to ANSI Z21.69.

### 2.2 VALVES

Valves shall be suitable for shutoff or isolation service and shall conform to the following:

#### 2.2.1 Valves 50 mm and Smaller

Valves 50 mm and smaller shall conform to ASME B16.33 and shall be of materials and manufacture compatible with system materials used.

#### 2.2.2 Valves 65 mm and Larger

Valves 65 mm and larger shall be carbon steel conforming to API Spec 6D, Class 150.

#### 2.2.3 Steel Valve Operators

Valves 200 mm and larger shall be provided with worm or spur gear operators, totally enclosed, grease packed, and sealed. The operators shall have Open and Closed stops and position indicators. Locking feature shall be provided where indicated. Wherever the lubricant connections are not conveniently accessible, suitable extensions for the application of lubricant shall be provided. Valves shall be provided with lubricant compatible with gas service.

### 2.3 PIPE HANGERS AND SUPPORTS

Pipe hangers and supports shall conform to MSS SP-58 and MSS SP-69.

### 2.4 PRESSURE REGULATORS

Regulators shall have ferrous bodies, shall provide backflow and vacuum protection, and shall be designed to meet the pressure, load and other service conditions.

#### 2.4.1 Gas Main Regulators

Pressure regulators for main distribution lines, supplied from a source of gas which is at a higher pressure than the maximum allowable operating pressure for the system, and shall be equipped with pressure regulating devices of adequate capacity. In addition to the pressure regulating devices, a suitable method shall be provided to prevent over pressuring of the system in accordance with ASME B31.8. Suitable protective devices are as follows:

- a. Spring-loaded relief valve meeting the provisions of ASME BPV VIII Div 1.
- b. Pilot-loaded back pressure regulator used as relief valve, so designed that failure of the pilot system will cause the regulator to open.
- c. Weight-loaded relief valves.
- d. Monitoring regulator installed in series with the primary pressure regulator.
- e. Series regulator installed upstream from the primary regulator, set to limit the pressure on the inlet of the primary regulator continuously to the maximum allowable operating pressure of the

system, or less.

f. Automatic shutoff device installed in series with the primary regulator, set to shut off when the pressure on the distribution system reaches the maximum allowable operating pressure of the system, or less. This device shall remain closed until manually reset.

g. Spring-loaded, diaphragm type relief valves.

#### 2.4.2 Service Line Regulators

Pressure regulators for individual service lines shall have ferrous bodies. Regulator shall be capable of reducing distribution line pressure to pressures required for users. Regulators shall be provided where gas will be distributed at pressures in excess of 2.5 kPa. Pressure relief shall be set at a lower pressure than would cause unsafe operation of any connected user. Regulators for liquified petroleum gas shall be adjusted to 2.5 to 3 kPa. Pressure relief for liquified petroleum gas shall be set at 4 kPa. Regulator shall have single port with orifice diameter no greater than that recommended by the manufacturer for the maximum gas pressure at the regulator inlet. Regulator valve vent shall be of resilient materials designed to withstand flow conditions when pressed against the valve port. Regulator shall be capable of regulating downstream pressure within limits of accuracy and shall be capable of limiting the buildup of pressure under no-flow conditions to 50 percent or less of the discharge pressure maintained under flow conditions. Regulator shall have a self contained service regulator. Regulator pipe connections shall not exceed 50 mm.

### PART 3 EXECUTION

#### 3.1 EXCAVATION AND BACKFILLING

Earthwork shall be as specified in Section 02316 EXCAVATION, TRENCHING AND BACKFILLING FOR UTILITIES SYSTEMS.

#### 3.2 GAS PIPING SYSTEM

Gas piping system shall be from the point of delivery, defined as the outlet of the meter set assembly, specified in Section 02556 GAS DISTRIBUTION SYSTEM, to the connections to each gas utilization device.

##### 3.2.1 Protection of Materials and Components

Pipe and tube openings shall be closed with caps or plugs during installation. Equipment shall be protected from dirt, water, and chemical or mechanical damage. At the completion of all work, the entire system shall be thoroughly cleaned.

### 3.2.2 Workmanship and Defects

Piping, tubing and fittings shall be clear and free of cutting burrs and defects in structure or threading and shall be thoroughly brushed and chip-and scale-blown. Defects in piping, tubing or fittings shall not be repaired. When defective piping, tubing, or fittings are located in a system, the defective material shall be replaced.

### 3.3 PROTECTIVE COVERING

#### 3.3.1 Underground Metallic Pipe

Buried metallic piping shall be protected from corrosion with protective coatings as specified in Section 02556 GAS DISTRIBUTION SYSTEM. When dissimilar metals are joined underground, gastight insulating fittings shall be used.

#### 3.3.2 Aboveground Metallic Piping Systems

##### 3.3.2.1 Ferrous Surfaces

Shop primed surfaces shall be touched up with ferrous metal primer. Surfaces that have not been shop primed shall be solvent cleaned. Surfaces that contain loose rust, loose mill scale and other foreign substances shall be mechanically cleaned by power wire brushing and primed with ferrous metal primer. Primed surface shall be finished with two coats of exterior oil paint.

### 3.4 INSTALLATION

Installation of the gas system shall be in conformance with the manufacturer's recommendations and applicable provisions of NFPA 54, AGA Manual, and as indicated. Pipe cutting shall be done without damage to the pipe. Unless otherwise authorized, cutting shall be done by an approved type of mechanical cutter. Wheel cutters shall be used where practicable. On steel pipe 150 mm and larger, an approved gas cutting and beveling machine may be used. Cutting of thermoplastic and fiberglass pipe shall be in accordance with AGA Manual.

#### 3.4.1 Metallic Piping Installation

Underground piping shall be buried a minimum of 450 mm below grade. Changes in direction of piping shall be made with fittings only; mitering or notching pipe to form elbows and tees or other similar type construction will not be permitted. Branch connection may be made with either tees or forged branch outlet fittings. Branch outlet fittings shall be forged, flared for improvement of flow where attached to the run, and reinforced against external strains. Aluminum alloy pipe shall not be used in exterior locations or underground.

#### 3.4.2 Metallic Tubing Installation

Metallic tubing shall be installed using gas tubing fittings approved by the tubing manufacturer. Branch connections shall be made with tees. All tubing end preparation shall be made with tools designed for the purpose.

Aluminum alloy tubing shall not be used in exterior locations or underground.

### 3.4.3 Concealed Piping in Buildings

When installing piping which is to be concealed, unions, tubing fittings, running threads, right- and left-hand couplings, bushings, and swing joints made by combinations of fittings shall not be used.

#### 3.4.3.1 Piping in Partitions

Concealed piping shall be located in hollow rather than solid partitions. Tubing passing through walls or partitions shall be protected against physical damage.

### 3.4.4 Aboveground Piping

Aboveground piping shall be run as straight as practicable along the alignment indicated and with a minimum of joints. Piping shall be separately supported. Exposed horizontal piping shall not be installed farther than 150 mm from nearest parallel wall in laundry areas where clothes hanging could be attempted.

### 3.4.5 Final Gas Connections

Unless otherwise specified, final connections shall be made with rigid metallic pipe and fittings. Flexible connectors may be used for final connections to gas utilization equipment. Provide accessible gas shutoff valve and coupling for each gas equipment item.

## 3.5 PIPE JOINTS

Pipe joints shall be designed and installed to effectively sustain the longitudinal pull-out forces caused by contraction of the piping or superimposed loads.

### 3.5.1 Threaded Metallic Joints

Threaded joints in metallic pipe shall have tapered threads evenly cut and shall be made with UL approved graphite joint sealing compound for gas service or tetrafluoroethylene tape applied to the male threads only. Threaded joints up to 40 mm in diameter may be made with approved tetrafluoroethylene tape. Threaded joints up to 50 mm in diameter may be made with approved joint sealing compound. After cutting and before threading, pipe shall be reamed and burrs shall be removed. Caulking of threaded joints to stop or prevent leaks shall not be permitted.

### 3.5.2 Welded Metallic Joints

Beveling, alignment, heat treatment, and inspection of welds shall conform to ASME B31.2. Weld defects shall be removed and repairs made to the weld, or the weld joints shall be entirely removed and rewelded. After filler metal has been removed from its original package, it shall be protected or stored so that its characteristics or welding properties are not affected

adversely. Electrodes that have been wetted or have lost any of their coating shall not be used.

### 3.5.3 Solder or Brazed Joints

Joints in metallic tubing and fittings shall be made with materials and procedures recommended by the tubing supplier. Joints shall be brazed with material having a melting point above 538 degrees C (1000 degrees F). Brazing alloys shall not contain phosphorous.

### 3.6 PIPE SLEEVES

Pipes passing through concrete or masonry walls or concrete floors or roofs shall be provided with pipe sleeves fitted into place at the time of construction. Sleeves shall not be installed in structural members except where indicated or approved. All rectangular and square openings shall be as detailed. Each sleeve shall extend through its respective wall, floor or roof, and shall be cut flush with each surface, except in mechanical room floors not located on grade where clamping flanges or riser pipe clamps are used. Sleeves in mechanical room floors above grade shall extend at least 100 mm above finish floor. Unless otherwise indicated, sleeves shall be large enough to provide a minimum clearance of 6.4 mm all around the pipe. Sleeves in bearing walls, waterproofing membrane floors, and wet areas shall be steel pipe. Sleeves in nonbearing walls, floors, or ceilings may be steel pipe, galvanized sheet metal with lock-type longitudinal seam, or moisture-resistant fiber or plastic. For penetrations of fire walls, fire partitions and floors which are not on grade, the annular space between the pipe and sleeve shall be sealed with firestopping material and sealant.

### 3.7 PIPES PENETRATING WATERPROOFING MEMBRANES

Pipes penetrating waterproofing membranes shall be installed as specified in Section 15400 PLUMBING, GENERAL PURPOSE.

### 3.8 ESCUTCHEONS

Escutcheons shall be provided for all finished surfaces where gas piping passes through floors, walls, or ceilings except in boiler, utility, or equipment rooms.

### 3.9 SPECIAL REQUIREMENTS

Drips, grading of the lines, freeze protection, and branch outlet locations shall be as shown and shall conform to the requirements of NFPA 54.

### 3.10 BUILDING STRUCTURE

Building structure shall not be weakened by the installation of any gas piping. Beams or joists shall not be cut or notched.

### 3.11 PIPING SYSTEM SUPPORTS

Gas piping systems in buildings shall be supported with pipe hooks, metal pipe straps, bands or hangers suitable for the size of piping or tubing. Gas piping system shall not be supported by other piping. Spacing of supports in gas piping and tubing installations shall conform to the requirements of NFPA 54. The selection and application of supports in gas piping and tubing installations shall conform to the requirements of MSS SP-69. In the support of multiple pipe runs on a common base member, a clip or clamp shall be used where each pipe crosses the base support member. Spacing of the base support members shall not exceed the hanger and support spacing required for any of the individual pipes in the multiple pipe run. The clips or clamps shall be rigidly connected to the common base member. A clearance of 3.2 mm shall be provided between the pipe and clip or clamp for all piping which may be subjected to thermal expansion.

### 3.12 ELECTRICAL BONDING AND GROUNDING

The gas piping system within the building shall be electrically continuous and bonded to a grounding electrode as required by NFPA 70. Conventional flange joints allow sufficient current flow to satisfy this requirement.

### 3.13 SHUTOFF VALVE

Main gas shutoff valve controlling the gas piping system shall be easily accessible for operation and shall be installed as indicated, protected from physical damage, and marked with a metal tag to clearly identify the piping system controlled.

### 3.14 CATHODIC PROTECTION

Cathodic protection shall be provided for underground ferrous gas piping.

### 3.15 TESTING

Before any section of a gas piping system is put into service, it shall be carefully tested to assure that it is gastight. Prior to testing, the system shall be blown out, cleaned and cleared of all foreign material. Each joint shall be tested by means of an approved gas detector, soap and water, or an equivalent nonflammable solution. Testing shall be completed before any work is covered, enclosed, or concealed. All testing of piping systems shall be done with due regard for the safety of employees and the public during the test. Bulkheads, anchorage and bracing suitably designed to resist test pressures shall be installed if necessary. Oxygen shall not be used as a testing medium.

#### 3.15.1 Pressure Tests

Before appliances are connected, piping systems shall be filled with air or an inert gas and shall withstand a minimum pressure of 21 kPa gauge for a period of not less than 10 minutes as specified in NFPA 54 without showing any drop in pressure. Oxygen shall not be used. Pressure shall be measured with a mercury manometer, slope gauge, or an equivalent device so calibrated as to be read in increments of not greater than 1 kPa. The source of pressure shall be isolated before the pressure tests are made.



### 3.15.2 Test With Gas

Before turning gas under pressure into any piping, all openings from which gas can escape shall be closed. Immediately after turning on the gas, the piping system shall be checked for leakage by using a laboratory-certified gas meter, an appliance orifice, a manometer, or equivalent device. All testing shall conform to the requirements of NFPA 54. If leakage is recorded, the gas supply shall be shut off, the leak shall be repaired, and the tests repeated until all leaks have been stopped.

### 3.15.3 Purging

After testing is completed, and before connecting any appliances, all gas piping shall be fully purged. LPG piping tested using fuel gas with appliances connected does not require purging. Piping shall not be purged into the combustion chamber of an appliance. The open end of piping systems being purged shall not discharge into confined spaces or areas where there are ignition sources unless the safety precautions recommended in NFPA 54 are followed.

### 3.15.4 Labor, Materials and Equipment

All labor, materials and equipment necessary for conducting the testing and purging shall be furnished by the Contractor.

### 3.16 PIPE COLOR CODE MARKING

Color code marking of piping shall be as specified in Section 09900 PAINTING, GENERAL.

-- End of Section --

01062/BERGER/ABAM  
FY02 Tactical Equipment Complex  
Fort Lewis, Washington

This page intentionally blank.

SECTION 15400

PLUMBING, GENERAL PURPOSE

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by basic designation only.

AMERICAN NATIONAL STANDARDS INSTITUTE (ANSI)

ANSI Z21.10.1	(1993; Z21.10.1a; Z21.10.1b; Z21.10.1c) Gas Water Heaters Vol. I, Storage Water Heaters with Input Ratings of 75,000 Btu Per Hour or Less
ANSI Z21.10.3	(1998) Gas Water Heaters Vol. III, Storage Water Heaters with Input Ratings Above 75,000 Btu Per Hour, Circulating and Instantaneous Water Heaters
ANSI Z21.22	(1986; Z21.22a) Relief Valves and Automatic Gas Shutoff Devices for Hot Water Supply Systems
ANSI Z21.56	(1994; Z21.56a) Gas-Fired Pool Heaters

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM A 47/A 47M	(1999) Ferritic Malleable Iron Castings
ASTM A 53/A 53M	(1999b) Pipe, Steel, Black and Hot-Dipped, Zinc-Coated, Welded and Seamless
ASTM A 74	(1998) Cast Iron Soil Pipe and Fittings
ASTM A 518/A 518M	(1999) Corrosion-Resistant High-Silicon Iron CastingsASTM A 536 (1984; R 1999el) Ductile Iron Castings
ASTM A 733	(1999) Welded and Seamless Carbon Steel and Austenitic Stainless Steel Pipe Nipples
ASTM A 888	(1998el) Hubless Cast Iron Soil Pipe and Fittings for Sanitary and Storm Drain, Waste, and Vent Piping Applications
ASTM B 32	(1996) Solder Metal
ASTM B 42	(1998) Seamless Copper Pipe, Standard Sizes

ASTM B 43	(1998) Seamless Red Brass Pipe, Standard Sizes
ASTM B 88	(1999) Seamless Copper Water Tube
ASTM B 88M	(1999) Seamless Copper Water Tube (Metric)
ASTM B 152	(1997a) Copper Sheet, Strip, Plate, and Rolled Bar
ASTM B 152M	(1997a) Copper Sheet, Strip, Plate, and Rolled Bar (Metric)
ASTM B 306	(1999) Copper Drainage Tube (DWV)
ASTM B 370	(1998) Copper Sheet and Strip for Building Construction
ASTM B 584	(1998a) Copper Alloy Sand Castings for General Applications
ASTM B 813	(1993) Liquid and Paste Fluxes for Soldering Applications of Copper and Copper Alloy Tube
ASTM B 828	(1998) Making Capillary Joints by Soldering of Copper and Copper Alloy Tube and Fittings
ASTM C 564	(1997) Rubber Gaskets for Cast Iron Soil Pipe and Fittings
ASTM C 920	(1998) Elastomeric Joint Sealants
ASTM C 1053	(1990; r 1995e1) Borosilicate Glass Pipe and Fittings for Drain, Waste and Vent (DWV)Applications.
ASTM E 1	(1998) ASTM Thermometers
ASME INTERNATIONAL (ASME)	
ASME A112.1.2	(1991; R 1998) Air Gaps in Plumbing Systems
ASME A112.6.1M	(1997) Supports for Off-the-Floor Plumbing Fixtures for Public Use
ASME A112.14.1	(1975; R 1998) Backwater Valves
ASME A112.18.1M	(1996) Plumbing Fixture Fittings
ASME A112.19.2M	(1998) Vitreous China Plumbing Fixtures
ASME A112.21.1M	(1991; R 1998) Floor Drains
ASME A112.36.2M	(1991; R 1998) Cleanouts

ASME B1.20.1	(1983; R 1992) Pipe Threads, General Purpose (Inch)
ASME B16.3	(1998) Malleable Iron Threaded Fittings
ASME B16.4	(1998) Gray Iron Threaded Fittings
ASME B16.12	(1998) Cast Iron Threaded Drainage Fittings
ASME B16.15	(1985; R 1994) Cast Bronze Threaded Fittings Classes 125 and 250
ASME B16.18	(1984; R 1994) Cast Copper Alloy Solder Joint Pressure Fittings
ASME B16.21	(1992) Nonmetallic Flat Gaskets for Pipe Flanges
ASME B16.22	(1995; B16.22a1998) Wrought Copper and Copper Alloy Solder Joint Pressure Fittings
ASME B16.23	(1992; Errata Jan 1994) Cast Copper Alloy Solder Joint Drainage Fittings - DWV
ASME B16.24	(1991; R 1998) Cast Copper Alloy Pipe Flanges, Class 150, 300, 400, 600, 900, 1500, and 2500, and Flanged Fittings, Class 150 and 300
ASME B16.29	(1994) Wrought Copper and Wrought Copper Alloy Solder Joint Drainage Fittings - DWV
ASME B16.34	(1997) Valves - Flanged, Threaded, and Welding End
ASME B16.39	(1998) Malleable Iron Threaded Pipe Unions Classes 150, 250, and 300
ASME B31.5	(1992; B31.5a1994) Refrigeration Piping
ASME B40.1	(1991) Gauges - Pressure Indicating Dial Type - Elastic Element
ASME BPV VIII Div 1	(1998) Boiler and Pressure Vessel Code; Section VIII, Pressure Vessels Division 1 - Basic Coverage ASME CSD-1 (1998) Controls and Safety Devices for Automatically Fired Boilers
AMERICAN SOCIETY OF SANITARY ENGINEERING FOR PLUMBING AND SANITARY RESEARCH(ASSE)	
ASSE 1001	(1990) Pipe Applied Atmospheric Type Vacuum Breakers

01062/BERGER/ABAM  
FY02 Tactical Equipment Complex  
Fort Lewis, Washington

ASSE 1002	(1986) Water Closet Flush Tank Ball Cocks
ASSE 1003	(1995) Water Pressure Reducing Valves for Domestic Water Supply Systems
ASSE 1005	(1986) Water Heater Drain Valves - 3/4-Inch Iron Pipe Size
ASSE 1011	(1995) Hose Connection Vacuum Breakers
ASSE 1012	(1995) Backflow Preventers with Intermediate Atmospheric Vent
ASSE 1013	(1993) Reduced Pressure Principle Backflow Preventers
ASSE 1018	(1986) Trap Seal Primer Valves Water Supply Fed
ASSE 1037	(1990; Rev thru Mar 1990) Pressurized Flushing Devices (Flushometers) for Plumbing Fixtures

AMERICAN WATER WORKS ASSOCIATION (AWWA)

AWWA EWW	(1999) Standard Methods for the Examination of Water and Wastewater
AWWA B300	(1999) Hypochlorites
AWWA B301	(1992; Addenda B301a - 1999) Liquid Chlorine
AWWA C105	(1993) Polyethylene Encasement for Ductile-Iron Pipe Systems
AWWA C203	(1997; addenda C203a - 1999) Coal-Tar Protective Coatings and Linings for Steel Water Pipelines - Enamel and Tape - Hot-Applied
AWWA C606	(1997) Grooved and Shouldered Joints
AWWA M20	(1973) Manual: Water Chlorination Principles and Practices

AMERICAN WELDING SOCIETY (AWS)

AWS A5.8	(1992) Filler Metals for Brazing and Braze Welding
AWS B2.2	(1991) Brazing Procedure and Performance Qualification

01062/BERGER/ABAM  
FY02 Tactical Equipment Complex  
Fort Lewis, Washington

CAST IRON SOIL PIPE INSTITUTE (CISPI)

CISPI 301	(1997) Hubless Cast Iron Soil Pipe and Fittings for Sanitary and Storm Drain, Waste, and Vent Piping Applications
CISPI 310	(1997) Coupling for Use in Connection with Hubless Cast Iron Soil Pipe and Fittings for Sanitary and Storm Drain, Waste, and Vent Piping Applications
CISPI HSN-85	(1985) Neoprene Rubber Gaskets for Hub and Spigot Cast Iron Soil Pipe and Fittings

CODE OF FEDERAL REGULATIONS (CFR)

10 CFR 430	Energy Conservation Program for Consumer Products
------------	---

COMMERCIAL ITEM DESCRIPTIONS (CID)

CID A-A-240	(Rev A; Canc. Notice 1) Shower Head, Ball Joint
-------------	---

COPPER DEVELOPMENT ASSOCIATION (CDA)

CDA Tube Handbook	(1995) Copper Tube Handbook
-------------------	-----------------------------

COUNCIL OF AMERICAN BUILDING OFFICIALS (CABO)

CABO A117.1	(1998) Accessible and Usable Buildings and Facilities
-------------	---

FOUNDATION FOR CROSS-CONNECTION CONTROL AND HYDRAULIC RESEARCH  
(FCCCHR)

FCCCHR-01	(1993) Manual of Cross-Connection Control
-----------	---

INTERNATIONAL ASSOCIATION OF PLUMBING AND MECHANICAL OFFICIALS  
(IAPMO)

IAPMO Z124.5	(1997) Plastic Toilet (Water Closets) Seats
--------------	---

MANUFACTURERS STANDARDIZATION SOCIETY OF THE VALVE AND FITTINGS  
INDUSTRY (MSS)

MSS SP-44	(1996) Steel PipeLine Flanges
MSS SP-58	(1993) Pipe Hangers and Supports - Materials, Design and Manufacture
MSS SP-67	(1995) Butterfly Valves
MSS SP-69	(1996) Pipe Hangers and Supports - Selection and Application

MSS SP-70	(1998) Cast Iron Gate Valves, Flanged and Threaded Ends
MSS SP-71	(1997) Cast Iron Swing Check Valves, Flanges and Threaded Ends
MSS SP-72	(1999) Ball Valves with Flanged or Butt-Welding Ends for General Service
MSS SP-73	(1991; R 1996) Brazing Joints for Copper and Copper Alloy Pressure Fittings
MSS SP-78	(1998) Cast Iron Plug Valves, Flanged and Threaded Ends
MSS SP-80	(1997) Bronze Gate, Globe, Angle and Check Valves
MSS SP-83	(1995) Class 3000 Steel Pipe Unions Socket-Welding and Threaded
MSS SP-85	(1994) Cast Iron Globe & Angle Valves, Flanged and Threaded Ends
MSS SP-110	(1996) Ball Valves Threaded, Socket-Welding, Solder Joint, Grooved and Flared Ends

NATIONAL ASSOCIATION OF PLUMBING-HEATING-COOLING CONTRACTORS (NAPHCC)

NAPHCC Plumbing Code	(1996) National Standard Plumbing Code
----------------------	--

NATIONAL ELECTRICAL MANUFACTURERS ASSOCIATION (NEMA)

NEMA 250	(1997) Enclosures for Electrical Equipment (1000 Volts Maximum)
----------	--

NATIONAL FIRE PROTECTION ASSOCIATION (NFPA)

NFPA 54	(1999) National Fuel Gas Code
---------	-------------------------------

NSF INTERNATIONAL (NSF)

NSF 14	(1999) Plastics Piping Components and Related Materials
--------	---

PLASTIC PIPE AND FITTINGS ASSOCIATION (PPFA)

PPFA-01	(1998) Plastic Pipe in Fire Resistive Construction
---------	--



PLUMBING AND DRAINAGE INSTITUTE (PDI)

PDI WH 201 (1992) Water Hammer Arresters

SOCIETY OF AUTOMOTIVE ENGINEERS (SAE)

SAE J 1508 (1997) Hose Clamps

1.2 STANDARD PRODUCTS

Specified materials and equipment shall be standard products of a manufacturer regularly engaged in the manufacture of such products. Specified equipment shall essentially duplicate equipment that has performed satisfactorily at least two years prior to bid opening.

1.3 ELECTRICAL WORK

Motors, motor controllers and motor efficiencies shall conform to the requirements of Section 16415 ELECTRICAL WORK, INTERIOR. Electrical motor-driven equipment specified herein shall be provided complete with motors. Equipment shall be rated at 60 Hz, single phase, ac unless otherwise indicated. Where a motor controller is not provided in a motor-control center on the electrical drawings, a motor controller shall be as indicated. Motor controllers shall be provided complete with properly sized thermal-overload protection in each ungrounded conductor, auxiliary contact, and other equipment, at the specified capacity, and including an allowable service factor.

1.4 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only. When used, a designation following the "G" designation identifies the office that will review the submittal for the Government. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

SD-03 Product Data

Plumbing Fixture Schedule; FIO.

Catalog cuts of specified plumbing fixtures valves and related piping.

Vibration-Absorbing Features; FIO.

Details of vibration-absorbing features, including arrangement, foundation plan, dimensions and specifications.

Plumbing System; FIO.

Diagrams, instructions, and other sheets proposed for posting. Manufacturer's recommendations for the installation of bell and spigot and hubless joints for cast iron soil pipe.

#### SD-06 Test Reports

Tests, Flushing and Disinfection; FIO.

Test reports in booklet form showing all field tests performed to adjust each component and all field tests performed to prove compliance with the specified performance criteria, completion and testing of the installed system. Each test report shall indicate the final position of controls.

Backflow Prevention Assembly Tests.

Certification of proper operation shall be as accomplished in accordance with state regulations by an individual certified by the state to perform such tests. If no state requirement exists, the Contractor shall have the manufacturer's representative test the device, to ensure the unit is properly installed and performing as intended. The Contractor shall provide written documentation of the tests performed and signed by the individual performing the tests.

#### SD-07 Certificates

Materials and Equipment; FIO.

Where materials or equipment are specified to comply with requirements of AGA, or ASME, proof of such compliance. The label or listing of the specified agency will be acceptable evidence. In lieu of the label or listing, a written certificate may be submitted from an approved, nationally recognized testing organization equipped to perform such services, stating that the items have been tested and conform to the requirements and testing methods of the specified agency. Where equipment is specified to conform to requirements of the ASME Boiler and Pressure Vessel Code, the design, fabrication, and installation shall conform to the code.

Bolts; FIO.

Written certification by the bolt manufacturer that the bolts furnished comply with the specified requirements. The certification shall include illustrations of product-required markings, the date of manufacture, and the number of each type of bolt to be furnished based on this certification.

#### SD-10 Operation and Maintenance Data

Plumbing System; FIO.

Six copies of the operation manual outlining the step-by-step procedures required for system startup, operation and shutdown. The manual shall include the manufacturer's name, model number, service manual, parts list, and brief description of all equipment and their basic operating features. Six copies of the maintenance manual listing routine maintenance procedures, possible breakdowns

and repairs. The manual shall include piping and equipment layout and simplified wiring and control diagrams of the system as installed.

## 1.5 REGULATORY REQUIREMENTS

Plumbing work shall be in accordance with NAPHCC Plumbing Code.

## 1.6 PROJECT/SITE CONDITIONS

The Contractor shall become familiar with details of the work, verify dimensions in the field, and advise the Contracting Officer of any discrepancy before performing any work.

## PART 2 PRODUCTS

### 2.1 MATERIALS

Materials for various services shall be in accordance with TABLES I and II. Pipe schedules shall be selected based on service requirements. Pipe fittings shall be compatible with the applicable pipe materials. Grooved pipe couplings and fittings shall be from the same manufacturer. Material or equipment containing lead shall not be used in any potable water system. Hubless cast-iron soil pipe shall not be installed underground, under concrete floor slabs.

#### 2.1.1 Pipe Joint Materials

Grooved pipe and hubless cast-iron soil pipe shall not be used under ground. Joints and gasket materials shall conform to the following:

- a. Coupling for Cast-Iron Pipe: for hub and spigot type ASTM A 74, AWWA C606. For hubless type: CISPI 310
- b. Coupling for Steel Pipe: AWWA C606.
- c. Flange Gaskets: Gaskets shall be made of non-asbestos material in accordance with ASME B16.21. Gaskets shall be flat, 1.6 mm (1/16 inch) thick, and contain Aramid fibers bonded with Styrene Butadiene Rubber (SBR) or Nitro Butadiene Rubber (NBR). Gaskets shall be the full face or self centering flat ring type. Gaskets used for hydrocarbon service shall be bonded with NBR.
- d. Neoprene Gaskets for Hub and Cast-Iron Pipe and Fittings: CISPI HSN-85.
- e. Brazing Material: Brazing material shall conform to AWS A5.8, BCuP-5.
- f. Brazing Flux: Flux shall be in paste or liquid form appropriate for use with brazing material. Flux shall be as follows: lead-free; have a 100 percent flushable residue; contain slightly acidic reagents; contain potassium borides; and contain fluorides. Silver brazing materials shall be in accordance with AWS A5.8.

- g. Solder Material: Solder metal shall conform to ASTM B 32 95-5 tin-antimony.
- h. Solder Flux: Flux shall be liquid form, non-corrosive, and conform to ASTM B 813, Standard Test 1.
- i. PTFE Tape: PTFE Tape, for use with Threaded Metal or Plastic Pipe, ASTM D 3308.
- j. Rubber Gaskets for Cast-Iron Soil-Pipe and Fittings (hub and spigot type and hubless type): ASTM C 564.
- k. Flexible Elastomeric Seals: ASTM D 3139, ASTM D 3212 or ASTM F 477.

#### 2.1.2 Miscellaneous Materials

Miscellaneous materials shall conform to the following:

- a. Water Hammer Arrester: PDI WH 201.
- b. Copper, Sheet and Strip for Building Construction: ASTM B 370.
- c. Asphalt Roof Cement: ASTM D 2822.
- d. Hose Clamps: SAE J 1508.
- e. Supports for Off-The-Floor Plumbing Fixtures: ASME A112.6.1M.
- f. Metallic Cleanouts: ASME A112.36.2M.
- g. Plumbing Fixture Setting Compound: A preformed flexible ring seal molded from hydrocarbon wax material. The seal material shall be nonvolatile nonasphaltic and contain germicide and provide watertight, gastight, odorproof and verminproof properties.
- h. Coal-Tar Protective Coatings and Linings for Steel Water Pipelines: AWWA C203.
- i. Hypochlorites: AWWA B300.
- j. Liquid Chlorine: AWWA B301.
- k. Polyethylene Encasement for Ductile-Iron Piping: AWWA C105.
- l. Gauges - Pressure and Vacuum Indicating Dial Type - Elastic Element: ASME B40.1.
- m. Thermometers: ASTM E 1.

## 2.2 PIPE HANGERS, INSERTS, AND SUPPORTS

Pipe hangers, inserts, and supports shall conform to MSS SP-58 and MSS SP-69.

## 2.3 VALVES

Valves shall be provided on supplies to equipment and fixtures. Valves 65 mm and smaller shall be bronze with threaded bodies for pipe and solder-type connections for tubing. Valves 80 mm and larger shall have flanged iron bodies and bronze trim. Pressure ratings shall be based upon the application. Grooved end valves may be provided if the manufacturer certifies that the valves meet the performance requirements of applicable MSS standard. Valves shall conform to the following standards:

Description	Standard
Butterfly Valves	MSS SP-67
Cast-Iron Gate Valves, Flanged and Threaded Ends	MSS SP-70
Cast-Iron Swing Check Valves, Flanged and Threaded Ends	MSS SP-71
Ball Valves with Flanged Butt-Welding Ends for General Service	MSS SP-72
Ball Valves Threaded, Socket-Welding, Solder Joint, Grooved and Flared Ends	MSS SP-110
Cast-Iron Plug Valves, Flanged and Threaded Ends	MSS SP-78
Bronze Gate, Globe, Angle, and Check Valves	MSS SP-80
Steel Valves, Socket Welding and Threaded Ends	ASME B16.34
Cast-Iron Globe and Angle Valves, Flanged and Threaded Ends	MSS SP-85
Backwater Valves	ASME A112.14.1
Vacuum Relief Valves	ASSE 1001
Water Pressure Reducing Valves	ASSE 1003
Water Heater Drain Valves	ASSE 1005
Trap Seal Primer Valves	ASSE 1018
Temperature and Pressure Relief Valves for Hot Water Supply Systems	ANSI Z21.22

Temperature and Pressure Relief Valves  
for Automatically Fired Hot  
Water Boilers

ASME CSD-1

Safety Code No., Part CW,  
Article 5

#### 2.3.1 Backwater Valves

Backwater valves shall be either separate from the floor drain or a combination floor drain, P-trap, and backwater valve, as shown. Valves shall have cast-iron bodies with cleanouts large enough to permit removal of interior parts. Valves shall be of the flap type, hinged or pivoted, with revolving disks. Hinge pivots, disks, and seats shall be nonferrous metal. Disks shall be slightly open in a no-flow no-backwater condition. Cleanouts shall extend to finished floor and be fitted with threaded countersunk plugs.

#### 2.3.2 Wall Hydrants

Wall hydrants with vacuum-breaker backflow preventer shall have a nickel-brass or nickel-bronze wall plate or flange with nozzle and detachable key handle. A brass or bronze operating rod shall be provided within a galvanized iron casing of sufficient length to extend through the wall so that the valve is inside the building, and the portion of the hydrant between the outlet and valve is self-draining. A brass or bronze valve with coupling and union elbow having metal-to-metal seat shall be provided. Valve rod and seat washer shall be removable through the face of the hydrant. The hydrant shall have 20 mm exposed hose thread on spout and 20 mm male pipe thread on inlet.

#### 2.3.3 Water Hammer Arrester

Install water hammer arrester at each toilet group, last fixture in hot water line

#### 2.3.4 Relief Valves

Water heaters and hot water storage tanks shall have a combination pressure and temperature (P&T) relief valve. The pressure relief element of a P&T relief valve shall have adequate capacity to prevent excessive pressure buildup in the system when the system is operating at the maximum rate of heat input. The temperature element of a P&T relief valve shall have a relieving capacity which is at least equal to the total input of the heaters when operating at their maximum capacity. Relief valves shall be rated according to ANSI Z21.22. Relief valves for systems where the maximum rate of heat input is less than 59 kW shall have 20 mm minimum inlets, and 20 mm outlets. Relief valves for systems where the maximum rate of heat input is greater than 59 kW shall have 25 mm minimum inlets, and 25 mm outlets. The discharge pipe from the relief valve shall be the size of the valve outlet.

#### 2.4 FIXTURES

Fixtures shall be water conservation type, in accordance with NAPHCC Plumbing Code. Fixtures for use by the physically handicapped shall be in accordance with CABO A117.1. Vitreous china, nonabsorbent, hard-burned, and vitrified throughout the body shall be provided. Porcelain enameled ware

shall have specially selected, clear white, acid-resisting enamel coating evenly applied on surfaces. No fixture will be accepted that shows cracks, crazes, blisters, thin spots, or other flaws. Fixtures shall be equipped with appurtenances such as traps, faucets, stop valves, and drain fittings. Each fixture and piece of equipment requiring connections to the drainage system, except grease interceptors, shall be equipped with a trap. Brass expansion or toggle bolts capped with acorn nuts shall be provided for supports, and polished chromium-plated pipe, valves, and fittings shall be provided where exposed to view. Fixtures with the supply discharge below the rim shall be equipped with backflow preventers. Internal parts of flush and/or flushometer valves, shower mixing valves, shower head face plates, pop-up stoppers of lavatory waste drains, and pop-up stoppers and overflow tees and shoes of bathtub waste drains may contain acetal resin, fluorocarbon, nylon, acrylonitrile-butadiene-styrene (ABS) or other plastic material, if the material has provided satisfactory service under actual commercial or industrial operating conditions for not less than 2 years. Plastic in contact with hot water shall be suitable for 82 degrees C (180 degrees F) water temperature. Plumbing fixtures shall be as indicated in paragraph PLUMBING FIXTURE SCHEDULE.

#### 2.4.1 Lavatories

Vitreous china lavatories shall be provided with two integral molded lugs on the back-underside of the fixture and drilled for bolting to the wall in a manner similar to the hanger plate.

#### 2.5 BACKFLOW PREVENTERS

Backflow preventers shall be approved and listed by the Foundation For Cross-Connection Control & Hydraulic Research and the State of Washington approved. Reduced pressure principle assemblies, double check valve assemblies, atmospheric (nonpressure) type vacuum breakers, and pressure type vacuum breakers shall be tested, approved, and listed in accordance with FCCCHR-01. Backflow preventers with intermediate atmospheric vent shall conform to ASSE 1012. Reduced pressure principle backflow preventers shall conform to ASSE 1013. Hose connection vacuum breakers shall conform to ASSE 1011. Pipe applied atmospheric type vacuum breakers shall conform to ASSE 1001. Air gaps in plumbing systems shall conform to ASME A112.1.2.

#### 2.6 DRAINS

##### 2.6.1 Floor and Shower Drains

Floor and shower drains shall consist of a galvanized body, integral seepage pan, and adjustable perforated or slotted chromium-plated bronze, nickel-bronze, or nickel-brass strainer, consisting of grate and threaded collar. Floor drains shall be cast iron except where metallic waterproofing membrane is installed. Drains shall be of double drainage pattern for embedding in the floor construction. The seepage pan shall have weep holes or channels for drainage to the drainpipe. The strainer shall be adjustable to floor thickness. A clamping device for attaching flashing or waterproofing membrane to the seepage pan without damaging the flashing or waterproofing membrane shall be provided when required. Drains shall be provided with threaded or caulked connection. In lieu of a caulked joint between the drain outlet and waste pipe, a neoprene rubber gasket conforming to ASTM C

564 may be installed, provided that the drain is specifically designed for the rubber gasket compression type joint. Floor and shower drains shall conform to ASME A112.21.1M.

## 2.7 TRAPS

Unless otherwise specified, traps shall be copper-alloy adjustable tube type with slip joint inlet and swivel. Traps shall be without a cleanout. Tubes shall be copper alloy with walls not less than 0.813 mm thick within commercial tolerances, except on the outside of bends where the thickness may be reduced slightly in manufacture by usual commercial methods. Inlets shall have rubber washer and copper alloy nuts for slip joints above the discharge level. Swivel joints shall be below the discharge level and shall be of metal-to-metal or metal-to-plastic type as required for the application. Nuts shall have flats for wrench grip. Outlets shall have internal pipe thread, except that when required for the application, the outlets shall have sockets for solder-joint connections. The depth of the water seal shall be not less than 50 mm. The interior diameter shall be not more than 3.2 mm over or under the nominal size, and interior surfaces shall be reasonably smooth throughout. A copper alloy "P" trap assembly consisting of an adjustable "P" trap and threaded trap wall nipple with cast brass wall flange shall be provided for lavatories. The assembly shall be a standard manufactured unit and may have a rubber-gasketed swivel joint.

## 2.8 WATER HEATERS

Water heater types and capacities shall be as indicated. Each primary water heater shall have controls with an adjustable range that includes 32 to 60 degrees C. Each gas-fired water heater and boost water heater shall have controls with an adjustable range that includes to 82 degrees C. The thermal efficiencies and standby heat losses shall conform to TABLE III for each type of water heater specified. The only exception is that storage water heaters and hot water storage tanks having more than 2000 liters storage capacity need not meet the standard loss requirement if the tank surface area is not insulated to R-12.5 and if a standing light is not used. Plastic materials polyetherimide (PEI) and polyethersulfone (PES) are forbidden to be used for vent piping of combustion gases.

### 2.8.1 Automatic Storage Type

Heaters shall be complete with control system, and shall have ASME rated combination pressure and temperature relief valve.

#### 2.8.1.1 Gas-Fired Type

Gas-fired water heaters shall conform to ANSI Z21.10.1 when input is 22 KW or less or ANSI Z21.10.3 for heaters with input greater than 22 KW.



## 2.9 COMPRESSED AIR SYSTEM

### 2.9.1 Air Compressors

Air compressor unit shall be a factory-packaged assembly, including 3 phase, 460 volt motor controls, switches, wiring, accessories, and motor controllers, in a NEMA 250, Type 4 enclosure. Tank-mounted air compressors shall be manufactured to comply with UL listing requirements. Air compressors shall have manufacturer's name and address, together with trade name, and catalog number on a nameplate securely attached to the equipment. Each compressor shall start and stop automatically at upper and lower pressure limits of the system. Guards shall shield exposed moving parts. Each compressor motor shall be provided with an across-the-line-type magnetic controller, complete with low-voltage release. An intake air filter and silencer shall be provided with each compressor. Aftercooler and moisture separator shall be installed between compressors and air receiver to remove moisture and oil condensates before the air enters the receiver. Aftercoolers shall be air cooled. The air shall pass through a sufficient number of tubes to affect cooling. Tubes shall be sized to give maximum heat transfer. Water to unit shall be controlled by a solenoid or pneumatic valve which opens when the compressors start and closes when the compressors shut down. Cooling capacity of the aftercooler shall be sized for the total capacity of the compressors. Means shall be provided for draining condensed moisture from the receiver by an automatic float type trap. Capacities of air compressors and receivers shall be as indicated.

### 2.9.2 Lubricated Compressors

Compressors shall be two-stage, V-belt drive, capable of operating continuously against their designed discharge pressure, and shall operate at a speed not in excess of 1800 rpm. Compressors shall have the capacity and discharge pressure indicated. Compressors shall be assembled complete on a common subbase. The compressor main bearings shall be either roller or ball. The discharge passage of the high pressure air shall be piped to the air receiver with a copper pipe or tubing. A pressure gauge calibrated to 1.03 MPa and equipped with a gauge cock and pulsation dampener shall be furnished for installation adjacent to pressure switches.

### 2.9.3 Air Receivers

Receivers shall be designed for 1.38 MPa working pressure. Receivers shall be factory air tested to 1-1/2 times the working pressure. Receivers shall be equipped with safety relief valves and accessories, including pressure gauges and automatic and manual drains. The outside of air receivers may be galvanized or supplied with commercial enamel finish. Receivers shall be designed and constructed in accordance with ASME BPV VIII Div 1 and shall have the design working pressures specified herein. A display of the ASME seal on the receiver or a certified test report from an approved independent testing laboratory indicating conformance to the ASME Code shall be provided.

#### 2.9.4 Intake Air Supply Filter

Dry type air filter shall be provided having a collection efficiency of 99 percent of particles larger than 10 microns. Filter body and media shall withstand a maximum 862 kPa, capacity as indicated.

#### 2.9.5 Pressure Regulators

The air system shall be provided with the necessary regulator valves to maintain the desired pressure for the installed equipment. Regulators shall be designed for a maximum inlet pressure of 862 kPa and a maximum temperature of 93 degrees C. Regulators shall be single-seated, pilot-operated with valve plug, bronze body and trim or equal, and threaded connections. The regulator valve shall include a pressure gauge and shall be provided with an adjustment screw for adjusting the pressure differential from 0 kPa to 862 kPa. Regulator shall be sized as indicated.

#### 2.9.6 AIR DRYER

Shall be refrigerated, compressed air dryer rated at ZAL/S. Air dryer unit to be air cooled with a .6 degrees C pressure dewpoint and 34.5kPa maximum pressure drop. Compressor motor to be 115 volts A.C., single phase, and 560 watts.

### PART 3 EXECUTION

#### 3.1 GENERAL INSTALLATION REQUIREMENTS

Installation of plastic pipe where in compliance with NFPA may be installed in accordance with PPFA-01. The plumbing system shall be installed complete with necessary fixtures, fittings, traps, valves, and accessories. Water and drainage piping shall be extended 1.5 m outside the building, unless otherwise indicated. A gate valve and drain shall be installed on the water service line inside the building approximately 150 mm above the floor from point of entry. Piping shall be connected to the exterior service lines or capped or plugged if the exterior service is not in place. Sewer and water pipes shall be laid in separate trenches, except when otherwise shown. Exterior underground utilities shall be at least 300 mm below the average local frost depth or as indicated on the drawings. If trenches are closed or the pipes are otherwise covered before being connected to the service lines, the location of the end of each plumbing utility shall be marked with a stake or other acceptable means. Valves shall be installed with control no lower than the valve body.

##### 3.1.1 Water Pipe, Fittings, and Connections

###### 3.1.1.1 Cutting and Repairing

The work shall be carefully laid out in advance, and unnecessary cutting of construction shall be avoided. Damage to building, piping, wiring, or equipment as a result of cutting shall be repaired by mechanics skilled in the trade involved.

#### 3.1.1.2 Protection of Fixtures, Materials, and Equipment

Pipe openings shall be closed with caps or plugs during installation. Fixtures and equipment shall be tightly covered and protected against dirt, water, chemicals, and mechanical injury. Upon completion of the work, the fixtures, materials, and equipment shall be thoroughly cleaned, adjusted, and operated. Safety guards shall be provided for exposed rotating equipment.

#### 3.1.1.3 Mains, Branches, and Runouts

Piping shall be installed as indicated. Pipe shall be accurately cut and worked into place without springing or forcing. Structural portions of the building shall not be weakened. Aboveground piping shall run parallel with the lines of the building, unless otherwise indicated. Branch pipes from service lines may be taken from top, bottom, or side of main, using crossover fittings required by structural or installation conditions. Supply pipes, valves, and fittings shall be kept a sufficient distance from other work and other services to permit not less than 12 mm between finished covering on the different services. Bare and insulated water lines shall not bear directly against building structural elements so as to transmit sound to the structure or to prevent flexible movement of the lines. Water pipe shall not be buried in or under floors unless specifically indicated or approved. Changes in pipe sizes shall be made with reducing fittings. Use of bushings will not be permitted except for use in situations in which standard factory fabricated components are furnished to accommodate specific excepted installation practice. Change in direction shall be made with fittings, except that bending of pipe 100 mm (4 inches) and smaller will be permitted, provided a pipe bender is used and wide sweep bends are formed. The center-line radius of bends shall be not less than six diameters of the pipe. Bent pipe showing kinks, wrinkles, flattening, or other malformations will not be acceptable.

#### 3.1.1.4 Commercial-Type Water Hammer Arresters

Commercial-type water hammer arresters shall be provided on hot- and cold-water supplies and shall be located as generally indicated, with precise location and sizing to be in accordance with PDI WH 201. Water hammer arresters, where concealed, shall be accessible by means of access doors or removable panels. Commercial-type water hammer arresters shall conform to PDI WH 201. Vertical capped pipe columns will not be permitted.

#### 3.1.2 Compressed Air Piping (Non-Oil Free)

Compressed air piping shall be installed as specified for water piping and suitable for 862 kPa working pressure. Compressed air piping shall have supply lines and discharge terminals legibly and permanently marked at both ends with the name of the system and the direction of flow. Make turns in work area with plugged tee's to allow for future expansion.

#### 3.1.3 Joints

Installation of pipe and fittings shall be made in accordance with the manufacturer's recommendations. Mitering of joints for elbows and notching of straight runs of pipe for tees will not be permitted. Joints shall be

made up with fittings of compatible material and made for the specific purpose intended.

#### 3.1.3.1 Threaded

Threaded joints shall have American Standard taper pipe threads conforming to ASME B1.20.1. Only male pipe threads shall be coated with graphite or with an approved graphite compound, or with an inert filler and oil, or shall have a polytetrafluoroethylene tape applied.

#### 3.1.3.2 Unions and Flanges

Unions, flanges and mechanical couplings shall not be concealed in walls, ceilings, or partitions. Unions shall be used on pipe sizes 65 mm and smaller; flanges shall be used on pipe sizes 80 mm and larger.

#### 3.1.3.3 Cast Iron Soil, Waste and Vent Pipe

Bell and spigot compression and hubless gasketed clamp joints for soil, waste and vent piping shall be installed per the manufacturer's recommendations.

#### 3.1.3.4 Copper Tube and Pipe

The tube or fittings shall not be annealed when making connections. Connections shall be made with a multiflame torch.

a. Brazed. Brazed joints shall be made in conformance with AWS B2.2, MSS SP-73, and CDA Tube Handbook with flux and are acceptable for all pipe sizes. Copper to copper joints shall include the use of copper-phosphorus or copper-phosphorus-silver brazing metal without flux. Brazing of dissimilar metals (copper to bronze or brass) shall include the use of flux with either a copper-phosphorus, copper-phosphorus-silver or a silver brazing filler metal.

b. Soldered. Soldered joints shall be made with flux and are only acceptable for piping 50 mm (2 inches) and smaller. Soldered joints shall conform to ASME B31.5 and CDA Tube Handbook.

c. Copper Tube Extracted Joint. An extracted mechanical joint may be made in copper tube. Joint shall be produced with an appropriate tool by drilling a pilot hole and drawing out the tube surface to form a collar having a minimum height of three times the thickness of the tube wall. To prevent the branch tube from being inserted beyond the depth of the extracted joint, dimpled depth stops shall be provided. Branch tube shall be notched for proper penetration into fitting to ensure a free flow joint. Extracted joints shall be brazed in accordance with NAPHCC Plumbing Code using B-Cup series filler metal in accordance with MSS SP-73. Soldered extracted joints will not be permitted.

#### 3.1.3.5 Other Joint Methods

#### 3.1.4 Dissimilar Pipe Materials

Connections between ferrous and copper water pipe shall be made with dielectric unions or flange waterways. Connecting joints between plastic and metallic pipe shall be made with transition fitting for the specific purpose.

#### 3.1.5 Corrosion Protection for Buried Pipe and Fittings

##### 3.1.5.1 Cast Iron and Ductile Iron

Pressure pipe shall have protective coating, a cathodic protection system, and joint bonding. Pipe, fittings, and joints shall have a protective coating. The protective coating shall be completely encasing polyethylene tube or sheet in accordance with AWWA C105. Joints and fittings shall be cleaned, coated with primer, and wrapped with tape. The pipe shall be cleaned, coated, and wrapped prior to pipe tightness testing. Joints and fittings shall be cleaned, coated, and wrapped after pipe tightness testing. Tape shall conform to AWWA C203 and shall be applied with a 50 percent overlap. Primer shall be as recommended by the tape manufacturer.

##### 3.1.5.2 Steel

Steel pipe, joints, and fittings shall be cleaned, coated with primer, and wrapped with tape. Pipe shall be cleaned, coated, and wrapped prior to pipe tightness testing. Joints and fittings shall be cleaned, coated, and wrapped after pipe tightness testing. Tape shall conform to AWWA C203 and shall be applied with a 50 percent overlap. Primer shall be as recommended by the tape manufacturer.

#### 3.1.6 Pipe Sleeves and Flashing

Pipe sleeves shall be furnished and set in their proper and permanent location.

##### 3.1.6.1 Sleeve Requirements

Pipes passing through concrete or masonry walls or concrete floors or roofs shall be provided with pipe sleeves fitted into place at the time of construction. Sleeves are not required for cast-iron soil pipe passing through concrete slab on grade, except where penetrating a membrane waterproof floor. A modular mechanical type sealing assembly may be installed in lieu of a waterproofing clamping flange and caulking and sealing of annular space between pipe and sleeve. The seals shall consist of interlocking synthetic rubber links shaped to continuously fill the annular space between the pipe and sleeve with corrosion-protected carbon steel bolts, nuts, and pressure plates. The links shall be loosely assembled with bolts to form a continuous rubber belt around the pipe with a pressure plate under each bolt head and each nut. After the seal assembly is properly positioned in the sleeve, tightening of the bolt shall cause the rubber sealing elements to expand and provide a watertight seal between the pipe and the sleeve. Each seal assembly shall be sized as recommended by the manufacturer to fit the pipe and sleeve involved. Sleeves shall not be installed in structural members, except where indicated or approved. Rectangular and square openings shall be as detailed. Each sleeve shall

extend through its respective floor, or roof, and shall be cut flush with each surface, except for special circumstances. Pipe sleeves passing through floors in wet areas such as mechanical equipment rooms, lavatories, kitchens, and other plumbing fixture areas shall extend a minimum of 100 mm above the finished floor. Unless otherwise indicated, sleeves shall be of a size to provide a minimum of 6 mm (1/4 inch) clearance between bare pipe and inside of sleeve or between jacket over insulation and sleeves. Sleeves in bearing walls shall be steel pipe or cast-iron pipe. Sleeves for membrane waterproof floors shall be steel pipe, cast-iron pipe, or plastic pipe. Membrane clamping devices shall be provided on pipe sleeves for waterproof floors. Sleeves in nonbearing walls or ceilings may be steel pipe, cast-iron pipe, galvanized sheet metal with lock-type longitudinal seam, or moisture-resistant fiber or plastic. Plastic sleeves shall not be used in nonbearing fire walls, roofs, or floor/ceilings. Except as otherwise specified, the annular space between pipe and sleeve, or between jacket over insulation and sleeve, shall be sealed as indicated with sealants conforming to ASTM C 920 and with a primer, backstop material and surface preparation as specified in Section 07900 JOINT SEALING. Pipes passing through sleeves in concrete floors over crawl spaces shall be sealed as specified above. The annular space between pipe and sleeve or between jacket over insulation and sleeve shall not be sealed for interior walls which are not designated as fire rated. Sleeves through below-grade walls in contact with earth shall be recessed 12 mm from wall surfaces on both sides. Annular space between pipe and sleeve shall be filled with backing material and sealants in the joint between the pipe and masonry wall as specified above. Sealant selected for the earth side of the wall shall be compatible with dampproofing/waterproofing materials that are to be applied over the joint sealant.

#### 3.1.6.2 Flashing Requirements

Pipes passing through roof or floor waterproofing membrane shall be installed through a 4.9 kg per square meter copper flashing, each within an integral skirt or flange. Flashing shall be suitably formed, and the skirt or flange shall extend not less than 200 mm from the pipe and shall be set over the roof or floor membrane in a solid coating of bituminous cement. The flashing shall extend up the pipe a minimum of 250 mm. For cleanouts, the flashing shall be turned down into the hub and caulked after placing the ferrule. Pipes passing through pitched roofs shall be flashed, using lead or copper flashing, with an adjustable integral flange of adequate size to extend not less than 200 mm from the pipe in all directions and lapped into the roofing to provide a watertight seal. The annular space between the flashing and the bare pipe or between the flashing and the metal-jacket-covered insulation shall be sealed as indicated. Flashing for dry vents shall be turned down into the pipe to form a waterproof joint. Pipes, up to and including 250 mm in diameter, passing through roof or floor waterproofing membrane may be installed through a cast-iron sleeve with caulking recess, anchor lugs, flashing-clamp device, and pressure ring with brass bolts. Flashing shield shall be fitted into the sleeve clamping device. Pipes passing through wall waterproofing membrane shall be sleeved as described above. A waterproofing clamping flange shall be installed.

#### 3.1.6.3 Waterproofing

Waterproofing at floor-mounted water closets shall be accomplished by forming a flashing guard from soft-tempered sheet copper. The center of the sheet shall be perforated and turned down approximately 40 mm to fit between the outside diameter of the drainpipe and the inside diameter of the cast-iron or steel pipe sleeve. The turned-down portion of the flashing guard shall be embedded in sealant to a depth of approximately 40 mm; then the sealant shall be finished off flush to floor level between the flashing guard and drainpipe. The flashing guard of sheet copper shall extend not less than 200 mm from the drainpipe and shall be lapped between the floor membrane in a solid coating of bituminous cement. If cast-iron water closet floor flanges are used, the space between the pipe sleeve and drainpipe shall be sealed with sealant and the flashing guard shall be upturned approximately 40 mm to fit the outside diameter of the drainpipe and the inside diameter of the water closet floor flange. The upturned portion of the sheet fitted into the floor flange shall be sealed.

#### 3.1.6.4 Optional Counterflashing

Instead of turning the flashing down into a dry vent pipe, or caulking and sealing the annular space between the pipe and flashing or metal-jacket-covered insulation and flashing, counterflashing may be accomplished by utilizing the following:

- a. A standard roof coupling for threaded pipe up to 150 mm in diameter.
- b. A tack-welded or banded-metal rain shield around the pipe.

#### 3.1.6.5 Pipe Penetrations of Slab on Grade Floors

Where pipes, fixture drains, floor drains, cleanouts or similar items penetrate slab on grade floors, except at penetrations of floors with waterproofing membrane as specified in paragraphs Flashing Requirements and Waterproofing, a groove 6 to 13 mm wide by 6 to 10 mm deep shall be formed around the pipe, fitting or drain. The groove shall be filled with a sealant as specified in Section 07900 JOINT SEALING.

#### 3.1.7 Fire Seal

Where pipes pass through fire walls or re-partitions a fire seal shall be provided.

#### 3.1.8 Supports

##### 3.1.8.1 General

Hangers used to support piping 50 mm and larger shall be fabricated to permit adequate adjustment after erection while still supporting the load. Pipe guides and anchors shall be installed to keep pipes in accurate alignment, to direct the expansion movement, and to prevent buckling, swaying, and undue strain. Piping subjected to vertical movement when operating temperatures exceed ambient temperatures shall be supported by variable spring hangers and supports or by constant support hangers. In the

support of multiple pipe runs on a common base member, a clip or clamp shall be used where each pipe crosses the base support member. Spacing of the base support members shall not exceed the hanger and support spacing required for an individual pipe in the multiple pipe run. Threaded sections of rods shall not be formed or bent.

#### 3.1.8.2 Pipe Supports and Structural Bracing, Seismic Requirements

Piping and attached valves shall be supported and braced to resist seismic loads. Structural steel required for reinforcement to properly support piping, headers, and equipment, but not shown, shall be provided. Material used for supports shall be as specified in Section 05120 STRUCTURAL STEEL.

#### 3.1.8.3 Pipe Hangers, Inserts, and Supports

Installation of pipe hangers, inserts and supports shall conform to MSS SP-58 and MSS SP-69, except as modified herein.

- a. Types 5, 12, and 26 shall not be used.
- b. Type 3 shall not be used on insulated pipe.
- c. Type 18 inserts shall be secured to concrete forms before concrete is placed. Continuous inserts which allow more adjustment may be used if they otherwise meet the requirements for type 18 inserts.
- d. Type 19 and 23 C-clamps shall be torqued per MSS SP-69 and shall have both locknuts and retaining devices furnished by the manufacturer. Field-fabricated C-clamp bodies or retaining devices are not acceptable.
- e. Type 20 attachments used on angles and channels shall be furnished with an added malleable-iron heel plate or adapter.
- f. Type 24 may be used only on trapeze hanger systems or on fabricated frames.
- g. Type 39 saddles shall be used on insulated pipe 100 mm and larger when the temperature of the medium is 15 degrees C or higher. Type 39 saddles shall be welded to the pipe.
- h. Type 40 shields shall:
  - (1) Be used on insulated pipe less than 100 mm.
  - (2) Be used on insulated pipe 100 mm and larger when the temperature of the medium is 15 degrees C or less.
  - (3) Have a high density insert for pipe 50 mm and larger and for smaller pipe sizes when the insulation is suspected of being visibly compressed, or distorted at or near the shield/insulation interface. High density inserts shall have a density of 128 kg per cubic meter or greater.



i. Horizontal pipe supports shall be spaced as specified in MSS SP-69 and a support shall be installed not over 300 mm from the pipe fitting joint at each change in direction of the piping. Pipe supports shall be spaced not over 1.5 m apart at valves. Operating temperatures in determining hanger spacing for PVC or CPVC pipe shall be 49 degrees C for PVC and 82 degrees C for CPVC. Horizontal pipe runs shall include allowances for expansion and contraction.

j. Vertical pipe shall be supported at each floor, except at slab-on-grade, at intervals of not more than 4.5 m nor more than 2 m from end of risers, and at vent terminations. Vertical pipe risers shall include allowances for expansion and contraction.

k. Type 40 shields used on insulated pipe shall have high density inserts with a density of 128 kg per cubic meter or greater.

l. Type 35 guides using steel, reinforced polytetrafluoroethylene (PTFE) or graphite slides shall be provided to allow longitudinal pipe movement. Slide materials shall be suitable for the system operating temperatures, atmospheric conditions, and bearing loads encountered. Lateral restraints shall be provided as needed. Where steel slides do not require provisions for lateral restraint the following may be used:

(1) On pipe 100 mm and larger when the temperature of the medium is 15 degrees C or higher, a Type 39 saddle, welded to the pipe, may freely rest on a steel plate.

(2) On pipe less than 100 mm a Type 40 shield, attached to the pipe or insulation, may freely rest on a steel plate.

(3) On pipe 100 mm and larger carrying medium less than 15 degrees C a Type 40 shield, attached to the pipe or insulation, may freely rest on a steel plate.

m. Pipe hangers on horizontal insulated pipe shall be the size of the outside diameter of the insulation. The insulation shall be continuous through the hanger on all pipe sizes and applications.

n. Where there are high system temperatures and welding to piping is not desirable, the type 35 guide shall include a pipe cradle, welded to the guide structure and strapped securely to the pipe. The pipe shall be separated from the slide material by at least 100 mm or by an amount adequate for the insulation, whichever is greater.

o. Hangers and supports for plastic pipe shall not compress, distort, cut or abrade the piping, and shall allow free movement of pipe except where otherwise required in the control of expansion/contraction.

### 3.1.9 Pipe Cleanouts

Pipe cleanouts shall be the same size as the pipe except that cleanout plugs larger than 100 mm will not be required. A cleanout installed in connection with cast-iron soil pipe shall consist of a long-sweep 1/4 bend or one or two 1/8 bends extended to the place shown. An extra-heavy cast-brass or cast-iron ferrule with countersunk cast-brass head screw plug shall be caulked into the hub of the fitting and shall be flush with the floor. Cleanouts in connection with other pipe, where indicated, shall be T-pattern, 90-degree branch drainage fittings with cast-brass screw plugs, except plastic plugs shall be installed in plastic pipe. Plugs shall be the same size as the pipe up to and including 100 mm. Cleanout tee branches with screw plug shall be installed at the foot of soil and waste stacks, at the foot of interior downspouts, on each connection to building storm drain where interior downspouts are indicated, and on each building drain outside the building. Cleanout tee branches may be omitted on stacks in single story buildings with slab-on-grade construction or where less than 450 mm of crawl space is provided under the floor. Cleanouts on pipe concealed in partitions shall be provided with chromium plated bronze, nickel bronze, nickel brass or stainless steel flush type access cover plates. Round access covers shall be provided and secured to plugs with securing screw. Square access covers may be provided with matching frames, anchoring lugs and cover screws. Cleanouts in finished walls shall have access covers and frames installed flush with the finished wall. Cleanouts installed in finished floors subject to foot traffic shall be provided with a chrome-plated cast brass, nickel brass, or nickel bronze cover secured to the plug or cover frame and set flush with the finished floor. Heads of fastening screws shall not project above the cover surface. Where cleanouts are provided with adjustable heads, the heads shall be cast iron.

## 3.2 WATER HEATERS AND HOT WATER STORAGE TANKS

### 3.2.1 Relief Valves

No valves shall be installed between a relief valve and its water heater or storage tank. The P&T relief valve shall be installed where the valve actuator comes in contact with the hottest water in the heater. Whenever possible, the relief valve shall be installed directly in a tapping in the tank or heater; otherwise, the P&T valve shall be installed in the hot-water outlet piping. A vacuum relief valve shall be provided on the cold water supply line to the hot-water storage tank or water heater and mounted above and within 150 mm above the top of the tank or water heater.

### 3.2.2 Installation of Gas-Fired Water Heater

Installation shall conform to NFPA 54 for gas fired water heaters. Storage water heaters that are not equipped with integral heat traps and having vertical pipe risers shall be installed with heat traps directly on both the inlet and outlet. An acceptable heat trap may be a piping arrangement such as elbows connected so that the inlet and outlet piping make vertically upward runs of not less than 600 mm just before turning downward or directly horizontal into the water heater's inlet and outlet fittings. Commercially available heat traps, specifically designed by the manufacturer for the purpose of effectively restricting the natural tendency of hot water

to rise through vertical inlet and outlet piping during standby periods may also be approved.

### 3.2.3 Heat Traps

Piping to and from each water heater and hot water storage tank shall be routed horizontally and downward a minimum of 600 mm before turning in an upward direction.

### 3.2.4 Connections to Water Heaters

Connections of metallic pipe to water heaters shall be made with dielectric unions or flanges.

## 3.3 FIXTURES AND FIXTURE TRIMMINGS

Angle stops, straight stops, stops integral with the faucets, or concealed type of lock-shield, and loose-key pattern stops for supplies with threaded, sweat or solvent weld inlets shall be furnished and installed with fixtures. Where connections between copper tubing and faucets are made by rubber compression fittings, a beading tool shall be used to mechanically deform the tubing above the compression fitting. Exposed traps and supply pipes for fixtures and equipment shall be connected to the rough piping systems at the wall, unless otherwise specified under the item. Floor and wall escutcheons shall be as specified. Drain lines and hot water lines of fixtures for handicapped personnel shall be insulated and do not require polished chrome finish. Plumbing fixtures and accessories shall be installed within the space shown.

### 3.3.1 Fixture Connections

Where space limitations prohibit standard fittings in conjunction with the cast-iron floor flange, special short-radius fittings shall be provided. Connections between earthenware fixtures and flanges on soil pipe shall be made gastight and watertight with a closet-setting compound or neoprene gasket and seal. Use of natural rubber gaskets or putty will not be permitted. Fixtures with outlet flanges shall be set the proper distance from floor or wall to make a first-class joint with the closet-setting compound or gasket and fixture used.

### 3.3.2 Flushometer Valves

Flushometer valves shall be secured to prevent movement by anchoring the long finished top spud coFlushometer valves for water closets shall be installed 1 m above the floor.

### 3.3.3 Height of Fixture Rims Above Floor

Lavatories shall be mounted with rim 775 mm above finished floor. Wall-hung drinking fountains and water coolers shall be installed with rim 1020 mm above floor. Wall-hung service sinks shall be mounted with rim 700 mm above the floor. Installation of fixtures for use by the physically handicapped shall be in accordance with CABO A117.1.

#### 3.3.4 Shower Bath Outfits

The area around the water supply piping to the mixing valves and behind the escutcheon plate shall be made watertight by caulking or gasketing.

#### 3.3.5 Fixture Supports

Fixture supports for off-the-floor lavatories, urinals, and other fixtures of similar size, design, and use, shall be of the chair-carrier type. The carrier shall provide the necessary means of mounting the fixture, with a foot or feet to anchor the assembly to the floor slab. Adjustability shall be provided to locate the fixture at the desired height and in proper relation to the wall. Support plates, in lieu of chair carrier, shall be fastened to the wall structure only where it is not possible to anchor a floor-mounted chair carrier to the floor slab.

##### 3.3.5.1 Support for Solid Masonry Construction

Chair carrier shall be anchored to the floor slab. Where a floor-anchored chair carrier cannot be used, a suitable wall plate shall be imbedded in the masonry wall.

##### 3.3.5.2 Support for Cellular-Masonry Wall Construction

Chair carrier shall be anchored to floor slab. Where a floor-anchored chair carrier cannot be used, a suitable wall plate shall be fastened to the cellular wall using through bolts and a back-up plate.

##### 3.3.5.3 Support for Steel Stud Frame Partitions

Chair carrier shall be used. The anchor feet and tubular uprights shall be of the heavy duty design; and feet (bases) shall be steel and welded to a square or rectangular steel tube upright. Wall plates, in lieu of floor-anchored chair carriers, shall be used only if adjoining steel partition studs are suitably reinforced to support a wall plate bolted to these studs.

#### 3.3.6 Backflow Prevention Devices

Plumbing fixtures, equipment, and pipe connections shall not cross connect or interconnect between a potable water supply and any source of nonpotable water. Backflow preventers shall be installed where indicated and in accordance with NAPHCC Plumbing Code at all other locations necessary to preclude a cross-connect or interconnect between a potable water supply and any nonpotable substance. In addition backflow preventers shall be installed at all locations where the potable water outlet is below the flood level of the equipment, or where the potable water outlet will be located below the level of the nonpotable substance. Backflow preventers shall be located so that no part of the device will be submerged. Backflow preventers shall be of sufficient size to allow unrestricted flow of water to the equipment, and preclude the backflow of any nonpotable substance into the potable water system. Bypass piping shall not be provided around backflow preventers. Access shall be provided for maintenance and testing. Each device shall be a standard commercial unit.

### 3.3.7 Access Panels

Access panels shall be provided for concealed valves and controls, or any item requiring inspection or maintenance. Access panels shall be of sufficient size and located so that the concealed items may be serviced, maintained, or replaced. Access panels shall be as specified in Section 05500 MISCELLANEOUS METAL.

### 3.3.8 Traps

Each trap shall be placed as near the fixture as possible, and no fixture shall be double-trapped. Traps installed on cast-iron soil pipe shall be cast iron. Traps installed on steel pipe or copper tubing shall be recess-drainage pattern, or brass-tube type. Traps installed on plastic pipe may be plastic conforming to ASTM D 3311. Traps for acid-resisting waste shall be of the same material as the pipe.

## 3.4 VIBRATION-ABSORBING FEATURES

Mechanical equipment, including compressors and pumps, shall be isolated from the building structure by approved vibration-absorbing features, unless otherwise shown. Each foundation shall include an adequate number of standard isolation units. Each unit shall consist of machine and floor or foundation fastening, together with intermediate isolation material, and shall be a standard product with printed load rating. Piping connected to mechanical equipment shall be provided with flexible connectors. Isolation unit installation shall limit vibration to 20 percent of the lowest equipment rpm.

### 3.4.1 Tank- or Skid-Mounted Compressors

Floor attachment shall be as recommended by compressor manufacturer.

### 3.4.2 Foundation-Mounted Compressors

Foundation attachment shall be as recommended by the compressor manufacturer.

## 3.5 IDENTIFICATION SYSTEMS

### 3.5.1 Identification Tags

Identification tags made of brass, engraved laminated plastic, or engraved anodized aluminum, indicating service and valve number shall be installed on valves, except those valves installed on supplies at plumbing fixtures. Tags shall be 35 mm minimum diameter, and marking shall be stamped or engraved. Indentations shall be black, for reading clarity. Tags shall be attached to valves with No. 12 AWG, copper wire, chrome-plated beaded chain, or plastic straps designed for that purpose.

### 3.5.2 Color Coding Scheme for Locating Hidden Utility Components

Scheme shall be provided in buildings having suspended grid ceilings. The color coding scheme shall identify points of access for maintenance and operation of operable components which are not visible from the finished

space and installed in the space directly above the suspended grid ceiling. The operable components shall include valves, dampers, switches, linkages and thermostats. The color coding scheme shall consist of a color code board and colored metal disks. Each colored metal disk shall be approximately 12 mm in diameter and secured to removable ceiling panels with fasteners. The fasteners shall be inserted into the ceiling panels so that the fasteners will be concealed from view. The fasteners shall be manually removable without tools and shall not separate from the ceiling panels when panels are dropped from ceiling height. Installation of colored metal disks shall follow completion of the finished surface on which the disks are to be fastened. The color code board shall have the approximate dimensions of 1 m width, 750 mm height, and 12 mm thickness. The board shall be made of wood fiberboard and framed under glass or 1.6 mm transparent plastic cover. Unless otherwise directed, the color code symbols shall be approximately 20 mm in diameter and the related lettering in 12 mm high capital letters. The color code board shall be mounted and located in the mechanical or equipment room. The color code system shall be obtained from the Public Works maintenance staff.

### 3.6 ESCUTCHEONS

Escutcheons shall be provided at finished surfaces where bare or insulated piping, exposed to view, passes through floors, walls, or ceilings, except in boiler, utility, or equipment rooms. Escutcheons shall be fastened securely to pipe or pipe covering and shall be satin-finish, corrosion-resisting steel, polished chromium-plated zinc alloy, or polished chromium-plated copper alloy. Escutcheons shall be either one-piece or split-pattern, held in place by internal spring tension or setscrew.

### 3.7 PAINTING

Painting of pipes, hangers, supports, and other iron work, either in concealed spaces or exposed spaces, is specified in Section 09900 PAINTING, GENERAL.

### 3.8 TESTS, FLUSHING AND DISINFECTION

#### 3.8.1 Plumbing System

The following tests shall be performed on the plumbing system in accordance with NAPHCC Plumbing Code.

- a. Drainage and Vent Systems Tests.
- b. Building Sewers Tests.
- c. Water Supply Systems Tests.

##### 3.8.1.1 Test of Backflow Prevention Assemblies

Backflow prevention assembly shall be tested using gauges specifically designed for the testing of backflow prevention assemblies. Gauges shall be tested annually for accuracy in accordance with the University of Southern California's Foundation of Cross Connection Control and Hydraulic Research or the American Water Works Association Manual of Cross Connection (Manual

M-14). Report form for each assembly shall include, as a minimum, the following:

Data on Device	Data on Testing Firm
Type of Assembly	Name
Manufacturer	Address
Model Number	Certified Tester
Serial Number	Certified Tester No.
Size	Date of Test
Location	
Test Pressure Readings	Serial Number and Test Data of
Gauges	

If the unit fails to meet specified requirements, the unit shall be repaired and retested. Original copy of report to be sent to public works for their records.

#### 3.8.2 Defective Work

If inspection or test shows defects, such defective work or material shall be replaced or repaired as necessary and inspection and tests shall be repeated. Repairs to piping shall be made with new materials. Caulking of screwed joints or holes will not be acceptable.

#### 3.8.3 System Flushing

Before operational tests or disinfection, potable water piping system shall be flushed with potable water. In general, sufficient water shall be used to produce a minimum water velocity of 0.762 meters per second through piping being flushed. Flushing shall be continued until entrained dirt and other foreign materials have been removed and until discharge water shows no discoloration. System shall be drained at low points. Strainer screens shall be removed, cleaned, and replaced. After flushing and cleaning, systems shall be prepared for testing by immediately filling water piping with clean, fresh potable water. Any stoppage, discoloration, or other damage to the finish, furnishings, or parts of the building due to the Contractor's failure to properly clean the piping system shall be repaired by the Contractor. When the system flushing is complete, the hot-water system shall be adjusted for uniform circulation. Flushing devices and automatic control systems shall be adjusted for proper operation.

#### 3.8.4 Operational Test

Upon completion of flushing and prior to disinfection procedures, the Contractor shall subject the plumbing system to operating tests to demonstrate satisfactory functional and operational efficiency. Such operating tests shall cover a period of not less than 8 hours for each system and shall include the following information in a report with conclusion as to the adequacy of the system:

- a. Time, date, and duration of test.
- b. Water pressures at the most remote and the highest fixtures.
- c. Operation of each fixture and fixture trim.

- d. Operation of each valve, hydrant, and faucet.
- e. Pump suction and discharge pressures.
- f. Temperature of each domestic hot-water supply.
- g. Operation of each floor and roof drain by flooding with water.
- h. Operation of each vacuum breaker and backflow preventer.
- i. Complete operation of each water pressure booster system, including pump start pressure and stop pressure.
- j. Compressed air readings at each compressor and at each outlet. Each indicating instrument shall be read at 1/2 hour intervals. The report of the test shall be submitted in quadruplicate. The Contractor shall furnish instruments, equipment, and personnel required for the tests; the Government will furnish the necessary water and electricity.

#### 3.8.5 Disinfection

After operational tests are complete, the entire domestic hot- and cold-water distribution system shall be disinfected. System shall be flushed as specified, before introducing chlorinating material. The chlorinating material shall be hypochlorites or liquid chlorine. Water chlorination procedure shall be in accordance with AWWA M20. The chlorinating material shall be fed into the water piping system at a constant rate at a concentration of at least 50 parts per million (ppm). A properly adjusted hypochlorite solution injected into the main with a hypochlorinator, or liquid chlorine injected into the main through a solution-feed chlorinator and booster pump, shall be used. The chlorine residual shall be checked at intervals to ensure that the proper level is maintained. Chlorine application shall continue until the entire main is filled. The water shall remain in the system for a minimum of 24 hours. Each valve in the system being disinfected shall be opened and closed several times during the contact period to ensure its proper disinfection. Following the 24-hour period, no less than 25 ppm chlorine residual shall remain in the system. Water tanks shall be disinfected by the addition of chlorine directly to the filling water. Following a 6 hour period, no less than 50 ppm chlorine residual shall remain in the tank. If after the 24 hour and 6 hour holding periods, the residual solution contains less than 25 ppm and 50 ppm chlorine respectively, flush the piping and tank with potable water, and repeat the above procedures until the required residual chlorine levels are satisfied. The system including the tanks shall then be flushed with clean water until the residual chlorine level is reduced to less than one part per million. During the flushing period each valve and faucet shall be opened and closed several times. Samples of water in disinfected containers shall be obtained from several locations selected by the Contracting Officer. The samples of water shall be tested for total coliform organisms (coliform bacteria, fecal coliform, streptococcal, and other bacteria) in accordance with AWWA EWW. The testing method used shall be either the multiple-tube fermentation technique or the membrane-filter technique. Disinfection shall be repeated until tests indicate the absence of coliform organisms (zero mean coliform



density per 100 milliliters) in the samples for at least 2 full days. The system will not be accepted until satisfactory bacteriological results have been obtained. Original copy of report to be sent to public works for their records.

### 3.9 PLUMBING FIXTURE SCHEDULE

#### P-1 WATER CLOSET:

Siphon-jet, elongated bowl, top supply spud, ASME A112.19.2M, floor mounted. Floor flange shall be copper alloy or cast iron.

Gasket shall be wax type.

Seat - IAPMO Z124.5, Type A, white plastic, elongated, open front.

Flushometer Valve - ASSE 1037, large diaphragm type with non-hold-open feature, backcheck angle control stop, and vacuum breaker. Minimum upper chamber inside diameter of not less than 66.7 mm at the point where the diaphragm is sealed between the upper and lower chambers. The maximum water use shall be 6 liters per flush.

Flush Valve in Flush Tank - Flush valve seats in tanks for flushing water closets shall be at least 25 mm above the flood level rim of the bowl connected thereto, except in approved water closet and flush tank combinations designed so that when the tank is flushed and the fixture is clogged or partially clogged, the flush valve shall close tightly so that water will not spill continuously over the rim of the bowl or back flow from the bowl to the tank.

#### P-1A WATER CLOSET HANDICAPPED:

Height of top rim of bowl shall be in accordance with CABO A117.1; other features are the same as P-1.

#### P-2 URINAL:

Wall hanging, with integral trap and extended shields, ASME A112.19.2Msiphon jet. Top supply connection, back outlet.

Flushometer Valve - Similar to Flushometer Valve for P-1. The maximum water use shall be 3.8 liters per flush.

#### P-3 LAVATORY:

Manufacturer's standard sink depth, vitreous china ASME A112.19.2M, straight back. Unit to be 533mm x 457mm with 102mm centers for faucets.

Faucet - Faucets shall be center set. Faucets shall have replaceable seats and washers. Valves and handles shall be copper alloy. Connection between valve and spout for center-set faucet shall be of rigid metal tubing. The flow shall be limited to 0.16 liters per second at a flowing pressure of 549 kPa.

Handles - Lever type. Cast, formed, or drop forged copper alloy.

Drain - Strainer shall be copper alloy or stainless steel. See paragraph FIXTURES for optional plastic accessories.

P-3A WHEELCHAIR LAVATORY:

Vitreous china, ASME A112.19.2M, wheelchair lavatory with wrist or elbow controls 508.0 mm wide x 685.8 mm deep with gooseneck spout. Flow shall be limited to 1 liter per cycle at a flowing water pressure of 549 kPa if a metering device or fitting is used that limits the period of water discharge such as foot switch or fixture occupancy sensor. If a metering device is not used, the flow shall be limited to 0.16 liters per second at a flowing water pressure of 549 kPa.

Drain - Strainer shall be copper alloy or stainless steel.

P-8 SERVICE SINK:

The mop service basin shall be a molded-stone product. The molding shall be done in matched metal dies under heat and pressure, resulting in a one piece homogeneous product. Color to be white. The unit shall have 254 mm high walls and an integrally molded shelf 268 mm wide where indicated. The factory installed drain body shall be stainless steel and designed to provide for a lead caulk or QKC-3 joint to a 76 mm drain pipe. A combination dome strainer and lint basket made from stainless steel shall be included.

Faucet and Spout - Cast or wrought copper alloy, with top or bottom brace, with backflow preventer. Faucets shall have replaceable seat and the washer shall rotate onto the seat. Handles shall be lever type. Strainers shall have internal threads.

Drain Assembly - Plug, cup strainer, crossbars, jam nuts, washers, couplings, stopper, etc., shall be copper alloy or stainless steel.

Trap - Cast iron, minimum 7.5 cm diameter.

P-5 Shower: Shower heads, CID A-A-240 other than emergency showers, shall be adjustable spray type and shall include a non-removable, tamperproof device to limit water flow to 0.16 liters per second when tested in accordance with ASME A112.18.1M.

Wall Mounted: Shower head shall be adjustable spray, stainless steel or chromium plated brass with ball joint. Handles shall be chrome-plated die cast zinc alloy. Control valves shall be copper alloy and have metal integral parts of copper alloy, nickel alloy, or stainless steel. Valves shall be mechanical mixing, single lever type. Shower head shall be vandalproof with integral back.

P-6 BUBBLER DRINKING FOUNTAINS:

Bubbler drinking fountains shall have self-closing valves. Self-closing valves shall have automatic stream regulators, flow control capability, a push button actuation or a cross-shaped index metal turn handle without a hood. Spouts shall provide a flow of water at least 100 mm high so as to

allow the insertion of a cup or glass under the flow of water. Stops, stream regulators, flow controls, pushbuttons, handles, and traps shall be made of copper zinc alloy. Strainers and drains shall be made of copper zinc alloy or stainless steel.

Surface Wall-Mounted - Surface wall-mounted units shall be 336.6 mm wide, 330.2 mm deep, 254.0 mm high, and have a back height of 152.4 to 203.2 mm. The bowl shall be made of corrosion-resisting steel. The unit shall have concealed fasteners and be for interior installation.

#### P-6A WATER COOLER DRINKING FOUNTAINS:

Handicapped - Handicapped units shall be surface wall-mounted. The dimensions shall be 381.0 mm wide, 508.0 mm deep, with a back height of 152.4 to 203.2 mm. The unit shall clear the floor or ground by at least 200 mm. A clear knee space shall exist between the bottom of the bowl and the floor or ground of at least 685 mm and between the front edge of the bowl and the body of the unit of at least 200 mm. A 200 mm wide clear space shall exist on both sides of the unit. The spout height shall be no more than 1 m above the floor or ground to the outlet. The spout shall be at the front of the unit and direct the water flow in a trajectory that is parallel or nearly parallel to the front of the unit. The bowl shall be 165.1 mm high, made of stainless steel and be for interior installation.

### 3.10 POSTED INSTRUCTIONS

Framed instructions under glass or in laminated plastic, including wiring and control diagrams showing the complete layout of the entire system, shall be posted where directed. Condensed operating instructions explaining preventive maintenance procedures, methods of checking the system for normal safe operation, and procedures for safely starting and stopping the system shall be prepared in typed form, framed as specified above for the wiring and control diagrams and posted beside the diagrams. The framed instructions shall be posted before acceptance testing of the systems.

### 3.11 PERFORMANCE OF WATER HEATING EQUIPMENT

Standard rating condition terms are as follows:

EF = Energy factor, overall efficiency.

ET = Thermal efficiency with 21 degrees C delta T.

EC = Combustion efficiency, 100 percent - flue loss when smoke = 0 (trace is permitted).

SL = Standby loss in W/0.093 sq. m. based on 27 degrees C delta T, or in percent per hour based on nominal 38 degrees C delta T.

01062/BERGER/ABAM  
FY02 Tactical Equipment Complex  
Fort Lewis, Washington

HL = Heat loss of tank surface area.

V = Storage volume in liters

### 3.11.1 Storage Water Heaters

#### 3.11.1.1 Gas

a. Storage capacity of 379 liters or less, and input rating of 21980 W or less: minimum EF shall be 0.62-0.0019V per 10 CFR 430.

b. Storage capacity of more than 379 liters - or input rating more than 21980 W: Et shall be 77 percent; maximum SL shall be  $1.3+38/V$ , per ANSI Z21.10.3.

### 3.11.2 Instantaneous Water Heater

#### 3.11.2.1 Gas

Volumes and inputs: ET shall be 80 percent per ANSI Z21.10.3.

01062/BERGER/ABAM  
 FY02 Tactical Equipment Complex  
 Fort Lewis, Washington

### 3.12 TABLES

TABLE I PIPE AND FITTING MATERIALS FOR DRAINAGE, WASTE, AND VENT PIPING SYSTEMS

Item #	Pipe and Fitting Materials	SERVICE					
		A	B	C	D	E	F
1	Cast iron soil pipe and fittings, hub and spigot, ASTM A 74 with compression gaskets	X	X	X	X	X	
2	Cast iron soil pipe and fittings hubless, CISPI 301 and ASTM A 888		X	X	X		
3	Cast iron drainage fittings, threaded, ASME B16.12 for use with Item 10	X		X	X		
4	Cast iron screwed fittings (threaded) ASME B16.4 for use with Item 10				X	X	
5	Grooved pipe couplings, ferrous and non-ferrous pipe ASTM A 536 and ASTM A 47/A 47M	X	X		X	X	
6	Ductile iron grooved joint fittings for ferrous pipe ASTM A 536 and ASTM A 47/A 47M for use with Item 5	X	X		X	X	
7	Bronze sand casting grooved joint pressure fittings for non-ferrous pipe ASTM B 584, for use with Item 5	X	X		X	X	
8	Wrought copper grooved joint pressure fittings for non-ferrous pipe ASTM B 75M C12200, ASTM B 152, ASTM B 152M, C11000, ASME B16.22 ASME B16.22 for use with Item 5	X	X				
9	Malleable-iron threaded fittings, galvanized ASME B16.3 for use with Item 10				X	X	
10	Steel pipe, seamless galvanized, ASTM A 53/A 53M, Type S, Grade B	X			X	X	
11	Seamless red brass pipe, ASTM B 43		X	X			

01062/BERGER/ABAM  
 FY02 Tactical Equipment Complex  
 Fort Lewis, Washington

TABLE I PIPE AND FITTING MATERIALS FOR DRAINAGE, WASTE, AND VENT PIPING SYSTEMS

Item #	Pipe and Fitting Materials	SERVICE					
		A	B	C	D	E	F
12	Bronzed flanged fittings, ASME B16.24 for use with Items 11 and 14				X	X	
13	Cast copper alloy solder joint pressure fittings, ASME B16.18 for use with Item 14				X	X	
14	Seamless copper pipe, ASTM B 42				X		
15	Cast bronze threaded fittings, ASME B16.15				X	X	
16	Copper drainage tube, (DWV), ASTM B 306	X*	X	X*	X	X	
17	Wrought copper and wrought alloy solder-joint drainage fittings. ASME B16.29	X	X	X	X	X	
18	Cast copper alloy solder joint drainage fittings, DWV, ASME B16.23	X	X	X	X	X	
19	Acrylonitrile-Butadiene-Styrene (ABS) plastic drain, waste, and vent pipe and fittings ASTM D 2661, ASTM F 628	X	X	X	X	X	X
20	Polyvinyl Chloride plastic drain, waste and vent pipe and fittings, ASTM D 2665, ASTM F 891, (Sch 40) ASTM F 1760	X	X	X	X	X	X
21	Process glass pipe and fittings, ASTM C 1053						X
22	High-silicon content cast iron pipe and fittings (hub and spigot, and mechanical joint), ASTM A 518/A 518M		X			X	
23	Polypropylene (PP) waste pipe and fittings, ASTM D 4101						X
24	Filament-wound reinforced thermosetting resin (RTRP) pipe, ASTM D 2996						X

01062/BERGER/ABAM  
FY02 Tactical Equipment Complex  
Fort Lewis, Washington

SERVICE:

- A - Underground Building Soil, Waste and Storm Drain
- B - Aboveground Soil, Waste, Drain In Buildings
- C - Underground Vent
- D - Aboveground Vent
- E - Interior Rainwater Conductors Aboveground
- F - Corrosive Waste And Vent Above And Belowground
- \* - Hard Temper

TABLE II PIPE AND FITTING MATERIALS FOR PRESSURE PIPING SYSTEMS

Item No.	Pipe and Fitting Materials	SERVICE			
		A	B	C	D
1	Malleable-iron threaded fittings,	X	X	X	X
a.	Not galvanized			X	
	for use with Item 4a				
2	Grooved pipe couplings, ferrous pipe ASTM A 536 and ASTM A 47/A 47M, non-ferrous pipe, ASTM A 536 and ASTM A 47/A 47M,	X	X	X	
3	Ductile iron grooved joint fittings for ferrous pipe ASTM A 536 and ASTM A 47/A 47M, for use with Item 2	X	X	X	
4	Steel pipe:	X	X	X	X
a.	Seamless, black, ASTM A 53/A 53M, Type S, Grade B			X	
5	Seamless red brass pipe, ASTM B 43	X	X		X
6	Bronze flanged fittings, ASME B16.24 for use with Items 5 and 7	X	X		X
7	Seamless copper pipe, ASTM B 42	X	X		X
8	Seamless copper water tube, ASTM B 88, ASTM B 88M	X**	X**	X**	X***
9	Cast bronze threaded fittings, ASME B16.15 for use with Items 5 and 7	X	X		X
10	Wrought copper and bronze solder-joint pressure fittings, ASME B16.22 for use with Items 5 and 7	X	X	X	X
11	Cast copper alloy solder-joint pressure fittings, ASME B16.18 for use with Items 8 and 9	X	X	X	X



TABLE II PIPE AND FITTING MATERIALS FOR PRESSURE PIPING SYSTEMS

Item No.	Pipe and Fitting Materials	SERVICE			
		A	B	C	D
12	Bronze and sand castings grooved joint pressure fittings for non-ferrous pipe ASTM B 584, for use with Item 2	X	X	X	
13	Steel pipeline flanges, MSS SP-44	X	X		
14	Fittings: brass or bronze; ASME B16.15, and ASME B16.18 ASTM B 828	X	X		
15	Carbon steel pipe unions, socket-welding and threaded, MSS SP-83	X	X	X	
16	Malleable-iron threaded pipe unions ASME B16.39	X	X		
17	Nipples, pipe threaded ASTM A 733	X	X	X	

A - Cold Water Aboveground

B - Hot Water 82 degree C Maximum Aboveground

C - Compressed Air Lubricated

D - Cold Water Service Belowground

Indicated types are minimum wall thicknesses.

\*\* - Type L - Hard

\*\*\* - Type K - Hard temper with brazed joints only or type K-soft temper without joints in or under floors

\*\*\*\* - In or under slab floors only brazed joints

01062/BERGER/ABAM  
FY02 Tactical Equipment Complex  
Fort Lewis, Washington

TABLE III STANDARD RATING CONDITIONS AND MINIMUM PERFORMANCE RATINGS FOR WATER  
HEATING EQUIPMENT

A. STORAGE WATER HEATERS

FUEL	STORAGE CAPACITY LITERS	INPUT RATING	TEST PROCEDURE	REQUIRED PERFORMANCE
Gas	380 max.	22 kW max.	10 CFR 430	EF = 0.62-0.0019V minimum
Gas	380 min. OR	22 kW min.	ANSI Z21.10.3	ET= 77 percent; SL = 1.3+38/V max.

B. Unfired Hot Water Storage, Instantaneous water heater, and pool heater.

Volumes and inputs: maximum HL shall be 20.5 W/sq. meter

C. Instantaneous Water Heater

Gas	All	All	ANSI Z21.10.3	ET = 80 percent
-----	-----	-----	---------------	-----------------

D. Pool Heater

Gas or Oil	All	All	ANSI Z21.56	ET = 78 percent
---------------	-----	-----	-------------	-----------------

TERMS:

EF = Energy factor, overall efficiency.

ET = Thermal efficiency with 21 degrees C delta T.

EC = Combustion efficiency, 100 percent - flue loss when smoke = 0  
(trace is permitted).

SL = Standby loss in W/0.09 sq. m. based on 27 degrees C delta T, or in  
percent per hour based on nominal 32 degrees C delta T.

HL = Heat loss of tank surface area

V = Storage volume in gallons

-- End of Section --

SECTION 15556

FORCED HOT WATER HEATING SYSTEMS USING DUCT COILS

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by basic designations only.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM A 733	(1993) Welded and Seamless Carbon Steel and Austenitic Stainless Steel Pipe Nipples
ASTM B 32	(1996) Solder Metal
ASTM B 62	(1993) Composition Bronze or Ounce Metal Castings
ASTM B 75	(1997) Seamless Copper Tube
ASTM B 88	(1996) Seamless Copper Water Tube
ASTM B 88M	(1996) Seamless Copper Water Tube (Metric)
ASTM B 687	(1996) Brass, Copper, and Chromium-Plated Pipe Nipples
ASTM B 813	(1993) Liquid and Paste Fluxes for Soldering Applications of Copper and Copper Alloy Tube
ASTM B 828	(1998) Making Capillary Joints by Soldering of Copper and Copper Alloy Tube and Fittings
ASTM D 596	(1991; R 1995) Reporting Results of Analysis of Water
ASTM D 1384	(1997a) Corrosion Test for Engine Coolants in Glassware
ASTM D 3308	(1997) PTFE Resin Skived Tape

ASME INTERNATIONAL (ASME)

ASME B16.15	(1985; R 1994) Cast Bronze Threaded Fittings Classes 125 and 250
ASME B16.18	(1984; R 1994) Cast Copper Alloy Solder Joint Pressure Fittings

ASME B16.22	(1995; B16.22a) Wrought Copper and Copper Alloy Solder Joint Pressure Fittings
ASME B16.26	(1988) Cast Copper Alloy Fittings for Flared Copper Tubes
ASME B16.39	(1986; R 1998) Malleable Iron Threaded Pipe Unions Classes 150, 250, and 300
ASME B31.1	(1998) Power Piping
ASME B40.1	(1991) Gauges - Pressure Indicating Dial Type - Elastic Element
ASME BPV VIII Div 1	(1998) Boiler and Pressure Vessel Code; Section VIII, Pressure Vessels Division 1 - Basic Coverage
ASME BPV IX	(1998) Boiler and Pressure Vessel Code; Section IX, Welding and Brazing Qualifications

AMERICAN WELDING SOCIETY (AWS)

AWS A5.8	(1992) Filler Metals for Brazing and Braze Welding
----------	--

MANUFACTURERS STANDARDIZATION SOCIETY OF THE VALVE AND FITTINGS INDUSTRY (MSS)

MSS SP-58	(1993) Pipe Hangers and Supports - Materials, Design and Manufacture
MSS SP-69	(1996) Pipe Hangers and Supports - Selection and Application
MSS SP-80	(1997) Bronze Gate, Globe, Angle and Check Valves

NATIONAL ELECTRICAL MANUFACTURERS ASSOCIATION (NEMA)

NEMA 250	(1991) Enclosures for Electrical Equipment (1000 Volts Maximum)
----------	---

1.2 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only. When used, a designation following the "G" designation identifies the office that will review the submittal for the Government. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

#### SD-06 Test Reports

##### Testing and Cleaning; FIO

Performance test reports in booklet form showing all field tests performed to adjust each component and all field tests performed to prove compliance with the specified performance criteria, upon completion and testing of the installed system. Each test report shall indicate the final position of controls.

##### Water Treatment Testing; FIO

The water quality test report shall identify the chemical composition of the heating water. The report shall include a comparison of the condition of the water with the chemical company's recommended conditions. Any required corrective action shall be documented within the report.

#### SD-10 Operation and Maintenance Data

##### Heating System; FIO

Six copies of operation and six copies of maintenance manuals for the equipment furnished. One complete set, prior to performance testing and the remainder upon acceptance. Operating manuals shall detail the step-by-step procedures required for system startup, operation, and shutdown. Operating manuals shall include the manufacturer's name, model number, parts list, and brief description of all equipment and their basic operating features. Maintenance manuals shall list routine maintenance procedures, water treatment procedures, possible breakdowns and repairs, and troubleshooting guides. Maintenance manuals shall include piping and equipment layout and simplified wiring and control diagrams of the system as installed. Manuals shall be provided prior to the field training course.

### 1.3 QUALIFICATIONS

Procedures and welders shall be qualified in accordance with the code under which the welding is specified to be accomplished.

### 1.4 DELIVERY AND STORAGE

All equipment delivered and placed in storage shall be stored with protection from the weather, excessive humidity and excessive temperature variation; and dirt, dust, or other contaminants.

### 1.5 FIELD MEASUREMENTS

The Contractor shall become familiar with all details of the work, verify all dimensions in the field, and shall advise the Contracting Officer of any discrepancy before performing the work.

## PART 2 PRODUCTS

### 2.1 GENERAL MATERIAL AND EQUIPMENT REQUIREMENTS

#### 2.1.1 Standard Products

Materials and equipment shall be the standard products of a manufacturer regularly engaged in the manufacture of such products and shall essentially duplicate items that have been in satisfactory use for at least 2 years prior to bid opening. Equipment shall be supported by a service organization that is, in the opinion of the Contracting Officer, reasonably convenient to the site.

#### 2.1.2 Nameplates

Each major item of equipment shall have the manufacturer's name, address, type or style, model or serial number, and catalog number on a plate secured to the item of equipment.

#### 2.1.3 Equipment Guards and Access

Belts, pulleys, chains, gears, couplings, projecting setscrews, keys, and other rotating parts exposed to personnel contact shall be fully enclosed or guarded in accordance with OSHA requirements. High temperature equipment and piping exposed to contact by personnel or where it creates a potential fire hazard shall be properly guarded or covered with insulation of a type specified.

#### 2.1.4 Asbestos Prohibition

Asbestos and asbestos-containing products shall not be used.

#### 2.1.5 Electrical Work

Electrical motor driven equipment specified shall be provided complete with motors, motor starters, and controls. Electric equipment (including motor efficiencies), and wiring shall be in accordance with Section 16415 ELECTRICAL WORK, INTERIOR. High efficiency motors shall be used. Electrical characteristics shall be as specified or indicated. Motor starters shall be provided complete with thermal overload protection and other appurtenances necessary for the motor control specified. Each motor shall be of sufficient size to drive the equipment at the specified capacity without exceeding the nameplate rating of the motor. Manual or automatic control and protective or signal devices required for the operation specified, and any control wiring, conduit, and connection to power required for controls and devices but not shown shall be provided.

### 2.2 PIPING, TUBING, AND FITTINGS

#### 2.2.1 General

Piping, and fittings shall be as follows:

- a. Low temperature water piping shall be copper tubing with solder-joint.

#### 2.2.5 Copper Tubing

Tubing shall conform to ASTM B 88, ASTM B 88M, Type K or L.

#### 2.2.3 Fittings for Copper Tubing

Wrought copper and bronze fittings shall conform to ASME B16.22 and ASTM B 75. Cast copper alloy fittings shall conform to ASME B16.18 and ASTM B 828. Flared fittings shall conform to ASME B16.26 and ASTM B 62. Adaptors may be used for connecting tubing to flanges and threaded ends of valves and equipment. Extracted brazed tee joints produced with an acceptable tool and installed as recommended by the manufacturer may be used. Cast bronze threaded fittings shall conform to ASME B16.15.

#### 2.2.4 Nipples

Nipples shall conform to ASTM A 733 or ASTM B 687, standard weight.

#### 2.2.5 Unions

Unions shall conform to ASME B16.39, type to match adjacent piping.

#### 2.2.6 Adapters

Adapters for copper tubing shall be brass or bronze for soldered fittings.

#### 2.2.7 Dielectric Unions

Unions shall conform to the tensile strength and dimensional requirements specified in ASME B16.39. Unions shall have metal connections on both ends to match adjacent piping. Metal parts of dielectric unions shall be separated so that the electrical current is below 1 percent of the galvanic current which would exist upon metal-to-metal contact.

### 2.3 MATERIALS AND ACCESSORIES

#### 2.3.1 Solder

Solder shall conform to ASTM B 32. Solder and flux shall be lead free. Solder flux shall be liquid or paste form, non-corrosive and conform to ASTM B 813.

#### 2.3.2 Solder, Silver

Silver solder shall conform to AWS A5.8.

#### 2.3.3 Thermometers

Thermometers shall have brass, malleable iron, or aluminum alloy case and frame, clear protective face, permanently stabilized glass tube with indicating-fluid column, white face, black numbers, and a 225 mm scale, and thermometers shall have rigid stems with straight, angular, or inclined pattern.

#### 2.3.4 Gauges

Gauges shall conform to ASME B40.1.

#### 2.3.5 Pipe Hangers, Inserts, and Supports

Pipe hangers, inserts, and supports shall conform to MSS SP-58 and MSS SP-69.

### 2.4 VALVES FOR LOW TEMPERATURE WATER HEATING AND STEAM SYSTEMS

#### 2.4.1 Check Valves

Sizes 65 mm and less, bronze shall conform to MSS SP-80, Type 3 or 4, Class 125.

#### 2.4.2 Globe Valves

Sizes 65 mm and less, bronze shall conform to MSS SP-80, Type 1, 2 or 3, Class 125.

#### 2.4.3 Gate Valves

Sizes 65 mm and less, bronze shall conform to MSS SP-80, Type 1 or 2, Class 125.

#### 2.4.4 Air Vents

Air vents shall be provided at all piping high points in water systems, with block valve in inlet and internal check valve to allow air vent to be isolated for cleaning and inspection. Outlet connection shall be piped to nearest open site or suitable drain, or terminated 300 mm above finished grade. Pressure rating of air vent shall match pressure rating of piping system. Body and cover shall be cast iron or semi-steel with stainless steel or copper float and stainless steel or bronze internal parts. Air vents installed in piping in chase walls or other inaccessible places shall be provided with an access panel.

#### 2.4.5 Automatic Flow Control Valves

Valves shall be factory set and shall automatically limit the rate of flow to required engineered capacity within +/-5% accuracy over an operating pressure differential of at least 14 times the minimum required for control.

The control mechanism of the valve shall consist of a self contained, open-chamber cartridge assembly with unobstructed flow passages that eliminate accumulation of particles and debris. All internal working parts shall be type 300 passivated stainless steel. No plated materials are acceptable.

The type 300 passivated stainless steel cartridge assembly shall consist of a spring loaded cup. The cup shall be guided at two points and shall utilize the full available differential pressure across the valve to actuate the cup and thereby reduce friction and hysteresis and eliminate binding. It shall have a thin orifice plate for self cleaning of the variable inlet



ports over the full control range. Cartridge must be removable in one piece.

Valves shall be available in four pressure differential ranges, with the minimum range requiring less than 13.78kPa to control flow. Cast iron valve bodies shall be provided with inlet and outlet tappings suitable for connection of instruments for verification of flow rates, and shall be marked to show direction of flow. Valve bodies shall be rated for use at not less than 150% of system designed pressures.

Certified performance data for the flow control valve, based on independent laboratory tests, supervised and witnessed by a registered professional engineer, shall be available.

All flow control valves shall be supplied by a single source responsibility.

Each automatic flow control valve shall be furnished with a valve kit consisting of 6mm x 51mm min. size nipples, quick disconnect valves (to be located outside insulation), and fittings suitable for use with the measuring instruments specified.

Provide a metal identification tag, with chain for each valve. The tag to be marked with zone I.D., valve model No. and rated flow in GPM.

Performance certification of valves, based on independent laboratory tests, shall be available.

## 2.5 COLD WATER CONNECTIONS

Connections shall be provided which include consecutively in line a strainer, backflow prevention device, and water pressure regulator. The backflow prevention device shall be provided as indicated and in compliance with Section 15400 PLUMBING, GENERAL PURPOSE.

### 2.5.1 Strainers

Basket or Y-type strainers shall be the same size as the pipelines in which they are installed. Strainer bodies shall be rated for 1.72 MPa service, with bottoms drilled and plugged. Bodies shall have arrows cast on the sides to indicate the direction of flow. Each strainer shall be equipped with a removable cover and sediment basket. Basket shall not be less than 0.795 mm and shall have perforations to provide a net free area through the basket of at least four times that of the entering pipe.

### 2.5.2 Pressure Regulating Valve

Valve shall be a type that will not stick nor allow pressure to build up on the low side. Valve shall be set to maintain a terminal pressure approximately 35 kPa in excess of the static head on the system and shall operate within a 138 kPa variation regardless of initial pressure and without objectionable noise under any condition of operation.

## 2.6 EXPANSION TANK

Pressurization system shall include a replaceable diaphragm-type captive air expansion tank which will accommodate the expanded water of the system generated within the normal operating temperature range, limiting this pressure increase at all components in the system to the maximum allowable pressure at those components. The only air in the system shall be the permanent sealed-in air cushion contained in the diaphragm-type tank. Sizes shall be as indicated. Expansion tank shall be welded steel, constructed, tested and stamped in accordance with ASME BPV VIII Div 1 for a working pressure of 862 kPa and precharged to the minimum operating pressure. Tank air chamber shall be fitted with an air charging valve. Tank shall be supported by steel legs or bases for vertical installation or steel saddles for horizontal installations.

## 2.7 AIR SEPARATOR TANK

External air separation tank shall be steel, constructed, tested, and stamped in accordance with ASME BPV VIII Div 1 for a working pressure of 862 kPa. The capacity of the air separation tank indicated is minimum.

## 2.8 SYSTEM EQUIPMENT AND ACCESSORIES

### 2.8.1 Circulating Pumps

Pumps for hot water shall be of the single-stage centrifugal type, loose coupled vertical inline, electrically driven. Pumps shall be supported by the piping on which installed] as indicated. Pumps shall be either integrally mounted with the motor coupling on a cast iron, or steel sub-base. Pump housing shall be of close grained cast iron. Shaft shall be carbon or alloy steel, turned and ground. Shaft seal shall be mechanical-seal or stuffing-box type. Impeller, impeller wearing rings, glands, casing wear rings, and shaft sleeve shall be bronze. Bearings shall be oil-lubricated, bronze-sleeve type, and shall be sealed or isolated to prevent loss of oil or entrance of dirt or water. Motor shall be of a type approved by the manufacturer of the pump.

### 2.8.2 Pressure Gauges and Thermometers

Gauges shall be provided for each heat exchanger and piping as indicated. A thermometer and pressure gauge shall be provided on the high temperature water supply and return mains. Thermometers shall be separable socket type.

### 2.8.3 Drains

A drain connection with 20 mm hose bib shall be installed at the lowest point in the low temperature water return main. In addition, threaded drain connections with threaded cap or plug shall be installed wherever required for thorough draining of the low temperature water system.

### 2.8.4 Strainers

Basket or Y-type strainer-body connections shall be the same size as the pipe lines in which the connections are installed. The bodies shall have arrows clearly cast on the sides to indicate the direction of flow. Each

strainer shall be equipped with an easily removable cover and sediment basket. The body or bottom opening shall be equipped with nipple and gate valve for blowdown. The basket for steam systems shall be of not less than 0.635 mm (0.025 inch) thick stainless steel, or monel with small perforations of sufficient number to provide a net free area through the basket of at least 2.5 times that of the entering pipe. The flow shall be into the basket and out through the perforations. For high temperature water systems, only cast steel bodies shall be used.

## 2.9 UNIT HEATERS

Heaters shall be as specified below, and shall have a heating capacity not in excess of 125 percent of the capacity indicated.

### 2.9.1 Heating Elements

Heating coils and radiating fins shall be of suitable nonferrous alloy with brazed fittings at each end for connecting to external piping. The heating elements shall be free to expand or contract without developing leaks and shall be properly pitched for drainage. The elements shall be tested under a hydrostatic pressure of 1.38 MPa and a certified report of the test shall be submitted to the Contracting Officer. Coils shall be suitable for use with water up to 121 degrees C.

### 2.9.2 Motors

Motors shall be provided with NEMA 250 general purpose enclosure. Motors and motor controls shall otherwise be as specified in Section 16415 ELECTRICAL WORK, INTERIOR.

### 2.9.3 Motor Switches

Motors shall be provided with manual selection switches with "Off," and "Automatic" positions and shall be equipped with thermal overload protection.

### 2.9.4 Controls

Controls shall be provided as specified in Section 15950 HEATING, VENTILATING, AND AIR CONDITIONING HVAC CONTROL SYSTEMS.

## 2.10 AIR HANDLING UNITS

Air handling units shall be as specified in Section 15895 AIR SUPPLY, DISTRIBUTION, VENTILATION, AND EXHAUST SYSTEMS.

## 2.11 WATER TREATMENT SYSTEM

The water treatment system shall be capable of manually feeding chemicals into the heating system to prevent corrosion and scale within the heat exchanger and piping system. All water treatment equipment and chemicals shall be furnished and installed by a water treatment company regularly engaged in the installation of water treatment equipment and the provision of water treatment chemicals based upon water condition analyses. The water

treatment company shall provide a water sample analysis taken from the building site, each month for one year.

#### 2.11.1 Chemical Shot Feeder

A shot feeder shall be provided as indicated. Size and capacity of feeder shall be based upon local requirements and water analysis. The feeder shall be furnished with an air vent, gauge glass, funnel, valves, fittings, and piping. All materials of construction shall be compatible with the chemicals being used.

#### 2.11.2 Make Up Water Analysis

The make up water conditions report provided by contractor is to be per ASTM D 596 and contain the following:

- Date of Sample
- Temperature
- Silica (SiO<sub>2</sub>)
- Insoluble
- Iron and Aluminum Oxides
- Calcium (Ca)
- Magnesium (Mg)
- Sodium and Potassium (Na and K)
- Carbonate (HCO<sub>3</sub>)
- Sulfate (SO<sub>4</sub>)
- Chloride (Cl)
- Nitrate (NO<sub>3</sub>)
- Turbidity
- pH
- Residual Chlorine
- Total Alkalinity
- Noncarbonate Hardness
- Total Hardness
- Dissolved Solids
- Fluorine
- Conductivity

#### 2.11.3 Chemicals

The chemical company shall provide pretreatment chemicals that will remove and permit flushing of mill scale, oil, grease, and other foreign matter from the water heating system. The chemical company shall also provide all treatment chemicals required for the initial fill of the system and for a period of one year of operation. The chemical company shall determine the correct chemicals and concentrations required for the water treatment. The chemicals shall not be proprietary and shall meet required federal, state, and local environmental regulations for the treatment of heating water systems and discharge to the sanitary sewer. The chemicals shall remain stable throughout the operating temperature range of the system, and shall be compatible with pump seals and other elements of the system.

#### 2.11.4 Glycol Solutions

A 30 percent concentration by volume of industrial grade propylene glycol shall be provided. The glycol shall be tested in accordance with ASTM D 1384 with less than 0.013 mm penetration per year for all system metals. The glycol shall contain corrosion inhibitors. Silicate based inhibitors shall not be used. The solution shall be compatible with pump seals, other elements of the system, and all water treatment chemicals used within the system.

#### 2.12.5 Test Kits

All required test kits and reagents for determining the proper water conditions shall be provided.

### PART 3 EXECUTION

#### 3.1 INSTALLATION

All work shall be installed as indicated and in accordance with the manufacturer's diagrams and recommendations.

#### 3.2 COLOR CODE MARKING AND FIELD PAINTING

Color code marking, field painting of exposed pipe, and field painting of factory primed equipment shall be as specified in Section 09900 PAINTING, GENERAL.

#### 3.4 PIPING

Unless otherwise specified, pipe and fittings installation shall conform to the requirements of ASME B31.1. Pipe shall be cut accurately to measurements established at the job site and worked into place without springing or forcing, completely clearing all windows, doors, and other openings. Cuttings or other weakening of the building structure to facilitate piping installation will not be permitted without written approval. Pipe or tubing shall be cut square, shall have burrs removed by reaming, and shall be so installed as to permit free expansion and contraction without causing damage to building structure, pipe, joints, or hangers. Changes in direction shall be made with factory made fittings, except that bending of pipe up to 100 mm (4 inches) will be permitted, provided a pipe bender is used and wide sweep bends are formed. The center line radius of bends shall not be less than six diameters of the pipe. Bent pipe showing kinks, wrinkles, flattening, or other malformations will not be accepted. Vent pipes shall be installed through the roof as indicated and shall be flashed as specified. Horizontal mains shall pitch up or down in the direction of flow as indicated. The grade shall be not less than 25 mm in 12 m. Reducing fittings shall be used for changes in pipe sizes. Open ends of pipelines and equipment shall be capped or plugged during installation to keep dirt or other foreign materials out of the systems. Pipe not otherwise specified shall be uncoated. Unions and other components for copper pipe or tubing shall be brass or bronze. Connections between ferrous and copper piping shall be electrically isolated using dielectric unions.

#### 3.4.1 Joints

Except as otherwise specified, joints used on steel pipe shall be threaded for fittings 25 mm and smaller; threaded or welded for 32 mm up through 65 mm. Joints between sections of copper tubing or copper pipe shall be flared or sweated. Pipe and fittings 32 mm and larger installed in inaccessible conduits or trenches beneath concrete floor slabs shall be welded. Unless otherwise specified, connections to equipment shall be made with black malleable iron unions for pipe 65 mm or smaller in diameter, and with flanges for pipe 80 mm or larger in diameter.

#### 3.4.5 Threaded Joints

Threaded joints shall be made with tapered threads properly cut, and shall be made tight with PTFE tape complying with ASTM D 3308, or equivalent thread joint compound applied to the male threads only, and in no case to the fittings.

#### 3.4.6 Welded Joints

Joints shall be fusion-welded unless otherwise required. Changes in direction of piping shall be made with welding fittings only. Branch connection may be made with either welding tees or branch outlet fittings. Branch outlet fittings shall be forged, flared for improvement of flow where attached to the run, and reinforced against external strains.

#### 3.4.8 Sweated Pipe and Tubing

Pipe and tubing shall be cut square and burrs shall be removed. Both inside of fittings and outside of tubing shall be cleaned with an abrasive before sweating. Care shall be taken to prevent annealing of fittings and hard drawn tubing when making connection. Installation shall be made in accordance with the manufacturer's recommendations. Changes in direction of piping shall be made with soldered fittings only. Solder and flux shall be lead free. Joints for soldered fittings shall be made with silver solder or 95:5 tin-antimony solder. Cored solder shall not be used. Swing joints or offsets shall be provided on all branch connections, mains, and risers to provide for expansion and contraction forces without undue stress to the fittings or to short lengths of pipe or tubing.

### 3.5 CONNECTIONS TO EQUIPMENT

Supply and return connections shall be provided by the Contractor unless otherwise indicated. Valves and traps shall be installed in accordance with the manufacturer's recommendations. Unless otherwise indicated, the size of the supply and return pipes to each piece of equipment shall be not smaller than the connections on the equipment. No bushed connections shall be permitted. Change in sizes shall be made with reducers or increasers only.

#### 3.5.1 Low Temperature Water

Connections, unless otherwise indicated, shall be made with malleable iron unions for piping 65 mm or less in diameter.

### 3.6 BRANCH CONNECTIONS

Branches shall pitch up or down as indicated, unless otherwise specified. Connection shall be made to insure unrestricted circulation, eliminate air pockets, and permit drainage of the system.

#### 3.6.1 Low Temperature Water Branches

Branches taken from mains shall pitch with a grade of not less than 25 mm in 3 m .

### 3.8 SUPPORTS

#### 3.8.1 General

Hangers used to support piping 50 mm and larger shall be fabricated to permit adequate adjustment after erection while supporting the load. Pipe guides and anchors shall be installed to keep pipes in accurate alignment, to direct the expansion movement, and to prevent buckling, swaying, and undue strain. All piping subjected to vertical movement when operating temperatures exceed ambient temperatures, shall be supported by variable spring hangers and supports or by constant support hangers. Where threaded rods are used for support, they shall not be formed or bent.

##### 3.8.1.1 Seismic Requirements for Pipe Supports, Standard Bracing

Structural steel required for reinforcement to properly support piping, headers, and equipment but not shown shall be provided under this section. Material used for supports shall be as specified under Section 05120 STRUCTURAL STEEL.

##### 3.8.1.2 Structural Attachments

Structural steel brackets required to support piping, headers, and equipment, but not shown, shall be provided under this section. Material and installation shall be as specified under Section 05120 STRUCTURAL STEEL. Pipe hanger loads suspended from steel joist panel points shall not exceed 222 N.

##### 3.8.1.3 Multiple Pipe Runs

In the support of multiple pipe runs on a common base member, a clip or clamp shall be used where each pipe crosses the base support member. Spacing of the base support members shall not exceed the hanger and support spacing required for any individual pipe in the multiple pipe run.

#### 3.8.2 Pipe Hangers, Inserts, and Supports

Pipe hangers, inserts and supports shall conform to MSS SP-58 and MSS SP-69, except as specified as follows:

- a. Types 5, 12, and 26 shall not be used.

b. Type 3 shall not be used on insulated pipe which has a vapor barrier. Type 3 may be used on insulated pipe that does not have a vapor barrier if clamped directly to the pipe and if the clamp bottom does not extend through the insulation and the top clamp attachment does not contact the insulation during pipe movement.

d. Type 19 and 23 C-clamps shall be torqued per MSS SP-69 and have both locknuts and retaining devices, furnished by the manufacturer. Field-fabricated C-clamp bodies or retaining devices are not acceptable.

e. Type 20 attachments used on angles and channels shall be furnished with an added malleable iron heel plate or adapter.

f. Type 24 may be used only on trapeze hanger systems or on fabricated frames.

h. Horizontal pipe supports shall be spaced as specified in MSS SP-69 and a support shall be installed not over 300 mm from the pipe fitting joint at each change in direction of the piping. Pipe supports shall be spaced not over 1.5 m apart at valves.

k. Except for Type 3, pipe hangers on horizontal insulated pipe shall be the size of the outside diameter of the insulation.

### 3.8.3 Piping in Trenches

Piping shall be supported as indicated.

## 3.9 PIPE SLEEVES

### 3.9.6 Fire Seal

Where pipes pass through fire walls, fire partitions, fire rated pipe chase walls or floors above grade, a fire seal shall be provided as specified in Section 07840 FIRESTOPPING.

### 3.9.7 Escutcheons

Escutcheons shall be provided at all finished surfaces where exposed piping, bare or covered, passes through floors, walls, or ceilings, except in boiler, utility, or equipment rooms. Escutcheons shall be fastened securely to pipe sleeves or to extensions of sleeves without any part of sleeves being visible. Where sleeves project slightly from floors, special deep-type escutcheons shall be used. Escutcheons shall be chromium-plated iron or chromium-plated brass, either one-piece or split pattern, held in place by internal spring tension or setscrew.

## 3.10 ANCHORS

Anchors shall be provided where necessary or indicated to localize expansion or prevent undue strain on piping. Anchors shall consist of heavy steel collars with lugs and bolts for clamping and attaching anchor braces, unless otherwise indicated. Anchor braces shall be installed using turnbuckles where required. Supports, anchors, or stays shall not be attached in places



where construction will be damaged by installation operations or by the weight or expansion of the pipeline.

### 3.12 VALVES AND EQUIPMENT ACCESSORIES

#### 3.12.1 Valves and Equipment

Valves shall be installed at the locations shown or specified, and where required for the proper functioning of the system as directed. Gate valves shall be used unless otherwise indicated, specified, or directed. Valves shall be installed with their stems horizontal to or above the main body of the valve. Valves used with ferrous piping shall have threaded or flanged ends and sweat-type connections for copper tubing.

#### 3.12.3 Thermometer Socket

A thermometer well shall be provided in each return line for each circuit in multicircuit systems.

#### 3.12.4 Air Vents

Vents shall be installed where indicated, and on all high points and piping offsets where air can collect or pocket.

##### 3.12.4.1 Water Air Vents

Medium temperature water air vents shall be as indicated. Vent discharge lines shall be double-valved with globe valves and shall discharge into a funnel drain.

### 3.13 TESTING AND CLEANING

#### 3.13.1 Pressure Testing

The Contractor shall notify the Contracting Officer 5 days before the tests are to be conducted. The tests shall be performed in the presence of the Contracting Officer. The Contractor shall furnish all instruments and personnel required for the tests. Electricity, steam, and water will be furnished by the Government. All test results shall be accepted before thermal insulation is installed. The entire low temperature heating system, including heat exchanger, radiators and fittings, shall be hydrostatically tested and proved tight under a pressure of 310 kPa for a period of four hours.

#### 3.13.2 Test of Backflow Prevention Assemblies

Backflow prevention assemblies shall be tested in accordance with Section 15400 PLUMBING, GENERAL PURPOSE.

#### 3.13.3 Cleaning

After the hydrostatic and backflow prevention tests have been made and prior to the operating tests, the heat exchanger and piping shall be thoroughly cleaned by filling the system with a solution of 0.5 kg of caustic soda or 0.5 kg of trisodium phosphate per 200 L of water. Observe the proper

safety precautions in the handling and use of these chemicals. The water shall be heated to approximately 66 degrees C, and the solution circulated in the system for a period of 48 hours, then drained and the system thoroughly flushed out with fresh water. Equipment shall be wiped clean, with all traces of oil, dust, dirt, or paint spots removed. The Contractor shall be responsible for maintaining the system in a clean condition until final acceptance. Bearings shall be lubricated with oil or grease as recommended by the manufacturer.

### 3.13.4 Water Treatment Testing

#### 3.13.4.1 Water Quality Test

The heating water shall be analyzed prior to the acceptance of the facility and a minimum of once a month for a period of one year by the water treatment company. The analysis shall include the following information recorded in accordance with ASTM D 596.

- Date of Sample
- Temperature
- Silica (SiO<sub>2</sub>)
- Insoluble
- Iron and Aluminum Oxides
- Calcium (Ca)
- Magnesium (Mg)
- Sodium and Potassium (Na and K)
- Carbonate (HCO<sub>3</sub>)
- Sulfate (SO<sub>4</sub>)
- Chloride (Cl)
- Nitrate (NO<sub>3</sub>)
- Turbidity
- pH
- Residual Chlorine
- Total Alkalinity
- Noncarbonate Hardness
- Total Hardness
- Dissolved Solids
- Fluorine
- Conductivity

### 3.14 TESTING, ADJUSTING AND BALANCING

Except as specified herein, testing, adjusting, and balancing shall be in accordance with Section 15990 TESTING, ADJUSTING, AND BALANCING OF HVAC SYSTEMS.

### 3.15 MANUFACTURER'S SERVICES

Services of a manufacturer's representative who is experienced in the installation, adjustment, and operation of the equipment specified shall be provided. The representative shall supervise the installation, adjustment, and testing of the equipment.

01062/BERGER/ABAM  
FY02 Tactical Equipment Complex  
Fort Lewis, Washington

### 3.16 FRAMED INSTRUCTIONS

Framed instructions containing wiring and control diagrams under glass or in laminated plastic shall be posted where directed. Condensed operating instructions, prepared in typed form, shall be framed as specified above and posted beside the diagrams. The framed instructions shall be posted before acceptance testing of the system.

### 3.17 FIELD TRAINING

A field training course shall be provided for designated operating and maintenance staff members. Training shall be provided for a total period of hours of normal working time and shall start after the system is functionally complete but prior to final acceptance tests. Field training shall cover all of the items contained in the approved operation and maintenance manuals.

-- End of Section -

01062/BERGER/ABAM  
FY02 Tactical Equipment Complex  
Fort Lewis, Washington

This page intentionally blank.

SECTION 15565

HEATING SYSTEM; GAS-FIRED HEATERS

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by basic designation only.

AMERICAN NATIONAL STANDARDS INSTITUTE (ANSI)

ANSI Z21.66 (1996) Automatic Vent Damper Devices for Use with Gas-Fired Appliances

ANSI Z83.4 (1991; Z83.4a) Direct Gas-Fired Make-Up Air Heaters

INTERNATIONAL APPROVAL SERVICES (IAS)

IAS Directory (1996) IAS Directory of AGA & CGA Certified Appliances and Accessories

NATIONAL ELECTRICAL MANUFACTURERS ASSOCIATION (NEMA)

NEMA MG 1 (1993; Rev 1; Rev 2; Rev 3; Rev 4) Motors and Generators

NATIONAL FIRE PROTECTION ASSOCIATION (NFPA)

NFPA 54 (1996; Errata) National Fuel Gas Code

NFPA 211 (1996; Errata 96-1) Chimneys, Fireplaces, Vents, and Solid Fuel-Burning Appliances

UNDERWRITERS LABORATORIES (UL)

UL Gas&Oil Dir (1996; Supple) Gas and Oil Equipment Directory

1.2 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only. When used, a designation following the "G" designation identifies the office that will review the submittal for the Government. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

SD-02 Shop Drawings

Heating System; FIO  
Installation; FIO

Detail drawings consisting of illustrations, schedules, performance charts, instructions, brochures, diagrams, and other information to illustrate the requirements and operation of the system. Detail drawings for space heating equipment, controls, associated equipment, and for piping and wiring. Drawings shall show proposed layout and anchorage of equipment and appurtenances, and equipment relationship to other parts of the work including clearances for maintenance and operation.

SD-03 Product Data

Heating System; FIO

Spare parts data for each different item of materials and equipment specified, after approval of the detail drawings, and not later than 2 months prior to the date of beneficial occupancy. The data shall include a complete list of parts and supplies, with current unit prices and source of supply.

SD-06 Test Reports

Testing, Adjusting, and Balancing; FIO

Test reports shall be submitted in booklet form showing all field tests performed to adjust each component and all field tests performed to prove compliance with the specified performance criteria, upon completion and testing of the installed system. Each test report shall indicate the final position of controls.

SD-10 Operation and Maintenance Data

Instructions; FIO

Six complete copies of operating instructions outlining the step-by-step procedures required for system startup, operation and shutdown. The instructions shall include the manufacturer's name, model number, service manual, parts list, and brief description of all equipment and basic operating features. Six complete copies of maintenance instructions listing routine maintenance, possible breakdowns, repairs and troubleshooting guide. The instructions shall include simplified piping, wiring, and control diagrams for the system as installed.

### 1.3 GENERAL REQUIREMENTS

#### 1.3.1 Nameplates

Each major component of equipment shall have the manufacturer's name, address, type or style, model or serial number, and catalog number on a plate secured to the equipment.

#### 1.3.2 Equipment Guards

Belts, pulleys, chains, gears, couplings, projecting setscrews, keys, and other rotating parts so located that any person may come in close proximity thereto shall be completely enclosed or guarded. High-temperature equipment and piping so located as to endanger personnel or create a fire hazard shall be guarded or covered with insulation of type specified for service.

#### 1.3.3 Verification of Dimensions

The Contractor shall become thoroughly familiar with all details of the work, verify all dimensions in the field, and shall advise the Contracting Officer of any discrepancy before performing any work.

### 1.4 DELIVERY AND STORAGE

All equipment delivered and placed in storage shall be stored with protection from weather, humidity and temperature variations, dirt and dust, or other contaminants.

## PART 2 PRODUCTS

### 2.1 STANDARD PRODUCTS

Material and equipment shall be standard products of a manufacturer regularly engaged in manufacturing of the products. Equipment shall essentially duplicate equipment that has been in satisfactory use at least 2 years prior to bid opening.

### 2.2 ELECTRICAL WORK

Electrical motor driven equipment shall be provided complete with motors, motor starters, and controls. Motors shall conform to NEMA MG 1. Electrical equipment and wiring shall be in accordance with Section 16415 ELECTRICAL WORK, INTERIOR. Electrical characteristics shall be as specified or indicated. Unless otherwise indicated motors of 745.7 W and above shall be high efficiency type. Motor starters shall be provided complete with thermal overload protection and other appurtenances necessary for the motor control specified. Each motor shall be of sufficient size to drive the equipment at the specified capacity without exceeding the nameplate rating of the motor. Manual or automatic control and protective or signal devices required for the operation specified and any control wiring required for controls and devices specified, but not shown, shall be provided.

## 2.3 HEATERS

Heaters shall be equipped for and adjusted to burn natural gas. Each heater shall be provided with a gas pressure regulator that will satisfactorily limit the main gas burner supply pressure. Heaters shall have an intermittent or interrupted electrically ignited pilot or a direct electric ignition system. Safety controls shall conform to the ANSI standard specified for each heater. Mounting brackets and hardware shall be furnished by the heater manufacturer and shall be factory finished to match the supported equipment.

### 2.3.1 Infrared Heaters

Heaters shall conform to the requirements of ANSI Z83.6 and shall be vented type as indicated. Vented heaters shall be vented to the outside atmosphere. Heater style shall be tubular type. Surface combustion or catalytic type heaters shall have not less than 5500 square mm (2.5 square inches) of burner surface per 1000 W (1000 btuh), when the surface area is calculated by multiplying the length by the width of the exposed emitting surface only. Catalytic type heaters shall have a secondary radiating surface, rods, or screen. Reflector shape shall be parabolic. Heaters shall be provided with space thermostats which control the unit's burner. Thermostats located in the direct radiation pattern shall be covered with a metal shield.

## 2.4 THERMOSTATS

Thermostats shall be the adjustable electric or electronic type. Control wiring required to complete the space temperature control system shall be included. Thermostats shall have a 2 degree C differential and a set point range of 4 to 24 degree C. Thermostats shall be the single stage type.

## 2.5 VENT PIPING

Vent piping shall conform to the requirements of NFPA 54. Plastic material polyetherimide (PEI) and polyethersulfone (PES) are forbidden to be used for vent piping of combustion gases.

## 2.7 FACTORY FINISHES

Equipment and component items, when fabricated from ferrous metal, shall be factory finished with the manufacturer's standard finish.

## PART 3 EXECUTION

### 3.1 INSTALLATION

Equipment shall be installed as indicated and in accordance with the recommendations of the equipment manufacturer and the listing agency, except as otherwise specified.

#### 3.1.1 Heating Equipment

Heaters shall be installed with clearance to combustibles complying with minimum distances as determined by IAS



Directory, UL Gas&Oil Dir and as indicated on each heater approval and listing plate. Heaters shall be independently supported from the building structure as indicated and shall not rely on support from suspended ceiling systems.

### 3.1.2 Vents

Vent dampers, piping and structural penetrations shall be located as indicated. Vent damper installation shall conform to ANSI Z21.66. Vent pipes, where not connected to a masonry chimney conforming to NFPA 211, shall extend through the roof or an outside wall and shall terminate, in compliance with NFPA 54. Vents passing through waterproof membranes shall be provided with the necessary flashings to obtain waterproof installations.

### 3.1.3 Gas Piping

Gas piping shall be connected as indicated and shall comply with the applicable requirements at Section 15190 GAS PIPING SYSTEMS.

### 3.2 TESTING, ADJUSTING, AND BALANCING

Testing, adjusting, and balancing shall be as specified in Section 15990 TESTING, ADJUSTING, AND BALANCING OF HVAC SYSTEMS.

### 3.3 TRAINING

The Contractor shall conduct a training course for the maintenance and operating staff. The training period of 4 hours normal working time shall start after the system is functionally complete but before the final acceptance tests. The training shall include all of the items contained in the approved operation and maintenance instructions as well as demonstrations of routine maintenance operations. The Contracting Officer shall be given at least two weeks advance notice of such training.

-- End of Section --

01062/BERGER/ABAM  
FY02 Tactical Equipment Complex  
Fort Lewis, Washington

This page intentionally blank.

SECTION 15566

WARM AIR HEATING SYSTEMS

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by basic designation only.

AIR DIFFUSION COUNCIL (ADC)

ADC 1062:GRD (1984) Test Codes for Grilles, Registers, and Diffusers

AMERICAN NATIONAL STANDARDS INSTITUTE (ANSI)

ANSI Z21.47 (1998) Gas-Fired Furnaces

ANSI Z21.66 (1996) Automatic Vent Damper Devices for Use with Gas-Fired Appliances

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM A 53/A 53M (1999b) Pipe, Steel, Black and Hot-Dipped, Zinc-Coated, Welded and Seamless

ASTM A 123/A 123M (1997a) Zinc (Hot-Dip Galvanized) Coatings on Iron and Steel Products

ASTM A 653/A 653M (1999a) Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process

ASTM B 117 (1997) Operating Salt Spray (Fog) Apparatus

ASTM D 520 (1984; R 1995e1) Zinc Dust Pigment

ASTM D 1654 (1992) Evaluation of Painted or Coated Specimens Subjected to Corrosive Environments

ASTM D 3359 (1997) Measuring Adhesion by Tape Test

AMERICAN SOCIETY OF HEATING, REFRIGERATING AND AIR-CONDITIONING ENGINEERS (ASHRAE)

ASHRAE 52.1 (1992) Gravimetric and Dust-Spot Procedures for Testing Air-Cleaning Devices Used in General Ventilation for Removing Particulate Matter

01062/BERGER/ABAM  
FY02 Tactical Equipment Complex  
Fort Lewis, Washington

INTERNATIONAL APPROVAL SERVICES (IAS)

IAS Directory (1998) IAS Directory of AGA & CGA Certified  
Appliances and Accessories

NATIONAL ELECTRICAL MANUFACTURERS ASSOCIATION (NEMA)

NEMA MG 1 (1998) Motors and Generators

NATIONAL FIRE PROTECTION ASSOCIATION (NFPA)

NFPA 54 (1999) National Fuel Gas Code

NFPA 90A (1999) Installation of Air Conditioning and  
Ventilating Systems

NFPA 90B (1999) Installation of Warm Air Heating and  
Air Conditioning Systems

NFPA 211 (200) Chimneys, Fireplaces, Vents, and Solid  
Fuel-Burning Appliances

NORTH AMERICAN INSULATION MANUFACTURERS ASSOCIATION (NAIMA)

NAIMA AH115 (1993) Fibrous Glass Duct Construction  
Standards

SHEET METAL & AIR CONDITIONING CONTRACTORS' NATIONAL ASSOCIATION  
(SMACNA)

SMACNA HVAC Duct Const Stds (1995; Addenda Nov 1997)) HVAC Duct  
Construction Standards - Metal and Flexible

SMACNA Install Fire Damp HVAC (1992) Fire, Smoke and Radiation Damper  
Installation Guide for HVAC Systems

UNDERWRITERS LABORATORIES (UL)

UL 181 (1996; Rev Dec 1998) Factory-Made Air Ducts  
and Air Connectors

UL 214 (1997) Tests for Flame-Propagation of Fabrics  
and Films

UL 441 (1996; Rev Dec 1999) Gas Vents

UL 555 (1999) Fire Dampers

UL 900 (1994; Rev thru Nov 1999) Test Performance of  
Air Filter Units

UL 1738 (1993; Rev thru Mar 1998) Venting Systems for  
Gas-Burning Appliances, Categories II, III  
and IV

UL Bld Mat Dir	(1999) Building Materials Directory
UL Elec Const Dir	(1999) Electrical Construction Equipment Directory
UL Fire Resist Dir	(1999) Fire Resistance Directory

1.2 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only. When used, a designation following the "G" designation identifies the office that will review the submittal for the Government. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

SD-02 Shop Drawings

Heating Equipment; FIO  
Installation

Drawings shall consist of a complete list of equipment and material including manufacturer's descriptive and technical literature, catalog cuts, and installation instructions. Drawings shall contain complete equipment wiring diagrams, and any other details required to demonstrate that the system has been coordinated and will properly function as a unit. Drawings shall show proposed layout and anchorage of equipment and appurtenance and equipment relationship to other parts of the work including clearances required for maintenance and operation.

SD-03 Product Data

Heating Equipment; FIO

Spare parts data for each different item of material and equipment specified, after approval of detail drawings and not later than 2 months prior to the date of beneficial occupancy. The data shall include a complete list of parts and supplies, with current unit prices and source of supply, a recommended spare parts list for 12 months operation, and a list of the parts recommended by the manufacturer to be replaced after year(s) of service.

Tests; FIO

Proposed test procedures for ductwork leak and performance tests, at least 2 weeks prior to the start of related testing.

System Diagrams; G, RE

Proposed diagrams, at least 2 weeks prior to start of related testing. System diagrams that show the layout of equipment and ductwork, and typed condensed operation manuals explaining preventative maintenance procedures, methods of checking the system for normal safe operation, and procedures for safely starting and stopping the system shall be framed under glass or laminated

plastic. After approval, these items shall be posted where directed.

Similar Services; FIO

Statement demonstrating successful completion of similar services on at least 5 projects of similar size and scope, at least 2 weeks prior to submittal of other items required by this section.

Tests; FIO

Proposed test schedules for ductwork leak test and performance tests, at least 2 weeks prior to the start of related testing.

Field Training; FIO

Proposed schedule for field training, at least 2 weeks prior to the start of related training.

#### SD-06 Test Reports

Tests; FIO

Test reports for the ductwork leak test and the performance tests in booklet form, upon completion of testing. Reports shall document phases of tests performed including initial test summary, repairs/adjustments made, and final test results.

#### SD-10 Operation and Maintenance Data

Heating Equipment; FIO

Six manuals listing step-by-step procedures required for system startup, operation, shutdown and routine maintenance, at least 2 weeks prior to field training. The manuals shall include the manufacturer's name, model number, parts list, list of parts and tool that should be kept in stock by the owner for routine maintenance including the name of a local supplier, simplified wiring and controls diagrams, troubleshooting guide, and recommended service organization (including address and telephone number) for each item of equipment. Each service organization submitted shall be capable of providing 4 hour onsite response to a service call on an emergency basis.

### 1.3 GENERAL REQUIREMENTS

#### 1.3.1 Standard Products

Material and equipment shall be the standard product of a manufacturer regularly engaged in the manufacture of the products. Equipment shall essentially duplicate equipment that has been in satisfactory use at least 2 years prior to bid opening.

### 1.3.2 Nameplates

Each major component of equipment shall have the manufacturer's name, address, type or style, model or serial number, and catalog number on a plate secured to the equipment.

### 1.3.3 Verification of Dimensions

After becoming familiar with all details of the work and working conditions, the Contractor shall verify all dimensions in the field and shall advise the Contracting Officer of any discrepancy before performing any work.

## 1.4 DELIVERY AND STORAGE

Equipment delivered and placed in storage shall be stored with protection from the weather, humidity and temperature variations, dirt and dust, or other contaminants.

## 1.5 ELECTRICAL WORK

Electrical motor-driven equipment specified shall be provided complete with motor, motor starter, and controls. Unless otherwise specified, electric equipment, including wiring and motor efficiencies, shall be in accordance with Section 16415 ELECTRICAL WORK, INTERIOR. Electrical characteristics and enclosure type shall be as shown. Unless otherwise indicated, motors of 746 W (1 hp) and above shall be high efficiency type. Motor starters shall be provided complete with thermal overload protection and other appurtenances necessary. Each motor shall be in accordance with NEMA MG 1 and shall be of sufficient size to drive the equipment at the specified capacity without exceeding the nameplate rating of the motor. Manual or automatic control and protective or signal devices required for the operation specified, and any control wiring required for controls and devices, but not shown, shall be provided. Where two-speed or variable-speed motors are indicated, solid-state variable-speed controller may be provided to accomplish the same function. Solid-state variable-speed controllers shall be utilized for motors rated 7.45 kW (10 hp) or less. Adjustable frequency drives shall be used for larger motors.

## PART 2 PRODUCTS

### 2.1 SELF-CONTAINED FURNACE

Furnace shall be a manufacturer's standard, self-contained, forced circulated air heating type furnace as indicated. Furnace and furnace components shall be completely factory-assembled and wired. Furnace casing shall be factory insulated and be compatible with the operating temperatures. Furnace shall be provided with removable service panels which allow access to all internal components requiring cleaning, servicing, or adjustment.

#### 2.1.1 Gas-Fired Unit

Gas-fired furnace shall be the conventional type in accordance with ANSI Z21.47. Furnace design shall be certified by the AMERICAN GAS ASSOCIATION LABORATORIES (AGA). Furnace shall have a minimum certified Annual Fuel Utilization Efficiency (AFUE) of not less than 78 percent.

### 2.2 FURNACE COMPONENTS

#### 2.2.1 Gas-Burning Components

Gas-burning equipment shall include the gas burners, ignition equipment, gas-control valve, gas piping, gas-pressure regulating valve, when applicable, and accessories necessary for a fully automatic system that is listed in IAS Directory. Gas-fired units equipped with programming controls shall be furnished both with high and with low gas supply pressure switches in the fuel supply piping.

#### 2.2.2 Ignition Systems

##### 2.2.2.1 Gas-Fired Units

Ignition systems shall be of the direct spark, hot surface, or interrupted intermittent type with automatic electric ignition. The pilots shall be of the electrically-ignited proven type. Continuous pilots will not be permitted. Burner shall be designed in accordance with NFPA 54 and located so that parts are protected against overheating. Provisions shall be made in the burner housing for inspection of the pilot flame.

#### 2.2.3 Supply Blowers

Blowers shall be centrifugal type. Blowers shall be statically and dynamically balanced. Lubrication points shall be located or extended, as required, to provide ready access for periodic lubrication. The direction of rotation shall be clearly and permanently marked on each blower housing. Blower speeds shall be single, or multispeed, as indicated, to provide the specified range of air temperature rises. Direct-drive blowers may have multiple speed motors to change blower speed. Belt-drive blowers shall be provided with an adjustable base and guard or enclosed in the unit casing. The belt drive shall be designed in accordance with the applicable Rubber Manufacturer's Association (RMA) power transmission belt specifications, with a service factor of at least 1.2. Shafts shall be supported by a minimum of two self-aligning bearings. Blower speed shall be adjusted by the use of variable pitch drive sheaves.

#### 2.2.4 Vents for Conventional furnaces

A 8 mm diameter hole shall be provided in the vent stack not greater than 152 mm (6 inches) from the furnace flue outlet for sampling of the exit gases. A method shall be provided to seal the hole to prevent exhaust gases from entering the indoor space when samples are not being taken. Each exhaust stack shall be provided complete with bird screen and rain hood.



#### 2.2.4.1 Gas-Fired Units

Vent piping shall be in accordance with UL 441, Type B. Vent shall conform to NFPA 211 and NFPA 54. Plastic materials polyetherimide (PEI) and polyethersulfone (PES) are forbidden to be used for vent piping of combustion gases.

#### 2.2.5 Exhaust Vent

The exhaust vent piping shall be constructed of stainless steel in accordance with UL 1738 and the furnace manufacturer's recommendations. The exhaust vent shall be suitable for the maximum anticipated furnace exhaust temperature and shall withstand the corrosive effects of the condensate. A 8 mm diameter hole shall be provided in the stack not greater than 152 mm from the furnace flue outlet for sampling of the exit gases. A method shall be provided to seal the hole to prevent exhaust gases from entering the indoor space when samples are not being taken. Each exhaust stack shall be provided complete with bird screen.

### 2.3 CONTROLS

Furnace controls shall be provided by the furnace manufacturer as an integral part of the furnace. Electronic controls shall be provided. The controls shall allow for single stage operation. Controls shall be provided as specified in Section 15950 HEATING, VENTILATING AND AIR CONDITIONING (HVAC) CONTROL SYSTEMS.

### 2.4 AUTOMATIC VENT DAMPERS

Automatic vent dampers shall be provided in the vents of all gas burning equipment that uses indoor air for combustion. Vent dampers shall conform to ANSI Z21.66.

### 2.5 HUMIDIFIERS

#### 2.5.1 Steam Spray Type

Steam spray humidifiers shall inject steam directly into the surrounding air as indicated. Package type steam spray humidifiers shall be equipped to trap out and to re-evaporate condensate and to supply dry steam to a single distribution grid. Grid shall be steam jacketed and condensate drained. Unit shall trap excess condensate to return system. Package type steam spray humidifiers shall have modulating electric, electronic, or pneumatic steam control valve, as indicated. Steam spray humidifiers shall be rated for humidifying capacity in kg (pounds) of steam per hour and at steam pressure as indicated.

#### 2.5.2 Operation

Humidifier shall be controlled by a manually adjustable humidistat with sensing bulb in return. Humidifier shall operate when the furnace operates. Humidistat shall be calibrated in percent relative humidity and shall be furnished by the humidifier manufacturer.

## 2.6 AIR FILTERS

Air Filters shall be listed in accordance with requirements of UL 900.

### 2.6.1 Replaceable Media filters

Replaceable media filters shall be the dry-media type, of the size required to suit the application. Filtering media shall be not less than 50 mm thick fibrous glass media pad supported by a structural wire grid or woven wire mesh. Pad shall be enclosed in a holding frame of not less than 1.6 mm galvanized steel, and equipped with quick-opening mechanism for changing filter media. The air flow capacity of the filter shall be based on net filter face velocity not exceeding 1.5 m/s with initial resistance of 32 Pa. Average efficiency shall be not less than 90 percent when tested according to ASHRAE 52.1.

## 2.7 FUEL-GAS SUPPLY SYSTEM

Fuel-gas supply system shall be as specified in Section 15190 GAS PIPING SYSTEMS and Section 02556 GAS DISTRIBUTION SYSTEM.

## 2.8 DUCTWORK COMPONENTS

### 2.8.1 Metal Ductwork

All aspects of metal ductwork construction, including all fittings and components, shall comply with SMACNA HVAC Duct Const Stds unless otherwise specified. Elbows shall be radius type with a centerline radius of 1-1/2 times the width or diameter of the duct where space permits. Otherwise, elbows having a minimum radius equal to the width or diameter of the duct or square elbows with factory fabricated turning vanes may be used. Static pressure Class 125, 250, and 500 Pa (1/2, 1, and 2 inch w.g.) ductwork shall meet the requirements of Seal Class C. Class 750 through 2500 Pa (3 through 10 inch) shall meet the requirements of Seal Class A. Pressure sensitive tape shall not be used as a sealant. Spiral lock seam duct, and flat oval shall be made with duct sealant and locked with not less than 3 equally spaced drive screws or other approved methods indicated in SMACNA HVAC Duct Const Stds. The sealant shall be applied to the exposed male part of the fitting collar so that the sealer will be on the inside of the joint and fully protected by the metal of the duct fitting. One brush coat of the sealant shall be applied over the outside of the joint to at least 50 mm band width covering all screw heads and joint gap. Dents in the male portion of the slip fitting collar will not be acceptable.

#### 2.8.1.1 Transitions

Diverging air flow transitions shall be made with each side pitched out a maximum of 15 degrees, for an included angle of 30 degrees. Transitions for converging air flow shall be made with each side pitched in a maximum of 30 degrees, for an included angle of 60 degrees, or shall be as indicated. Factory-fabricated reducing fittings for systems using round duct sections when formed to the shape of the ASME short flow nozzle, need not comply with the maximum angles specified.

#### 2.8.1.2 Insulated Nonmetallic Flexible Duct Runouts

Flexible duct runouts shall be used only where indicated. Runouts length shall be as shown on the drawings, but shall not exceed 3 m. Runouts shall be preinsulated, factory fabricated, and shall comply with NFPA 90A and UL 181. Either field or factory applied vapor barrier shall be provided. Where coil induction or high velocity units are supplied with vertical air inlets, a streamlined and vaned and mitered elbow transition piece shall be provided for connection to the flexible duct or hose. The last elbow to these units, other than the vertical air inlet type, shall be a die-stamped elbow and not a flexible connector. Insulated flexible connectors may be used as runouts. The insulation material surface shall not be exposed to the air stream.

#### 2.8.1.3 General Service Duct Connectors

A flexible duct connector approximately 150 mm in width shall be provided where sheet metal connections are made to fans or where ducts of dissimilar metals are connected. For round/oval ducts, the flexible material shall be secured by stainless steel or zinc-coated, iron clinch-type draw bands. For rectangular ducts, the flexible material locked to metal collars shall be installed using normal duct construction methods. The composite connector system shall comply with UL 214 and be classified as "flame-retarded fabrics" in UL Bld Mat Dir.

#### 2.8.2 Ductwork Accessories

##### 2.8.2.1 Duct Access Doors

Access doors shall be provided in ductwork where indicated and at all air flow measuring primaries, automatic dampers, fire dampers, coils, thermostats, and other apparatus requiring service and inspection in the duct system, and unless otherwise shown, shall conform to SMACNA HVAC Duct Const Stds. Access doors shall be provided upstream and downstream of air flow measuring primaries and heating and cooling coils. Doors shall be minimum 375 by 450 mm (15 by 18 inches), unless otherwise shown. Where duct size will not accommodate this size door, the doors shall be made as large as practicable. Doors 600 by 600 mm (24 by 24 inches) or larger shall be provided with fasteners operable from both sides. Doors in insulated ducts shall be the insulated type.

##### 2.8.2.2 Fire Dampers

Fire dampers shall be 1-1/2 hour fire rated unless otherwise indicated. Fire dampers shall conform to the requirements of NFPA 90A and UL 555. Fire dampers shall be automatic operating type and shall have a dynamic rating suitable for the maximum air velocity and pressure differential to which it will be subjected. Fire dampers shall be approved for the specified application, and shall be installed in accordance with their listing. Fire dampers shall be equipped with a steel sleeve or adequately sized frame installed in such a manner that disruption of the attached ductwork, if any, will not impair the operation of the damper. Sleeves or frames shall be equipped with perimeter mounting angles attached on both sides of the wall or floor opening. Ductwork in fire-rated floor-ceiling or roof-ceiling assembly systems with air ducts that pierce the ceiling of the assemblies

shall be constructed in conformance with UL Fire Resist Dir. Fire dampers shall be in the air stream. Dampers shall not reduce the duct or the air transfer opening cross-sectional area. Dampers shall be installed so that the centerline of the damper depth or thickness is located in the centerline of the wall, partition of floor slab depth or thickness. Unless otherwise indicated, the installation details given in SMACNA Install Fire Damp HVAC and in manufacturer's instructions for fire dampers shall be followed.

#### 2.8.2.3 Splitters and Manual Balancing Dampers

Splitters and manual balancing dampers shall be furnished with accessible operating mechanisms. Where operators occur in finished portion of the building, operators shall be chromium plated with all exposed edges rounded. Splitters shall be operated by quadrant operators or 5 mm (3/16 inch) rod brought through the side of the duct with locking setscrew and bushing. Two rods are required on splitters over 200 mm (8 inches). Manual volume control dampers shall be operated by locking-type quadrant operators. Dampers and splitters shall be 2 gauges heavier than the duct in which installed. Unless otherwise indicated, multileaf dampers shall be opposed blade type with maximum blade width of 300 mm (12 inches). Access doors or panels shall be provided for all concealed damper operators and locking setscrew. Unless otherwise indicated, the locking-type quadrant operators for dampers, when installed on ducts to be thermally insulated, shall be provided with stand-off mounting brackets, bases, or adapters to provide clearance between the duct surface and the operator not less than the thickness of the insulation. Stand-off mounting items shall be integral with the operator or standard accessory of the damper manufacturer. Volume dampers shall be provided where indicated.

#### 2.8.2.4 Air Deflectors and Branch Connections

Air deflectors shall be provided at duct mounted supply outlets, at takeoff or extension collars to supply outlets, at duct branch takeoff connections, and at 90 degree elbows, as well as at locations as indicated on the drawings or otherwise specified. Conical branch connections or 45 degree entry connections may be used in lieu of deflectors or extractors for branch connections. All air deflectors, except those installed in 90 degree elbows, shall be provided with an approved means of adjustment. Adjustment shall be made from easily accessible means inside the duct or from an adjustment with sturdy lock on the face of the duct. When installed on ducts to be thermally insulated, external adjustments shall be provided with stand-off mounting brackets integral with the adjustment device, to provide clearance between the duct surface and the adjustment device not less than the thickness of the thermal insulation. Air deflectors shall be factory-fabricated units consisting of curved turning vanes or louver blades designed to provide uniform air distribution and change of direction with minimum turbulence or pressure loss. Air deflectors shall be factory or field assembled. Blade air deflectors, also called blade air extractors, shall be approved factory fabricated units consisting of equalizing grid and adjustable blade and lock. Adjustment shall be easily made from the face of the diffuser or by position adjustment and lock external to the duct. Stand-off brackets shall be provided on insulated ducts and are described herein. Fixed air deflectors, also called turning vanes, shall be provided in all 90 degree elbows.

### 2.8.3 Duct Sleeves, Framed Prepared Openings, Closure Collars

#### 2.8.3.1 Duct Sleeves

Duct sleeves shall be provided for round ducts 375 mm in diameter or less passing through floors, walls, ceilings, or roof, and installed during construction of the floor, wall, ceiling, or roof. Round ducts larger than 375 mm in diameter and square, rectangular, and oval ducts passing through floors, walls, ceilings, or roof shall be installed through framed prepared openings. The Contractor shall be responsible for the proper size and location of sleeves and prepared openings. Sleeves and framed openings are also required where grilles, registers, and diffusers are installed at the openings. Framed prepared openings shall be fabricated from 1.0 mm (20 gauge) galvanized steel, unless otherwise indicated. Where sleeves are installed in bearing walls or partitions, black steel pipe, ASTM A 53/A 53M, Schedule 20 shall be used. Sleeve shall provide 25 mm clearance between the duct and the sleeve or 25 mm clearance between the insulation and the sleeve for insulated ducts.

#### 2.8.3.2 Framed Prepared Opening

Openings shall have 25 mm clearance between the duct and the opening or 25 mm clearance between the insulation and the opening for insulated ducts.

#### 2.8.3.3 Closure Collars

Collars shall be fabricated of galvanized sheet metal not less than 100 mm wide, unless otherwise indicated, and shall be installed on exposed ducts on each side of walls or floors where sleeves or prepared openings are provided. Collars shall be installed tight against surfaces. Collars shall fit snugly around the duct or insulation. Sharp edges of the collar around insulated duct shall be ground smooth to preclude tearing or puncturing the insulation covering or vapor barrier. Collars for round ducts 375 mm in diameter or less shall be fabricated from 1.0 mm (20 gauge) galvanized steel. Collars for round duct larger than 375 mm and all square, and rectangular ducts shall be fabricated from 1.3 mm (18 gauge) galvanized steel. Collars shall be installed with fasteners on maximum 150 mm centers, except that not less than 4 fasteners shall be used.

#### 2.8.4 Diffusers, Registers, and Grilles

Units shall be factory-fabricated of steel, corrosion-resistant steel, or aluminum and shall distribute the specified quantity of air evenly over space intended without causing noticeable drafts, air movement faster than 0.25 m/s (50 fpm) in occupied zone, or dead spots anywhere in the conditioned area. Outlets for diffusion, spread, throw, and noise level shall be as required for specified performance. Performance shall be certified in accordance with ADC 1062:GRD. Inlets and outlets shall be sound rated and certified in accordance with ADC 1062:GRD. Sound power level shall be as indicated. Diffusers and registers shall be provided with volume damper with accessible operator, unless otherwise indicated; or if standard with the manufacturer, an automatically controlled device will be acceptable. Volume dampers shall be opposed blade type for all diffusers and registers, except linear slot diffusers. Linear slot diffusers shall be provided with round or elliptical balancing dampers. Where the inlet and

outlet openings are located less than 2 m above the floor, they shall be protected by a grille or screen in accordance with NFPA 90A.

#### 2.8.4.1 Diffusers

Diffuser types shall be as indicated. Ceiling mounted units shall be furnished with antismudge devices, unless the diffuser unit minimizes ceiling smudging through design features. Diffusers shall be provided with air deflectors of the type indicated. Air handling troffers or combination light and ceiling diffusers shall conform to the requirements of UL Elec Const Dirfor the interchangeable use as cooled or heated air supply diffusers or return air units. Ceiling mounted units shall be installed with rims tight against ceiling. Sponge rubber gaskets shall be provided between ceiling and surface mounted diffusers for air leakage control. Suitable trim shall be provided for flush mounted diffusers. Duct collar connecting the duct to diffuser shall be airtight and shall not interfere with volume controller. Return or exhaust units shall be similar to supply diffusers.

#### 2.8.4.2 Registers and Grilles

Units shall be four-way directional-control type, except that return and exhaust registers may be fixed horizontal or vertical louver type similar in appearance to the supply register face. Registers shall be provided with sponge-rubber gasket between flanges and wall or ceiling. Wall supply registers shall be installed at least 150 mm below the ceiling unless otherwise indicated. Return and exhaust registers shall be located 150 mm above the floor unless otherwise indicated. Four-way directional control may be achieved by a grille face which can be rotated in 4 positions or by adjustment of horizontal and vertical vanes. Grilles shall be as specified for registers, without volume control damper.

#### 2.8.5 Louvers

Louvers for installation in exterior walls which are associated with the air supply and distribution system shall be as specified in Section 07600 SHEET METALWORK, GENERAL.

### 2.9 FACTORY PAINTING

Units which are not of galvanized construction according to ASTM A 123/A 123M or ASTM A 653/A 653M shall be factory painted with a corrosion resisting paint finish. Internal and external ferrous metal surfaces shall be cleaned, phosphated and coated with a paint finish which has been tested according to ASTM B 117, ASTM D 1654, and ASTM D 3359. Evidence of satisfactory paint performance for a minimum of 125 hours for units to be installed indoors and 500 hours for units to be installed outdoors shall be submitted. Rating of failure at the scribe mark shall be not less than 6, average creepage not greater than 10, no failure. On units constructed of galvanized steel which have been welded, exterior surfaces of welds or welds that have burned through from the interior shall receive a final shop docket of zinc-rich protective paint in accordance with ASTM D 520, Type I.

## PART 3 EXECUTION

### 3.1 INSTALLATION

The warm air heating installation shall conform to the requirements contained in NFPA 90A or NFPA 90B, as applicable. Combustion air supply and ventilation shall be in accordance with NFPA 54.

#### 3.1.1 Furnaces

Foundations, settings, or suspensions for mounting equipment and accessories including supports, vibration isolators, stands, guides, anchors, clamps, and brackets shall be provided. Foundations and suspension for equipment shall conform to the recommendations of the manufacturer, unless otherwise indicated on drawings. Anchor bolts and sleeves shall be set accurately using properly constructed templates. Anchor bolts, when embedded in concrete, shall be provided with welded-on plates on the head end and guarded against damage until equipment is installed. Equipment bases shall be leveled, using jacks or steel wedges, and when resting on concrete shall be neatly grouted-in with a nonshrinking type of grout. Equipment shall be located as indicated and in such a manner that working space is available for all necessary servicing, such as shaft removal, replacing, or adjusting drives, motors, or shaft seals, air filters, access to automatic controls, humidifiers, and lubrication. Electrical isolation shall be provided between dissimilar metals for the purpose of minimizing galvanic corrosion. The interior of cabinets or casings shall be cleaned before completion of installation. The furnace shall be connected to the vent or chimney with the specified connectors, draft regulators, draft loads, and induced draft fans, as applicable, in accordance with NFPA 211.

#### 3.1.2 Automatic Vent Dampers

Automatic vent dampers shall be installed in accordance with ANSI Z21.66.

#### 3.1.3 Humidifiers

Humidifiers shall be installed in accordance with manufacturer's instructions and in an arrangement that will permit access and ease of maintenance. Piping, draining, manual shut-off valve, and solenoid valves when required for type of humidifier furnished shall be provided. Drain lines shall be provided for humidifiers and shall be piped to drains shown. Humidifiers installed in a bypass arrangement shall be provided with an integral damper that can be conveniently operated to regulate or shut off flow through the humidifier. To permit humidifier operation, a manual ON-OFF switch shall be provided near the humidifier. The ON-OFF switch may be integral with the humidifier. When humidifier is installed in glass fiber ductwork, ductwork shall be adequately reinforced to support the humidifier.

#### 3.1.4 Access Panels

Access panels shall be provided for concealed valves, vents, controls, dampers, and items requiring inspection or maintenance. Access panels shall be of sufficient size and so located that the concealed items may be serviced and maintained or completely removed for replacement. Access panels shall be as specified in Section 05500 MISCELLANEOUS METAL.

#### 3.1.5 Flexible Connectors

Pre-insulated flexible connectors and flexible duct shall be attached to other components in accordance with the latest printed instructions of the manufacturer to ensure a vapor tight joint. Hangers, when required to suspend the connectors, shall be of the type recommended by the connector or duct manufacturer and shall be provided at the intervals recommended.

#### 3.1.6 Sleeved and Framed Openings

Space between the sleeved or framed opening and the duct or the duct insulation shall be packed as specified in Section 07840 FIRESTOPPING for fire rated penetrations. For non-fire rated penetrations, the space shall be packed as specified in Section 07900 JOINT SEALING.

#### 3.1.7 Metal Ductwork

Installation shall be in accordance with SMACNA HVAC Duct Const Stds unless otherwise indicated. Duct supports for sheet metal ductwork shall be in accordance with SMACNA HVAC Duct Const Stds, unless otherwise specified. Friction beam clamps indicated in SMACNA HVAC Duct Const Stds shall not be used. Risers on high velocity ducts shall be anchored in the center of the vertical run to allow ends of riser to move due to thermal expansion. Supports shall be attached only to structural framing members and concrete slabs. Supports shall not be anchored to metal decking unless a means is provided and approved for preventing the anchor from puncturing the metal decking. Where supports are required between structural framing members, suitable intermediate metal framing shall be provided. Where C-clamps are used, retainer clips shall be provided. Where threaded rods are used, they not be formed or bent.

#### 3.1.8 Fibrous glass Ductwork

Installation shall be in accordance with the manufacturer's written recommendations unless otherwise required in NAIMA AH115. Duct supports for fibrous glass ductwork shall conform to NAIMA AH115. In those cases not covered in NAIMA AH115, the written recommendation of the fibrous duct manufacturer shall be followed.

#### 3.1.9 Air Filters

Air filters shall be installed in return air ducts at furnaces. Fans or blowers shall not be operated until filters are installed. After completion of tests and before the building is accepted by the Government, the Contractor shall clean the permanent type filters.

#### 3.1.10 Dust Control

To prevent the accumulation of dust, debris and foreign material during construction, temporary dust control protection shall be provided. The distribution system (supply and return) shall be protected with temporary seal-offs at all inlets and outlets at the end of each day's work. Temporary protection shall remain in place until system is ready for startup.



### 3.1.11 Duct Test Holes

Holes with closures or threaded holes with plugs shall be provided in ducts and plenums as indicated or where necessary for the use of pitot tube in balancing the air system. Extensions, complete with cap or plug, shall be provided where the ducts are insulated.

### 3.12 FIELD PAINTING

Finish painting of items only primed at the factory or surfaces not specifically noted, otherwise are specified in Section 09900 PAINTING, GENERAL.

### 3.13 CLEANING

Ducts, plenums, and casings shall be thoroughly cleaned of all debris and blown free of all small particles of rubbish and dust and then shall be vacuum cleaned before installing outlet faces. Equipment shall be wiped clean, with all traces of oil, dust, dirt, or paint spots removed. Temporary filters shall be provided prior to startup of all fans that are operated during construction, and new filters shall be installed after all construction dirt has been removed from the building, and the ducts, plenums, casings, and other items specified have been vacuum cleaned. System shall be maintained in this clean condition until final acceptance. Bearings shall be properly lubricated with oil or grease as recommended by the manufacturer. Belts shall be tightened to proper tension. All equipment requiring adjustment shall be adjusted to setting indicated or directed. Fans shall be adjusted to the speed indicated by the manufacturer to meet specified conditions.

### 3.14 TESTS

Upon completion and prior to acceptance of the installation, the Contractor shall furnish all equipment, instruments, materials, labor, and supervision required for the tests as specified. Water, electricity, and fuel required for testing shall be furnished by the Contractor. Defects disclosed by the tests shall be rectified. Tests shall be made under the direction and subject to the approval of the Contracting Officer. All indicating instruments shall be read at 1/2-hour intervals unless otherwise directed by the Contracting Officer.

#### 3.14.1 Testing, Adjusting, and Balancing

Testing, adjusting, and balancing shall be as specified in SECTION 15990 TESTING, ADJUSTING, AND BALANCING OF HVAC SYSTEMS. Testing, adjusting, and balancing shall begin only when the air supply and distribution, including controls, has been completed, with the exception of performance tests.

### 3.14.2 Performance Tests

After testing, adjusting, and balancing has been completed as specified, each system shall be tested as a whole to see all items perform as integral parts of the system and temperatures and conditions are evenly controlled throughout the building. Corrections and adjustments shall be conducted by an experienced engineer. Tests shall cover a period of not less than 5 days for each system and shall demonstrate that the entire system is functioning according to the specifications. Coincidental chart recordings shall be made at points indicated on the drawings for the duration of the time period and shall record the temperature at space thermostats or space sensors, the humidity in a shaded and weather protected area.

### 3.15 FIELD TRAINING

The Contractor shall conduct a training course for operating and maintenance personnel as designated by the Contracting Officer. Training shall be provided for a period of 4 hours of normal working time shall start after the system is functionally complete but prior to the performance tests. The field instruction shall cover all of the items contained in the approved operating and maintenance instructions.

-- End of Section --

SECTION 15653

AIR-CONDITIONING SYSTEM (UNITARY TYPE)

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by basic designation only.

AIR CONDITIONING AND REFRIGERATION INSTITUTE (ARI)

ARI 210/240	(1994) Unitary Air-Conditioning and Air-Source Heat Pump Equipment
ARI 410	(1991) Forced-Circulation Air-Cooling and Air-Heating Coils
ARI 460	(1994) Remote Mechanical-Draft Air-Cooled Refrigerant Condensers
ARI 490	(1998) Remote Mechanical-Draft Evaporative Refrigerant Condensers
ARI 500	(1990) Variable Capacity Positive Displacement Refrigerant Compressors and Compressor Units for Air-Conditioning and Heat Pump Applications
ARI 700	(1995; Apx C) Specifications for Fluorocarbon and Other Refrigerants
ARI 720	(1997) Refrigerant Access Valves and Hose Connectors
ARI 750	(1994) Thermostatic Refrigerant Expansion Valves
ARI 760	(1994) Solenoid Valves for Use with Volatile Refrigerants

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM A 53	(1999b) Pipe, Steel, Black and Hot-Dipped, Zinc-Coated, Welded and Seamless
ASTM A 334/A 334M	(1999) Seamless and Welded Carbon and Alloy-Steel Tubes for Low-Temperature Service
ASTM A 653/A 653M	(1999) Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process

ASTM B 117	(1997) Operating Salt Spray (Fog) Apparatus
ASTM B 280	(1998) Seamless Copper Tube for Air Conditioning and Refrigeration Field Service
ASTM D 520	(1984; R 1995el) Zinc Dust Pigment
ASTM D 3308	(1997) PTFE Resin Skived Tape
ASTM F 104	(1995) Nonmetallic Gasket Materials

AMERICAN SOCIETY OF HEATING, REFRIGERATING AND AIR-CONDITIONING  
ENGINEERS (ASHRAE)

ASHRAE 15	(1994) Safety Code for Mechanical Refrigeration
ASHRAE 34	(1997) Number Designation and Safety Classification of Refrigerants

ASME INTERNATIONAL (ASME)

ASME B1.20.1	(1983; R 1992) Pipe Threads, General Purpose (Inch)
ASME B31.5	(1992; B31.5a1994) Refrigeration Piping
ASME BPV VIII Div 1	(1998) Boiler and Pressure Vessel Code; Section VIII, Pressure Vessels Division 1 - Basic Coverage
ASME BPV IX	(1998) Boiler and Pressure Vessel Code; Section IX, Welding and Brazing Qualifications

AMERICAN WELDING SOCIETY (AWS)

AWS Brazing Hdbk	(1991) Brazing Handbook
------------------	-------------------------

MANUFACTURERS STANDARDIZATION SOCIETY OF THE VALVE AND FITTINGS  
INDUSTRY (MSS)

MSS SP-69	(1996) Pipe Hangers and Supports - Selection and Application
-----------	---

NATIONAL ELECTRICAL MANUFACTURERS ASSOCIATION (NEMA)

NEMA MG 1	(1998) Motors and Generators
NEMA MG 2	(1989) Safety Standard for Construction and Guide for Selection, Installation, and Use of Electric Motors and Generators

NATIONAL FIRE PROTECTION ASSOCIATION (NFPA)

UNDERWRITERS LABORATORIES (UL)

UL 1995 (1995; Rev thru Jul 98) Heating and Cooling  
Equipment

1.2 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only. When used, a designation following the "G" designation identifies the office that will review the submittal for the Government. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

SD-02 Shop Drawings

Drawings; FIO,

Drawings shall provide adequate detail to demonstrate compliance with contract requirements. Drawings shall consist of:

- (1) Equipment layouts which identify assembly and installation details.
- (2) Piping layouts which identify valves and fittings.
- (3) Plans and elevations which identify clearances required for maintenance and operation.
- (4) Wiring diagrams which identify each component individually and interconnected or interlocked relationships between components.
- (5) Foundation drawings, bolt-setting information, and foundation bolts prior to concrete foundation construction for equipment indicated or required to have concrete foundations.
- (6) Details, if piping and equipment are to be supported other than as indicated, which include loadings and type of frames, brackets, stanchions, or other supports.
- (7) Automatic temperature control diagrams and control sequences.
- (8) Installation details which includes the amount of factory set superheat and corresponding refrigerant pressure/temperature.

#### SD-03 Product Data

Air-Conditioning/Heat Pump System; FIO,

Manufacturer's standard catalog data, prior to the purchase or installation of a particular component, shall be highlighted to show brand name, model number, size, options, performance charts and curves, etc. in sufficient detail to demonstrate compliance with contract requirements. Data shall be submitted for each specified component. Data shall include manufacturer's recommended installation instructions and procedures. If vibration isolation is specified for a unit, vibration isolator literature shall be included containing catalog cuts and certification that the isolation characteristics of the isolators provided meet the manufacturer's recommendations.

Spare Parts Data; FIO,

Spare parts data for each different item of equipment specified, after approval of detail drawings and not later than 2 months prior to the date of beneficial occupancy. The data shall include a complete list of parts and supplies, with current unit prices and source of supply, a recommended spare parts list for 1 year of operation, and a list of the parts recommended by the manufacturer to be replaced on a routine basis.

Tests; FIO,

A letter, at least 10 working days in advance of each tests, advising the Contracting Officer of the test. Individual letters shall be submitted for the condenser water system, refrigerant system, ductwork leak tests, cooling tower tests, condenser water quality tests, and the system performance tests. Each letter shall identify the date, time, and location for each test.

Demonstrations; G, RE

A letter, at least 14 working days prior to the date of the proposed training course, which identifies the date, time, and location for the training.

#### SD-06 Test Reports

Tests; G, RE

Six copies of each test containing the information described below in bound 216 x 279 mm booklets.

- (1) The date the tests were performed.
- (2) A list of equipment used, with calibration certifications.
- (3) Initial test summaries.

(4) Repairs/adjustments performed.

(5) Final test results.

System Performance Tests; G, RE

Six copies of the report shall be provided in bound 216 x 279 mm booklets. The report shall document compliance with the specified performance criteria upon completion and testing of the system. The report shall indicate the number of days covered by the tests and any conclusions as to the adequacy of the system. The report shall also include the following information and shall be taken at least three different times at outside dry-bulb temperatures that are at least 3 degrees C apart:

(1) Date and outside weather conditions.

(2) The load on the system based on the following:

- (a) The refrigerant used in the system.
- (b) Condensing temperature and pressure.
- (c) Suction temperature and pressure.
- (d) Ambient, condensing and coolant temperatures.
- (e) Running current, voltage and proper phase sequence for each phase of all motors.

(3) The actual on-site setting of operating and safety controls.

(4) Thermostatic expansion valve superheat - value as determined by field test

(5) Subcooling

(6) High and low refrigerant temperature switch set-points

(7) Low oil pressure switch set-point

(8) Defrost system timer and thermostat set-points

(9) Moisture content

(10) Capacity control set-points

(11) Field data and adjustments which affect unit performance and energy consumption.

(12) Field adjustments and settings which were not permanently marked as an integral part of a device.

SD-07 Certificates

Air-Conditioning/Heat Pump System; FIO,

Where the system, components, or equipment are specified to comply with requirements of ARI, ASHRAE, ASME, or UL, proof of such

compliance shall be provided. The label or listing of the specified agency shall be acceptable evidence. In lieu of the label or listing, a written certificate from an approved, nationally recognized testing organization equipped to perform such services, stating that the items have been tested and conform to the requirements and testing methods of the specified agency may be submitted. When performance requirements of this project's drawings and specifications vary from standard ARI rating conditions, computer printouts, catalog, or other application data certified by ARI or a nationally recognized laboratory as described above shall be included. If ARI does not have a current certification program that encompasses such application data, the manufacturer may self certify that his application data complies with project performance requirements in accordance with the specified test standards.

#### SD-10 Operation and Maintenance Data

##### Operation; FIO,

Six complete copies of an operation manual in bound 216 x 279 mm booklets listing step-by-step procedures required for system startup, operation, and shutdown. The booklets shall include the manufacturer's name, model number, and parts list. The manuals shall include the manufacturer's name, model number, service manual, and a brief description of all equipment and their basic operating features.

##### Maintenance Manuals; FIO,

Six complete copies of maintenance manual in bound 216 x 279 mm booklets listing routine maintenance procedures, possible breakdowns and repairs, and a trouble shooting guide. The manuals shall include piping and equipment layouts and simplified wiring and control diagrams of the system as installed.

#### 1.3 DELIVERY, STORAGE, AND HANDLING

Stored items shall be protected from the weather and contamination. Proper protection and care of all material before, during, and after installation shall be the Contractor's responsibility. Any materials found to be damaged shall be replaced at the Contractor's expense. During installation, piping and similar openings shall be capped to keep out dirt and other foreign matter.

#### 1.4 PROJECT/SITE CONDITIONS

##### 1.4.1 Verification of Dimensions

The Contractor shall become familiar with all details of the work, verify dimensions in the field, and advise the Contracting Officer of any discrepancy before performing any work.



#### 1.4.2 Drawings

Because of the small scale of the drawings, it is not possible to indicate all offsets, fittings, and accessories that may be required. The Contractor shall carefully investigate the plumbing, fire protection, electrical, structural and finish conditions that would affect the work to be performed and arrange such work accordingly, furnishing required offsets, fittings, and accessories to meet such conditions. Equipment, ductwork, and piping arrangements shall fit into space allotted and allow adequate acceptable clearances for installation, replacement, entry, servicing, and maintenance.

### PART 2 PRODUCTS

#### 2.1 STANDARD COMMERCIAL PRODUCTS

Materials and equipment shall be standard products of a manufacturer regularly engaged in the manufacturing of such products, which are of a similar material, design and workmanship. The standard products shall have been in satisfactory commercial or industrial use for 2 years prior to bid opening. The 2 year use shall include applications of equipment and materials under similar circumstances and of similar size. The 2 years experience shall be satisfactorily completed by a product which has been sold or is offered for sale on the commercial market through advertisements, manufacturer's catalogs, or brochures. Products having less than a 2 year field service record shall be acceptable if a certified record of satisfactory field operation, for not less than 6000 hours exclusive of the manufacturer's factory tests, can be shown. Products shall be supported by a service organization. System components shall be environmentally suitable for the indicated locations.

#### 2.2 NAMEPLATES

Major equipment including compressors, condensers shall have the manufacturer's name, address, type or style, model or serial number, and catalog number on a plate secured to the item of equipment. Plates shall be durable and legible throughout equipment life and made of anodized aluminum. Plates shall be fixed in prominent locations with nonferrous screws or bolts.

#### 2.3 ELECTRICAL WORK

Electrical equipment, motors, motor efficiencies, and wiring shall be in accordance with Section 16415 ELECTRICAL WORK, INTERIOR. Electrical motor driven equipment specified shall be provided complete with motors, motor starters, and controls. Electrical characteristics shall be as shown, and unless otherwise indicated, all motors of 746 kW and above with open, dripproof, totally enclosed, or explosion proof fan cooled enclosures, shall be high efficiency type. Field wiring shall be in accordance with manufacturer's instructions. Each motor shall conform to NEMA MG 1 and NEMA MG 2 and be of sufficient size to drive the equipment at the specified capacity without exceeding the nameplate rating of the motor. Motors shall be continuous duty with the enclosure specified. Motor starters shall be provided complete with thermal overload protection and other appurtenances necessary for the motor control indicated. Motors shall be furnished with a magnetic across-the-line or reduced voltage type starter as required by the

manufacturer. Motor duty requirements shall allow for maximum frequency start-stop operation and minimum encountered interval between start and stop. Motors shall be sized for the applicable loads. Motor torque shall be capable of accelerating the connected load within 20 seconds with 80 percent of the rated voltage maintained at motor terminals during one starting period. Motor bearings shall be fitted with grease supply fittings and grease relief to outside of enclosure. Manual or automatic control and protective or signal devices required for the operation specified and any control wiring required for controls and devices specified, but not shown, shall be provided.

## 2.4 MISCELLANEOUS MATERIALS

### 2.4.1 GASKETS

Gaskets shall conform to ASTM F 104 - classification for compressed sheet with nitrile binder and acrylic fibers for maximum 370 degrees C service.

### 2.4.2 Bolts and Nuts

Bolts and nuts, except as required for piping applications, shall be in accordance with ASTM A 307. The bolt head shall be marked to identify the manufacturer and the standard with which the bolt complies in accordance with ASTM A 307.

### 2.4.3 Pipe Hangers, Inserts, and Supports

Pipe hangers, inserts, and supports shall conform to MSS SP-58 and MSS SP-69.

### 2.4.4 Escutcheons

Escutcheons shall be chromium-plated iron or chromium-plated brass, either one piece or split pattern, held in place by internal spring tension or set screws.

### 2.4.5 Pressure and Vacuum Gauge

Gauge shall conform to ASME B40.1, Class 1, 2, or 3, Style X, Type I or III as required, 114mm in diameter with phenolic or metal case. Each gauge range shall be selected so that at normal operating pressure, the needle is within the middle-third of the range.

### 2.4.6 Temperature Gauges

Industrial duty thermometers shall be provided for the required temperature range. Thermometers shall have Fahrenheit scale in 2 degree graduations scale on a white face. The pointer shall be adjustable.

#### 2.4.6.1 Stem Cased-Glass

Stem cased-glass case shall be polished stainless steel or cast aluminum, 229 mm long, with clear acrylic lens, and non-mercury filled glass tube.

#### 2.4.6.2 Bimetallic Dial

Bimetallic dial type case shall be not less than 89mm, stainless steel, and shall be hermetically sealed with clear acrylic lens. Bimetallic element shall be silicone dampened and unit fitted with external calibrator adjustment. Accuracy shall be one percent of dial range.

#### 2.4.6.3 Liquid-, Solid-, and Vapor-Filled Dial

Liquid-, solid-, and vapor-filled dial type cases shall be not less than 89mm, stainless steel or cast aluminum with clear acrylic lens. Fill shall be nonmercury, suitable for encountered cross-ambients, and connecting capillary tubing shall be double-braided bronze.

#### 2.4.7 Bird Screen

Screen shall be in accordance with ASTM E 437, Type 1, Class 1, 2 by 2 mesh, 2mm diameter aluminum wire or 1mm diameter stainless steel wire.

### 2.5 UNITARY EQUIPMENT SECTION

#### 2.5.1 Summary

Includes, but not limited to, furnishing and installing material as described in Contract Documents.

#### 2.5.2 Quality Assurance

##### Qualifications:

1. Outdoor units shall be started up, checked out, and adjusted by Unit Manufacturer's authorized factory trained service mechanic.
2. Units shall be ARI certified and bear the certification symbol.

Requirements of Regulatory Agencies: Each unit shall be UL labeled.

#### 2.5.3 Warranty

This Contractor shall warrant the systems to be free from defects in material, equipment, and workmanship under normal use and service and any time within one (1) year from date of final acceptance, with repair or replacement without cost to the Owner, any material, equipment, or workmanship found to be defective. the date of final acceptance shall be recorded on a warranty certificate for each unit. The certificate is to be included in Operation & Maintenance Manual.

#### 2.5.4 References

ARI 210/240 - Unitary Air-Conditioning and Air Source Heat Pump Equipment.

ARI 410 - Forced-Circulation Air-Cooling and Air-Heating Coils.

## 2.6 MANUFACTURED UNITS

Units: The outdoor unit shall be completely factory assembled, piped and wired. The casing shall be fabricated of galvanized steel, bonderized and finished with baked enamel. The unit shall be furnished with two (2) direct drive, propeller type fans arranged for horizontal discharge. The motors shall have inherent protection, be of the permanently lubricated type, and resiliently mounted for quiet operation. The fans shall be provided with a raised guard to prevent contact with moving parts. The compressor shall be of high-performance rotary type with crankcase heater, accumulator and internal thermal overloads. The compressor shall be mounted so to avoid the transmission of vibration. The refrigeration system shall be equipped with high pressure switch and have the capability to operate with a maximum height difference of 50.3 M between indoor and outdoor sections without the need for line size changes, traps or additional oil. Refrigerant flow from the condenser to be controlled by means of capillary tube. the condenser coil shall be of nonferrous construction with smooth plate fins bonded to copper tubing. The coil shall be protected with an integral metal guard. The unit shall be controlled by the microprocessor located in the indoor marching unit. A built-in, low-ambient controller will allow cooling to -18 degrees C outdoor temperature. The unit electrical power shall be 208/230 volts, 1 phase, 60 hertz. The system shall be capable of satisfactory operation within voltage limits of 198 volts to 253 volts.

Splices: When running longer lengths or more than one set of remote controller wires together, a double insulated, two wire cable equivalent to that provided e.g. Belden 9407 cable, is mandatory or use shielded two wire cable. One microprocessor shall be factory wired and located within the indoor unit. It shall be factory wired and located within the indoor unit. It shall have the capability of sensing return air temperature and indoor coil temperature; receive and process commands from the remote controller; provide emergency operation; and control the outdoor unit. The microprocessor within the wall-mounted remote controller shall provide automatic cooling; display set point and room temperature; a 24-hour on/off timer so that automatic operation can be set on the timer at one hour intervals from one to 24 hours; have self-diagnostic function display; check mode for memory of most recent problem; control system shall control continued operation of the air sweep louvers; and provide on-off and system/mode function switching. Normal operation of the remote controller provides individual system control in which one remote controller and one indoor unit are installed in the same room. The remote controller shall have the capability of controlling up to a maximum of 50 systems at a maximum developed control cable distance of 503 M. The control voltage between the remote controller and the indoor unit shall be 12 volts, D.C. The control voltage between the indoor unit and the outdoor unit shall be 12 volts D.C. Both 12 VDC shall be generated from the indoor unit microprocessor board. The system shall be capable of automatic restart when power is restored after power interruption. System shall include 20 function self-diagnostics including total hours of compressor run time.

#### 2.6.1 Installation

General: Install units in location shown on plans and in accordance with manufacturer's instructions.

Piping: Insulate refrigerant piping according to Section 15261. Provide condensate piping to unit. Condensate line shall drain to the nearest drainage point or where indicated on plans. Drain lines shall slope at 1/8 unit to 12 units.

Unit Protection: units shall be protected during construction to prevent debris from depositing on the unit.

#### 2.6.2 Start-Up

Initial Checks: Prior to operating units, checks shall be made to insure that adequate voltage, duct connections, electrical connections, control connections, and other items as listed by the manufacturer are properly provided/connected and operating to insure safe and proper unit operation.

Testing and Adjustment: Operate unit in various modes of operation to test for proper operation, including fan rotation, proper damper travel (where applicable), proper cooling/heating, correct interface to other controls (time clock, fans, etc.). Make necessary adjustments per manufacturer's directions.

Final Check: When testing and adjustment is complete, a final check of each unit shall be done by the manufacturer's authorization service representative to verify proper unit operation.

Start-Up Log: Provide a start-up log.

#### 2.7 EQUIPMENT EFFICIENCY

Unit shall have an EER of 11.2.

#### 2.8 REMOTE CONDENSER OR CONDENSING UNIT

Each remote condenser coil shall be fitted with a manual isolation valve and an access valve on the coil side. Saturated refrigerant condensing temperature shall not exceed 49 degrees C at 40 degrees C ambient. Unit shall be provided with low ambient condenser controls to ensure proper operation in an ambient temperature of 19 degrees C. Fan and cabinet construction shall be provided as specified in paragraph "System Components". Fan and condenser motors shall have totally enclosed enclosures.

##### 2.8.1 Air-Cooled Condenser

Unit shall be rated in accordance with ARI 460 and conform to the requirements of UL 1995. Unit shall be factory fabricated, tested, packaged, and self-contained. Unit shall be complete with casing, propeller or centrifugal type fans, heat rejection coils, connecting piping and wiring, and all necessary appurtenances.

#### 2.8.1.1 Connections

Interconnecting refrigeration piping, electrical power, and control wiring between the condensing unit and the indoor unit shall be provided as required and as indicated. Electrical and refrigeration piping terminal connections between condensing unit and evaporator units shall be provided.

#### 2.8.1.2 Head Pressure Control and Liquid Subcooling

Low ambient control for multi-circuited units serving more than one evaporator coil shall provide independent condenser pressure controls for each refrigerant circuit. Controls shall be set to produce a minimum of 95 degrees F saturated refrigerant condensing temperature. Unit shall be provided with a liquid subcooling circuit which shall ensure proper liquid refrigerant flow to the expansion device over the specified application range of the condenser. Unit shall be provide with manufacturer's standard liquid subcooling. Subcooling circuit shall be liquid sealed.

#### 2.8.3 Compressor

Unit shall be rated in accordance with ARI 500. Compressor shall be direct drive, semi-hermetic or hermetic reciprocating, or scroll type capable of operating at partial load conditions. Compressor shall be capable of continuous operation down to the lowest step of unloading as specified. Units 35 kW and larger shall be provided with capacity reduction devices to produce automatic capacity reduction of at least 50 percent. If standard with the manufacturer, two or more compressors may be used in lieu of a single compressor with unloading capabilities, in which case the compressors will operate in sequence, and each compressor shall have an independent refrigeration circuit through the condenser and evaporator. Each compressor shall start in the unloaded position. Each compressor shall be provided with vibration isolators, crankcase heater, thermal overloads, and high pressure safety cutoffs and protection against short cycling.

### 2.9 INSULATION

#### 2.9.1 Factory Installed Insulation

Factory applied insulation shall be as specified for the equipment to be insulated except that refrigerant suction lines shall be insulated with unicellular plastic foam.

#### 2.10 TEMPERATURE CONTROLS

Temperature controls shall be in accordance with Section 15950 HEATING, VENTILATING AND AIR CONDITIONING HVAC CONTROL SYSTEMS.

#### 2.11 SYSTEM COMPONENTS

##### 2.11.1 Refrigerant and Oil

Refrigerant shall be one of the fluorocarbon gases. Refrigerants shall have number designations and safety classifications in accordance with ASHRAE 34. Refrigerants shall meet the requirements of ARI 700 as a minimum. Refrigerants shall have an Ozone Depletion Potential (ODP) of less than or

equal to 0.05. Contractor shall provide and install a complete charge of refrigerant for the installed system as recommended by the manufacturer. Except for factory sealed units, two complete charges of lubricating oil for each compressor crankcase shall be furnished. One charge shall be used during the system performance testing period. Following the satisfactory completion of the performance testing, the oil shall be drained and replaced with a second charge. Lubricating oil shall be of a type and grade recommended by the manufacturer for each compressor. Where color leak indicator dye is incorporated, charge shall be in accordance with manufacturer's recommendation.

## 2.12 REFRIGERANT PIPING

Refrigerant piping, valves, fittings, and accessories shall conform to the requirements of ASHRAE 15 and ASME B31.5, except as specified.

### 2.12.1 Steel Pipe

Steel pipe for refrigerant service shall conform to ASTM A 53, Schedule 40, Type E or S, Grades A or B. Type F pipe shall not be used.

### 2.12.2 Joints and Fittings, Steel Pipe

Joints and fittings shall be steel butt-welding, socket-welding, or malleable iron threaded type. Pipe shall be welded except that joints on lines 50 mm and smaller may be threaded. Threads shall be tapered type conforming to ASME B1.20.1. The malleable iron threaded type fitting shall be of a weight corresponding to adjacent pipe. Flanges and flange faces of fittings shall be tongue-and-groove type with gaskets suitable for the refrigerant used; size 25 mm and smaller shall be oval, two-bolt type; size above 25 mm, up to and including 100 mm, shall be square four-bolt type; and sizes over 100 mm shall be round.

### 2.12.3 Steel Tubing

Steel tubing for refrigeration service shall be in accordance with ASTM A 334/A 334M, Grade 1. Tubing with a nominal diameter of 10 mm or 15 mm shall have a wall thickness of 1.22 mm. Tubing with a nominal diameter of 20 mm through 50 mm shall have a wall thickness of 1.62 mm. Tubing with a nominal diameter of 65 through 100 mm shall have a wall thickness of 2.4 mm. Steel tubing shall be cold-rolled, electric-forged, welded-steel. One end of the tubing shall be provided with a socket. Steel tubing shall be cleaned, dehydrated, and capped.

### 2.12.4 Joints and Fittings, Steel Tubing

Joints and fittings shall be socket type provided by the steel tubing manufacturer.

### 2.12.5 Copper Tubing

Copper tubing shall conform to ASTM B 280 annealed or hard drawn as required. Copper tubing shall be soft annealed where bending is required and hard drawn where no bending is required. Soft annealed copper tubing

shall not be used in sizes larger than 35 mm. Joints shall be brazed except that joints on lines 22 mm and smaller may be flared.

#### 2.12.6 Joints and Fittings, Copper Tubing

Copper tube joints and fittings shall be flare joint type with short-shank flare, or solder-joint pressure type. Joints and fittings for brazed joint shall be wrought-copper or forged-brass sweat fittings. Cast sweat-type joints and fittings shall not be allowed for brazed joints.

#### 2.12.7 Valves

Valves shall be pressure and temperature rated for contained refrigerant service and shall comply with ASME B31.5. Metals of construction shall be ferrous or copper based. Atmosphere exposed valve stems shall be stainless steel or corrosion resistant metal plated carbon steel. Valve body connections shall be brazed or welded socket, flanged or combination thereof. Threaded connections shall not be used, except in pilot pressure or gauge lines where maintenance disassembly is required and welded flanges cannot be used. Valves shall be suitable for or fitted with extended copper ends for brazing in-place without disassembly. Ferrous body valves shall be fitted with factory fabricated and brazed copper transitions. To minimize system pressure drops, where practicable, globe valves shall be angle body type, and straight line valves shall be full port ball type. Control valve inlets shall be fitted with integral or adapted strainer or filter where recommended or required by manufacturer. Valves shall be cleaned and sealed moisture-tight.

##### 2.12.7.1 Refrigerant-Stop Valves

Valves, in sizes through 15 mm, shall be handwheel operated, straight or angle, packless diaphragm globe type with back-seating stem, brazed ends, except where SAE flare or retained seal cap connections are required. In sizes over 15 mm, valves shall be globe or angle type, wrench operated with ground-finish stems, or ball valves, packed especially for refrigerant service, back seated, and provided with seal caps. Refrigerant isolation and shut-off valves shall have retained or captive spindles and facilities for tightening or replacement of the gland packing under line pressure as applicable. Stop valves shall have back-seating plated steel stem, bolted bonnet in sizes 25 mm OD and larger, integral or flanged transition brazed socket. Valves in sizes through 65 mm shall be end-entry body assembly, full-port, floating ball type, with equalizing orifice fitted chrome plated ball, seats and seals of tetrafluoroethylene, chrome plated or stainless steel stem, and seal cap. In sizes 100 mm IPS and larger, and in smaller sizes where carbon steel piping is used, valve bodies shall be tongue and groove flanged and complete with mating flange, gaskets and bolting for socket or butt-weld connection. Purge, charge and receiver valves shall be of manufacturer's standard configuration.

##### 2.12.7.2 Check Valves

Valve shall be designed for service application, spring-loaded type where required, with resilient seat and with flanged body in sizes 15 mm and larger. Valve shall provide positive shut-off at 10 kPa differential pressure.



#### 2.12.7.3 Liquid Solenoid Valves

Valves shall comply with ARI 760 and be suitable for continuous duty with applied voltages 15 percent under and 5 percent over nominal rated voltage at maximum and minimum encountered pressure and temperature service conditions. Valves shall be direct-acting or pilot-operating type, packless, except that packed stem, seal capped, manual lifting provisions shall be furnished. Solenoid coils shall be moisture-proof, UL approved, totally encapsulated or encapsulated and metal jacketed as required. Valves shall have safe working pressure of 2760 kPa and a maximum operating pressure differential of at least 1375 kPa at 85 percent rated voltage. Valves shall have an operating pressure differential suitable for the refrigerant used.

#### 2.12.7.4 Expansion Valves

Expansion valves conform to requirements of ARI 750. Valve shall be of the diaphragm and spring type with internal or external equalizers, and bulb and capillary tubing. Valve shall be provided with an external superheat adjustment along with a seal cap. Internal equalizers may be utilized where flowing refrigerant pressure drop between outlet of the valve and inlet to the evaporator coil is negligible and pressure drop across the evaporator is less than the pressure difference corresponding to 1 degrees C of saturated suction temperature at evaporator conditions. Bulb charge shall be determined by the manufacturer for the application and such that liquid will remain in the bulb at all operating conditions. Gas limited liquid charged valves and other valve devices for limiting evaporator pressure shall not be used without a distributor or discharge tube or effective means to prevent loss of control when bulb becomes warmer than valve body. Pilot-operated valves shall have a characterized plug to provide required modulating control. A de-energized solenoid valve may be used in the pilot line to close the main valve in lieu of a solenoid valve in the main liquid line. An isolatable pressure gauge shall be provided in the pilot line, at the main valve. Automatic pressure reducing or constant pressure regulating expansion valves may be used only where indicated or for constant evaporator loads.

#### 2.12.7.5 Safety Relief Valve

Valve shall be the two-way type. Single type valves shall be used only where indicated. Valve shall bear the ASME code symbol. Valve capacity shall be certified by the National Board of Boiler and Pressure Vessel Inspectors. Valve shall be of an automatically reseating design after activation.

#### 2.12.7.6 Evaporator Pressure Regulators, Direct-Acting

Valve shall include a diaphragm/spring power assembly, external pressure adjustment with seal cap, and pressure gauge port. Valve shall maintain a constant inlet pressure by balancing inlet pressure on diaphragm against an adjustable spring load. Pressure drop at system design load shall not exceed the pressure difference corresponding to a 1 degrees C change in saturated refrigerant temperature at evaporator operating suction

temperature. Spring shall be selected for indicated maximum allowable suction pressure range.

#### 2.12.7.7 Refrigerant Access Valves

Refrigerant access valves and hose connections shall be in accordance with ARI 720.

### 2.13 FACTORY COATINGS

Unless otherwise specified, equipment and component items, when fabricated from ferrous metal, shall be factory finished with the manufacturer's standard finish, except that items located outside of buildings shall have weather resistant finishes that will withstand 125 hours exposure to the salt spray test specified in ASTM B 117 using a 25 percent sodium chloride solution. Immediately after completion of the test, the specimen shall show no signs of blistering, wrinkling, cracking, or loss of adhesion and no sign of rust creepage beyond 3 mm on either side of the scratch mark. Cut edges of galvanized surfaces where hot-dip galvanized sheet steel is used shall be coated with a zinc-rich coating conforming to ASTM D 520, Type I.

## PART 3 EXECUTION

### 3.1 INSTALLATION

Work shall be performed in accordance with the manufacturer's published diagrams, recommendations, and equipment warranty requirements. Where equipment is specified to conform to the requirements of ASME BPV VIII Div 1 and ASME BPV IX, the design, fabrication, and installation of the system shall conform to ASME BPV VIII Div 1 and ASME BPV IX.

#### 3.1.1 Equipment

Refrigeration equipment and the installation thereof shall conform to ASHRAE 15. Necessary supports shall be provided for all equipment, appurtenances, and pipe as required, including frames or supports for compressors, pumps, cooling towers, condensers, and similar items. Compressors shall be isolated from the building structure. If mechanical vibration isolators are not provided, vibration absorbing foundations shall be provided. Each foundation shall include isolation units consisting of machine and floor or foundation fastenings, together with intermediate isolation material. Other floor-mounted equipment shall be set on not less than a concrete pad doweled in place. Concrete foundations for floor mounted pumps shall have a mass equivalent to three times the weight of the components, pump, base plate, and motor to be supported. In lieu of concrete pad foundation, concrete pedestal block with isolators placed between the pedestal block and the floor may be provided. Concrete pedestal block shall be of mass not less than three times the combined pump, motor, and base weights. Isolators shall be selected and sized based on load-bearing requirements and the lowest frequency of vibration to be isolated. Lines connected to pumps mounted on pedestal blocks shall be provided with flexible connectors. Foundation drawings, bolt-setting information, and foundation bolts shall be furnished prior to concrete foundation construction for all equipment indicated or required to have concrete foundations. Concrete for foundations shall be as specified in Section 03300 CAST-IN-PLACE STRUCTURAL

CONCRETE. Equipment shall be properly leveled, aligned, and secured in place in accordance with manufacturer's instructions.

### 3.1.2 Mechanical Room Ventilation

Mechanical ventilation systems shall be in accordance with Section 15895 AIR SUPPLY, DISTRIBUTION, VENTILATION, AND EXHAUST SYSTEM.

### 3.1.3 Building Surface Penetrations

Sleeves in nonload bearing surfaces shall be galvanized sheet metal, conforming to ASTM A 653/A 653M, Coating Class G-90, 1.0 mm. Sleeves in load bearing surfaces shall be uncoated carbon steel pipe, conforming to ASTM A 53, Schedule 30. Sealants shall be applied to moisture and oil-free surfaces and elastomers to not less than 13 mm depth. Sleeves shall not be installed in structural members.

#### 3.1.3.1 General Service Areas

Each sleeve shall extend through its respective wall, floor, or roof, and shall be cut flush with each surface. Pipes passing through concrete or masonry wall or concrete floors or roofs shall be provided with pipe sleeves fitted into place at the time of construction. Sleeves shall be of such size as to provide a minimum of 6.35 mm all-around clearance between bare pipe and sleeves or between jacketed-insulation and sleeves. Except in pipe chases or interior walls, the annular space between pipe and sleeve or between jacket over-insulation and sleeve shall be sealed in accordance with Section 07900 JOINT SEALING.

#### 3.1.3.2 Fire-Rated Penetrations

Penetration of fire-rated walls, partitions, and floors shall be sealed as specified in Section 07840 FIRESTOPPING.

#### 3.1.3.3 Escutcheons

Finished surfaces where exposed piping, bare or insulated, pass through floors, walls, or ceilings, except in boiler, utility, or equipment rooms, shall be provided with escutcheons. Where sleeves project slightly from floors, special deep-type escutcheons shall be used. Escutcheon shall be secured to pipe or pipe covering.

#### 3.1.4 Access Panels

Access panels shall be provided for all concealed valves vents, controls, and items requiring inspection or maintenance. Access panels shall be of sufficient size and located so that the concealed items may be serviced and maintained or completely removed and replaced. Access panels shall be as specified in Section 05500 MISCELLANEOUS METALS.

### 3.1.5 General Piping Installation

#### 3.1.5.1 Brazed Joints

Brazing shall be performed in accordance with AWS Brazing Hdbk, except as modified herein. During brazing, the pipe and fittings shall be filled with a pressure regulated inert gas, such as nitrogen, to prevent the formation of scale. Before brazing copper joints, both the outside of the tube and the inside of the fitting shall be cleaned with a wire fitting brush until the entire joint surface is bright and clean. Brazing flux shall not be used. Surplus brazing material shall be removed at all joints. Steel tubing joints shall be made in accordance with the manufacturer's recommendations. Joints in steel tubing shall be painted with the same material as the baked-on coating within 8 hours after joints are made. Tubing shall be protected against oxidation during brazing by continuous purging of the inside of the piping using nitrogen. Piping shall be supported prior to brazing and not be sprung or forced.

#### 3.1.5.2 Threaded Joints

Threaded joints shall be made with tapered threads and made tight with PTFE tape complying with ASTM D 3308 or equivalent thread-joint compound applied to the male threads only. Not more than three threads shall show after the joint is made.

#### 3.1.5.3 Flared Connections

When flared connections are used, a suitable lubricant shall be used between the back of the flare and the nut in order to avoid tearing the flare while tightening the nut.

#### 3.1.6 Refrigeration Piping

Unless otherwise specified, pipe and fittings installation shall conform to requirements of ASME B31.5. Pipe shall be cut accurately to measurement established at the jobsite and worked into place without springing or forcing. Cutting or otherwise weakening of the building structure to facilitate piping installation will not be permitted without written approval. Pipes shall be cut square, shall have burrs removed by reaming, and shall be installed in a manner to permit free expansion and contraction without damage to joints or hangers. Filings, dust, or dirt shall be wiped from interior of pipe before connections are made.

##### 3.1.6.1 Directional Changes

Changes in direction shall be made with fittings, except that bending of pipe 100 mm and smaller will be permitted, provided a pipe bender is used and wide-sweep bends are formed. The centerline radius of bends shall not be less than 6 diameters of the pipe. Bent pipe showing kinks, wrinkles, or other malformations will not be accepted.

#### 3.1.6.2 Functional Requirements

Piping shall be installed 4 mm per meter of pipe in the direction of flow to ensure adequate oil drainage. Open ends of refrigerant lines or equipment shall be properly capped or plugged during installation to keep moisture, dirt, or other foreign material out of the system. Piping shall remain capped until installation. Equipment piping shall be in accordance with the equipment manufacturer's recommendations and the contract drawings.

#### 3.1.7 Thermometers

Thermometers located within 5 feet of floor may be rigid stem type. Where thermal well is located above 5 feet above floor, thermometer shall be universal adjustable angle type or remote element type to 7 feet above floor and remote element type where thermal well is 7 feet or more above floor. Thermometers shall be located in coolant supply and return or waste lines at each heat exchanger, condenser water lines entering and leaving the condenser, at each automatic temperature control device without an integral thermometer, refrigerant liquid line leaving receiver, refrigerant suction line at each evaporator or liquid cooler, and where indicated or required for proper operation of equipment.

#### 3.1.8 Piping Supports

Refrigerant pipe supports shall be in accordance with ASME B31.5. Hangers used to support piping 50 mm and larger shall be fabricated to permit adequate adjustment after erection while still supporting the load. Pipe guides and anchors shall be installed to keep pipes in accurate alignment, to direct the expansion movement, and to prevent buckling, swaying, and undue strain. Piping subjected to vertical movement, when operating temperatures exceed ambient temperatures, shall be supported by variable spring hangers and supports or by constant support hangers.

#### 3.1.8. Structural Attachments

Attachment to building structure concrete and masonry shall be by cast-in concrete inserts, built-in anchors, or masonry anchor devices. Inserts and anchors shall be applied with a safety factor not less than 5. Supports shall not be attached to metal decking. Masonry anchors for overhead applications shall be constructed of ferrous materials only. Material used for support shall be as specified under Section 05210 STRUCTURAL STEEL.

#### 3.1.9 Pipe Hangers, Inserts, and Supports

Pipe hangers, inserts, and supports shall conform to MSS SP-58 and MSS SP-69, except as modified herein. Pipe hanger types 5, 12, and 26 shall not be used.

##### 3.1.9.1 Hangers

Type 3 shall not be used on insulated piping. Type 24 may be used only on trapeze hanger systems or on fabricated frames.

#### 3.1.9.2 Inserts

Type 18 inserts shall be secured to concrete forms before concrete is placed. Continuous inserts which allow more adjustments may be used if they otherwise meet the requirements for Type 18 inserts.

#### 3.1.9.3 C-Clamps

Type 19 and 23 C-clamps shall be torqued per MSS SP-69 and have both locknuts and retaining devices, furnished by the manufacturer. Field-fabricated C-clamp bodies or retaining devices are not acceptable.

#### 3.1.9.4 Angle Attachments

Type 20 attachments used on angles and channels shall be furnished with an added malleable-iron heel plate or adapter.

#### 3.1.9.5 Saddles and Shields

Where Type 39 saddle or Type 40 shield are permitted for a particular pipe attachment application, the Type 39 saddle, connected to the pipe, shall be used on all pipe 4 inches and larger when the temperature of the medium is 60 degrees F or higher. Type 40 shields shall be used on all piping less than 4 inches and all piping 4 inches and larger carrying medium less than 60 degrees F. A high density insulation insert of cellular glass shall be used under the Type 40 shield for piping 2 inches and larger.

#### 3.1.9.6 Vertical Pipe Supports

Vertical pipe shall be supported at each floor, except at slab-on-grade, and at intervals of not more than 15 feet, not more than 8 feet from end of risers, and at vent terminations.

#### 3.1.9.7 Pipe Guides

Type 35 guides using, steel, reinforced polytetrafluoroethylene (PTFE) or graphite slides shall be provided where required to allow longitudinal pipe movement. Lateral restraints shall be provided as required. Slide materials shall be suitable for the system operating temperatures, atmospheric conditions, and bearing loads encountered.

#### 3.1.9.8 Steel Slides

Where steel slides do not require provisions for restraint of lateral movement, an alternate guide method may be used. On piping 102mm and larger, a Type 39 saddle shall be used. On piping under 102mm, a Type 40 protection shield may be attached to the pipe or insulation and freely rest on a steel slide plate.

#### 3.1.9.9 Horizontal Pipe Supports

Horizontal pipe supports shall be spaced as specified in MSS SP-69 and a support shall be installed not over 300 mm from the pipe fitting joint at each change in direction of the piping. Pipe supports shall be spaced not over 1.5 m apart at valves. Pipe hanger loads suspended from steel joist

with hanger loads between panel points in excess of 222 N shall have the excess hanger loads suspended from panel points.

### 3.1.10 Pipe Color Code Marking

Color code marking of piping shall be as specified in Section 09900 PAINTING, GENERAL.

## 3.2 TESTS

Tests shall be conducted in the presence of the Contracting Officer. Utilities for testing shall be provided as specified in the SPECIAL CONTRACT REQUIREMENTS. Water and electricity required for the tests will be furnished by the Government. Any material, equipment, instruments, and personnel required for the test shall be provided by the Contractor. The services of a qualified technician shall be provided as required to perform all tests and procedures indicated herein. Field tests shall be coordinated with Section 15990 TESTING, ADJUSTING, AND BALANCING OF HVAC SYSTEMS.

### 3.2.1 Refrigerant System

After all components of the refrigerant system have been installed and connected, the entire refrigeration system shall be subjected to a pneumatic test as described herein.

#### 3.2.1.1 Preliminary Procedures

Prior to pneumatic testing, equipment which has been factory tested and refrigerant charged as well as equipment which could be damaged or cause personnel injury by imposed test pressure, positive or negative, shall be isolated from the test pressure or removed from the system. Safety relief valves and rupture discs, where not part of factory sealed systems, shall be removed and openings capped or plugged.

#### 3.2.1.2 Refrigerant Leakage

If a refrigerant leak is discovered after the system has been charged, the leaking portion of the system shall immediately be isolated from the remainder of the system and the refrigerant pumped into the system receiver or other suitable container. Under no circumstances shall the refrigerant be discharged into the atmosphere.

#### 3.2.2.3 Contractor's Responsibility

The Contractor shall, at all times during the installation and testing of the refrigeration system, take steps to prevent the release of refrigerants into the atmosphere. The steps shall include, but not be limited to, procedures which will minimize the release of refrigerants to the atmosphere and the use of refrigerant recovery devices to remove refrigerant from the system and store the refrigerant for reuse or reclaim. At no time shall more than 3 ounces of refrigerant be released to the atmosphere in any one occurrence. Any system leaks within the first year shall be repaired in accordance with the requirements herein at no cost to the Government including material, labor, and refrigerant if the leak is the result of defective equipment, material, or installation.

### 3.2.2. System Performance Tests

After the foregoing tests have been completed and before each refrigeration system is accepted, tests to demonstrate the general operating characteristics of all equipment shall be conducted by a registered professional engineer or an approved manufacturer's start-up representative experienced in system start-up and testing, at such times as directed. Tests shall cover a period of not less than 48 hours for each system and demonstrate that the entire system is functioning in accordance with the drawings and specifications. Corrections and adjustments shall be made as necessary and tests shall be re-conducted to demonstrate that the entire system is functioning as specified. Prior to acceptance, service valve seal caps and blanks over gauge points shall be installed and tightened. Any refrigerant lost during the system startup shall be replaced. If tests do not demonstrate satisfactory system performance, deficiencies shall be corrected and the system shall be retested.

### 3.3 INSPECTIONS

At the conclusion of the one year period, cooling towers and condensers shall be inspected for problems due to corrosion, scale, and biological growth. If the cooling tower and condenser are found not to conform to the manufacturers recommended conditions, assuming the water treatment company recommendations have been followed; the water treatment company shall provide all chemicals and labor for cleaning or repairing the equipment as required by the manufacturer's recommendations.

### 3.4 CLEANING AND ADJUSTING

#### 3.4.1 Piping

Prior to testing, pipes shall be cleaned free of scale and thoroughly flushed of all foreign matter. A temporary bypass shall be provided for water coils to prevent flushing water from passing through coils. Strainers and valves shall be thoroughly cleaned. Prior to testing and balancing, air shall be removed from each water system through the use of the air vents. Temporary measures, such as piping the overflow from vents to a collecting vessel shall be taken to avoid water damage during the venting process. Air vents shall be plugged or capped after the system has been vented.

#### 3.4.2 Equipment

Equipment shall be wiped clean, with all traces of oil, dust, dirt, or paint spots removed. System shall be maintained in this clean condition until final acceptance. Bearings shall be lubricated with oil or grease as recommended by the manufacturer. Belts shall be tightened to proper tension. Control valves and other miscellaneous equipment requiring adjustment shall be adjusted to setting indicated or directed.

#### 3.4.3 Testing, Adjusting, and Balancing

Testing, adjusting, and balancing shall be as specified in Section 15990 TESTING, ADJUSTING AND BALANCING OF HVAC SYSTEMS.



01062/BERGER/ABAM  
FY02 Tactical Equipment Complex  
Fort Lewis, Washington

### 3.5 DEMONSTRATIONS

Contractor shall conduct a training course for the operating staff as designated by the Contracting Officer. The training period shall consist of a total 2 hours of normal working time and start after the system is functionally completed but prior to final acceptance tests. The field instructions shall cover all of the items contained in the approved operation and maintenance manuals as well as demonstrations of routine maintenance operations.

-- End of Section -

01062/BERGER/ABAM  
FY02 Tactical Equipment Complex  
Fort Lewis, Washington

This page intentionally blank.

SECTION 15895

AIR SUPPLY, DISTRIBUTION, VENTILATION, AND EXHAUST SYSTEM

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by basic designation only.

AIR CONDITIONING AND REFRIGERATION INSTITUTE (ARI)

ARI Guideline D	(1996) Application and Installation of Central Station Air-Handling Units
-----------------	--

AIR MOVEMENT AND CONTROL ASSOCIATION (AMCA)

AMCA 210	(1985) Laboratory Methods of Testing Fans for Rating
AMCA 300	(1996) Reverberant Room Method for Sound Testing of Fans

AMERICAN BEARING MANUFACTURERS ASSOCIATION (AFBMA)

AFBMA Std 9	(1990) Load Ratings and Fatigue Life for Ball Bearings
AFBMA Std 11	(1990) Load Ratings and Fatigue Life for Roller Bearings

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM A 53	(1999b) Pipe, Steel, Black and Hot-Dipped, Zinc-Coated, Welded and Seamless
ASTM A 123/A 123M	(1997ael) Zinc (Hot-Dip Galvanized) Coatings on Iron and Steel Products
ASTM A 924/A 924M	(1999) General Requirements for Steel Sheet, Metallic-Coated by the Hot-Dip Process
ASTM B 117	(1997) Operating Salt Spray (Fog) Apparatus
ASTM C 916	(1985; R 1996el) Adhesives for Duct Thermal Insulation
ASTM C 1071	(1998) Thermal and Acoustical Insulation (Glass Fiber, Duct Lining Material)
ASTM D 520	(1984; R 1995el) Zinc Dust Pigment

ASTM D 1654	(1992) Evaluation of Painted or Coated Specimens Subjected to Corrosive Environments
ASTM D 3359	(1997) Measuring Adhesion by Tape Test
ASTM E 84	(1999) Surface Burning Characteristics of Building Materials
ASTM E 437	(1997) Industrial Wire Cloth and Screens (Square Opening Series)

AMERICAN SOCIETY OF HEATING, REFRIGERATING AND AIR-CONDITIONING ENGINEERS (ASHRAE)

ASHRAE 52.1	(1992) Gravimetric and Dust-Spot Procedures for Testing Air-Cleaning Devices Used in General Ventilation for Removing Particulate Matter
ASHRAE 70	(1991) Method of Testing for Rating the Performance of Air Outlets and Inlets

ASME INTERNATIONAL (ASME)

ASME B31.1	(1998) Power Piping
------------	---------------------

NATIONAL ELECTRICAL MANUFACTURERS ASSOCIATION (NEMA)

NEMA MG 1	(1998) Motors and Generators
-----------	------------------------------

NATIONAL FIRE PROTECTION ASSOCIATION (NFPA)

NFPA 90A	(1996) Installation of Air Conditioning and Ventilating Systems
NFPA 96	(1998) Ventilation Control and Fire Protection of Commercial Cooking Equipment

NORTH AMERICAN INSULATION MANUFACTURERS ASSOCIATION (NAIMA)

NAIMA AH115	(1993) Fibrous Glass Duct Construction Standards
-------------	--

SHEET METAL AND AIR CONDITIONING CONTRACTORS' NATIONAL ASSOCIATION (SMACNA)

SMACNA HVAC Duct Const Stds	(1995; Addenda Nov 1997) HVAC Duct Construction Standards - Metal and Flexible
SMACNA Install Fire Damp HVAC	(1992) Fire, Smoke and Radiation Damper Installation Guide for HVAC Systems
SMACNA Leakage Test Mnl	(1985) HVAC Air Duct Leakage Test Manual

UNDERWRITERS LABORATORIES (UL)

UL 181	(1996; Rev Dec 1998) Factory-Made Air Ducts and Air Connectors
UL 214	(1997) Tests for Flame-Propagation of Fabrics and Films
UL 555	(1999) Fire Dampers
UL 586	(1996; Rev thru Aug 1999) High-Efficiency, Particulate, Air Filter Units
UL 723	(1996; Rev thru Dec 1998) Test for Surface Burning Characteristics of Building Materials
UL 900	(1994; Rev thru Apr 1997) Test Performance of Air Filter Units
UL Bld Mat Dir	(1999) Building Materials Directory
UL Elec Const Dir	(1998) Electrical Construction Equipment Directory
UL Fire Resist Dir	(1999) Fire Resistance Directory (2 Vol.)

1.2 COORDINATION OF TRADES

Ductwork, piping offsets, fittings, and accessories shall be furnished as required to provide a complete installation and to eliminate interference with other construction.

1.3 DELIVERY AND STORAGE

Equipment delivered and placed in storage shall be stored with protection from the weather, humidity and temperature variations, dirt and dust, or other contaminants.

1.4 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only. When used, a designation following the "G" designation identifies the office that will review the submittal for the Government. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

SD-02 Shop Drawings

Drawings; FIO  
Installation; FIO

Drawings shall consist of equipment layout including assembly and installation details and electrical connection diagrams; ductwork layout showing the location of all supports and hangers, typical hanger details, gauge reinforcement, reinforcement spacing rigidity

classification, and static pressure and seal classifications; and piping layout showing the location of all guides and anchors, the load imposed on each support or anchor, and typical support details. Drawings shall include any information required to demonstrate that the system has been coordinated and will properly function as a unit and shall show equipment relationship to other parts of the work, including clearances required for operation and maintenance.

#### SD-03 Product Data

##### Components and Equipment; FIO

Manufacturer's catalog data shall be included with the detail drawings for the following items. The data shall be highlighted to show model, size, options, etc., that are intended for consideration. Data shall be adequate to demonstrate compliance with contract requirements for the following:

- a. Piping Components
- b. Ductwork Components
- c. Air Systems Equipment
- d. Air Handling Units
- e. Energy Recovery Devices
- f. Terminal Units

##### Test Procedures; FIO

Proposed test procedures for piping hydrostatic test, ductwork leak test, and performance tests of systems, at least 2 weeks prior to the start of related testing.

##### System Diagrams; G, FIO

Proposed diagrams, at least 2 weeks prior to start of related testing. System diagrams that show the layout of equipment, piping, and ductwork, and typed condensed operation manuals explaining preventative maintenance procedures, methods of checking the system for normal, safe operation, and procedures for safely starting and stopping the system shall be framed under glass or laminated plastic. After approval, these items shall be posted where directed.

##### Similar Services; FIO

Statement demonstrating successful completion of similar services on at least 5 projects of similar size and scope, at least 2 weeks prior to submittal of other items required by this section.

Testing, Adjusting and Balancing; FIO

Proposed test schedules for hydrostatic test of piping, ductwork leak test, and performance tests, at least 2 weeks prior to the start of related testing.

Field Training; FIO

Proposed schedule for field training, at least 2 weeks prior to the start of related training.

SD-06 Test Reports

Performance Tests; FIO

Test reports for the piping hydrostatic test, ductwork leak test, and performance tests in booklet form, upon completion of testing. Reports shall document phases of tests performed including initial test summary, repairs/adjustments made, and final test results.

SD-07 Certificates

Bolts; FIO

Written certification from the bolt manufacturer that the bolts furnished comply with the requirements of this specification. The certification shall include illustrations of product markings, and the number of each type of bolt to be furnished.

SD-10 Operation and Maintenance Data

Operating and Maintenance Instructions; FIO

Six manuals listing step-by-step procedures required for system startup, operation, shutdown, and routine maintenance, at least 2 weeks prior to field training. The manuals shall include the manufacturer's name, model number, parts list, list of parts and tools that should be kept in stock by the owner for routine maintenance including the name of a local supplier, simplified wiring and controls diagrams, troubleshooting guide, and recommended service organization (including address and telephone number) for each item of equipment. Each service organization submitted shall be capable of providing 4 hour onsite response to a service call on an emergency basis.

PART 2 PRODUCTS

2.1 STANDARD PRODUCTS

Components and equipment shall be standard products of a manufacturer regularly engaged in the manufacturing of products that are of a similar material, design and workmanship. The standard products shall have been in satisfactory commercial or industrial use for 2 years before bid opening. The 2-year experience shall include applications of components and equipment under similar circumstances and of similar size. The 2 years must be

satisfactorily completed by a product which has been sold or is offered for sale on the commercial market through advertisements, manufacturers' catalogs, or brochures. Products having less than a 2-year field service record will be acceptable if a certified record of satisfactory field operation, for not less than 6000 hours exclusive of the manufacturer's factory tests, can be shown. The equipment items shall be supported by a service organization.

## 2.2 ASBESTOS PROHIBITION

Asbestos and asbestos-containing products shall not be used.

## 2.3 NAMEPLATES

Equipment shall have a nameplate that identifies the manufacturer's name, address, type or style, model or serial number, and catalog number.

## 2.4 EQUIPMENT GUARDS AND ACCESS

Belts, pulleys, chains, gears, couplings, projecting setscrews, keys, and other rotating parts exposed to personnel contact shall be fully enclosed or guarded according to OSHA requirements. High temperature equipment and piping exposed to contact by personnel or where it creates a potential fire hazard shall be properly guarded or covered with insulation of a type specified.

## 2.5 (NOT USED)

## 2.6 ELECTRICAL WORK

Electrical motor-driven equipment specified shall be provided complete with motor, motor starter, and controls. Unless otherwise specified, electric equipment, including wiring and motor efficiencies, shall be according to Section 16415 ELECTRICAL WORK, INTERIOR. Electrical characteristics and enclosure type shall be as shown. Unless otherwise indicated, motors of 745 W and above shall be high efficiency type. Motor starters shall be provided complete with thermal overload protection and other appurtenances necessary. Each motor shall be according to NEMA MG 1 and shall be of sufficient size to drive the equipment at the specified capacity without exceeding the nameplate rating of the motor. Manual or automatic control and protective or signal devices required for the operation specified, and any control wiring required for controls and devices, but not shown, shall be provided. Where two-speed or variable-speed motors are indicated, solid-state variable-speed controller may be provided to accomplish the same function. Solid-state variable-speed controllers shall be utilized for motors rated 7.45 kW or less. Adjustable frequency drives shall be used for larger motors.

## 2.7 CONTROLS

Controls shall be provided as specified in Section 15950 HEATING, VENTILATING AND AIR CONDITIONING (HVAC) CONTROL SYSTEMS.



## 2.8 DUCTWORK COMPONENTS

### 2.8.1 Metal Ductwork

All aspects of metal ductwork construction, including all fittings and components, shall comply with SMACNA HVAC Duct Const Stds unless otherwise specified. Elbows shall be radius type with a centerline radius of 1-1/2 times the width or diameter of the duct where space permits. Otherwise, elbows having a minimum radius equal to the width or diameter of the duct or square elbows with factory fabricated turning vanes may be used. Static pressure Class 125, 250, and 500 Pa ductwork shall meet the requirements of Seal Class C. Class 750 through 2500 Pa shall meet the requirements of Seal Class A. Pressure sensitive tape shall not be used as a sealant. Spiral lock seam duct, and flat oval shall be made with duct sealant and locked with not less than 3 equally spaced drive screws or other approved methods indicated in SMACNA HVAC Duct Const Stds. The sealant shall be applied to the exposed male part of the fitting collar so that the sealer will be on the inside of the joint and fully protected by the metal of the duct fitting. One brush coat of the sealant shall be applied over the outside of the joint to at least 50 mm band width covering all screw heads and joint gap. Dents in the male portion of the slip fitting collar will not be acceptable. Outdoor air intake ducts and plenums shall be fabricated with watertight soldered or brazed joints and seams.

#### 2.8.1.1 Transitions

Diverging air flow transitions shall be made with each side pitched out a maximum of 15 degrees, for an included angle of 30 degrees. Transitions for converging air flow shall be made with each side pitched in a maximum of 30 degrees, for an included angle of 60 degrees, or shall be as indicated. Factory-fabricated reducing fittings for systems using round duct sections when formed to the shape of the ASME short flow nozzle, need not comply with the maximum angles specified.

#### 2.8.1.2 Metallic Flexible Duct

Metallic type duct shall be single-ply galvanized steel. Duct shall be of corrugated/interlocked, folded and knurled type seam construction, bendable without damage through 180 degrees with a throat radius equal to 1/2 duct diameter. Duct shall conform to UL 181 and shall be rated for positive or negative working pressure of 3.75 kPa at 177 degrees C when duct is aluminum, and 343 degrees C when duct is galvanized steel or stainless steel.

#### 2.8.1.3 Insulated Nonmetallic Flexible Duct Runouts

Flexible duct runouts shall be used only where indicated. Runout length shall be as shown on the drawings, but shall in no case exceed 3 m. Runouts shall be preinsulated, factory fabricated, and shall comply with NFPA 90A and UL 181. Either field or factory applied vapor barrier shall be provided. Where coil induction or high velocity units are supplied with vertical air inlets, a streamlined and vaned and mitered elbow transition piece shall be provided for connection to the flexible duct or hose. The last elbow to these units, other than the vertical air inlet type, shall be

a die-stamped elbow and not a flexible connector. Insulated flexible connectors may be used as runouts.

#### 2.8.1.4 General Service Duct Connectors

A flexible duct connector approximately 150 mm in width shall be provided where sheet metal connections are made to fans or where ducts of dissimilar metals are connected. For round/oval ducts, the flexible material shall be secured by stainless steel or zinc-coated, iron clinch-type draw bands. For rectangular ducts, the flexible material locked to metal collars shall be installed using normal duct construction methods. The composite connector system shall comply with UL 214 and be classified as "flame-retarded fabrics" in UL Bld Mat Dir.

#### 2.8.1.5 High Temperature Service Duct Connections

Material shall be approximately 2.38 mm thick, 1.2 to 1.36 kg per square meter weight, plain weave fibrous glass cloth with, nickel/chrome wire reinforcement for service in excess of 650 degrees C.

#### 2.8.2 Fibrous Glass Ductwork

Fibrous glass ductwork may be provided in lieu of sheet metal ductwork except that fibrous glass ductwork will not be allowed in fan and equipment rooms, where subject to traffic or weather damage, for outside air intakes, for risers of more than two stories, in kitchen or fume exhaust ducts, to convey solids or corrosive gases, in concrete, for burial below grade, as casings or housings, or in systems used for life support systems. Fibrous glass ductwork, including all components, shall be fabricated according to NAIMA AH115 where the velocity and the static pressure are within its scope. Where the velocity or static pressure exceeds these limits, the ductwork manufacturer shall certify that the ductwork is intended for the velocities and pressures to be encountered, and that the proposed installation meets all performance criteria specified herein for metal ductwork. Field or factory fabricated fibrous glass ductwork shall conform to UL 181, Class 1. Duct wall penetrations, transverse joints and longitudinal seams shall be sealed as instructed by the manufacturer by one of the methods prescribed by NAIMA AH115, where applicable, except that pressure sensitive tape shall not be used as a sealant. All items necessary for a complete installation shall be provided as specified for sheet metal duct systems.

#### 2.8.3 Ductwork Accessories

##### 2.8.3.1 Duct Access Doors

Access doors shall be provided in ductwork and plenums where indicated and at all air flow measuring primaries, automatic dampers, fire dampers, coils, thermostats, and other apparatus requiring service and inspection in the duct system, and unless otherwise shown, shall conform to SMACNA HVAC Duct Const Stds. Access doors shall be provided upstream and downstream of air flow measuring primaries and heating and cooling coils. Doors shall be minimum 375 x 450 mm, unless otherwise shown. Where duct size will not accommodate this size door, the doors shall be made as large as practicable. Doors 600 x 600 mm or larger shall be provided with fasteners operable from both sides. Doors in insulated ducts shall be the insulated type.

#### 2.8.3.2 Fire Dampers

Fire dampers shall be 1-1/2 hour fire rated unless otherwise indicated. Fire dampers shall conform to the requirements of NFPA 90A and UL 555. The Contractor shall perform the fire damper test as outlined in NFPA 90A. A pressure relief damper shall be provided upstream of the fire damper. If the ductwork connected to the fire damper is to be insulated then this pressure relief damper shall be factory insulated. Fire dampers shall be automatic operating type and shall have a dynamic rating suitable for the maximum air velocity and pressure differential to which it will be subjected. Fire dampers shall be approved for the specific application, and shall be installed according to their listing. Fire dampers shall be equipped with a steel sleeve or adequately sized frame installed in such a manner that disruption of the attached ductwork, if any, will not impair the operation of the damper. Sleeves or frames shall be equipped with perimeter mounting angles attached on both sides of the wall or floor opening. Ductwork in fire-rated floor-ceiling or roof-ceiling assembly systems with air ducts that pierce the ceiling of the assemblies shall be constructed in conformance with UL Fire Resist Dir. Fire dampers shall be curtain type with damper blades in the air stream out of the air stream or single blade type. Dampers shall not reduce the duct or the air transfer opening cross-sectional area. Dampers shall be installed so that the centerline of the damper depth or thickness is located in the centerline of the wall, partition or floor slab depth or thickness. Unless otherwise indicated, the installation details given in SMACNA Install Fire Damp HVAC and in manufacturer's instructions for fire dampers shall be followed.

#### 2.8.3.3 Splitters and Manual Balancing Dampers

Splitters and manual balancing dampers shall be furnished with accessible operating mechanisms. Where operators occur in finished portions of the building, operators shall be chromium plated with all exposed edges rounded. Splitters shall be operated by quadrant operators or 5 mm rod brought through the side of the duct with locking setscrew and bushing. Two rods are required on splitters over 200 mm. Manual volume control dampers shall be operated by locking-type quadrant operators. Dampers and splitters shall be 2 gauges heavier than the duct in which installed. Unless otherwise indicated, multileaf dampers shall be opposed blade type with maximum blade width of 300 mm. Access doors or panels shall be provided for all concealed damper operators and locking setscrews. Unless otherwise indicated, the locking-type quadrant operators for dampers, when installed on ducts to be thermally insulated, shall be provided with stand-off mounting brackets, bases, or adapters to provide clearance between the duct surface and the operator not less than the thickness of the insulation. Stand-off mounting items shall be integral with the operator or standard accessory of the damper manufacturer. Volume dampers shall be provided where indicated.

#### 2.8.3.4 Air Deflectors and Branch Connections

Air deflectors shall be provided at duct mounted supply outlets, at takeoff or extension collars to supply outlets, at duct branch takeoff connections, and at 90 degree elbows, as well as at locations as indicated on the drawings or otherwise specified. Conical branch connections or 45 degree entry connections may be used in lieu of deflectors or extractors for branch

connections. All air deflectors, except those installed in 90 degree elbows, shall be provided with an approved means of adjustment. Adjustment shall be made from easily accessible means inside the duct or from an adjustment with sturdy lock on the face of the duct. When installed on ducts to be thermally insulated, external adjustments shall be provided with stand-off mounting brackets, integral with the adjustment device, to provide clearance between the duct surface and the adjustment device not less than the thickness of the thermal insulation. Air deflectors shall be factory-fabricated units consisting of curved turning vanes or louver blades designed to provide uniform air distribution and change of direction with minimum turbulence or pressure loss. Air deflectors shall be factory or field assembled. Blade air deflectors, also called blade air extractors, shall be approved factory fabricated units consisting of equalizing grid and adjustable blade and lock. Adjustment shall be easily made from the face of the diffuser or by position adjustment and lock external to the duct. Stand-off brackets shall be provided on insulated ducts and are described herein. Fixed air deflectors, also called turning vanes, shall be provided in 90 degree elbows.

#### 2.8.4 Duct Sleeves, Framed Prepared Openings, Closure Collars

##### 2.8.4.1 Duct Sleeves

Duct sleeves shall be provided for round ducts 375 mm in diameter or less passing through floors, walls, ceilings, or roof, and installed during construction of the floor, wall, ceiling, or roof. Round ducts larger than 375 mm in diameter and square, rectangular, and oval ducts passing through floors, walls, ceilings, or roof shall be installed through framed prepared openings. The Contractor shall be responsible for the proper size and location of sleeves and prepared openings. Sleeves and framed openings are also required where grilles, registers, and diffusers are installed at the openings. Framed prepared openings shall be fabricated from 1.0 mm (20 gauge) galvanized steel, unless otherwise indicated. Where sleeves are installed in bearing walls or partitions, black steel pipe, ASTM A 53, Schedule 20 shall be used. Sleeve shall provide 25 mm clearance between the duct and the sleeve or 25 mm clearance between the insulation and the sleeve for insulated ducts.

##### 2.8.4.2 Framed Prepared Openings

Openings shall have 25 mm clearance between the duct and the opening or 25 mm clearance between the insulation and the opening for insulated ducts.

##### 2.8.4.3 Closure Collars

Collars shall be fabricated of galvanized sheet metal not less than 100 mm wide, unless otherwise indicated, and shall be installed on exposed ducts on each side of walls or floors where sleeves or prepared openings are provided. Collars shall be installed tight against surfaces. Collars shall fit snugly around the duct or insulation. Sharp edges of the collar around insulated duct shall be ground smooth to preclude tearing or puncturing the insulation covering or vapor barrier. Collars for round ducts 375 mm in diameter or less shall be fabricated from 1.0 mm galvanized steel. Collars for round ducts larger than 375 mm and square, and rectangular ducts shall be fabricated from 1.3 mm galvanized steel. Collars shall be installed with

fasteners on maximum 150 mm centers, except that not less than 4 fasteners shall be used.

#### 2.8.6 Sound Attenuation Equipment

##### a. Systems With Total Pressure Above 1 kPa:

Sound attenuators shall be provided on the discharge duct of each fan operating at a total pressure above 1 kPa, and, when indicated, at the intake of each fan system. Sound attenuators shall be provided elsewhere as indicated. The sound attenuators shall be factory fabricated and shall be tested by an independent laboratory for sound and performance characteristics. Net sound reduction shall be as indicated. Maximum permissible pressure drop shall not exceed 157 Pa. Traps shall be constructed to be airtight when operating under an internal static pressure of 2.5 kPa. Air-side surface shall be capable of withstanding air velocity of 50 m/s (10,000 fpm). The Contractor shall certify that the sound reduction values specified will be obtained after the equipment is installed in the system and coordinated with the sound information of the system fan to be provided. Sound absorbing material shall conform to ASTM C 1071, Type I or II. A duct transition section shall be provided for connection to ductwork. Factory fabricated double-walled internally insulated spiral lock seam and round duct and fittings designed for high pressure air system may be provided in lieu of factory fabricated sound attenuators, and shall comply with requirements specified for factory fabricated sound attenuators. The double-walled duct and fittings shall be constructed of an outer metal pressure shell of zinc-coated steel sheet, 25 mm thick acoustical blanket insulation, and an internal perforated zinc-coated metal liner. Sufficient length of run shall be provided to obtain the noise reduction coefficient specified. The Contractor shall certify that the sound reduction value specified will be obtained within the length of duct run provided. The outer sheet metal of the double-walled duct shall have welded, or spiral lock, seams to prevent water vapor penetration. The outer sheet of the duct and fittings shall conform to the metal thickness of high pressure spiral and round ducts and fittings shown in SMACNA HVAC Duct Const Stds. The acoustical insulation shall have a thermal conductivity "k" of not more than 0.0389 W/m-K at 24 degrees C mean temperature. The internal perforated zinc-coated metal liner shall be not less than 0.7 mm with perforations not larger than 6.35 mm in diameter providing a net open area not less than 10 percent of the surface.

##### a. System With Total Pressure of 1000 Pa and Lower:

Sound attenuators shall be provided only where indicated, or in lieu of lined ducts. Factory fabricated sound attenuators shall be constructed of galvanized steel sheets. Outer casing shall be not less than 0.85 mm. Acoustical fill shall be fibrous glass. Net sound reduction shall be as indicated. Values shall be obtained on a test unit not less than 600 mm by 600 mm outside dimensions made by a certified nationally recognized independent acoustical laboratory. Air flow capacity shall be as indicated or required. Pressure drop through the attenuator shall not exceed the value indicated, or shall not be in excess of 15 percent of the total external static pressure of the air handling system, whichever is less. Sound attenuators shall be acoustically tested with metal duct inlet and outlet sections while under the rated air flow conditions. Noise reduction

data shall include the effects of flanking paths and vibration transmission. Sound attenuators shall be constructed to be airtight when operating at the internal static pressure indicated or specified for the duct system, but in no case less than 500 Pa.

a. Acoustical Duct Liner:

Acoustical duct lining shall be fibrous glass designed exclusively for lining ductwork and shall conform to the requirements of ASTM C 1071, Type I and II. Liner composition may be uniform density, graduated density, or dual density, as standard with the manufacturer. Lining shall be coated, not less than 25 mm thick. Duct sizes shown shall be increased to compensate for the thickness of the lining used. In lieu of sheet metal duct with field-applied acoustical lining, acoustically equivalent lengths of fibrous glass duct or factory fabricated double-walled internally insulated duct with perforated liner may be provided. Net insertion loss value, static pressure drop, and air flow velocity capacity data shall be certified by a nationally recognized independent acoustical laboratory.

2.8.7 Diffusers, Registers, and Grilles

Units shall be factory-fabricated of steel, corrosion-resistant steel, or aluminum and shall distribute the specified quantity of air evenly over space intended without causing noticeable drafts, air movement faster than 0.25 m/s in occupied zone, or dead spots anywhere in the conditioned area. Outlets for diffusion, spread, throw, and noise level shall be as required for specified performance. Performance shall be certified according to ASHRAE 70. Inlets and outlets shall be sound rated and certified according to ASHRAE 70. Sound power level shall be as indicated. Diffusers and registers shall be provided with volume damper with accessible operator, unless otherwise indicated; or if standard with the manufacturer, an automatically controlled device will be acceptable. Volume dampers shall be opposed blade type for all diffusers and registers, except linear slot diffusers. Linear slot diffusers shall be provided with round or elliptical balancing dampers. Where the inlet and outlet openings are located less than 2 m above the floor, they shall be protected by a grille or screen according to NFPA 90A.

2.8.7.1 Diffusers

Diffuser types shall be as indicated. Ceiling mounted units shall be furnished with anti-smudge devices, unless the diffuser unit minimizes ceiling smudging through design features. Diffusers shall be provided with air deflectors of the type indicated. Air handling troffers or combination light and ceiling diffusers shall conform to the requirements of UL Elec Const Dir for the interchangeable use as cooled or heated air supply diffusers or return air units. Ceiling mounted units shall be installed with rims tight against ceiling. Sponge rubber gaskets shall be provided between ceiling and surface mounted diffusers for air leakage control. Suitable trim shall be provided for flush mounted diffusers. Duct collar connecting the duct to diffuser shall be airtight and shall not interfere with volume controller. Return or exhaust units shall be similar to supply diffusers.

#### 2.8.7.2 Registers and Grilles

Units shall be four-way directional-control type, except that return and exhaust registers may be fixed horizontal or vertical louver type similar in appearance to the supply register face. Registers shall be provided with sponge-rubber gasket between flanges and wall or ceiling. Wall supply registers shall be installed at least 150 mm below the ceiling unless otherwise indicated. Return and exhaust registers shall be located 150 mm above the floor unless otherwise indicated. Four-way directional control may be achieved by a grille face which can be rotated in 4 positions or by adjustment of horizontal and vertical vanes. Grilles shall be as specified for registers, without volume control damper.

#### 2.8.8 Louvers

Louvers for installation in exterior walls which are associated with the air supply and distribution system shall be as specified in Section 07600 SHEET METALWORK, GENERAL.

#### 2.8.9 Air Vents, Penthouses, and Goosenecks

Air vents, penthouses, and goosenecks shall be fabricated from galvanized steel sheets with galvanized structural shapes. Sheet metal thickness, reinforcement, and fabrication shall conform to SMACNA HVAC Duct Const Stds. Louver blades shall be accurately fitted and secured to frames. Edges of louver blades shall be folded or beaded for rigidity and baffled to exclude driving rain. Air vents, penthouses, and goosenecks shall be provided with bird screen.

#### 2.8.10 Bird Screens and Frames

Bird screens shall conform to ASTM E 437, No. 2 mesh, aluminum or stainless steel. Aluminum screens shall be rated "medium-light". Stainless steel screens shall be rated "light". Frames shall be removable type, or stainless steel or extruded aluminum.

### 2.9 AIR SYSTEMS EQUIPMENT

#### 2.9.1 Fans

Fans shall be tested and rated according to AMCA 210. Fans may be connected to the motors either directly or indirectly with V-belt drive. V-belt drives shall be designed for not less than 150 percent of the connected driving capacity. Motor sheaves shall be variable pitch for 11 kW and below and fixed pitch as defined by ARI Guideline D. Variable pitch sheaves shall be selected to drive the fan at a speed which will produce the specified capacity when set at the approximate midpoint of the sheave adjustment. When fixed pitch sheaves are furnished, a replaceable sheave shall be provided when needed to achieve system air balance. Motors for V-belt drives shall be provided with adjustable rails or bases. Removable metal guards shall be provided for all exposed V-belt drives, and speed-test openings shall be provided at the center of all rotating shafts. Fans shall be provided with personnel screens or guards on both suction and supply ends, except that the screens need not be provided, unless otherwise indicated, where ducts are connected to the fan. Fan and motor assemblies

shall be provided with vibration-isolation supports or mountings as indicated. Vibration-isolation units shall be standard products with published loading ratings. Each fan shall be selected to produce the capacity required at the fan static pressure indicated. Sound power level shall be as indicated. The sound power level values shall be obtained according to AMCA 300. Standard AMCA arrangement, rotation, and discharge shall be as indicated.

#### 2.9.1.1 Centrifugal Fans

Centrifugal fans shall be fully enclosed, single-width single-inlet, or double-width double-inlet, AMCA Pressure Class I, II, or III as required or indicated for the design system pressure. Impeller wheels shall be rigidly constructed, accurately balanced both statically and dynamically. Fan blades may be forward curved, backward-inclined or airfoil design in wheel sizes up to 750 mm. Fan blades for wheels over 750 mm in diameter shall be backward-inclined or airfoil design. Fan wheels 900 mm or less in diameter may have one or more extra long bearings between the fan wheel and the drive. Bearings shall be sleeve type, self-aligning and self-oiling with oil reservoirs, or precision self-aligning roller or ball-type with accessible grease fittings or permanently lubricated type. Grease fittings shall be connected to tubing and serviceable from a single accessible point. Bearing life shall be L50 rated at not less than 200,000 hours as defined by AFBMA Std 9 and AFBMA Std 11. Fan shafts shall be steel, accurately finished, and shall be provided with key seats and keys for impeller hubs and fan pulleys. Each fan outlet shall be of ample proportions and shall be designed for the attachment of angles and bolts for attaching flexible connections. Motors, unless otherwise indicated, shall not exceed 1800 rpm and shall have open enclosures.

#### 2.9.1.2 In-Line Centrifugal Fans

In-line fans shall have centrifugal backward inclined blades, stationary discharge conversion vanes, internal and external belt guards, and adjustable motor mounts. Fans shall be mounted in a welded tubular casing. Air shall enter and leave the fan axially. Inlets shall be streamlined with conversion vanes to eliminate turbulence and provide smooth discharge air flow. Fan bearings and drive shafts shall be enclosed and isolated from the air stream. Fan bearings shall be sealed against dust and dirt and shall be permanently lubricated, and shall be precision self aligning ball or roller type. Bearing life shall be L50 rated at not less than 200,000 hours as defined by AFBMA Std 9 and AFBMA Std 11.

#### 2.9.1.4 Panel Type Power Wall Ventilators

Fans shall be propeller type, assembled on a reinforced metal panel with venturi opening spun into panel. Fans with wheels less than 600 mm diameter shall be direct or V-belt driven and fans with wheels 600 mm diameter and larger shall be V-belt drive type. Fans shall be furnished with wall mounting collar. Lubricated bearings shall be provided. Fans shall be fitted with wheel and motor side metal or wire guards which have a corrosion-resistant finish. Motor enclosure shall be totally enclosed fan cooled type. Motor operated backdraft dampers shall be provided where indicated.



#### 2.9.1.5 Centrifugal Type Power Wall Ventilators

Fans shall be direct or V-belt driven centrifugal type with backward inclined, non-overloading wheel. Motor housing shall be removable and weatherproof. Unit housing shall be designed for sealing to building surface and for discharge and condensate drippage away from building surface. Housing shall be constructed of heavy gauge aluminum. Unit shall be fitted with an aluminum or plated steel wire discharge bird screen, [manufacturer's standard motor-operated damper, an airtight and liquid-tight metallic wall sleeve. Motor enclosure shall be totally enclosed fan cooled type. Lubricated bearings shall be provided.

#### 2.9.1.9 Ceiling Exhaust Fans

Suspended cabinet-type ceiling exhaust fans shall be centrifugal type, direct-driven. Fans shall have acoustically insulated housing. Integral backdraft damper shall be chatter-proof. The integral face grille shall be of egg-crate design or louver design. Fan motors shall be mounted on vibration isolators. Unit shall be provided with mounting flange for hanging unit from above. Fans shall be U.L. listed.

#### 2.9.3 Air Filters

Air filters shall be listed according to requirements of UL 900, except high efficiency particulate air filters of 99.97 percent efficiency by the DOP Test method shall be as listed under the Label Service and shall meet the requirements of UL 586.

##### 2.9.3.6 Electrostatic Filters

Electrostatic filters shall be the combination dry agglomerator/extended surface nonsupported pocket filter or the combination dry agglomerator/automatic renewable media (roll) type, as indicated. Each dry agglomerator electrostatic air filter shall be supplied with the correct quantity of fully housed power packs and equipped with silicon rectifiers, manual reset circuit breakers, low voltage safety cutout, relays for field wiring to remote indication of primary and secondary voltages, and lamps mounted in the cover to indicate these functions locally. Power pack enclosure shall be equipped with external mounting brackets, and low and high voltage terminals shall be fully exposed with access cover removed for ease of installation. Interlock safety switches shall be furnished for each access door and access panel which permits access to either side of the filter, so that the filter will be de-energized in the event that a door or panel is opened. Ozone generation within the filter shall not exceed five parts per one hundred million parts of air. High voltage insulators shall be located outside the moving air stream or on the clean air side of the unit and shall be serviceable. Ionizer wire supports shall be fully exposed and ionizer wires shall be furnished pre-cut to size and with formed loops at each end to facilitate ionizer wire replacement. Agglomerator cell plates shall allow proper air stream entrainment of agglomerates and prevent excessive residual dust build-up. Cells shall be open at the top and bottom to prevent accumulation of agglomerates which settle by gravity. Where the dry agglomerator electrostatic filter is indicated to be the automatic renewable media type, the storage section shall utilize a horizontal or vertical travelling curtain of adhesive-coated bonded fibrous glass for dry

agglomerator storage section service and supplied in 19.8 m lengths in convenient roll form. Storage section construction and roll media characteristics shall otherwise be as specified for automatic renewable media filters. Initial air flow resistance of the dry agglomerator/renewable media combination, after installation of clean media, shall not exceed 62.3 Pa at 2.54 m/s face velocity. Minimum atmospheric air dust spot efficiency of the combination shall be not less than 90 percent when tested according to ASHRAE 52.1 at an average operating resistance of 125 Pa. Where the dry agglomerator electrostatic filter is indicated to be of the extended surface nonsupported pocket filter type, the storage section shall be as specified for extended surface non-supported pocket filters, with sectional holding frames or side access housings as indicated. Initial air flow resistance of the dry agglomerator/extended surface nonsupported pocket filter section combination, after installation of clean filters, shall not exceed 162 Pa at 2.54 m/s face velocity. Minimum atmospheric air dust spot efficiency of the combination shall be not less than 95 percent when tested according to ASHRAE 52.1. Front access filters shall be furnished with full height air distribution baffles and upper and lower mounting tracks to permit the baffles to be moved for agglomerator cell inspection and service. When used in conjunction with factory fabricated air handling units, side access housings shall be supplied which have dimensional compatibility.

## 2.13 FACTORY PAINTING

Units which are not of galvanized construction according to ASTM A 123/A 123M or ASTM A 924/A 924M shall be factory painted with a corrosion resisting paint finish. Internal and external ferrous metal surfaces shall be cleaned, phosphatized and coated with a paint finish which has been tested according to ASTM B 117, ASTM D 1654, and ASTM D 3359. Evidence of satisfactory paint performance for a minimum of 125 hours for units to be installed indoors and 500 hours for units to be installed outdoors shall be submitted. Rating of failure at the scribe mark shall be not less than 6, average creepage not greater than 3 mm. Rating of the inscribed area shall not be less than 10, no failure. On units constructed of galvanized steel which have been welded, exterior surfaces of welds or welds that have burned through from the interior shall receive a final shop docket of zinc-rich protective paint according to ASTM D 520 Type I.

## PART 3 EXECUTION

### 3.1 INSTALLATION

Work shall be installed as shown and according to the manufacturer's diagrams and recommendations.

#### 3.1.1 Piping

Pipe and fitting installation shall conform to the requirements of ASME B31.1. Pipe shall be cut accurately to measurements established at the jobsite, and worked into place without springing or forcing, completely clearing all windows, doors, and other openings. Cutting or other weakening of the building structure to facilitate piping installation will not be permitted without written approval. Pipe or tubing shall be cut square, shall have burrs removed by reaming, and shall permit free expansion and

contraction without causing damage to the building structure, pipe, joints, or hangers. Changes in direction shall be made with fittings, except that bending of pipe 100 mm and smaller will be permitted, provided a pipe bender is used and wide sweep bends are formed. The centerline radius of bends shall not be less than 6 diameters of the pipe. Bent pipe showing kinks, wrinkles, flattening, or other malformations will not be accepted. Horizontal supply mains shall pitch down in the direction of flow as indicated. The grade shall be not less than 2 mm in 1 m. Reducing fittings shall be used for changes in pipe sizes. Open ends of pipelines and equipment shall be capped or plugged during installation to keep dirt or other foreign materials out of the system. Pipe not otherwise specified shall be uncoated. Connections to appliances shall be made with malleable iron unions for steel pipe 65 mm or less in diameter, and with flanges for pipe 80 mm and larger. Connections between ferrous and copper piping shall be electrically isolated from each other with dielectric unions or flanges. All piping located in air plenums shall conform to NFPA 90A requirements. Pipe and fittings installed in inaccessible conduits or trenches under concrete floor slabs shall be welded.

#### 3.1.13 Metal Ductwork

Installation shall be according to SMACNA HVAC Duct Const Stds unless otherwise indicated. Duct supports for sheet metal ductwork shall be according to SMACNA HVAC Duct Const Stds, unless otherwise specified. Friction beam clamps indicated in SMACNA HVAC Duct Const Stds shall not be used. Risers on high velocity ducts shall be anchored in the center of the vertical run to allow ends of riser to move due to thermal expansion. Supports on the risers shall allow free vertical movement of the duct. Supports shall be attached only to structural framing members and concrete slabs. Supports shall not be anchored to metal decking unless a means is provided and approved for preventing the anchor from puncturing the metal decking. Where supports are required between structural framing members, suitable intermediate metal framing shall be provided. Where C-clamps are used, retainer clips shall be provided.

#### 3.1.14 Fibrous Glass Ductwork

Installation shall be according to the manufacturer's written recommendations unless otherwise required in NAIMA AH115. Duct supports for fibrous glass ductwork shall conform to NAIMA AH115. In those cases not covered in NAIMA AH115, the written recommendation of the fibrous duct manufacturer shall be followed.

##### 3.1.15.2 Exposed Ductwork

Exposed ductwork shall be fabricated from minimum 1.3 mm, Type 304L or 316L, stainless steel with continuously welded joints and seams. Ducts shall be pitched to drain at hoods and low points indicated. Surface finish shall match hoods.

##### 3.1.15.3 Concealed Ducts Conveying Moisture Laden Air

Concealed ducts conveying moisture laden air shall be fabricated from minimum 1.3 mm, Type 300 series, stainless steel 1.6 mm. Joints shall be continuously welded, brazed, or soldered to be liquid tight. Duct shall be

pitched to drain at points indicated. Transitions to other metals shall be liquid tight, companion angle bolted and gasketed.

#### 3.1.16 Acoustical Duct Lining

Lining shall be applied in cut-to-size pieces attached to the interior of the duct with nonflammable fire resistant adhesive conforming to ASTM C 916, Type I, NFPA 90A, UL 723, and ASTM E 84. Top and bottom pieces shall lap the side pieces and shall be secured with welded pins, adhered clips of metal, nylon, or high impact plastic, and speed washers or welding cup-head pins installed according to SMACNA HVAC Duct Const Stds. Welded pins, cup-head pins, or adhered clips shall not distort the duct, burn through, nor mar the finish or the surface of the duct. Pins and washers shall be flush with the surfaces of the duct liner and all breaks and punctures of the duct liner coating shall be sealed with the nonflammable, fire resistant adhesive. Exposed edges of the liner at the duct ends and at other joints where the lining will be subject to erosion shall be coated with a heavy brush coat of the nonflammable, fire resistant adhesive, to prevent delamination of glass fibers. Duct liner may be applied to flat sheet metal prior to forming duct through the sheet metal brake. Lining at the top and bottom surfaces of the duct shall be additionally secured by welded pins or adhered clips as specified for cut-to-size pieces. Other methods indicated in SMACNA HVAC Duct Const Stds to obtain proper installation of duct liners in sheet metal ducts, including adhesives and fasteners, will be acceptable.

#### 3.1.17 Dust Control

To prevent the accumulation of dust, debris and foreign material during construction, temporary dust control protection shall be provided. The distribution system (supply and return) shall be protected with temporary seal-offs at all inlets and outlets at the end of each day's work. Temporary protection shall remain in place until system is ready for startup.

#### 3.1.18 Insulation

Outdoor air intake ducts and plenums shall be externally insulated up to the point where the outdoor air reaches the conditioning unit.

#### 3.1.19 Duct Test Holes

Holes with closures or threaded holes with plugs shall be provided in ducts and plenums as indicated or where necessary for the use of pitot tube in balancing the air system. Extensions, complete with cap or plug, shall be provided where the ducts are insulated.

#### 3.1.20 Power Transmission Components Adjustment

V-belts and sheaves shall be tested for proper alignment and tension prior to operation and after 72 hours of operation at final speed. Belts on drive side shall be uniformly loaded, not bouncing. Alignment of direct driven couplings shall be to within 50 percent of manufacturer's maximum allowable range of misalignment.

### 3.2 FIELD PAINTING AND COLOR CODE MARKING

Finish painting of items only primed at the factory, surfaces not specifically noted otherwise, and color code marking for piping shall be as specified in Section 09900 PAINTING, GENERAL.

### 3.4 DUCTWORK LEAK TEST

Ductwork leak test shall be performed for the entire air distribution and exhaust system, including fans, coils, filters, etc. Test procedure, apparatus, and report shall conform to SMACNA Leakage Test Mnl. Ductwork leak test shall be completed with satisfactory results prior to applying insulation to ductwork exterior.

### 3.5 CLEANING AND ADJUSTING

Air vents shall be plugged or capped after the system has been vented. Inside of air terminal units, ducts and casing shall be thoroughly cleaned of debris and blown free of small particles of rubbish and dust and then shall be vacuum cleaned before installing outlet faces. Equipment shall be wiped clean, with traces of oil, dust, dirt, or paint spots removed. Temporary filters shall be provided prior to startup of all fans that are operated during construction, and new filters shall be installed after all construction dirt has been removed from the building, and the ducts, plenums, casings, and other items specified have been vacuum cleaned. System shall be maintained in this clean condition until final acceptance. Bearings shall be properly lubricated with oil or grease as recommended by the manufacturer. Belts shall be tightened to proper tension. Control valves and other miscellaneous equipment requiring adjustment shall be adjusted to setting indicated or directed. Fans shall be adjusted to the speed indicated by the manufacturer to meet specified conditions.

### 3.6 TESTING, ADJUSTING, AND BALANCING

Testing, adjusting, and balancing shall be as specified in Section 15990 TESTING, ADJUSTING AND BALANCING OF HVAC SYSTEMS. Testing, adjusting, and balancing shall begin only when the air supply and distribution, including controls, has been completed, with the exception of performance tests.

### 3.7 PERFORMANCE TESTS

After testing, adjusting, and balancing has been completed as specified, each system shall be tested as a whole to see that all items perform as integral parts of the system and temperatures and conditions are evenly controlled throughout the building. Corrections and adjustments shall be made as necessary to produce the conditions indicated or specified. Capacity tests and general operating tests shall be conducted by an experienced engineer. Tests shall cover a period of not less than 1 day for each system and shall demonstrate that the entire system is functioning according to the specifications. Coincidental chart recordings shall be made at points indicated on the drawings for the duration of the time period and shall record the temperature at space thermostats or space sensors, the humidity at space humidistats or space sensors and the ambient temperature and humidity in a shaded and weather protected area.

01062/BERGER/ABAM  
FY02 Tactical Equipment Complex  
Fort Lewis, Washington

### 3.8 FIELD TRAINING

The Contractor shall conduct a training course for operating and maintenance personnel as designated by the Contracting Officer. Training shall be provided for a period of 2 hours of normal working time and shall start after the system is functionally complete but prior to the performance tests. The field instruction shall cover all of the items contained in the approved Operating and Maintenance Instructions.

-- End of Section --

SECTION 15950

HEATING, VENTILATING AND AIR CONDITIONING (HVAC) CONTROL SYSTEMS

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by basic designation only.

AIR MOVEMENT AND CONTROL ASSOCIATION (AMCA)

AMCA 500-D (1997) Laboratory Methods of Testing Dampers for Rating

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM A 269 (1996) Seamless and Welded Austenitic Stainless Steel Tubing for General Service

ASTM B 88 (1996) Seamless Copper Water Tube

ASTM D 635 (1997) Rate of Burning and/or Extent and Time of Burning of Self-Supporting Plastics in a Horizontal Position

ASTM D 1693 (1997a) Environmental Stress-Cracking of Ethylene Plastics

AMERICAN SOCIETY OF MECHANICAL ENGINEERS (ASME)

ASME B40.1 (1991) Gauges - Pressure Indicating Dial Type - Elastic Element

INSTITUTE OF ELECTRICAL AND ELECTRONICS ENGINEERS (IEEE)

IEEE C62.41 (1991; R 1995) Surge Voltages in Low-Voltage AC Power Circuits

NATIONAL ELECTRICAL MANUFACTURERS ASSOCIATION (NEMA)

NEMA 250 (1991) Enclosures for Electrical Equipment (1000 Volts Maximum)

NATIONAL FIRE PROTECTION ASSOCIATION (NFPA)

NFPA 70 (1999) National Electrical Code

NFPA 90A (1996) Installation of Air Conditioning and Ventilating Systems

UNDERWRITERS LABORATORIES (UL)

UL 94	(1996; Rev thru Jul 1998) Tests for Flammability of Plastic Materials for Parts in Devices and Appliances
UL 508	(1993; Rev thru Oct 1997) Industrial Control Equipment

1.2 GENERAL REQUIREMENTS

The direct digital control (DDC) shall be a complete system suitable for the heating, ventilating and air-conditioning (HVAC) system. It is to be interfaced with the existing post system.

1.3 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only. When used, a designation following the "G" designation identifies the office that will review the submittal for the Government. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

SD-02 Shop Drawings

Drawings

Drawings on A1 841 by 594 mm sheets in the form and arrangement shown. The drawings shall use the same abbreviations, symbols, nomenclature and device identifiers shown. Each control-system element on a drawing shall have a unique identifier as shown. All HVAC control system drawings shall be delivered together as a complete submittal. Drawings shall be submitted for each HVAC system.

a. HVAC control system drawings shall include the following:

Sheet One: Drawing index, HVAC control system legend.

Sheet Two: Valve schedule, damper schedule.

Sheet Three: Compressed air station schematic.

Sheet Four: HVAC control system schematic and equipment schedule.

Sheet Five: HVAC control system sequence of operation and ladder diagram.

Sheet Six: HVAC control panel arrangement, control panel cross-section, and control panel inner door layout.



Sheet Seven: HVAC control panel back-panel layout.

Sheet Eight: Control loop wiring diagrams.

Sheet Nine: Motor starter and relay wiring diagram.

Note: Repeat sheets four through nine for each AHU system.

b. An HVAC control system drawing index showing the name and number of the building, military site, State or other similar designation, and Country. The drawing index shall list all HVAC control system drawings, including the drawing number, sheet number, drawing title, and computer filename when used.

c. An HVAC control system legend showing generic symbols and the name of devices shown on the HVAC control system drawings.

d. A valve schedule showing each valve's unique identifier, size, flow coefficient (Cv), pressure drop at specified flow rate, spring range, positive positioner range, actuator size, close-off pressure data, dimensions, and access and clearance requirements data.

e. A damper schedule showing each damper and actuator's identifier, nominal and actual sizes, orientation of axis and frame, direction of blade rotation, spring ranges, operation rate, positive positioner ranges, locations of actuators and damper end switches, arrangement of sections in multi-section dampers, and methods of connecting dampers, actuators, and linkages. The damper schedule shall include the maximum leakage rate at the operating static-pressure differential. The damper schedule shall contain actuator selection data supported by calculations of the torque required to move and seal the dampers, access and clearance requirements.

f. A compressed-air station schematic diagram showing all equipment, including: compressor with motor horsepower and voltage; starter; isolators; manual bypasses; tubing sizes; drain piping and drain traps; reducing valves; dryer; and data on manufacturer's names and model numbers, mounting, access, and clearance requirements. Air compressor and air dryer data shall include calculations of the air consumption of current-to-pneumatic transducers and any other control system devices to be connected to the compressed air station, and the compressed air supply dewpoint temperature at 140 kPa (gauge).

g. An HVAC control system equipment schedule showing the control loop, device unique identifier, device function, setpoint, input range, and additional important parameters (i.e. output range).

h. An HVAC control system sequence of operation.

i. An HVAC control system ladder diagram showing all relays, contacts, pilot lights, switches, fuses and starters connected to the control system.

j. HVAC control panel arrangement drawings showing both side and front views of the panel. The drawing shall show panel and mounting dimensions.

k. HVAC control panel cross-section drawings showing mounting rails and standoffs for devices.

l. HVAC control panel inner door layout drawings showing both front and rear views of the inner door. The drawings shall show device locations, labels, nameplate legends, and fabrication details.

m. HVAC control panel back-panel layout drawings showing device locations, labels, nameplate legends, terminal block layout, fabrication details, and enclosure operating temperature-rise calculations.

n. HVAC control system wiring diagrams showing functional wiring diagrams of the interconnection of conductors and cables to HVAC control panel terminal blocks and to the identified terminals of devices, starters and package equipment. The wiring diagrams shall show all necessary jumpers and ground connections. The wiring diagrams shall show the labels of all conductors. Sources of power required for HVAC control systems and for packaged-equipment control systems shall be identified back to the panel-board circuit breaker number, HVAC system control panel, magnetic starter, or packaged equipment control circuit. Each power supply and transformer not integral to a controller, starter, or packaged equipment shall be shown. The connected volt-ampere load and the power supply volt-ampere rating shall be shown.

#### SD-03 Product Data

##### HVAC Control System Service Organizations

Six copies of a list of service organizations qualified to service the HVAC control system. The list shall include the service organization name, address, technical point of contact and telephone number, and contractual point of contact and telephone number.

##### Equipment Compliance Booklet

An HVAC control system equipment compliance booklet (ECB) in indexed booklet form with numbered tabs separating the information on each device. It shall consist of, but not be limited to, data sheets and catalog cuts which document compliance of all devices and components with the specifications. The ECB shall be indexed in alphabetical order by the unique identifiers. Devices and components which do not have unique identifiers shall follow the devices and components with unique identifiers and shall be indexed in alphabetical order according to their functional name. The ECB shall include a bill of materials for each HVAC control system.

The bill of materials shall function as the table of contents for the ECB and shall include the device's unique identifier, device function, manufacturer, model/part/catalog number used for ordering, and tab number where the device information is located in the ECB.

#### Commissioning Procedures

a. Six copies of the HVAC control system commissioning procedures, in indexed booklet form, 60 days prior to the scheduled start of commissioning. Commissioning procedures shall be provided for each HVAC control system, and for each type of terminal-unit control system. The commissioning procedures shall reflect the format and language of this specification, and refer to devices by their unique identifiers as shown. The commissioning procedures shall be specific for each HVAC system, and shall give detailed step-by-step procedures for commissioning of the system.

b. Commissioning procedures documenting detailed, product-specific set-up procedures, configuration procedures, adjustment procedures, and calibration procedures for each device. Where the detailed product-specific commissioning procedures are included in manufacturer supplied manuals, reference may be made in the HVAC control system commissioning procedures to the manuals.

c. Commissioning procedures documenting controller configuration check sheets for each controller listing all configuration parameters, dip switch and jumper settings, and initial recommended P, I and D values. The configuration parameters shall be listed in the order in which they appear during the configuration process. Each configuration parameter shall be noted as being: set per specs with no field adjustment required, set per specs but field adjustable, or not applicable.

d. Commissioning procedures showing a time clock configuration check sheet listing all parameters, and switch settings. The parameters shall be listed in the order which they appear during the setup process.

e. An HVAC control system commissioning procedures equipment list that lists the equipment to be used to accomplish commissioning. The list shall include manufacturer name, model number, equipment function, the date of the latest calibration, and the results of the latest calibration.

#### Performance Verification Test Procedures

Six copies of the HVAC control system performance verification test procedures, in indexed booklet form, 60 days before the Contractor's scheduled test dates. The performance verification test procedures shall refer to the devices by their unique identifiers as shown, shall explain, step-by-step, the actions and expected results that will demonstrate that the HVAC control system performs in accordance with the sequences of operation. An HVAC control system performance verification test equipment list shall

be included that lists the equipment to be used during performance verification testing. The list shall include manufacturer name, model number, equipment function, the date of the latest calibration, and the results of the latest calibration.

#### Training Course Requirements

Six copies of HVAC control system training course material 30 days prior to the scheduled start of the training course. The training course material shall include the operation manual, maintenance and repair manual, and paper copies of overheads used in the course. An HVAC control system training course, in outline form, with a proposed time schedule. Approval of the planned training schedule shall be obtained from the Government at least 60 days prior to the start of the training.

#### SD-06 Test Reports

##### Commissioning Report

Six copies of the HVAC control system commissioning report, in indexed booklet form, within 30 days after completion of the system commissioning. The commissioning report shall include data collected during the HVAC control system commissioning and shall follow the format of the commissioning procedures. The commissioning report shall include all controller and time clock checksheets with final values listed for all parameters, setpoints, P, I, D setting constants, calibration data for all devices, and results of adjustments.

##### Performance Verification Test

Six copies of the HVAC control system performance verification test report, in indexed booklet form, within 30 days after completion of the test. The HVAC control system performance verification test report shall include data collected during the HVAC control system performance verification test. The original copies of data gathered during the performance verification test shall be turned over to the Government after Government approval of the test results.

#### SD-10 Operation and Maintenance Data

##### Operation Manual Maintenance and Repair Manual

Six copies of the HVAC control system operation manual for each HVAC control system 30 days before the date scheduled for the training course.

#### 1.4 GENERAL REQUIREMENTS

##### 1.4.1 Verification of Dimensions

The Contractor shall become familiar with all details of the work, shall verify all dimensions in the field, and shall advise the Contracting Officer of any discrepancy before performing any work.

##### 1.4.2 Drawings

Because of the small scale of the drawings, it is not possible to indicate all offsets, fittings, and accessories that may be required. The Contractor shall investigate the mechanical, electrical, and finish conditions that could affect the work to be performed, shall arrange such work accordingly, and shall furnish all work necessary to meet such conditions.

#### 1.5 DELIVERY AND STORAGE

Products shall be stored with protection from the weather, humidity and temperature variations, dirt and dust, and other contaminants, within the storage-condition limits published by the equipment manufacturer. Dampers shall be stored so that seal integrity, blade alignment and frame alignment are maintained.

#### 1.6 OPERATION MANUAL

An HVAC control system operation manual for each HVAC control system, in indexed booklet form, shall be provided. The operation manual shall include the HVAC control system sequence of operation, and procedures for the HVAC system start-up, operation and shut-down. The operation manual shall include as-built HVAC control system detail drawings. The operation manual shall include the as-built controller configuration checksheets, the as-built time clock configuration checksheet, the HVAC control system front panel description, the procedures for changing HVAC system controller setpoints, the procedures for gaining manual control of processes, the time clock manufacturer's manual control of processes, the time clock manufacturer's operation manual, and the controller manufacturer's operation manual.

a. The HVAC control system front panel description shall explain the meaning and use of the lights, switches, gauges, and controller displays located in the front panel. Each light, switch, gauge, and display described shall be numbered and referenced to a drawing of the front panel.

b. The procedures for changing HVAC system controller setpoints shall describe the step-by-step procedures required to change: the process variable setpoints of controllers, the alarm setpoints of controllers, the controller bias settings, and controller setpoint reset schedules.

c. The procedures for gaining manual control of processes shall describe step-by-step procedures required to gain manual control of devices and manually adjust their positions.

## 1.7 MAINTENANCE AND REPAIR MANUAL

An HVAC control system maintenance and repair manual for each HVAC control system, in indexed booklet form in hardback binders, shall be provided. The maintenance and repair manual shall include the routine maintenance checklist, a recommended repair methods list, a list of recommended maintenance and repair tools, the qualified service organization list, the as-built commissioning procedures and report, the as-built performance verification test procedures and report, and the as-built equipment data booklet (EDB).

a. The routine maintenance checklist shall be arranged in a columnar format. The first column shall list all devices listed in the equipment compliance booklet (ECB), the second column shall state the maintenance activity or state no maintenance required, the third column shall state the frequency of the maintenance activity, and the fourth column for additional comments or reference.

b. The recommended repair methods list shall be arranged in a columnar format and shall list all devices in the equipment compliance booklet (ECB) and state the guidance on recommended repair methods, either field repair, factory repair, or whole-item replacement.

c. The as-built equipment data booklet (EDB) shall include the equipment compliance booklet (ECB) and all manufacturer supplied user manuals and information.

d. If the operation manual and the maintenance and repair manual are provided in a common volume, they shall be clearly differentiated and separately indexed.

## PART 2 PRODUCTS

### 2.1 MATERIAL AND EQUIPMENT

Material and equipment shall be standard products of a manufacturer regularly engaged in the manufacturing of such products which are of a similar material, design and workmanship. The standard products shall have been in satisfactory commercial or industrial use for 2 years prior to bid opening. The 2-year use shall include applications of equipment and materials under similar circumstances and of similar size. The 2 years experience must be satisfactorily completed by a product which has been sold or is offered for sale on the commercial market through advertisements, manufacturers' catalogs, or brochures. Products having less than a 2-year field service record will be acceptable if a certified record of satisfactory field operation, for not less than 6000 hours exclusive of the manufacturer's factory tests, can be shown. The equipment items shall be supported by a service organization. The Contractor shall submit a certified list of qualified permanent service organizations and qualifications. These service organizations shall be reasonably convenient to the equipment on a regular and emergency basis during the warranty period.

## 2.2 GENERAL EQUIPMENT REQUIREMENTS

### 2.2.1 Electrical and Electronic Devices

All electrical, electronic, and electro-pneumatic devices not located within an HVAC control panel shall have a NEMA Type 1 enclosure in accordance with NEMA 250 unless otherwise shown.

### 2.2.2 Standard Signals

The output of all analog transmitters and the analog input and output of all single-loop controllers and function modules shall be 4-to-20 mAdc signals. The signal shall originate from current-sourcing devices and shall be received by current-sinking devices.

### 2.2.3 Ambient Temperature Limits

Ambient Temperature Actuators and positive positioners, and transmitters shall operate within temperature limit ratings of 5 to 60 degrees C. All panel-mounted instruments shall operate within limit ratings of 2 to 50 degrees C and 10 percent to 95 percent relative humidity, noncondensing. All devices installed outdoors shall operate within limit ratings of minus 40 to plus 65 degrees C.

### 2.2.4 Nameplates, Lens Caps, and Tag Nameplates

Nameplates, lens caps, and lens caps bearing legends as shown and tags bearing device-unique identifiers as shown shall have engraved or stamped characters. A plastic or metal tag shall be mechanically attached directly to each device or attached by a metal chain or wire. Each air flow measurement station shall have a tag showing flow rate range for signal output range, duct size, and identifier as shown.

### 2.2.5 Year 2000 Compliance

All equipment shall be Year 2000 compliant and shall be able to accurately process date/time data (including, but not limited to, calculating, comparing, and sequencing) from, into, and between the twentieth and twenty-first centuries, including leap year calculations, when used in accordance with the product documentation provided by the contractor, provided that all products (e.g. hardware, software, firmware) used in combination with other information technology, shall accurately process date/time data if other information technology properly exchanges date/time data with it.

## 2.3 MATERIALS

### 2.3.1 Tubing

#### 2.3.1.1 Copper

Copper tubing shall conform to ASTM B 88 and shall have sweat fittings and valves.

#### 2.3.1.2 Plastic

Plastic tubing shall have barbed fittings and valves. Plastic tubing shall have the burning characteristics of linear low-density polyethylene tubing, shall be self-extinguishing when tested in accordance with ASTM D 635, shall have UL 94 V-2 flammability classification, and shall withstand stress cracking when tested in accordance with ASTM D 1693. Plastic-tubing bundles shall be provided with Mylar barrier and flame-retardant polyethylene jacket.

#### 2.3.1.3 Stainless Steel

Stainless steel tubing shall conform to ASTM A 269, and shall have stainless steel compression fittings.

#### 2.3.2 Wiring

##### 2.3.2.1 Terminal Blocks

Terminal blocks shall be insulated, modular, feed-through, clamp style with recessed captive screw-type clamping mechanism, shall be suitable for rail mounting, and shall have end plates and partition plates for separation or shall have enclosed sides.

##### 2.3.2.2 Control Wiring for 24-Volt Circuits

Control wiring for 24-volt circuits shall be 18 AWG minimum, stranded copper and shall be rated for 300-volt service.

##### 2.3.2.3 Wiring for 120-Volt Circuits

Wiring for 120-volt circuits shall be 18 AWG minimum, stranded copper and shall be rated for 600-volt service.

##### 2.3.2.4 Analog Signal Wiring Circuits

Analog signal wiring circuits within control panels shall not be less than 20 AWG and shall be rated for 300-volt service.

##### 2.3.2.5 Instrumentation Cable

Instrumentation cable shall be 18 AWG, stranded copper, single or multiple-twisted, minimum 51 mm lay of twist, 100 percent shielded pairs, and shall have a 300-volt insulation. Each pair shall have a 20 AWG tinned-copper drain wire and individual overall pair insulation. Cables shall have an overall aluminum-polyester or tinned-copper cable-shield tape, overall 20 AWG tinned-copper cable drain wire, and overall cable insulation.

##### 2.3.2.6 Nonconducting Wiring Duct

Nonconducting wiring duct in control panels shall have wiring duct in control panels shall have slotted sides, snap-on duct covers, have slotted sides, snap-on duct covers, fittings for connecting ducts, mounting clips for securing ducts, and wire-retaining clips.



#### 2.3.2.7 Transformers

Step-down transformers shall be utilized where control equipment operates at lower than line circuit voltage. Transformers, other than transformers in bridge circuits, shall have primaries wound for the voltage available and secondaries wound for the correct control circuit voltage. Transformers shall be sized so that the connected load is 80 percent of the rated capacity or less. Transformers shall conform to UL 508.

### 2.4 ACTUATORS

Actuators shall be electric or electronic as shown and shall be provided with mounting and connecting hardware. Actuators shall fail to their spring-return positions on signal or power failure. The actuator stroke shall be limited in the direction of power stroke by an adjustable stop. Actuators shall have a visible position indicator. Actuators shall smoothly open or close the devices to which they are applied and shall have a full stroke response time of 90 seconds or less. Electric actuators shall have an oil-immersed gear train. Electric or electronic actuators operating in series shall have an auxiliary actuator driver. Electric or electronic actuators used in sequencing applications shall have an adjustable operating range and start point. Pneumatic actuators shall be rated for 172 kPa operating pressure except for high-pressure cylinder-type actuators.

#### 2.4.1 Valve Actuators

Valve actuators shall be selected to provide a minimum of 125 percent of the motive power necessary to operate the valve over its full range of operation.

#### 2.4.2 Positive Positioners

Positive positioners are required for pneumatic actuators. Each positive positioner shall be a pneumatic relay with a mechanical feedback mechanism and an adjustable operating range and starting point.

### 2.5 DAMPERS

#### 2.5.1 Damper Assembly

A single damper section shall have blades no longer than 1.2 m and shall be no higher than 1.8 m. Maximum damper blade width shall be 203 mm. Larger sizes shall be made from a combination of sections. Dampers shall be steel, or other materials where shown. Flat blades shall be made rigid by folding the edges. All blade-operating linkages shall be within the frame so that blade-connecting devices within the same damper section will not be located directly in the air stream. Damper axles shall be 13 mm (minimum) plated steel rods supported in the damper frame by stainless steel or bronze bearings. Blades mounted vertically shall be supported by thrust bearings. Pressure drop through dampers shall not exceed 10 Pa at 5 m/s in the wide-open position. Frames shall not be less than 50 mm in width. Dampers shall be tested in accordance with AMCA 500-D.

#### 2.5.1.1 Operating Links

Operating links external to dampers (such as crankarms, connecting rods, and line shafting for transmitting motion from damper actuators to dampers) shall withstand a load equal to at least twice the maximum required damper-operating force. Rod lengths shall be adjustable. Links shall be brass, bronze, zinc-coated steel, or stainless steel. Working parts of joints and clevises shall be brass, bronze, or stainless steel. Adjustments of crankarms shall control the open and closed positions of dampers.

#### 2.5.1.2 Damper Types

Dampers shall be parallel blade type.

#### 2.5.2 Outside-Air, Return-Air, and Relief-Air Dampers

The dampers shall be provided where shown. Blades shall have interlocking edges and shall be provided with compressible seals at points of contact. The channel frames of the dampers shall be provided with jamb seals to minimize air leakage. Dampers shall not leak in excess of 102 L/s per square meter at 1,000 Pa (gauge) static pressure when closed. Seals shall be suitable for an operating temperature range of minus 40 to plus 93 degrees C. Dampers shall be rated at not less than 10 m/s air velocity.

#### 2.5.3 Mechanical and Electrical Space Ventilation Dampers

The dampers shall be as shown. Dampers shall not leak in excess of 406 L/s per square meter at 1,000 Pa (gauge) static pressure when closed. Dampers shall be rated at not less than 7.8 m/s air velocity.

#### 2.5.4 Damper End Switches

Each end switch shall be a hermetically-sealed switch with a trip lever and over-travel mechanism. The switch enclosure shall be suitable for mounting on the duct exterior and shall permit setting the position of the trip lever that actuates the switch. The trip lever shall be aligned with the damper blade.

### 2.6 INSTRUMENTATION

#### 2.6.1 Measurements

Transmitters shall be factory calibrated to provide an output of 4 to 20 mAdc over the indicated ranges:

- a. Conditioned space temperature, from 10 to 30 degrees C.
- b. Duct temperature, from 5 to 60 degrees C except that return-air temperature for economizer operation shall be minus 35 to plus 55 degrees C.
- c. High-temperature hot-water temperature, from 94 to 260 degrees C.
- d. Chilled-water temperature, from minus 1 to plus 38 degrees C.

- e. Dual-temperature water, from minus 1 to plus 116 degrees C.
- f. Heating hot-water temperature, from 10 to 121 degrees C.
- g. Condenser-water temperature, from minus 1 to plus 55 degrees C.
- h. Outside-air temperature, from minus 35 to plus 55 degrees C.
- i. Relative humidity, 0 to 100 percent for space and duct high-limit applications.
- j. Differential pressure for VAV supply-duct static pressure from 0 to 500 Pa (gauge).
- k. Pitot-tube air-flow measurement station and transmitter, from 0 to 25 Pa (gauge) for flow velocities of 3.5 to 6 m/s, 0 to 60 Pa (gauge) for velocities of 3.5 to 9 m/s, or 0 to 125 Pa (gauge) for velocities of 3.5 to 13 m/s.
- l. Electronic air-flow measurement station and transmitter, from 0.6 to 13 m/s.

## 2.6.2 Temperature Instruments

### 2.6.2.1 Resistance Temperature Detectors (RTD)

Temperature sensors shall be 100 ohms 3- or 4-wire RTD. Each RTD shall be platinum with a tolerance of plus or minus 0.30 degrees C at 0 degrees C with a temperature coefficient of resistance (TCR) of 0.00385ohms/ohm/degC. Each RTD shall be furnished with an RTD transmitter as specified, integrally-mounted unless otherwise shown.

#### 2.6.2.2 Continuous-Averaging RTD

Continuous-averaging RTDs shall have a tolerance of plus or minus 0.5 degree C at the reference temperature, and shall be of sufficient length to ensure that the resistance represents an average over the cross-section in which it is installed. The sensing element shall have a bendable copper sheath. Each averaging RTD shall be furnished with an RTD transmitter as specified, to match the resistance range of the averaging RTD.

#### 2.6.2.3 RTD Transmitter

The RTD transmitter shall accept a 3-wire 100 ohm RTD input. The transmitter shall be a 2-wire, loop-powered device. The transmitter shall produce a linear 4-to-20 mAdc output corresponding to the required temperature measurement. The output error shall not exceed 0.1 percent of the calibrated span. The transmitter shall include offset and span adjustments.

## 2.6.3 Electronic Air-Flow-Measurement Stations and Transmitters

### 2.6.3.1 Stations

Each station shall consist of an array of velocity sensing elements and an air-flow straightener. Air-flow straighteners shall be contained in a flanged sheet-metal or aluminum casing. The velocity sensing elements shall be of the RTD or thermistor type, producing a temperature compensated output. The sensing elements shall be distributed across the duct cross-section in the quantity and pattern specified by the published application data of the station manufacturer. The resistance to airflow through the air-flow measurement station shall not exceed 20.0 Pa at an air-flow of 10 m/s. Station construction shall be suitable for operation at air-flows of up to 25.3 m/s over a temperature range of 4.4 to 49 degrees C, and accuracy shall be plus or minus 3 percent over a range of 0.6 to 13 m/s. In outside-air measurement or in low-temperature air delivery applications, the station shall be certified by the manufacturer to be accurate as specified over a temperature range of minus 30 to plus 50 degrees C. In outside-air measurement applications, the air-flow straightener shall be constructed of 3.175 mm (1/8 inch) aluminum honeycomb and the depth of the straightener shall not be less than 40 mm.

### 2.6.3.2 Transmitters

Each transmitter shall produce a linear, 4-to-20 mAdc output corresponding to the required velocity measurement. The output error of the transmitter shall not exceed 0.5 percent of the calibrated measurement. Each transmitter shall have offset and span adjustments.

## 2.6.4 Pitot-Tube Air-Flow-Measurement Stations and Transmitters

### 2.6.4.1 Pitot-Tube Type Stations

Each station shall contain an array of velocity sensing elements and straightening vanes inside a flanged sheet-metal casing. The velocity sensing elements shall be of the multiple pitot-tube type with averaging manifolds. The sensing elements shall be distributed across the duct cross-section in the quantity and pattern specified by the published installation instructions of the station manufacturer. The resistance to air flow through the air-flow-measurement station shall not exceed 20 Pa at an air flow of 10 m/s. Station construction shall be suitable for operation at air flows of up to 25.3 m/s over a temperature range of 4.4 to 49 degrees C, and accuracy shall be plus or minus 3 percent over a range of 3.5 to 13 m/s. This device will not be used if the required velocity measurement is below 3.5 m/s or for outside air flow measurements.

### 2.6.4.2 Pitot-Tube Type Transmitters

Each transmitter shall produce a linear 4-to-20 mAdc output corresponding to the required velocity pressure measurement. Each transmitter shall have a low-range differential-pressure sensing element and a square-root extractor. Sensing element accuracy shall be plus or minus 1 percent of full scale, and overall transmitter accuracy shall be plus or minus 0.25 percent of the calibrated measurement. Each transmitter shall have offset and span adjustments.

#### 2.6.5 Differential Pressure Instruments

The instrument shall be a pressure transmitter with an integral sensing element. The instrument over pressure rating shall be 300 percent of the operating pressure. The sensor/transmitter assembly accuracy shall be plus or minus 2 percent of full scale. The transmitter shall be a 2-wire, loop-powered device. The transmitter shall produce a linear 4-to-20 mAdc output corresponding to the required pressure measurement. Each transmitter shall have offset and span adjustments.

#### 2.6.6 Thermowells

Thermowells shall be Series 300 stainless steel with threaded brass plug and chain, 50 mm lagging neck and extension-type well, and inside diameter and insertion length as required for the application.

#### 2.6.7 Sunshields

Sunshields for outside-air temperature sensing elements shall prevent the sun from directly striking the temperature sensing elements. The sunshields shall be provided with adequate ventilation so that the sensing element responds to the ambient temperature of the surroundings. The top of each sunshield shall have a galvanized-metal rainshield projecting over the face of the sunshield. The sunshields shall be painted white or shall be unpainted aluminum.

### 2.7 THERMOSTATS

Thermostat ranges shall be selected so that the setpoint is adjustable without tools between plus or minus 5 degrees C of the setpoint shown. Thermostats shall be electronic or electric.

#### 2.7.1 Nonmodulating Room Thermostats

Contacts shall be single-pole double-throw (SPDT), hermetically sealed, and wired to identified terminals. Maximum differential shall be 2.75 degrees C. Room thermostats shall be enclosed with separate locking covers (guards). Thermostats shall have manual switches as required by the application.

#### 2.7.2 Microprocessor-Based Room Thermostats

Microprocessor-based thermostats shall have built-in keypads for scheduling of day and night temperature settings. When out of the scheduling mode, thermostats shall have continuous display of time, with AM and PM indicator, continuous display of day of week, and either continuous display of room temperature with display of temperature setpoint on demand, or continuous display of temperature setpoint with display of room temperature on demand. In the programmable mode, the display shall be used for interrogating time program ON-OFF setpoints for all 7 days of the week. The time program shall allow 2 separate temperature-setback intervals per day. The thermostats shall have a means for temporary and manual override of the program schedule, with automatic program restoration on the following day. Thermostats shall have a replaceable battery to maintain the timing and

maintain the schedule in memory for 1 year in the event of a power outage. Maximum differential shall be 1 degree C. When used for heat-pump applications, the thermostat shall have an emergency heat switch.

#### 2.7.3 Modulating Room Thermostats

Modulating room thermostats shall have either one output signal, two output signals operating in unison, or two output signals operating in sequence, as required for the application. Each thermostat shall have an adjustable throttling range of 2 to 4 degrees C for each output. Room thermostats shall be enclosed with separate locking covers (guards).

### 2.8 PRESSURE SWITCHES AND SOLENOID VALVES

#### 2.8.1 Pressure Switches

Each switch shall have an adjustable setpoint with visible setpoint scale. Range shall be as shown. Differential adjustment shall span 20 to 40 percent of the range of the device.

#### 2.8.2 Differential-Pressure Switches

Each switch shall be an adjustable diaphragm-operated device with two SPDT contacts, with taps for sensing lines to be connected to duct pressure fittings designed to sense air pressure. These fittings shall be of the angled-tip type with tips pointing into the air stream. The setpoint shall not be in the upper or lower quarters of the range and the range shall not be more than three times the setpoint. Differential shall be a maximum of 35 Pa at the low end of the range and 85 Pa at the high end of the range.

#### 2.8.3 Pneumatic Electric (PE) Switches

Each switch shall have an adjustable setpoint range of 20 to 140 kPa with a switching differential adjustable from 15 to 35 kPa. The switch action shall be SPDT.

#### 2.8.4 Solenoid-Operated Pneumatic (EP) Valves

Each valve shall have three-port operation: common, normally open, and normally closed. Each valve shall have an outer cast-aluminum body and internal parts of brass, bronze, or stainless steel. The air connection shall be a 10 mm NPT threaded connection. Valves shall be rated for 345 kPa when used in a control system that operates at 172 kPa or less, or 1035 kPa when used in a control system that operates in the range of 172 to 690 kPa.

## 2.9 INDICATING DEVICES

### 2.9.1 Thermometers

#### 2.9.1.1 Piping System Thermometers

Piping system thermometers shall have brass, malleable iron or aluminum alloy case and frame, clear protective face, permanently stabilized glass tube with indicating-fluid column, white face, black numbers, and a 230 mm scale. Thermometers for piping systems shall have rigid stems with straight, angular, or inclined pattern.

#### 2.9.1.2 Piping System Thermometer Stems

Thermometer stems shall have expansion heads as required to prevent breakage at extreme temperatures. On rigid-stem thermometers, the space between bulb and stem shall be filled with a heat-transfer medium.

#### 2.9.1.3 Non-Averaging Air-Duct Thermometers

Air-duct thermometers shall have perforated stem guards and 45-degree adjustable duct flanges with locking mechanism.

#### 2.9.1.4 Averaging Air-Duct Thermometers

Averaging thermometers shall have a 90 mm (nominal) dial, with black legend on white background, and pointer traveling through a 270-degree arc.

#### 2.9.1.5 Accuracy

Thermometers shall have an accuracy of plus or minus 1 percent of scale range. Thermometers shall have a range suitable for the application.

### 2.9.2 Pressure Gauges

Gauges shall be 50 mm (nominal) size, back connected, suitable for field or panel mounting as required, shall have black legend on white background, and shall have a pointer traveling through a 270-degree arc. Accuracy shall be plus or minus 3 percent of scale range. Gauges shall meet requirements of ASME B40.1.

#### 2.9.2.1 Pneumatic Actuator Gauges

Field mounted gauges for indicating signal input to pneumatic actuators shall have a scale of 0 to 200 kPa with 10 kPa graduations.

#### 2.9.2.2 Air Storage Tank, Filter, and Dryer Gauges

Gauges for air storage tanks, or for use before and after dryers or dirt and oil filters, shall have a scale of 0 to 1100 kPa with 20 kPa graduations.

#### 2.9.2.3 Control Panel Pressure Gauges

Panel mounted air pressure gauges shall have a scale of 0 to 200 kPa with 10 kPa graduations.

#### 2.9.3 Low Differential Pressure Gauges

Gauges for low differential-pressure measurements shall be a minimum of 90 mm (nominal) size with two sets of pressure taps, and shall have a diaphragm-actuated pointer, white dial with black figures, and pointer zero adjustment. Gauges shall have ranges and graduations as shown. Accuracy shall be plus or minus 2 percent of scale range.

### 2.10 SINGLE-LOOP CONTROLLERS

#### 2.10.1 Controller Features

The controller shall be a microprocessor-based single-loop device that does not require Contractor generated software. The controller shall be mountable in a panel cutout measuring 92 by 92 mm. The controller shall have field scalable process variable, a remote setpoint analog input, which is field scalable independent of the process variable, and an analog output with adjustable high and low end limits and proportional control manual reset adjustment. The analog output shall result from proportional, integral and derivative (PID) control. The analog output shall be configurable as direct acting and reverse acting. The controller shall have keyboard, display, auto/manual selection for control of its analog output, remote setpoint adjustment/local setpoint adjustment selection with adjustable high-end and low-end limits, ratio and bias adjustments on remote setpoint input, operator-initiated self-tune/manual-tune selection, anti-reset wind-up feature, and 2 independent SPDT contact-closure outputs (PV alarm and deviation alarm). The controller shall be configurable to power-up in automatic with local setpoint control and in automatic with remote setpoint control. The range of hysteresis adjustment shall be not smaller than from 1 percent to 5 percent of process variable input span. The controller shall power the analog output loop to 20 milliamperes when connected to a load of 600 ohms. The controller shall be capable of retransmitting the process variable to 20 milliamperes when connected to 600 ohms. The controller shall have 5-year battery backup to store operating parameters or shall have nonvolatile memory.

#### 2.10.2 Parameter Input and Display

Control parameters shall be entered and displayed directly, in the correct engineering units, through a series of keystrokes on a front-panel display with a 3-1/2 digit, 7-segment display, with decimal point and polarity indication. The use of this display shall allow manual interrogation of setpoint, mode constants, and values of the process variable and output.

#### 2.10.3 Controller Electrical Requirements

Each controller shall be powered by 120 volts ac. Power consumption shall not be greater than 25 watts. Each controller shall provide electrical noise isolation between the ac power line and the process variable input, remote setpoint input, and output signals and of not less than 100 db at 60



Hz common-mode rejection ratio, and not less than 60 db at 60 Hz normal-mode rejection ratio.

#### 2.10.4 Controller Accuracy

The controller shall have an accuracy of plus or minus 0.30 percent of input span, plus or minus 1 digit.

#### 2.10.5 Self-Tuning

The controller self-tuning operation shall apply proportional, integral, and derivative modes of control and shall modify the mode constants as required. Self-tuning shall only be in operation when selected from the front panel.

#### 2.10.6 Manual-Tuning

The controller manual-tuning operation shall provide proportional, integral, and derivative control modes, or any combination thereof, by means of individual mode constant adjustments. These adjustments shall be set for the appropriate value if a particular control mode action is desired, or to zero if that particular mode is not desired. The proportional-mode constant shall be adjustable from 0 to 200 percent of input signal range, the integral-mode constant shall be adjustable from 0 to 20 repeats per minute, and derivative-mode constant shall be adjustable from 0 to 5 minutes.

### 2.11 CONTROL DEVICES AND ACCESSORIES

Control device and accessory input impedance shall not exceed 250 ohms.

#### 2.11.1 Function Modules

Function modules shall accept mAdc analog input signals to produce mAdc analog output signals or contact output signals. Modules shall have zero and span adjustments for analog outputs, and setpoint adjustments for contact outputs. Module output span accuracy shall be plus or minus 1 percent of input span. Modules shall be rail-mounted as shown. Power consumption shall be not greater than 5 watts.

##### 2.11.1.1 Minimum-Position Switch and Temperature-Setpoint Device

Minimum-position switch and temperature-setpoint device shall accept a 1000 ohms potentiometer input and shall produce a steady analog output. In temperature setpoint applications the potentiometer shall be single-turn, suitable for wall mounting, enclosed in a locking metal or heavy duty plastic enclosure and shall have a graduated dial corresponding to the range of the setpoint adjustment. In a minimum position switch application the potentiometer shall be mounted on or internal to the minimum position switch. The device shall have its input signal electrically or optically isolated from output. Mounting socket shall be an 8 pin base with pins 1, 2, 3 ac power input, 4, 5, 6 input signal, 7, 8, output signal.

#### 2.11.1.2 Signal-Inverter Modules

Signal inverter shall accept an analog input signal and shall have sufficient output capacity to drive the output signal through a circuit with an impedance of not less than 600 ohms. The output shall be electrically isolated from the input and the device shall have a moisture resistant coating. Mounting socket shall be an 8 pin base with pins 1, 2, 3 ac power input, 4, 5, 6 input signal, 7, 8, output signal.

#### 2.11.1.3 High-Low Signal Selector

High-low signal-selector modules shall accept analog input signals and select either the highest or the lowest input signal as the output signal. The signal selector shall be powered by 120 Vac and the output signal shall be electrically isolated from the input signal.

#### 2.11.1.4 Sequencer Modules (Dual Limit Alarm)

Sequencer modules (dual limit alarms) shall accept an analog input signal and shall provide two contact closure outputs. Each output shall have an adjustable independent contact setpoint with an adjustable switching differential range between 1 percent and 100 percent of the input span. The setpoint shall be adjustable between 0 percent and 100 percent of the input span. Setpoint and switching differential (dead band) adjustment potentiometers shall be internal, top-accessed potentiometers or screws. Sequencers shall return all contacts to their zero input signal condition when power is interrupted. The device shall have moisture resistant coating.

#### 2.11.1.5 Loop Driver Modules

Loop driver module shall accept an analog input signal and shall have a circuit input impedance not greater than 100 ohms. The loop driver module shall have sufficient output capacity to drive the output signal through a circuit with an impedance range of not less than 1000 ohms. The output shall be electrically isolated from the input and the device shall have moisture resistant coating. Mounting socket shall be an 8 pin base with pins 1, 2, 3 ac power input, 4, 5, 6 input signal, 7, 8 output signal.

#### 2.11.2 Relays

Relays shall be 2-pole, double-throw (2PDT) with a 10-ampere resistive rating at 120 Vac, and shall have an enclosed 120-Vac coil with 8 pin blade connectors, and a matching rail-mounted socket. Power consumption shall not be greater than 3 watts.

#### 2.11.3 Time-Delay Relays

Time delay relays shall be 2PDT with 8 pin connectors, dust cover, and a matching rail-mounted socket. Adjustable timing range shall be 0 to 5 minutes. Power consumption shall be not greater than 3 watts.

#### 2.11.4 Current Sensing Relays

Current sensing relays shall provide a normally-open contact rated at a minimum of 50 volts peak and 1/2 ampere or 25 VA, noninductive. There shall be a single hole for passage of current carrying conductors. The devices shall be sized for operation at 50 percent rated current based on the connected load. Voltage isolation shall be a minimum of 600 volts.

#### 2.11.5 Time Clocks

Each time clock shall be a 365-day programmable timing device with 4 independently timed circuits. Each clock shall have a manual scheduling keypad and an alphanumeric display of all timing parameters. Timing parameters shall include: date in Gregorian calendar for month, day and day-of-month indication; and 24-hour time-of-day display, with one-minute resolution for programming the ON and OFF times for each circuit. Each clock shall allow programming of each circuit for 12 holiday periods for either ON or OFF events for any selected duration of the 365-day program. Each clock shall have capacity for programming 4 ON events and 4 OFF events per day for each circuit. The programmed events shall be assignable to a 365-day schedule. Each clock shall have automatic Standard Time and Daylight Saving Time adjustment, by input of the appropriate dates. Each time clock shall have automatic leap year correction. Each clock shall be provided with 4-day battery backup. Power consumption shall not be greater than 10 watts.

#### 2.11.6 Current-to-Pneumatic (IP) Transducers

The transducers shall be 2-wire current-to-pressure transmitters that convert a 4-to-20 mA<sub>dc</sub> input signal to a 21 to 103 kPa, or a 103 to 21 kPa, pneumatic output, with a conversion accuracy of plus or minus 2 percent of full scale, including linearity and hysteresis. Input impedance shall not exceed 250 ohms. Air consumption shall not be greater than 0.12 L/s.

#### 2.11.7 Direct Current (DC) Power Supply

One DC power supply shall be used to power all transmitters connected to the control panel. The power supply shall be 24 V<sub>dc</sub> at not less than 1.2 amperes, with a peak-to-peak ripple not to exceed 0.03 percent of output voltage. Each power supply shall have a fused input, and shall be protected from voltage surges and powerline transients. The power supply output shall be protected against overvoltage and short circuits.

### 2.12 HVAC SYSTEM CONTROL PANELS

#### 2.12.1 Panel Assembly

The control panel shall be factory assembled and shipped to the job site as a single unit. The panel shall be fabricated as shown, and the devices shall be mounted as shown. Each panel shall be fabricated as a bottom-entry connection point for control-system electric power, control-system main air source, control-system wiring, pneumatic tubing, interconnection of control systems, interconnection of starters and external shutdown devices, and energy monitoring and control systems (EMCS) interface. Each panel shall

have an operating temperature rise of not greater than 11 degrees C above an ambient temperature of 38 degrees C.

#### 2.12.2 Panel Electrical Requirements

Each control panel shall be powered by nominal 120 volts ac, fused at 5 amps, terminating at the panel on terminal blocks. Instrument cases shall be grounded. Interior panel, interior door, and exterior panel enclosure shall be grounded.

#### 2.12.3 Enclosure

The enclosure for each panel shall be a NEMA 12 single-door wall-mounted box conforming to NEMA 250, with continuous hinged and gasketed exterior door with print pocket and key lock, continuous hinged interior door, interior back panel, and ventilation louvers in back surface as shown. Inside finish shall be white enamel, and outside finish shall be gray primer over phosphatized surfaces.

#### 2.12.4 Mounting and Labeling

Controllers, pilot lights, switches, IP's, and pressure gauge shall be mounted on the interior door as shown. Power conditioner, fuses and duplex outlet shall be mounted on the interior of the cabinet as shown. All other components housed in the panel shall be mounted on the interior back panel surface of the enclosure, behind the door on rails as shown. Controllers and gauges mounted on the front of the inner door shall be identified by a plastic or metal nameplate as shown that is mechanically attached to the panel. Function modules, relays, timeclocks, IP transducers, DC power supply, and other devices interior to the panel shall be identified by a plastic or metal nameplate that is mechanically attached to the panel. The nameplate shall have the inscription as shown. Lettering shall be cut or stamped into the nameplate to a depth of not less than 0.4 mm, and shall show a contrasting color, produced by filling with enamel or lacquer or by the use of a laminated material. Painting of lettering directly on the surface of the interior door or panel is not permitted.

#### 2.12.5 Wiring and Tubing

##### 2.12.5.1 Current-to-Pneumatic Transducers (IP)

Current-to-pneumatic transducers (IP) shall be piped to bulkhead fittings in the bottom of the panel with a 50 mm loop to accommodate IP replacement and shall be wired to identified terminal blocks.

##### 2.12.5.2 Panel Wiring

Interconnections Wiring shall be installed in wiring ducts in such a way that devices can be added or replaced without disturbing wiring that is not affected by the change. Wiring to all devices shall have a 100 mm wiring loop in the horizontal wiring duct at each wiring connection. There shall be no wiring splices within the control panel. All interconnections required for power or signals shall be made on device terminals or panel terminal blocks, with not more than two wires connected to a terminal.

#### 2.12.5.3 Panel Terminal Blocks

Terminal blocks shall be arranged in groups as shown. Instrument signal grounds at the same ground reference level shall end at a grounding terminal for connection to a common ground point. Wiring-shield grounds at the same reference level shall end at a grounding terminal for connection to a common ground point. Grounding terminal blocks shall be identified by reference level.

#### 2.12.5.4 Wiring Identification

All wiring connected to controllers, time clocks and function modules shall be identified by function and polarity with full word identifiers, i.e., process variable input, remote setpoint input and control output.

#### 2.12.6 EMCS Terminal Blocks

Terminal blocks shall be provided for connections to EMCS as shown. Analog signals shall require only the removal of jumpers to interface to EMCS.

### PART 3 EXECUTION

#### 3.1 GENERAL INSTALLATION CRITERIA

The HVAC control system shall be installed and ready for operation, as specified and shown. Dielectric isolation shall be provided where dissimilar metals are used for connection and support. Penetrations through and mounting holes in the building exterior shall be made watertight. The HVAC control system installation shall provide clearance for control system maintenance by maintaining access space between coils, access space to mixed-air plenums, and other access space required to calibrate, remove, repair, or replace control system devices. The control system installation shall not interfere with the clearance requirements for mechanical installation shall not interfere with the clearance requirements for mechanical and electrical system maintenance.

##### 3.1.1 Device Mounting Criteria

Devices mounted in or on piping or ductwork, on building surfaces, in mechanical/electrical spaces, or in occupied space ceilings shall be installed in accordance with manufacturer's recommendations and as shown. Control devices to be installed in piping and ductwork shall be provided with all required gaskets, flanges, thermal compounds, insulation, piping, fittings, and manual valves for shutoff, equalization, purging, and calibration. Strap-on temperature sensing elements shall not be used except as specified.

##### 3.1.2 Wiring Criteria

Wiring external to control panels, including low-voltage wiring, shall be installed in metallic raceways. Nonmetallic-sheathed cables or metallic-armored cables may be installed in areas permitted by NFPA 70. Wiring shall be installed without splices between control devices and HVAC control panels. Cables and conductors shall be tagged at both ends, with the identifier shown on the shop drawings, in accordance with the requirements

of Section 16415 ELECTRICAL WORK, INTERIOR. Other electrical work shall be as specified in Section 16415 ELECTRICAL WORK, INTERIOR and as shown.

#### 3.1.2.1 Power-Line Surge Protection

Equipment connected to ac circuits shall be protected from powerline surges. Equipment protection shall meet the requirements of IEEE C62.41. Fuses shall not be used for surge protection.

#### 3.1.2.2 Surge Protection for Transmitter and Control Wiring

HVAC system control panel equipment shall be protected against surges induced on control and transmitter wiring installed outside and as shown.

The equipment protection shall be tested in the normal mode and in the common mode, using the following two waveforms:

- a. A 10-microsecond by 1000-microsecond waveform with a peak voltage of 1500 volts and a peak current of 60 amperes.
- b. An 8-microsecond by 20-microsecond waveform with a peak voltage of 1000 volts and a peak current of 500 amperes.

#### 3.1.2.3 Controller Output Loop Impedance Limitation

Controller output loops shall be constructed so that total circuit impedance connected to the analog output of a single-loop controller shall not exceed 600 ohms.

### 3.2 CONTROL SYSTEM INSTALLATION

#### 3.2.1 Damper Actuators

Actuators shall not be mounted in the air stream. Multiple actuators operating a common damper shall be connected to a common drive shaft. Actuators shall be installed so that their action shall seal the damper to the extent required to maintain leakage at or below the specified rate and shall move the blades smoothly.

#### 3.2.2 Local Gauges for Actuators

Pneumatic actuators shall have an accessible and visible receiver gauge installed in the tubing lines at the actuator as shown.

#### 3.2.3 Room-Instrument Mounting

Room instruments, such as wall mounted thermostats, shall be mounted 1.5 m above the floor unless otherwise noted. Temperature setpoint device shall be recess mounted.

#### 3.2.4 Manual Emergency Fan Shutdown Switches

Manual emergency fan shutdown switches shall be provided for air distribution fans in accordance with NFPA 90A. Switches shall be the manual-reset type. Switches shall be located and mounted in an accessible manner, approximately 1.2 m above the finished floor. Switches shall be properly identified in etched rigid plastic placards.

#### 3.2.5 Low-Temperature-Protection Thermostats

For each 1.8 square meters of coil-face area, or fraction thereof, a thermostat shall be provided to sense the temperature at the location shown. The thermostat sensing element shall be installed in a serpentine pattern.

#### 3.2.6 Averaging-Temperature Sensing Elements

Sensing elements shall have a total-element minimum length equal to 3.3 linear meter per square meter of duct cross-sectional area.

#### 3.2.7 Duct Static-Pressure Sensing Elements and Transmitters

The duct static-pressure sensing element and transmitter sensing point shall be located at 75% to 100% of the distance between the first and last air terminal units.

### 3.3 CONTROL SEQUENCES OF OPERATION

#### 3.3.1 System Requirements

These requirements shall apply to all primary HVAC systems unless modified herein. The sequences describe the actions of the control system for one direction of change in the HVAC process analog variable, such as temperature, humidity or pressure. The reverse sequence shall occur when the direction of change is reversed.

##### 3.3.1.1 HVAC System Supply Fan Operating

HVAC system outside-air, return-air, and relief-air dampers shall function as described hereinafter for specific modes of operation. Interlocked exhaust fans shall be stopped in the unoccupied and ventilation delay modes and their dampers shall be closed. Interlocked exhaust fans shall run in the occupied mode, and their dampers shall open.

##### 3.3.1.2 HVAC System Supply Fan Not Operating

When an HVAC system is stopped, interlocked fans shall stop, the outside-air and relief-air dampers shall close, the return-air damper shall open, all stages of direct-expansion cooling shall stop, the system shall pump down if it has a pump down cycle and humidification shall stop.

#### 3.3.2 Gas-Fired Infrared-Heater

A microprocessor-based room thermostat with "AUTO-OFF" switch, located as shown, shall control the infrared heater. When the switch is in the "AUTO" position, the thermostat shall cycle the infrared heater to maintain the day

and night setpoints as shown. Programmed occupied times shall be considered "day" and programmed unoccupied times shall be considered "night." When the switch is in the "OFF" position, the infrared heater shall be off.

### 3.3.3 All-Air Small Package Unitary System

A microprocessor-based room thermostat, located as shown, with "HEAT-OFF-COOL" and "AUTO-ON" switches shall control the system. When the switch is in the "HEATING" position, the cooling unit shall be off, and heating shall be active. The thermostat shall operate the condensing unit and system fan to maintain the day and night setpoints as shown. Programmed occupied times shall be considered "day" and programmed unoccupied times shall be considered "night." When the switch is in the "COOLING" position, the heating unit shall be off. The thermostat shall operate the condensing units and system fan to maintain the setpoint as shown during the day. The condensing unit shall be off at night. When the switch is in the "OFF" position, the system shall be off. When the "AUTO-ON" switch is in the "ON" position, the system fan shall run continuously. In the "AUTO" position, the system fan shall operate whenever heating or cooling is required.

## 3.4 COMMISSIONING PROCEDURES

### 3.4.1 General Procedures

#### 3.4.1.1 Evaluations

The Contractor shall make the observations, adjustments, calibrations, measurements, and tests of the control systems, tune the controllers, set the time clock schedule, and make any necessary control-system corrections to ensure that the systems function as described in paragraph CONTROL SEQUENCES OF OPERATION. The Contractor shall permanently record, on system equipment schedule, the final setting of controller proportional, integral and derivative constant settings, setpoint, manual reset setting, maximum and minimum controller output, and ratio and bias settings, in units and terminology specific to the controller.

#### 3.4.1.2 Item Check

An item-by-item check of the sequence of operation requirement shall be performed using Steps 1 through 4 in the specified control system commissioning procedures. Steps 1, 2, and 3 shall be performed with the HVAC system shutdown; Step 4 shall be performed after the HVAC systems have been started. Signals used to change the mode of operation shall originate from the actual HVAC control device intended for the purpose, such as the time clock. External input signals to the HVAC control panel (such as EMCS, starter auxiliary contacts, and external systems) may be simulated in Steps 1, 2, and 3. With each operational-mode change signal, pilot lights and HVAC-panel output-relay contacts shall be observed to ensure that they function. All terminals assigned to EMCS shall be checked and observed to ensure that the proper signals are available.



#### 3.4.1.3 Weather-Dependent Test Procedures

Weather-dependent test procedures that cannot be performed by simulation shall be performed in the appropriate climatic season. When simulation is used, the Contractor shall verify the actual results in the appropriate season.

#### 3.4.1.4 Configuration

The Contractor shall configure each controller for its specified service.

#### 3.4.1.5 Two-Point Accuracy Check

A two-point accuracy check of the calibration of each HVAC-control-system sensing element and transmitter shall be performed by comparing the HVAC-control-panel readout to the actual value of the variable measured at the sensing element and transmitter or airflow measurement station location. Digital indicating test instruments shall be used, such as digital thermometers, motor-driven psychrometers, and tachometers. The test instruments shall be at least twice as accurate as the specified sensing element-to-controller readout accuracy. The calibration of the test instruments shall be traceable to NIST standards. The first check point shall be with the HVAC system in the shutdown condition, and the second check point shall be with the HVAC system in an operational condition. Calibration checks shall verify that the sensing element-to-controller readout accuracies at two points are within the specified product accuracy tolerances. If not, the device shall be recalibrated or replaced and the calibration check repeated.

#### 3.4.1.6 Insertion, Immersion Temperature

Insertion-temperature and immersion-temperature sensing element and transmitter-to-controller readout calibration accuracy shall be checked at one physical location along the axis of the sensing element.

#### 3.4.1.7 Averaging Temperature

Averaging-temperature sensing element and transmitter-to-controller readout calibration accuracy shall be checked every 1/2 meter along the axis of the sensing element in the proximity of the sensing element, for a maximum of 10 readings. These readings shall then be averaged.

#### 3.4.1.8 Controller Stations

The Contractor shall use the controllers' MANUAL/AUTOMATIC stations as the means of manipulating control devices, such as dampers and valves, to check IP operation and to effect stable conditions prior to making measurement checks.

#### 3.4.1.9 Controller-Tuning Procedure

The Contractor shall perform a controller-tuning procedure, which shall consist of setting the initial proportional, integral, and derivative (PID) mode constants, controller setpoints, and logging the settings. Tuning

shall be self-tuning operation by the controller unless manual tuning is necessary.

#### 3.4.1.10 Controller Manual-Tuning Procedure

Where required, the controller manual-tuning procedure shall be performed in three steps. Using a constant-temperature-setpoint controller as an example, these steps are:

a. Step A:

(1) The controller MANUAL/AUTO station shall be indexed to the AUTO position and the integral- and derivative-mode constants set to zero.

(2) The proportional-mode constant shall be set to an initial setting of 8 percent. (This corresponds to 18.6 kPa per degree C or 3.6 ma per degree C proportional controller output change for a 55.5 degree C transmitter span.) This causes the controller output signal to vary from live zero output to full output for an input signal change representing an 4.5 degree C change.

(3) Controllers for other variables, such as relative humidity and static pressure, shall have their proportional-mode constants set initially in a similar manner for an achievable output range proportional to the transmitter span.

b. Step B:

(1) The controller temperature setpoint shall be set at any achievable temperature. The controller output and transmitter input shall be observed.

(2) If the transmitter input continuously oscillates above and below the setpoint without settling at a fixed value, or if such oscillation increases, the proportional-mode constant is too small.

(3) If the proportional-mode constant is too small, increase it in steps until the transmitter input indicates stable control at any temperature, provided that the controller output is not at either extreme of the output range.

(4) If the temperature control point slowly drifts toward or away from the controller setpoint, the proportional-mode constant is too large. Its setting shall be decreased in steps until oscillations occur as described in the preceding paragraphs, and then the setting shall be increased until stable control occurs.

(5) A step change in controller setpoint shall be introduced. This should cause the controller to overshoot the setpoint slightly, with each subsequent overshoot peak value decreasing by a factor of 2/3 until stable control is achieved at, above, or below the setpoint.

(6) Next, the integral-mode constant setting shall be increased in small steps, and setpoint changes shall be introduced until control point and controller setpoint coincide at stable control. This should happen consistently after a setpoint change within a short time, such as 5 to 10 minutes.

c. Step C:

(1) Unless the HVAC process variable changes rapidly, the derivative-mode constant setting can remain at zero.

(2) If derivative control is needed, the derivative-mode constant shall be gradually increased.

(3) Step changes in controller setpoint shall be introduced, and the derivative-mode constant setting adjusted until stable control is achieved.

3.4.1.11 Setting the Controller

After the controller manual-tuning procedure is complete, the controller shall be set at the setpoint as shown.

3.4.2 Gas-Fired Infrared-Heater

Each space-thermostat temperature setting shall be turned up so that it makes contact to turn on the infrared heater; the heater shall turn on. Each space-thermostat temperature shall be turned down and the infrared heater shall turn off. The thermostats shall be set at their temperature setpoints as shown. The results of testing of one of each type of unit shall be logged.

3.4.3 All-Air Small Packaged Unitary

The schedules shall be manually entered for day-temperature and night-temperature setpoints as shown. The fan "AUTO/ON" switch shall be set to "ON". The time shall be manually entered as "DAY". The heating-cooling switch shall be raised to "HEATING" and cooling shall be off. The temperature setpoint shall be raised and heating shall start. The heating/cooling switch shall be set to "COOLING" and heat shall be off. The temperature setpoint shall be lowered and cooling shall start. The fan "AUTO/ON" switch shall be set to "AUTO" and the foregoing procedure repeated. The fan shall start and stop automatically with the starting and stopping of heating and cooling. The time shall be manually entered as "NIGHT". The foregoing procedures shall be repeated. When the system is verified as operational, the correct "DAY" and "NIGHT" temperature settings shall be restored and the correct time restored. The power to the thermostat shall be shut off and it shall be verified that the thermostat clock keeps time. The results of testing of one of each type of unit shall be logged.

### 3.5 BALANCING, COMMISSIONING, AND TESTING

#### 3.5.1 Coordination with HVAC System Balancing

Commissioning of the control system, except for tuning of controllers, shall be performed prior to or simultaneous with HVAC system balancing. The Contractor shall tune the HVAC control system after all air-system and hydronic-system balancing has been completed, minimum damper positions set and a report has been issued.

#### 3.5.2 Control System Calibration, Adjustments, and Commissioning

Control system commissioning shall be performed for each HVAC system, using test plans and procedures previously approved by the Government. The Contractor shall provide all personnel, equipment, instrumentation, and supplies necessary to perform commissioning and testing of the HVAC control system. All instrumentation and controls shall be calibrated and the specified accuracy shall be verified using test equipment with calibration traceable to NIST standards. Wiring shall be tested for continuity and for ground, open, and short circuits. Tubing systems shall be tested for leaks. Mechanical control devices shall be adjusted to operate as specified. HVAC control panels shall be pretested off-site as a functioning assembly ready for field connections, calibration, adjustment, and commissioning of the operational HVAC control system. Written notification of any planned commissioning or testing of the HVAC Control systems shall be given to the Government at least 14 calendar days in advance.

#### 3.5.3 Performance Verification Test

The Contractor shall demonstrate compliance of the HVAC control system with the contract documents. Using test plans and procedures previously approved by the Government, the Contractor shall demonstrate all physical and functional requirements of the project. The performance verification test shall show, step-by-step, the actions and results demonstrating that the control systems perform in accordance with the sequences of operation. The performance verification test shall not be started until after receipt by the Contractor of written permission by the Government, based on Government approval of the commissioning report and completion of balancing. The tests shall not be conducted during scheduled seasonal off-periods of base heating and cooling systems.

#### 3.5.4 Posted and Panel Instructions

Posted and panel instructions, showing the final installed conditions, shall be provided for each system. The posted instructions shall consist of half-size laminated drawings and shall include the control system schematic, equipment schedule, ladder diagram, sequence of operation, panel arrangement drawings, wiring diagram, and valve and damper schedules. The posted instructions shall be permanently affixed, by mechanical means, to a wall near the control panel. Panel instructions shall consist of laminated letter-size sheets and shall include a routine maintenance checklist and controller configuration check sheets with final configuration record for each controller. Panel instructions and one copy of the operation and maintenance manuals, previously described herein, shall be placed inside each control panel.

### 3.6 TRAINING

#### 3.6.1 Training-Course Requirements

A training course shall be conducted for 2 operating staff members designated by the Contracting Officer. The training period, for a total of 32 hours of normal working time, shall be conducted within 30 days after successful completion of the performance verification test. The training course shall be conducted at the project site. Audiovisual equipment and 4 sets of all other training materials and supplies shall be provided. A training day is defined as 8 hours of classroom instruction, including two 15-minute breaks and excluding lunchtime, Monday through Friday, during the daytime shift in effect at the training facility.

#### 3.6.2 Training-Course Content

For guidance in planning the required instruction, the Contractor shall assume that attendees will have a high school education or equivalent, and are familiar with HVAC systems. The training course shall cover all of the material contained in the operating and maintenance instructions, the layout and location of each HVAC control panel, the layout of one of each type of unitary equipment and the locations of each, the location of each system-control device external to the panels, the location of the compressed-air station, preventive maintenance, troubleshooting, diagnostics, calibration, adjustment, commissioning, tuning, and repair procedures. Typical systems and similar systems may be treated as a group, with instruction on the physical layout of one such system. The results of the performance verification test and the calibration, adjustment and commissioning report shall be presented as benchmarks of HVAC control-system performance by which to measure operation and maintenance effectiveness.

-- End of Section -

01062/BERGER/ABAM  
FY02 Tactical Equipment Complex  
Fort Lewis, Washington

This page intentionally blank.

SECTION 15951

DIRECT DIGITAL CONTROL FOR HVAC

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by basic designation only.

AIR MOVEMENT AND CONTROL ASSOCIATION (AMCA)

AMCA Std 500 (11989; Rev994) Test Methods for Louvers,  
Dampers and Shutters

AMERICAN SOCIETY OF HEATING, REFRIGERATING AND AIR-CONDITIONING  
ENGINEERS (ASHRAE)

AMERICAN SOCIETY OF MECHANICAL ENGINEERS (ASME)

ASME B40.1 (1991) Gauges - Pressure Indicating Dial Type  
- Elastic Element

INSTITUTE OF ELECTRICAL AND ELECTRONICS ENGINEERS (IEEE)

IEEE C62.41 (1991; R 1995) Surge Voltages in Low-Voltage  
AC Power Circuits

IEEE Std 142 (1991) IEEE Recommended Practice for  
Grounding of Industrial and Commercial Power  
Systems

NATIONAL ELECTRICAL MANUFACTURERS ASSOCIATION (NEMA)

NEMA 250 (1991) Enclosures for Electrical Equipment  
(1000 Volts Maximum)

NEMA ICS 1 (1993) Industrial Control and Systems

NEMA ST 1 (1988) Specialty Transformers (Except  
General-Purpose Type)

NATIONAL FIRE PROTECTION ASSOCIATION (NFPA)

NFPA 90A (1996) Installation of Air Conditioning and  
Ventilating Systems

UNDERWRITERS LABORATORIES (UL)

UL 508 (1993; Rev thru Oct 1997) Industrial Control  
Equipment

UL 555S

(1996) Leakage Rated Dampers for Use in Smoke  
Control Systems

## 1.2 GENERAL REQUIREMENTS

The direct digital control (DDC) shall be a complete system suitable for the heating, ventilating and air-conditioning (HVAC) system.

### 1.2.1 Nameplates, Lens Caps, and Tags

Nameplates and lens caps bearing legends as shown and tags bearing device-unique identifiers as shown shall have engraved or stamped characters. A plastic or metal tag shall be mechanically attached directly to each device or attached by a metal chain or wire. Each airflow measurement station shall have a tag showing flow rate range for signal output range, duct size, and identifier as shown.

### 1.2.2 Verification of Dimensions

After becoming familiar with all details of the work, the Contractor shall verify all dimensions in the field, and shall advise the Contracting Officer of any discrepancy before performing any work.

### 1.2.3 Drawings

Because of the small scale of the drawings, it is not possible to indicate all offsets, fittings, and accessories that may be required. The Contractor shall carefully investigate the mechanical, electrical, and finish conditions that could affect the work to be performed, shall arrange such work accordingly, and shall furnish all work necessary to meet such conditions.

### 1.2.4 Power-Line Surge Protection

Equipment connected to ac circuits shall be protected from power-line surges. Equipment protection shall meet the requirements of IEEE C62.41. Fuses shall not be used for surge protection.

### 1.2.5 Surge Protection for Transmitter and Control Wiring

DDC system control-panel equipment shall be protected against surges induced on control and transmitter wiring installed outside and as shown. The equipment protection shall be tested in the normal mode and in the common mode, using the following two waveforms:

a. A 10-microsecond by 1,000-microsecond waveform with a peak voltage of 1,500 volts and a peak current of 60 amperes.

b. An eight microsecond by 20-microsecond waveform with a peak voltage of 1,000 volts and a peak current of 500 amperes.



#### 1.2.6 System Overall Reliability Requirement

The system shall be configured and installed to yield a mean time between failure (MTBF) of at least 40,000 hours. Each DDC controller shall be designed, configured, installed and programmed to provide for stand alone operation with minimal performance degradation on failure of other system components to which it is connected or with which it communicates.

#### 1.2.7 DDC System Network Accessibility

Where the systems to be controlled by the DDC system are located in multiple mechanical rooms, each mechanical room shall have at least one communication port for the portable workstation/tester. DDC controllers shall be located in the same room as the equipment being controlled or in an adjacent space which has direct access to the equipment room.

#### 1.2.8 System Accuracy and Display

The system shall maintain an end-to-end accuracy for one year from sensor to operator's console display for the applications specified and shall display the value as specified. Each temperature shall be displayed and printed to nearest 0.05 degree C.

##### 1.2.8.1 Space Temperature

Space temperature with a range of 10 to 30 degrees C plus or minus 0.5 degrees C for conditioned space; minus 1 to plus 55 degrees C plus or minus 0.5 degrees C for unconditioned space.

##### 1.2.8.2 Duct Temperature

Duct temperature with a range of 5 to 60 degrees C plus or minus 1 degree C.

##### 1.2.8.3 Outside Air Temperature

Outside air (OA) temperature with a range of minus 35 to plus 55 degrees C plus or minus 1 degree C; with a subrange of minus 1 to plus 40 degrees C plus or minus 0.5 degree C.

##### 1.2.8.4 Water Temperature

Water temperature with a range of minus 1 to plus 40 degrees C plus or minus 0.5 degree C; the range of 40 to 120 degrees C plus or minus 1 degree C; and water temperatures for the purpose of performing energy calculations using differential temperatures to plus or minus 0.5 degree C using matched sensors.

##### 1.2.8.5 Flow

Flow with a range for the specific application plus or minus 3.0 percent of range, and flows for the purpose of thermal calculations to plus or minus 2.0 percent of actual flow (display and print to nearest unit, such as liters per second).

#### 1.2.8.6 KWh and kW Demand

KWh and kW demand with a range for the specific application plus or minus 1.0 percent of reading (display and print to nearest kWh or kW).

#### 1.2.8.7 Analog Value Input

An analog value input to the system's equipment via an AI with a maximum error of 0.50 percent of range, not including the sensor or transmitter error. This accuracy shall be maintained over the specified environmental conditions.

### 1.3 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only. When used, a designation following the "G" designation identifies the office that will review the submittal for the Government. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

#### SD-02 Shop Drawings

##### HVAC Control System ; GA

Drawings shall be on A1 (841 by 594 mm) sheets in the form and arrangement shown. The drawings shall use the same abbreviations, symbols, nomenclature and identifiers shown. Each control system element on a drawing shall have a unique identifier as shown. The HVAC Control System Drawings shall be delivered together as a complete submittal. Deviations must be approved by the Contracting Officer. Drawings shall be submitted along with Submittal SD-01, Data.

a. HVAC Control System Drawings shall include the following:

Sheet One: Drawing Index, HVAC Control System Legend.

Sheet Two: Valve Schedule, Damper Schedule.

Sheet Four: Control System Schematic and Equipment Schedule.

Sheet Five: Sequence of Operation and Data Terminal Strip Layout.

Sheet Six: Control Loop Wiring Diagrams.

Sheet Seven: Motor Starter and Relay Wiring Diagram.

Sheet Eight: Communication Network and Block Diagram.

Sheet Nine: DDC Panel Installation and Block Diagram.

(Repeat Sheets Four through Seven for each AHU System.)

b. The HVAC Control System Drawing Index shall show the name and number of the building, military site, State or other similar designation, and Country. The Drawing Index shall list HVAC Control System Drawings, including the drawing number, sheet number, drawing title, and computer filename when used. The HVAC Control System Legend shall show generic symbols and the name of devices shown on the HVAC Control System Drawings.

c. The valve schedule shall include each valve's unique identifier, size, flow coefficient Kv, pressure drop at specified flow rate, spring range, positive positioner range, actuator size, close-off pressure data, dimensions, and access and clearance requirements data. Valve schedules may be submitted in advance but shall be included in the complete submittal.

d. The damper schedule shall contain each damper's and each actuator's identifier, nominal and actual sizes, orientation of axis and frame, direction of blade rotation, spring ranges, operation rate, positive positioner ranges, locations of actuators and damper end switches, arrangement of sections in multi-section dampers, and methods of connecting dampers, actuators, and linkages. The Damper Schedule shall include the maximum leakage rate at the operating static-pressure differential. The Damper Schedule shall contain actuator selection data supported by calculations of the torque required to move and seal the dampers, access and clearance requirements. Damper schedules may be submitted in advance but shall be included in the complete submittal.

g. The HVAC control system equipment Schedule shall be in the form shown. All devices shown on the drawings having unique identifiers shall be referenced in the equipment schedule. Information to be included in the equipment schedule shall be the control loop, device unique identifier, device function, setpoint, input range, and additional important parameters (i.e., output range). An equipment schedule shall be submitted for each HVAC system.

h. The HVAC control system sequence of operation shall reflect the language and format of this specification, and shall refer to the devices by their unique identifiers as shown. No operational deviations from specified sequences will be permitted without prior written approval of the Contracting Officer. Sequences of operation shall be submitted for each HVAC control system including each type of terminal unit control system.

i. The HVAC control system wiring diagrams shall be functional wiring diagrams which show the interconnection of conductors and cables to HVAC control panel terminal blocks and to the identified terminals of devices, starters and package equipment. The wiring diagrams shall show necessary jumpers and ground connections. The wiring diagrams shall show the labels of all conductors. Sources of power required for HVAC control systems and for packaged equipment control systems shall be identified back to the panel board circuit breaker number, HVAC system control panel, magnetic

starter, or packaged equipment control circuit. Each power supply and transformer not integral to a controller, starter, or packaged equipment shall be shown. The connected volt-ampere load and the power supply volt-ampere rating shall be shown. Wiring diagrams shall be submitted for each HVAC control system.

#### 1.4 DELIVERY AND STORAGE

Products shall be stored with protection from the weather, humidity and temperature variations, dirt and dust, and other contaminants, within the storage condition limits published by the equipment manufacturer. Dampers shall be stored so that seal integrity, blade alignment and frame alignment are maintained.

#### 1.5 OPERATION MANUAL

An HVAC control system operation manual in indexed booklet form shall be provided for each HVAC control system. The operation manual shall include the HVAC control system sequence of operation, and procedures for the HVAC system start-up, operation and shut-down. The operation manual shall include as-built HVAC control system detail drawings. The operation manual shall include the as-built configuration checksheets, the procedures for changing HVAC control system setpoints, and the procedures for placing HVAC system controllers in the manual control mode.

a. The procedures for changing HVAC control system setpoints shall describe the step-by-step procedures required to change the process variable setpoints, the alarm setpoints, the bias settings, and setpoint reset schedules.

b. The procedures for placing HVAC system controllers in the manual control mode shall describe step-by-step procedures required to obtain manual control of each controlled device and to manually adjust their positions.

#### 1.6 MAINTENANCE AND REPAIR MANUAL

An HVAC control system maintenance and repair manual in indexed booklet form in hardback binders shall be provided for each HVAC control system. The maintenance and repair manual shall include the routine maintenance checklist, a recommended repair methods list, a list of recommended maintenance and repair tools, the qualified service organization list, the as-built commissioning procedures and report, the as-built performance verification test procedures and report, and the as-built equipment data booklet.

a. The routine maintenance checklist shall be arranged in a columnar format. The first column shall list all devices listed in the equipment compliance booklet, the second column shall state the maintenance activity or state no maintenance required, the third column shall state the frequency of the maintenance activity, and the fourth column for additional comments or reference.

b. The recommended repair methods list shall be arranged in a columnar format and shall list all devices in the equipment data compliance booklet and state the guidance on recommended repair methods, either field repair, factory repair, or whole-item replacement.

c. The as-built equipment data booklet shall include the equipment compliance booklet and manufacturer supplied user manuals and information.

d. If the operation manual and the maintenance and repair manual are provided in a common volume, they shall be clearly differentiated and separately indexed.

## PART 2 PRODUCTS

### 2.1 GENERAL EQUIPMENT REQUIREMENTS

Units of the same type of equipment shall be products of a single manufacturer. Each major component of equipment shall have the manufacturer's name and address, and the model and serial number in a conspicuous place. Materials and equipment shall be standard products of a manufacturer regularly engaged in the manufacturing of such products, which are of a similar material, design and workmanship. The standard products shall have been in a satisfactory commercial or industrial use for two years prior to use on this project. The two years' use shall include applications of equipment and materials under similar circumstances and of similar size. The two years' experience shall be satisfactorily completed by a product which has been sold or is offered for sale on the commercial market through advertisements, manufacturers' catalogs, or brochures. Products having less than a two-year field service record will be acceptable if a certified record of satisfactory field operation, for not less than 6,000 hours exclusive of the manufacturer's factory tests, can be shown. The equipment items shall be supported by a service organization. Items of the same type and purpose shall be identical, including equipment, assemblies, parts and components. Automatic temperature controls shall be direct digital controls that will provide the required sequence of operation.

#### 2.1.1 Electrical and Electronic Devices

Electrical, electronic, and electropneumatic devices not located within a DDC panel shall have a NEMA ICS 1 enclosure in accordance with NEMA 250 unless otherwise shown.

#### 2.1.2 Standard Signals

Except for air distribution terminal unit control equipment, the output of all analog transmitters and the analog input and output of all DDC controllers shall be 4-to-20 mAdc signals. The signal shall originate from current-sourcing devices and shall be received by current-sinking devices.

## 2.2 WIRING

### 2.2.1 Terminal Blocks

Terminal blocks shall be insulated, modular, feed-through, clamp style with recessed captive screw-type clamping mechanism, shall be suitable for rail mounting, and shall have end plates and partition plates for separation or shall have enclosed sides.

### 2.2.2 Control Wiring for 24-Volt Circuits

Control wiring for 24-volt circuits shall be 18 AWG minimum, stranded copper and shall be rated for 300-volt service.

### 2.2.3 Wiring for 120-Volt Circuits

Wiring for 120-volt circuits shall be 18 AWG minimum, stranded copper and shall be rated for 600-volt service.

### 2.2.4 Instrumentation Cable

Instrumentation cable shall be 18 AWG, stranded copper, single- or multiple-twisted, minimum 50 mm lay of twist, 100 percent shielded pairs, and shall have a 300-volt insulation. Each pair shall have a 20 AWG tinned-copper drain wire and individual overall pair insulation. Cables shall have an overall aluminum-polyester or tinned-copper cable-shield tape, overall 20 AWG tinned-copper cable drain wire, and overall cable insulation.

### 2.2.5 Transformers

Step down transformers shall be utilized where control equipment operates at lower than line circuit voltage. Transformers, other than transformers in bridge circuits, shall have primaries wound for the voltage available and secondaries wound for the correct control circuit voltage. Transformer shall be sized so that the connected load is 80 percent of the rated capacity or less. Transformers shall conform to UL 508 and NEMA ST 1.

## 2.3 AUTOMATIC CONTROL VALVES

Valves shall have stainless-steel stems and stuffing boxes with extended necks to clear the piping insulation. Unless otherwise stated, valves shall have globe style bodies. Valve bodies shall be designed for not less than 862 kPa working pressure or 150 percent of the system operating pressure, whichever is greater. Valve leakage rating shall be 0.01 percent of rated Kv. Unless otherwise specified, bodies for valves 40 mm and smaller shall be brass or bronze, with threaded or union ends; bodies for 50 mm valves shall have threaded ends; and bodies for valves 50 to 80 mm shall be of brass, bronze or iron. Bodies for valves 65 mm and larger shall be provided with flanged-end connections. Valve Kv shall be within 100 to 125 percent of the Kv shown.

### 2.3.1 Three-Way Valves

Three-way valves shall provide linear flow control with constant total flow throughout full plug travel.

### 2.3.2 Valves for Hot-Water

For hot water service below 122 degrees C and dual-temperature service, internal trim (including seats, seat rings, modulating plugs, and springs) of valves controlling water hotter than 99 degrees C shall be Type 316 stainless steel. Internal trim for valves controlling water 99 degrees C or less shall be brass or bronze. Nonmetallic parts of hot-water control valves shall be suitable for a minimum continuous operating temperature of 121 degrees C or 28 degrees C above the system design temperature, whichever is higher. Valves 100 mm and larger shall be butterfly valves.

## 2.4 DAMPERS

### 2.4.1 Damper Assembly

A single damper section shall have blades no longer than 1.2 meters and shall be no higher than 1.8 meters. Maximum damper blade width shall be 203 mm. Larger sizes shall be made from a combination of sections. Dampers shall be steel, or other materials where shown. Flat blades shall be made rigid by folding the edges. Blade-operating linkages shall be within the frame so that blade-connecting devices within the same damper section shall not be located directly in the air stream. Damper axles shall be 13 mm minimum, plated steel rods supported in the damper frame by stainless steel or bronze bearings. Blades mounted vertically shall be supported by thrust bearings. Pressure drop through dampers shall not exceed 10 Pa at 5.1 m/s in the wide-open position. Frames shall not be less than 50 mm in width. Dampers shall be tested in accordance with AMCA Std 500.

### 2.4.2 Operating Links

Operating links external to dampers, such as crankarms, connecting rods, and line shafting for transmitting motion from damper actuators to dampers, shall withstand a load equal to at least twice the maximum required damper-operating force. Rod lengths shall be adjustable. Links shall be brass, bronze, zinc-coated steel, or stainless steel. Working parts of joints and clevises shall be brass, bronze, or stainless steel. Adjustments of crankarms shall control the open and closed positions of dampers.

### 2.4.3 Damper Types

Dampers shall be parallel-blade type.

#### 2.4.3.1 Outside Air, Return Air, and Relief Air Dampers

Outside air, return air and relief air dampers shall be provided where shown. Blades shall have interlocking edges and shall be provided with compressible seals at points of contact. The channel frames of the dampers shall be provided with jamb seals to minimize air leakage. Dampers shall not leak in excess of 102 L/s per square meter at 1017 Pa static pressure when closed. Seals shall be suitable for an operating temperature range of minus 40 to plus 94 degrees C. Dampers shall be rated at not less than 10 m/s air velocity.

#### 2.4.3.2 Smoke Dampers

Smoke-damper and actuator assembly required per NFPA 90A shall meet the Class II leakage requirements of UL 555S. Dampers shall be rated at not less than 10 m/s air velocity.

#### 2.4.4 Damper End Switches

Each end switch shall be a hermetically sealed switch with a trip lever and over-travel mechanism. The switch enclosure shall be suitable for mounting on the duct exterior and shall permit setting the position of the trip lever that actuates the switch. The trip lever shall be aligned with the damper blade.

### 2.5 INSTRUMENTATION

#### 2.5.1 Measurements

Transmitters shall be calibrated to provide the following measurements, over the indicated ranges, for an output of 4 to 20 mAdc:

a. Conditioned space temperature, from 10 to 30 degrees C.

b. Duct temperature, from 5 to 60 degrees C.

k. Pitot-tube air-flow measurement station and transmitter, from 0 to 25 Pa for flow velocities of 3.5 to 6 m/s, 0 to 60 Pa for velocities of 3.5 to 9 m/s, or 0 to 125 Pa for velocities of 3.5 to 13 m/s.

#### 2.5.2 Temperature Instruments

##### 2.5.2.1 Resistance Temperature Detectors (RTD)

Temperature sensors shall be 100 ohms 3- or 4-wire RTD. Each RTD shall be platinum with a tolerance of 0.30 degrees C at 0 degrees C with a temperature coefficient of resistance (TCR) of .00385 ohms/ohm/deg C and shall be encapsulated in epoxy, series 300 stainless steel, anodized aluminum, or copper. Each RTD shall be furnished with an RTD transmitter as specified, integrally mounted unless otherwise shown.

##### 2.5.2.2 Continuous Averaging RTD

Continuous averaging RTDs shall have a tolerance of plus or minus 0.5 degrees C at the reference temperature, and shall be of sufficient length to ensure that the resistance represents an average over the cross section in which it is installed. The sensing element shall have a bendable copper sheath. Each averaging RTD shall be furnished with an RTD transmitter to match the resistance range of the averaging RTD.

##### 2.5.2.3 RTD Transmitter

The RTD transmitter shall match the resistance range of the RTD. The transmitter shall be a two-wire, loop powered device. The transmitter shall produce a linear 4-to-20 mAdc output corresponding to the required



temperature measurement. The output error shall not exceed 0.1 percent of the calibrated measurement.

## 2.5.3 Electronic Airflow Measurement Stations and Transmitters

### 2.5.3.1 Stations

Each station shall consist of an array of velocity sensing elements and an air-flow straightener. Air-flow straightener shall be contained in a flanged sheet metal or aluminum casing. The velocity sensing elements shall be of the RTD or thermistor type, producing a temperature compensated output. The sensing elements shall be distributed across the duct cross section in the quantity and pattern specified by the published application data of the station manufacturer. The resistance to air flow through the airflow measurement station shall not exceed 20 Pa at an airflow of 10 m/s. Station construction shall be suitable for operation at airflows of up to 25 m/s over a temperature range of 4 to 49 degrees C, and accuracy shall be plus or minus three percent over a range of 0.6 to 12.5 m/s. In outside air measurement or in low-temperature air delivery applications, the station shall be certified by the manufacturer to be accurate as specified over a temperature range of minus 29 to plus 49 degrees C. In outside air measurement applications, the air flow straightener shall be constructed of 3 mm aluminum honeycomb and the depth of the straightener shall not be less than 40 mm.

### 2.5.3.2 Transmitters

Each transmitter shall produce a linear, 4-to-20 mAdc, output corresponding to the required velocity pressure measurement. The transmitter shall be a two-wire, loop powered device. The output error of the transmitter shall not exceed 0.5 percent of the calibrated measurement.

## 2.5.4 Pitot Tube Airflow Measurement Stations and Transmitters

### 2.5.4.1 Stations

Each station shall contain an array of velocity sensing elements and straightening vanes inside a flanged sheet metal casing. The velocity sensing elements shall be of the multiple pitot tube type with averaging manifolds. The sensing elements shall be distributed across the duct cross section in the quantity and pattern specified by the published installation instructions of the station manufacturer. The resistance to air flow through the airflow measurement station shall not exceed 20 Pa at an airflow of 10 m/s. Station construction shall be suitable for operation at airflows of up to 25 m/s over a temperature range of 4 to 49 degrees C, and accuracy shall be plus or minus three percent over a range of 2.5 to 12.5 m/s. This device will not be used if the required velocity measurement is below 3.5 m/s or for outside airflow measurements.

### 2.5.4.2 Transmitters

Each transmitter shall produce a linear 4-to-20 mAdc output corresponding to the required velocity pressure measurement. Each transmitter shall have a low range differential pressure sensing element. The transmitter shall be a two-wire, loop powered device. Sensing element accuracy shall be plus or

minus one percent of full scale, and overall transmitter accuracy shall be plus or minus 0.25 percent of the calibrated measurement.

#### 2.5.5 Differential Pressure Instruments

The instrument shall be a pressure transmitter with an integral sensing element. The instrument over pressure rating shall be 300 percent of the operating pressure. The sensor/transmitter assembly accuracy shall be plus or minus two percent of full scale. The transmitter shall be a two-wire, loop-powered device. The transmitter shall produce a linear 4-to-20 mA<sub>dc</sub> output corresponding to the required pressure measurement.

#### 2.5.6 Thermowells

Thermowells shall be Series 300 stainless steel with threaded brass plug and chain, 50 mm lagging neck and extension type well. Inside diameter and insertion length shall be as required for the application.

#### 2.5.7 Sunshields

Sunshields for outside air temperature sensing elements shall prevent the sun from directly striking the temperature sensing elements. The sunshields shall be provided with adequate ventilation so that the sensing element responds to the ambient temperature of the surroundings. The top of each sunshield shall have a galvanized metal rainshield projecting over the face of the sunshield. The sunshields shall be painted white.

### 2.6 THERMOSTATS

Thermostat ranges shall be selected so that the setpoint is adjustable without tools between plus or minus 5 degrees C of the setpoint shown. Thermostats shall be electronic or electric.

#### 2.6.1 Microprocessor Based Room Thermostats

Microprocessor based thermostats shall have built-in keypads for scheduling of day and night temperature settings. When out of the scheduling mode, thermostats shall have continuous display of time, with AM and PM indicator, continuous display of day of week, and either continuous display of room temperature with display of temperature setpoint on demand, or continuous display of temperature setpoint with display of room temperature on demand. In the programmable mode, the display shall be used for interrogating time program ON-OFF setpoints for all seven days of the week. The time program shall allow two separate temperature setback intervals per day. The thermostats shall have a means for temporary and manual override of the program schedule, with automatic program restoration on the following day. Thermostats shall have a replaceable battery to maintain the timing and maintain the schedule in memory for one year in the event of a power outage. Maximum differential shall be 1 degree C. When used for heat pump applications, the thermostat shall have an emergency heat switch.

#### 2.6.2 Freezestats

Freezestats shall be manual reset, low temperature safety thermostats, with NO and NC contacts and a 6000 mm element which shall respond to the coldest 450 mm segment.

#### 2.6.3 Modulating Capillary Thermostats

Each thermostat shall have either one output signal, two output signals operating in unison, or two output signals operating in sequence, as required for the application. Thermostats shall have adjustable throttling ranges of 2 to 4 degrees C for each output.

### 2.7 INDICATING DEVICES

#### 2.7.1 Thermometers

##### 2.7.1.1 Piping System Thermometers

Piping system thermometers shall have brass, malleable iron or aluminum alloy case and frame, clear protective face, permanently stabilized glass tube with indicating-fluid column, white face, black numbers, and a 230 mm scale. Thermometers for piping systems shall have rigid stems with straight, angular, or inclined pattern.

##### 2.7.1.2 Piping System Thermometer Stems

Thermometer stems shall have expansion heads as required to prevent breakage at extreme temperatures. On rigid-stem thermometers, the space between bulb and stem shall be filled with a heat-transfer medium.

##### 2.7.1.3 Averaging Air-Duct Thermometers

Averaging thermometers shall have a 90 mm (nominal) dial, with black legend on white background, and pointer traveling through a 270-degree arc.

##### 2.7.1.4 Accuracy

Thermometers shall have an accuracy of plus or minus one percent of scale range. Thermometers shall have a range suitable for the application.

#### 2.7.2 Pressure Gauges

Gauges shall be 50 mm (nominal) size, back connected, suitable for field or panel mounting as required, shall have black legend on white background, and shall have a pointer traveling through a 270-degree arc. Accuracy shall be plus or minus three percent of scale range. Gauges shall meet requirements of ASME B40.1.

#### 2.7.3 Low Differential Pressure Gauges

Gauges for low differential pressure measurements shall be a minimum of 90 mm (nominal) size with two sets of pressure taps, and shall have a diaphragm-actuated pointer, white dial with black figures, and pointer zero

adjustment. Gauges shall have ranges and graduations as shown. Accuracy shall be plus or minus two percent of scale range.

## 2.8 CONTROL DEVICES AND ACCESSORIES

### 2.8.1 Relays

Control relay contacts shall have utilization category and ratings selected for the application, with a minimum of two sets of contacts (two normally open, two normally closed) enclosed in a dustproof enclosure. Relays shall be rated for a minimum life of one million operations. Operating time shall be 20 milliseconds or less. Relays shall be equipped with coil transient suppression devices to limit transients to 150 percent of rated coil voltage. Time delay relays shall be 2PDT with eight-pin connectors, dust cover, and a matching rail-mounted socket. Adjustable timing range shall be 0 to 5 minutes. Power consumption shall not be greater than three watts.

## 2.9 DIRECT DIGITAL CONTROL (DDC) HARDWARE

All functions, constraints, data base parameters, operator developed programs and any other data shall be downloadable from a portable workstation/tester [or the central workstation/tester] to network control panels, RIU's, universal programmable controllers, and unitary controllers. Download shall be accomplished through both the primary network and the local DDC portable workstation/tester port.

### 2.9.1 Network Control Panel

Network control panels shall be microcomputer-based with sufficient memory provided to perform all specified and shown network control panel functions and operations, including spare capacity for all spares and its I/O functions specified. Each network control panel and remote I/O units (RIU) shall have a minimum of 10% of its I/O functions as spare capacity but not less than 2 of each type used in each. The type of spares shall be in the same proportion as the implemented I/O functions on the panel, but in no case shall there be less than two spare points of each type. The panel I/O functions shall be furnished complete, with no changes or additions necessary to support implementation of spare functions. Output relays associated with digital signals shall be considered part of the I/O function, whether physically mounted in the enclosure or separately mounted. Implementation of spare points shall necessitate only providing the additional field sensor or control device, field wiring including connection to the system, and point definition assignment by the operator using the central workstation/tester or portable workstation/tester. The panel shall contain all necessary I/O functions to connect to field sensors and control panels. I/O function operation shall be fully supervised to detect I/O function failures. Network control panels shall operate in an independent stand-alone mode, which is defined as all network control panel operations performed by the network control panel without any continuing input from other Direct digital controls or portable workstation/tester. The network control panel shall be capable of controlling a mix of at least 32 RIUs, unitary controllers, and universal programmable controllers.

#### 2.9.1.1 Integral Features

The network control panel shall include:

- a. Main power switch.
- b. Power on indicator.
- d. Manufacturers control network port.
- e. On-Off-Auto switches for each DO which controls a device. These switches shall be mounted in the field panel, with the exception of motors, for which the switch shall be mounted at the motor control center. On-Off-Auto switches are not required for DO associated with a status or alarm such as pilot lights. The status of these switches shall be available to the panel for further processing.

#### 2.9.1.2 Communication Interfaces

The following communication capabilities shall function simultaneously.

a. Manufacturers Control Network. Manufacturers control network communications interfaces for each data transmission systems (DTS) circuit between network control panels and RIUs, unitary controllers, and universal programmable controllers, shall be provided. Communication interfaces shall be provided between each network control panel and associated I/O functions. The DTS will provide for transmission speeds necessary to comply with performance requirements specified. DTS equipment shall be installed in the network control panel enclosure.

b. Portable Workstation/Tester Port. A communications port for interfacing to a portable workstation/tester shall be provided. Network control panel workstation/tester port other than RS-232, shall be converted to RS-232, including cabling and power supply, and shall be permanently installed in the panel.

c. Primary Network Port. The network control panel shall either have a built in primary network Port or be capable of accepting a primary network port expansion card for future networking to a base wide utility monitoring and control system (UMCS). The primary network port expansion card shall be either Ethernet (IEEE802.3) or ARCNET.

#### 2.9.1.3 Memory and Real Time Clock (RTC) Backup

The network control panel memory and real time clock functions shall continue to operate for a minimum of 72 hours in the event of a power failure. If rechargeable batteries are provided, automatic charging of batteries shall be provided. Whenever a either a permanent workstation/tester or portable workstation/tester is monitoring the network control panel, a low battery alarm message shall be sent to it.

#### 2.9.1.4 Duplex Outlet

A single phase, 120 Vac electrical service outlet for use with test equipment shall be furnished either inside or within 2 meters of the network control panel enclosure.

#### 2.9.1.5 Locking Enclosures

Locking type mounting cabinets with common keying shall be furnished for each network control panel.

#### 2.9.1.6 Failure Mode

Upon failure of the network control panel, either due to failure of the network control panel hardware or of the manufacturers control network, the network control panel shall revert to the failure mode as shown.

a. Manufacturers Control Network Failure: Upon failure of the manufacturers control network, the network control panel shall operate in an independent stand-alone mode.

b. Network Control Panel Hardware Failure: Upon failure of the network control panel hardware, the network control panel shall cease operation and stop communications with other network control panels, RIUs, unitary controllers and universal programmable controllers connected to the affected network control panel. The affected network control panel shall respond to this failure as specified and shown.

### 2.10 DDC SOFTWARE

All DDC software described in this specification shall be furnished as part of the complete DDC System.

#### 2.10.1 Operating System

Each DDC shall contain an operating system that controls and schedules that DDC's activities in real time. The DDC shall maintain a point database in its memory that includes all parameters, constraints, and the latest value or status of all points connected to that DDC. The execution of DDC application programs shall utilize the data in memory resident files. The operating system shall include a real time clock function that maintains the seconds, minutes, hours, date and month, including day of the week. Each DDC real time clock shall be automatically synchronized with the network control panel real time clock at least once per day to plus or minus 10 seconds. When the network control panel is connected to a central workstation/tester, the network control panel RTC shall be updated by the central workstation/tester RTC. The time synchronization shall be accomplished without operator intervention and without requiring system shutdown. The operating system shall allow loading of software, data files data entry, and diagnostics from the central workstation/tester both locally through the central workstation/tester port and remotely through a network control panel and the manufacturers control network.

#### 2.10.1.1 Startup

The DDC shall have startup software that causes automatic commencement of operation without human intervention, including startup of all connected I/O functions. A DDC restart program based on detection of power failure at the DDC shall be included in the DDC software. Upon restoration of power to the DDC, the program shall restart equipment and restore loads to the state at time of power failure, or to the state as commanded by time programs or other overriding programs. The restart program shall include start time delays between successive commands to prevent demand surges or overload trips. The startup software shall initiate operation of self-test diagnostic routines. Upon failure of the DDC, if the database and application software are no longer resident or if the clock cannot be read, the DDC shall not restart and systems shall remain in the failure mode indicated until the necessary repairs are made. If the database and application programs are resident, the DDC shall resume operation after an adjustable time delay of from 0 to 600 seconds. The startup sequence for each DDC shall include a unique time delay setting for each control output when system operation is initiated.

#### 2.10.1.2 Operating Mode

Each DDC shall control and monitor functions as specified, independent of communications with other DDC. This software shall perform all DDC functions and DDC resident application programs as specified using data obtained from I/O functions and based upon the DDC real time clock function. When communications circuits between the DDC are operable, the DDC shall obtain real time clock updates and any required global data values transmitted from other network control panels. The DDC software shall execute commands after performing constraints checks in the DDC. Status and analog values, including alarms and other data shall be transmitted from other network control panels when communications circuits are operable. If communications are not available, each DDC shall function in stand-alone mode and operational data, including the latest status and value of each point and results of calculations, normally transmitted from other network control panels shall be stored for later transmission to the network control panel. Storage for the latest 256 values shall be provided at each network control panel. Each DDC shall accept software downloaded from the network control panel. Constraints shall reside at the DDC.

#### 2.10.1.3 Failure Mode

Upon failure for any reason, each DDC shall perform an orderly shutdown and force all DDC outputs to a predetermined (failure mode) state, consistent with the failure modes shown and the associated control device.

#### 2.10.2 Functions

The Contractor shall provide software necessary to accomplish the following functions, as appropriate, fully implemented and operational, within each network control panel, RIU, unitary controller and universal programmable controller.

- a. Scanning of inputs.

- b. Control of outputs.
- c. Reporting of analog changes outside a selectable differential.
- d. Reporting of unauthorized digital status.
- e. Reporting of alarms automatically to network control panel.
- f. Reporting of I/O status to network control panel upon request.
- g. Maintenance of real time, updated by the network control panel at least once a day.
- h. Communication with the network control panel.
- i. Execution of DDC resident application programs.
- j. Averaging or filtering of AIs.
- k. Constraints checks (prior to command issuance).
- l. Diagnostics.
- m. Portable workstation/tester operation as specified.
- n. Reset of PA by operator based on time and value.

#### 2.10.3 Diagnostics

Each DDC shall have self-test diagnostic routines implemented in firmware. The tests shall include routines that exercise memory. Diagnostic software shall be usable in conjunction with the central workstation/tester and portable workstation/tester. The software shall display messages in English to inform the tester's operator of diagnosed problems.

#### 2.10.4 Summer-Winter Operation Monitoring

The system shall provide software to automatically change the operating parameters, monitoring of alarm limits, and start-stop schedules for each mechanical system from summer to winter and vice-versa. The software shall provide automatic commands to applications programs to coordinate proper summer or winter operation. Change over setpoints shall be operator selectable and settable.

#### 2.10.5 Control Sequences and Control Loops

Sufficient memory shall be provided to implement the requirements specified and shown for each DDC. Specific functions to be implemented are defined in individual system control sequences and database tables shown in the drawings, and shall include, as applicable, the following:

- a. PI Control: This function shall provide proportional control and proportional plus integral control.



b. Two Position Control: This function shall provide control for a two state device by comparing a set point against a process variable and an established deadband.

c. Floating Point Control: This function shall exercise control when an error signal exceeds a selected deadband, and shall maintain control until the error is within the deadband limits.

d. Signal Selection: This function shall allow the selection of the highest or lowest analog value from a group of analog values as the basis of control. The function shall include the ability to cascade analog values so that large numbers of inputs can be reduced to one or two outputs.

e. Signal Averaging: This function shall allow the mathematical calculation of the average analog value from a group of analog values as the basis of control. The function shall include the ability to "weight" the individual analog values so that the function output can be biased as necessary to achieve proper control.

f. Reset Function: This function shall develop an AO based on up to two AIs and one operator specified reset schedule.

g. Cooling/Heating Operation Program: Software shall be provided to change, either automatically or on operator command, the operating parameters, monitoring of alarm limits, and start-stop schedules for each mechanical system where such a change from cooling to heating and vice versa is meaningful. The software shall provide commands to application programs to coordinate cooling or heating mode operation. Software shall automatically switch facilities from cooling to heating, and vice versa, based on schedules or temperatures. All HVAC equipment and systems shall be assigned to the program.

#### 2.10.6 Command Priorities

A scheme of priority levels shall be provided to prevent interaction of a command of low priority with a command of higher priority. The system shall require the latest highest priority command addressed to a single point to be stored for a period of time longer than the longest time constraint in the on and off states, insuring that the correct command shall be issued when the time constraint is no longer in effect or report the rejected command. Override commands entered by the operator shall have higher priority than those emanating from applications programs.

### PART 3 EXECUTION

#### 3.1 GENERAL INSTALLATION CRITERIA

##### 3.1.1 HVAC Control System

The HVAC control system shall be completely installed and ready for operation. Dielectric isolation shall be provided where dissimilar metals are used for connection and support. Penetrations through and mounting holes in the building exterior shall be made watertight. The HVAC control system installation shall provide clearance for control system maintenance by maintaining access space between coils, access space to mixed-air

plenums, and other access space required to calibrate, remove, repair, or replace control system devices. The control system installation shall not interfere with the clearance requirements for mechanical and electrical system maintenance.

#### 3.1.2 Software Installation

Software shall be loaded for an operational system, including databases for all points, operational parameters, and system, command, and application software. The Contractor shall provide original and backup copies of source, excluding the general purpose operating systems and utility programs furnished by computer manufacturers and the non-job-specific proprietary code furnished by the system manufacturer, and object modules for software on each type of media utilized, within 30 days of formal Government acceptance. In addition, a copy of individual floppy disks of software for each DDC panel shall be provided.

#### 3.1.3 Device Mounting Criteria

Devices mounted in or on piping or ductwork, on building surfaces, in mechanical/electrical spaces, or in occupied space ceilings shall be installed in accordance with manufacturer's recommendations and as shown. Control devices to be installed in piping and ductwork shall be provided with required gaskets, flanges, thermal compounds, insulation, piping, fittings, and manual valves for shutoff, equalization, purging, and calibration. Strap-on temperature sensing elements shall not be used except as specified.

#### 3.1.4 Wiring Criteria

Wiring external to control panels, including low-voltage wiring, shall be installed in metallic raceways. Instrumentation grounding shall be installed as necessary to prevent ground loops, noise, and surges from adversely affecting operation of the system. Ground rods installed by the contractor shall be tested as specified in IEEE Std 142. Cables and conductor wires shall be tagged at both ends, with the identifier shown on the shop drawings. Electrical work shall be as specified in Section 16415 ELECTRICAL WORK, INTERIOR and as shown.

### 3.2 CONTROL SYSTEM INSTALLATION

#### 3.2.1 Damper Actuators

Actuators shall not be mounted in the air stream. Multiple actuators operating a common damper shall be connected to a common drive shaft. Actuators shall be installed so that their action shall seal the damper to the extent required to maintain leakage at or below the specified rate and shall move the blades smoothly.

#### 3.2.2 Local Gauges for Actuators

Pneumatic actuators shall have an accessible and visible receiver gauge installed in the tubing lines at the actuator as shown.

### 3.2.3 Room Instrument Mounting

Room instruments , such as wall mounted thermostats, shall be mounted 1.5 m above the floor unless otherwise shown. Temperature setpoint devices shall be recess mounted.

### 3.2.4 Freezestats

For each 2 square meters of coil face area, or fraction thereof, a freezestat shall be provided to sense the temperature at the location shown. Manual reset freezestats shall be installed in approved, accessible locations where they can be reset easily. The freezestat sensing element shall be installed in a serpentine pattern.

### 3.2.5 Averaging Temperature Sensing Elements

Sensing elements shall have a total element minimum length equal to 3 m per square meter of duct cross-sectional area.

### 3.2.6 Foundations and Housekeeping Pads

Foundations and housekeeping pads shall be provided for the HVAC control system air compressors.

### 3.2.7 Indication Devices Installed in Piping and Liquid Systems

Gauges in piping systems subject to pulsation shall have snubbers. Gauges for steam service shall have pigtail fittings with cock. Thermometers and temperature sensing elements installed in liquid systems shall be installed in thermowells.

## 3.3 CONTROL SEQUENCES OF OPERATION

### 3.3.1 General Requirements - HVAC Systems

These requirements shall apply to all primary HVAC systems unless modified herein. The sequences describe the actions of the control system for one direction of change in the HVAC process analog variable, such as temperature, humidity or pressure. The reverse sequence shall occur when the direction of change is reversed.

#### 3.3.1.1 Supply Fan Operating

HVAC system outside air, return air, and relief air dampers shall function as described for specific modes of operation.

#### 3.3.1.2 Supply Fan Not Operating

When an HVAC system is stopped, the outside air and relief air dampers shall close, the return air damper shall open, all stages of direct-expansion cooling shall stop, the system shall pump down if it has a pump down cycle, humidification shall stop, and cooling coil valves for coils located indoors shall close to the coil. Cooling coil valves of units located outdoors shall open to the coil. Heating coil valves shall remain under control.

### 3.3.1.3 Hydronic Heating - Distribution Pump Operating

Hydronic heat-exchanger valves shall be under control.

### 3.3.1.4 Hydronic Heating - Distribution Pump Not Operating

Hydronic heat-exchanger valves shall close.

### 3.3.2 All-Air Small Package Unitary System

A microprocessor-based room thermostat, located as shown, with "HEAT-OFF-COOL" and "AUTO-ON" switches shall control the system. Heating Mode - Cooling unit shall be off, and heating shall be active. The thermostat shall operate the condensing unit and system fan to maintain the day and night setpoints as shown. Programmed occupied times shall be considered "day" and programmed unoccupied times shall be considered "night." Cooling Mode - Heating unit shall be off. During the day the thermostat shall operate the condensing units and system fan to maintain the setpoint. The condensing unit shall be off at night. Off Mode - The system shall be off. On Mode - The system fan shall run continuously. Auto Mode - The system fan shall operate whenever heating or cooling is required.

### 3.3.3 Single Building Hydronic Heating with Hot Water Boiler

#### 3.3.3.1 All Modes

The DDC system shall accept a signal from a sunshielded outside air temperature sensing element and transmitter located as shown. The DDC system shall start and stop distribution pump and boiler at the outside air temperatures shown. The DDC system shall reset the hydronic heating supply temperature setpoint in a linear schedule based on the outside air temperature as shown. The DDC system shall accept a signal from a temperature sensing element and transmitter located in the hydronic heating supply line and the DDC system output shall modulate the hydronic heating system control valve to maintain the reset schedule setpoint in the hydronic heating supply line.

#### 3.3.3.2 Occupied Mode

When the system time schedule places the system in the occupied mode, a space temperature sensing element and transmitter located as shown shall signal the DDC system, which shall maintain the space temperature setpoint shown by modulating the secondary hydronic system zone valve.

#### 3.3.3.3 Unoccupied Mode

When the system is in the unoccupied mode, the space temperature setpoint shall be as shown.

### 3.3.4 Single Zone with Hydronic Heating Coils No Return Fan

#### 3.3.4.1 Occupied, Unoccupied, and Ventilation Delay Modes of Operation

Ventilation delay mode timing shall start prior to the occupied mode timing. The DDC system shall prevent the outside air damper from opening. At the time shown, the DDC system shall place the system in the occupied mode. At the expiration of the ventilation delay mode timing period, the DDC system shall allow the outside air damper to open. At the time shown, the DDC system shall place the control system in the unoccupied mode of operation.

#### 3.3.4.2 Outside Air, Return Air, and Relief Air Dampers

a. Occupied Mode - The outside air, return air, and relief air dampers shall be under space temperature and economizer control.

b. Unoccupied Mode - The dampers shall return to their normal positions.

c. Ventilation Delay Mode - The dampers shall return to their normal positions, except when under economizer control.

#### 3.3.4.3 Supply Fan Control

a. Occupied and Ventilation Delay Modes - Supply fan shall start, and shall operate continuously.

b. Unoccupied Mode - The supply fan shall cycle according to the night setback schedule. The fan shall start and stop at the setpoints.

#### 3.3.4.4 Filter

A differential pressure switch across the filter shall initiate a filter alarm when the pressure drop across the filter reaches the setpoint.

#### 3.3.4.5 Freeze Protection

All Modes - A freezestat, located as shown, shall stop the supply fan, cause the outside air, return air, and relief air dampers to return to their normal position, and shall initiate a low temperature alarm if the temperature drops below the freezestat's setpoint. Return to the normal mode of operation shall require manual reset at the freezestat. The DDC system shall monitor the freezestat through auxiliary contacts and shall indicate an alarm condition when the freezestat trips.

#### 3.3.4.6 Economizer Control

The DDC system shall accept the signal of an outside air temperature sensing element and transmitter and the signal of a return air temperature sensing element and transmitter. The DDC system shall perform switchover between outside air economizer control mode and minimum outside air mode. Until the return air temperature rises above the setpoint, the DDC system shall hold the system in the minimum outside air mode. When the return air temperature rises above the setpoint, the DDC system shall place the AHU in the economizer mode or in the minimum outside air mode, as determined by a

comparison of the outside air and return air temperatures in accordance with the differential temperature setpoints. When the outside air temperature is low with respect to the return air temperature, the AHU shall be in the economizer mode. When the DDC system places the control system in the minimum outside air mode, the outside air damper shall be open to the minimum outdoor air setting.

#### 3.3.4.7 Space Temperature Sequenced Heating and Cooling Control

When the DDC system is in the economizer mode, it shall maintain the setpoint from the signal of a space temperature sensor and transmitter. On a rise in space temperature, the DDC system shall first gradually close the heating coil valve. After passing through a deadband, the DDC system shall gradually operate the outside air damper to admit outside air beyond the minimum quantity and after the outside air damper is fully open the DDC system shall then operate the cooling coil valve to maintain the setpoint. When the DDC system is in the minimum outside air mode, the outside air damper shall be open to the minimum outside air setting. On a rise in space temperature, the DDC system shall first gradually close the heating coil valve. After passing through a deadband, the DDC system shall then gradually open the cooling coil valve to maintain the setpoint.

#### 3.3.4.8 Emergency Fan Shutdown

All Modes - Smoke detectors in the supply air and return air ductwork shall stop the supply fan and initiate a smoke alarm if smoke is detected at either location. Restarting the supply fan shall require manual reset at the smoke detector.

-- End of Section --

SECTION 15990

TESTING, ADJUSTING, AND BALANCING OF HVAC SYSTEMS

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by basic designation only.

ASSOCIATED AIR BALANCE COUNCIL (AABC)

AABC MN-1 (1989) National Standards for Testing and  
Balancing Heating, Ventilating, and Air  
Conditioning Systems

NATIONAL ENVIRONMENTAL BALANCING BUREAU (NEBB)

NEBB Procedural Stds (1991) Procedural Standards for Testing  
Adjusting Balancing of Environmental Systems

1.2 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only. When used, a designation following the "G" designation identifies the office that will review the submittal for the Government. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

SD-02 Shop Drawings

TAB Schematic Drawings and Report Forms; G

Three copies of the TAB Schematic Drawings and Report Forms, no later than 21 days prior to the start of TAB field measurements.

SD-03 Product Data

TAB Related HVAC Submittals; GA

A list of the TAB Related HVAC Submittals, no later than 7 days after the approval of the TAB Specialist.

TAB Procedures; G

Proposed procedures for TAB, submitted with the TAB Schematic Drawings and Report Forms.

Calibration; GA

List of each instrument to be used during TAB, stating calibration requirements required or recommended by both the TAB Standard and the instrument manufacturer and the actual calibration history of the instrument, submitted with the TAB Procedures. The calibration history shall include dates calibrated, the qualifications of the calibration laboratory, and the calibration procedures used.

Systems Readiness Check; FIO

Proposed date and time to begin the Systems Readiness Check, no later than 7 days prior to the start of the Systems Readiness Check.

TAB Execution; G

Proposed date and time to begin field measurements, making adjustments, etc., for the TAB Report, submitted with the Systems Readiness Check Report.

TAB Verification; G

Proposed date and time to begin the TAB Verification, submitted with the TAB Report.

SD-06 Test Reports

Design Review Report; G

A copy of the Design Review Report, no later than 14 days after approval of the TAB Firm and the TAB Specialist.

Systems Readiness Check; G

A copy of completed checklists for each system, each signed by the TAB Specialist, at least 7 days prior to the start of TAB Execution. All items in the Systems Readiness Check Report shall be signed by the TAB Specialist and shall bear the seal of the Professional Society or National Association used as the TAB Standard.

TAB Report; G

Three copies of the completed TAB Reports, no later than 7 days after the execution of TAB. All items in the TAB Report shall be signed by the TAB Specialist and shall bear the seal of the Professional Society or National Association used as the TAB Standard.



TAB Verification Report; G

Three copies of the completed TAB Verification Report, no later than 7 days after the execution of TAB Verification. All items in the TAB Verification Report shall be signed by the TAB Specialist and shall bear the seal of the Professional Society or National Association used as the TAB Standard.

SD-07 Certificates

Ductwork Leak Testing, FIO

A written statement signed by the TAB Specialist certifying that the TAB Specialist witnessed the Ductwork Leak Testing, it was successfully completed, and that there are no known deficiencies related to the ductwork installation that will prevent TAB from producing satisfactory results.

TAB Firm; G

Certification of the proposed TAB Firm's qualifications by either AABC or NEBB to perform the duties specified herein and in other related Sections, no later than 21 days after the Notice to Proceed. The documentation shall include the date that the Certification was initially granted and the date that the current Certification expires. Any lapses in Certification of the proposed TAB Firm or disciplinary action taken by AABC or NEBB against the proposed TAB Firm shall be described in detail.

TAB Specialist; G

Certification of the proposed TAB Specialist's qualifications by either AABC or NEBB to perform the duties specified herein and in other related Sections, no later than 21 days after the Notice to Proceed. The documentation shall include the date that the Certification was initially granted and the date that the current Certification expires. Any lapses in Certification of the proposed TAB Specialist or disciplinary action taken by AABC or NEBB against the proposed TAB Specialist shall be described in detail.

1.3 SIMILAR TERMS

In some instances, terminology differs between the Contract and the TAB Standard primarily because the intent of this Section is to use the industry standards specified, along with additional requirements listed herein to produce optimal results. The following table of similar terms is provided for clarification only. Contract requirements take precedent over the corresponding AABC or NEBB requirements where differences exist.

#### SIMILAR TERMS

Contract Term	AABC Term	NEBB Term
TAB Standard	National Standards for Testing and Balancing	Procedural Standards for Testing
Adjusting Systems.	Heating, Ventilating, and Air Conditioning Systems	Balancing of Environmental
TAB Specialist	TAB Engineer	TAB Supervisor
Systems Readiness Check	Construction Phase Inspection	Field Readiness Check & Preliminary Field Procedures.

#### 1.4 TAB STANDARD

TAB shall be performed in accordance with the requirements of the standard under which the TAB Firm's qualifications are approved, i.e., AABC MN-1 or NEBB Procedural Stds, unless otherwise specified herein. All recommendations and suggested practices contained in the TAB Standard shall be considered mandatory. The provisions of the TAB Standard, including checklists, report forms, etc., shall, as nearly as practical, be used to satisfy the Contract requirements. The TAB Standard shall be used for all aspects of TAB, including qualifications for the TAB Firm and Specialist and calibration of TAB instruments. Where the instrument manufacturer calibration recommendations are more stringent than those listed in the TAB Standard, the manufacturer's recommendations shall be adhered to. All quality assurance provisions of the TAB Standard such as performance guarantees shall be part of this contract. For systems or system components not covered in the TAB Standard, TAB procedures shall be developed by the TAB Specialist. Where new procedures, requirements, etc., applicable to the Contract requirements have been published or adopted by the body responsible for the TAB Standard used (AABC or NEBB), the requirements and recommendations contained in these procedures and requirements shall be considered mandatory.

#### 1.5 QUALIFICATIONS

##### 1.5.1 TAB Firm

The TAB Firm shall be either a member of AABC or certified by the NEBB and certified in all categories and functions where measurements or performance are specified on the plans and specifications. The certification shall be maintained for the entire duration of duties specified herein. If, for any reason, the firm loses subject certification during this period, the Contractor shall immediately notify the Contracting Officer and submit another TAB Firm for approval. Any firm that has been the subject of disciplinary action by either the AABC or the NEBB within the five years preceding Contract Award shall not be eligible to perform any duties related to the HVAC systems, including TAB. All work specified in this Section and in other related Sections to be performed by the TAB Firm shall be

considered invalid if the TAB Firm loses its certification prior to Contract completion and must be performed by an approved successor. These TAB services are to assist the prime Contractor in performing the quality oversight for which it is responsible. The TAB Firm shall be a subcontractor of the prime Contractor, and shall report to and be paid by the prime Contractor.

#### 1.5.2 TAB Specialist

The TAB Specialist shall be either a member of AABC or an experienced technician of the Firm certified by the NEBB. The certification shall be maintained for the entire duration of duties specified herein. If, for any reason, the Specialist loses subject certification during this period, the Contractor shall immediately notify the Contracting Officer and submit another TAB Specialist for approval. Any individual that has been the subject of disciplinary action by either the AABC or the NEBB within the five years preceding Contract Award shall not be eligible to perform any duties related to the HVAC systems, including TAB. All work specified in this Section and in other related Sections performed by the TAB Specialist shall be considered invalid if the TAB Specialist loses its certification prior to Contract completion and must be performed by the approved successor.

#### 1.6 TAB SPECIALIST RESPONSIBILITIES

All TAB work specified herein and in related sections shall be performed under the direct guidance of the TAB Specialist.

#### PART 2 PRODUCTS (NOT APPLICABLE)

#### PART 3 EXECUTION

##### 3.1 DESIGN REVIEW

The TAB Specialist shall review the Contract Plans and Specifications and advise the Contracting Officer of any deficiencies that would prevent the HVAC systems from effectively operating in accordance with the sequence of operation specified or prevent the effective and accurate TAB of the system. The TAB Specialist shall provide a Design Review Report individually listing each deficiency and the corresponding proposed corrective action necessary for proper system operation.

##### 3.2 TAB RELATED HVAC SUBMITTALS

The TAB Specialist shall prepare a list of the submittals from the Contract Submittal Register that relate to the successful accomplishment of all HVAC TAB. The submittals identified on this list shall be accompanied by a letter of approval signed and dated by the TAB Specialist when submitted to the Government. The TAB Specialist shall also ensure that the location and details of ports, terminals, connections, etc., necessary to perform TAB are identified on the submittals.

### 3.3 TAB SCHEMATIC DRAWINGS AND REPORT FORMS

A schematic drawing showing each system component, including balancing devices, shall be provided for each system. Each drawing shall be accompanied by a copy of all report forms required by the TAB Standard used for that system. Where applicable, the acceptable range of operation or appropriate setting for each component shall be included on the forms or as an attachment to the forms. The schematic drawings shall identify all testing points and cross reference these points to the report forms and procedures.

### 3.4 DUCTWORK LEAK TESTING

The TAB Specialist shall witness the Ductwork Leak Testing specified in Section 15895 AIR SUPPLY, DISTRIBUTION, VENTILATION, AND EXHAUST SYSTEM and approve the results as specified in Paragraph TAB RELATED HVAC SUBMITTALS.

### 3.5 TESTING, ADJUSTING, AND BALANCING

#### 3.5.1 TAB Procedures

Step by step procedures for each measurement required during TAB Execution shall be provided. The procedures shall be oriented such that there is a separate section for each system. The procedures shall include measures to ensure that each system performs as specified in all operating modes, interactions with other components (such as exhaust fans, kitchen hoods, fume hoods, relief vents, etc.) and systems, and with all seasonal operating differences, diversity, simulated loads, and pressure relationships required.

#### 3.5.2 Systems Readiness Check

The TAB Specialist shall inspect each system to ensure that it is complete, including installation and operation of controls, and that all aspects of the facility that have any bearing on the HVAC systems, including installation of ceilings, walls, windows, doors, and partitions, are complete to the extent that TAB results will not be affected by any detail or touch-up work remaining. The TAB Specialist shall also verify that all items such as ductwork and piping ports, terminals, connections, etc., necessary to perform TAB shall be complete during the Systems Readiness Check.

#### 3.5.3 Preparation of TAB Report

Preparation of the TAB Report shall begin only when the Systems Readiness Report has been approved. The Report shall be oriented so that there is a separate section for each system. The Report shall include a copy of the appropriate approved Schematic Drawings and TAB Related Submittals, such as pump curves, fan curves, etc., along with the completed report forms for each system. The operating points measured during successful TAB Execution and the theoretical operating points listed in the approved submittals shall be marked on the performance curves and tables. Where possible, adjustments shall be made using an "industry standard" technique which would result in the greatest energy savings, such as adjusting the speed of a fan instead of throttling the flow. Any deficiencies outside of the realm of normal

adjustments and balancing during TAB Execution shall be noted along with a description of corrective action performed to bring the measurement into the specified range. If, for any reason, the TAB Specialist determines during TAB Execution that any Contract requirement cannot be met, the TAB Specialist shall immediately provide a written description of the deficiency and the corresponding proposed corrective action necessary for proper system operation to the Contracting Officer.

#### 3.5.4 TAB Verification

The TAB Specialist shall recheck ten percent of the measurements listed in the Tab Report and prepare a TAB Verification Report. The measurements selected for verification and the individuals that witness the verification will be selected by the Contracting Officer's Representative (COR). The measurements will be recorded in the same manner as required for the TAB Report. All measurements that fall outside the acceptable operating range specified shall be accompanied by an explanation as to why the measurement does not correlate with that listed in the TAB Report and a description of corrective action performed to bring the measurement into the specified range. The TAB Specialist shall update the original TAB report to reflect any changes or differences noted in the TAB verification report and submit the updated TAB report. If over 20 percent of the measurements selected by the COR for verification fall outside of the acceptable operating range specified, the COR will select an additional ten percent for verification. If over 20 percent of the total tested (including both test groups) fall outside of the acceptable range, the TAB Report shall be considered invalid and all contract TAB work shall be repeated beginning with the Systems Readiness Check.

#### 3.5.5 Marking of Setting

Following approval of TAB Verification Report, the setting of all HVAC adjustment devices including valves, splitters, and dampers shall be permanently marked by the TAB Specialist so that adjustment can be restored if disturbed at any time.

#### 3.5.6 Identification of Test Ports

The TAB Specialist shall permanently and legibly identify the location points of duct test ports. If the ductwork has exterior insulation, the identification shall be made on the exterior side of the insulation. All penetrations through ductwork and ductwork insulation shall be sealed to prevent air leakage or to maintain integrity of vapor barrier.

-- End of Section -

01062/BERGER/ABAM  
FY02 Tactical Equipment Complex  
Fort Lewis, Washington

This page intentionally blank.

SECTION 15995

COMMISSIONING OF HVAC SYSTEMS

PART 1 GENERAL

1.1 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only. When used, a designation following the "G" designation identifies the office that will review the submittal for the Government. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

SD-03 Product Data

Commissioning Team; FIO

List of team members who will represent the Contractor in the pre-commissioning checks and functional performance testing, at least 2 weeks prior to the start of pre-commissioning checks. Proposed revision to the list, prior to the start of the impacted work.

Test Procedures; FIO

Detailed procedures for pre-commissioning checks and functional performance tests, at least 4 weeks prior to the start of pre-commissioning checks.

Test Schedule; G, RE

Schedule for pre-commissioning checks and functional performance tests, at least 2 weeks prior to the start of pre-commissioning checks.

SD-06 Test Reports

Test Reports; G, RE

Completed pre-commissioning checklists and functional performance test checklists organized by system and by subsystem and submitted as one package. The results of failed tests shall be included along with a description of the corrective action taken.

1.2 SEQUENCING AND SCHEDULING

The work described in this Section shall begin only after all work required in related Sections, including Section 15950 HEATING, VENTILATING, AND AIR CONDITIONING (HVAC) CONTROL SYSTEMS and Section 15990 TESTING, ADJUSTING AND BALANCING OF HVAC SYSTEMS, has been successfully completed, and all test and inspection reports and operation and maintenance manuals required in these Sections have been submitted and approved.

PART 2 PRODUCTS (NOT APPLICABLE)

PART 3 EXECUTION

3.1 COMMISSIONING TEAM AND CHECKLISTS

The Contractor shall designate team members to participate in the pre-commissioning checks and the functional performance testing specified herein. In addition, the Government will be represented by a representative of the Contracting Officer, the Design Agent's Representative, and the Using Agency. The team members shall be as follows:

Designation	Function
Q	Contractor's Chief Quality Control Representative
M	Contractor's Mechanical Representative
E	Contractor's Electrical Representative
T	Contractor's Testing, Adjusting, and Balancing Representative
C	Contractor's Controls Representative
D	Design Agent's Representative
O	Contracting Officer's Representative
U	Using Agency's Representative

Each checklist shown in appendices A and B shall be completed by the commissioning team. Acceptance by each commissioning team member of each pre-commissioning checklist item shall be indicated by initials and date unless an "X" is shown indicating that participation by that individual is not required. Acceptance by each commissioning team member of each functional performance test checklist shall be indicated by signature and date.

3.2 TESTS

The pre-commissioning checks and functional performance tests shall be performed in a manner which essentially duplicates the checking, testing, and inspection methods established in the related Sections. Where checking, testing, and inspection methods are not specified in other Sections, methods shall be established which will provide the information required. Testing and verification required by this section shall be performed during the Commissioning phase. Requirements in related Sections are independent from the requirements of this Section and shall not be used to satisfy any of the requirements specified in this Section. The Contractor shall provide all materials, services, and labor required to perform the pre-commissioning checks and functional performance tests. A pre-commissioning check or functional performance test shall be aborted if any system deficiency prevents the successful completion of the test or if any participating non-Government commissioning team member of which participation is specified is not present for the test. The Contractor shall reimburse the Government for all costs associated with effort lost due to tests that are aborted. These costs shall include salary, travel costs and per diem (where applicable) for Government commissioning team members.



### 3.2.1 Pre-Commissioning Checks

Pre-commissioning checks shall be performed for the items indicated on the checklists in Appendix A. Deficiencies discovered during these checks shall be corrected and retested in accordance with the applicable contract requirements.

### 3.2.2 Functional Performance Tests

Functional performance tests shall be performed for the items indicated on the checklists in Appendix B. Functional performance tests shall begin only after all pre-commissioning checks have been successfully completed. Tests shall prove all modes of the sequences of operation, and shall verify all other relevant contract requirements. Tests shall begin with equipment or components and shall progress through subsystems to complete systems. Upon failure of any functional performance test checklist item, the Contractor shall correct all deficiencies in accordance with the applicable contract requirements. The checklist shall then be repeated until it has been completed with no errors.

APPENDIX A  
PRE-COMMISSIONING CHECKLISTS

Pre-commissioning Checklist - Ductwork

For Air Handler:

Checklist Item	Q	M	E	T	C	D	O	U
Installation								
a. Ductwork complete.	___	___	X	___	X	___	___	___
b. As-built shop drawings submitted.	___	___	X	___	X	___	___	___
c. Ductwork leak test complete.	___	___	X	___	X	___	___	___
d. Fire dampers, smoke dampers, and access doors installed as required.	___	___	X	___	X	___	___	___
e. Ductwork insulated as required.	___	___	X	___	X	___	___	___
f. Thermometers and gauges installed as required.	___	___	___	___	___	___	___	___
g. Verify open/closed status of dampers.	___	___	X	___	X	___	___	___
h. Verify smoke dampers operation.	___	___	X	___	___	___	___	___
i. Flexible connectors installed as specified	___	___	X	___	X	___	___	___
Testing, Adjusting, and Balancing (TAB)								
a. TAB operation complete.	___	___	X	___	X	___	___	___

Pre-commissioning Checklist - Exhaust Fan

For Exhaust Fan:

Checklist Item	Q	M	E	T	C	D	O
Installation							
a. Fan belt adjusted.	___	___	X	___	X	___	___
Electrical							
a. Power available to fan disconnect.	___	___	___	X	___	___	___
b. Proper motor rotation verified.	___	___	___	___	X	___	___

c. Verify that power disconnect is located within sight of the unit it controls.   \_\_\_ \_\_\_ \_\_\_ X \_\_\_ \_\_\_ \_\_\_ \_\_\_

Controls

a. Control interlocks properly installed.   \_\_\_ \_\_\_ \_\_\_ X \_\_\_ \_\_\_ \_\_\_ \_\_\_

b. Control interlocks operable.   \_\_\_ \_\_\_ \_\_\_ X \_\_\_ \_\_\_ \_\_\_ \_\_\_

c. Dampers/actuators properly installed.   \_\_\_ \_\_\_ X \_\_\_ \_\_\_ \_\_\_ \_\_\_ \_\_\_

d. Dampers/actuators operable.   \_\_\_ \_\_\_ X \_\_\_ \_\_\_ \_\_\_ \_\_\_ \_\_\_

e. Verify proper location and installation of thermostat.   \_\_\_ \_\_\_ X \_\_\_ \_\_\_ \_\_\_ \_\_\_ \_\_\_

Testing, Adjusting, and Balancing (TAB)

a. TAB results +10%/-0% to cfm shown on drawings   \_\_\_ \_\_\_ X \_\_\_ X \_\_\_ \_\_\_ \_\_\_

b. TAB Report submitted.   \_\_\_ \_\_\_ X \_\_\_ X \_\_\_ \_\_\_ \_\_\_

Pre-commissioning Checklist - HVAC System Controls

For HVAC System: [\_\_\_]

Checklist Item	Q	M	E	T	C	D	O	U
Installation								
a. As-built shop drawings submitted.	___	___	X	X	___	___	___	___
b. Layout of control panel matches drawings.	___	___	X	X	___	___	___	___
c. Framed instructions mounted in or near control panel.	___	___	X	X	___	___	___	___
d. Components properly labeled (on inside and outside of panel).	___	___	X	X	___	___	___	___
e. Control components piped and/or wired to each labeled terminal strip.	___	___	X	X	___	___	___	___
f. EMCS connection made to each labeled terminal strip as shown.	___	___	X	X	___	___	___	___
g. Control wiring and tubing labeled at all terminations, splices, and junctions.	___	___	X	X	___	___	___	___
h. Shielded wiring used on electronic sensors.	___	___	X	X	___	___	___	___
i. Air dryer installed as specified.	___	___	X	X	___	___	___	___

01062/BERGER/ABAM  
 FY02 Tactical Equipment Complex  
 Fort Lewis, Washington

j. Water drain installed as specified.      \_\_\_ \_\_\_ X X \_\_\_ \_\_\_ \_\_\_ \_\_\_

Main Power and Control Air

a. 110 volt AC power available to panel.      \_\_\_ \_\_\_ \_\_\_ X \_\_\_ \_\_\_ \_\_\_ \_\_\_

b. 20 psig  
     compressed air available to panel.      \_\_\_ \_\_\_ X X \_\_\_ \_\_\_ \_\_\_ \_\_\_

Testing, Commissioning, and Balancing

a. Testing, Commissioning, and Balancing  
     Report submitted.      \_\_\_ \_\_\_ X \_\_\_ \_\_\_ \_\_\_ \_\_\_ \_\_\_

Pre-commissioning Checklist - Single Zone Air Handling Unit

For Air Handling Unit:

Checklist Item	Q	M	E	T	C	D	O	U
----------------	---	---	---	---	---	---	---	---

Installation

a. Vibration isolation devices installed.	___	___	X	X	X	___	___	___
---	-----	-----	---	---	---	-----	-----	-----

b. Inspection and access doors are operable and sealed.	___	___	X	___	X	___	___	___
--	-----	-----	---	-----	---	-----	-----	-----

c. Casing undamaged.	___	___	X	X	X	___	___	___
----------------------	-----	-----	---	---	---	-----	-----	-----

d. Insulation undamaged.	___	___	X	X	X	___	___	___
--------------------------	-----	-----	---	---	---	-----	-----	-----

e. Fan belt adjusted.	___	___	X	___	X	___	___	___
-----------------------	-----	-----	---	-----	---	-----	-----	-----

f. Any damage to coil fins has been repaired.	___	___	X	___	X	___	___	___
---	-----	-----	---	-----	---	-----	-----	-----

g. Manufacturer's required maintenance clearance provided.	___	___	X	X	X	___	___	___
---	-----	-----	---	---	---	-----	-----	-----

Electrical

a. Power available to unit disconnect.	___	___	___	X	X	___	___	___
--	-----	-----	-----	---	---	-----	-----	-----

b. Power available to unit control panel.	___	___	___	X	___	___	___	___
---	-----	-----	-----	---	-----	-----	-----	-----

c. Proper motor rotation verified.	___	___	___	___	X	___	___	___
------------------------------------	-----	-----	-----	-----	---	-----	-----	-----

d. Verify that power disconnect is located within sight of the unit it controls.	___	___	___	X	___	___	___	___
---	-----	-----	-----	---	-----	-----	-----	-----

01062/BERGER/ABAM  
FY02 Tactical Equipment Complex  
Fort Lewis, Washington

e. Power available to electric heating coil.   \_\_ \_\_ \_\_ X \_\_ \_\_ \_\_ \_\_

Controls

a. Dampers/actuators properly installed.       \_\_ \_\_ X \_\_ \_\_ \_\_ \_\_

b. Dampers/actuators operable.               \_\_ \_\_ X \_\_ \_\_ \_\_ \_\_

c. Verify proper location and installation  
of thermostat.                               \_\_ \_\_ X \_\_ \_\_ \_\_ \_\_

Testing, Adjusting, and Balancing (TAB)

a. Construction filters removed and replaced. \_\_ \_\_ X \_\_ X \_\_ \_\_

b. TAB results +10%/-0%  
cfm shown on drawings.                   \_\_ \_\_ X \_\_ X \_\_ \_\_

c. TAB Report submitted.                   \_\_ \_\_ X \_\_ X \_\_ \_\_

APPENDIX B

FUNCTIONAL PERFORMANCE TESTS CHECKLISTS

Functional Performance Test Checklist - Single Zone Air Handling Unit

For Air Handling Unit:

1. Functional Performance Test: Contractor shall verify operation of air handling unit as per specification including the following:

a. The following shall be verified when the supply fan operating mode is initiated:

(1) All dampers in normal position. \_\_\_\_\_

(2) System safeties allow start if safety conditions are met. \_\_\_\_\_

b. Occupied mode of operation - economizer de-energized.

(1) Outside air damper at minimum position. \_\_\_\_\_

(2) Return air damper open. \_\_\_\_\_

(3) Relief air damper [closed]. \_\_\_\_\_

c. Occupied mode of operation - economizer energized.

(1) Outside air damper modulated to maintain mixed air temperature set point. \_\_\_\_\_

(2) Relief air damper modulates with outside air damper according to sequence of operation. \_\_\_\_\_

d. Unoccupied mode of operation

(1) All dampers in normal position. \_\_\_\_\_

(2) Verify low limit space temperature is maintained as specified in sequence of operation. \_\_\_\_\_

e. The following shall be verified when the supply fan off mode is initiated:

(1) All dampers in normal position. \_\_\_\_\_

(2) Fan de-energizes. \_\_\_\_\_

f. Verify safety shut down initiated by smoke detectors. \_\_\_\_\_

g. Verify safety shut down initiated by low temperature protection thermostat. \_\_\_\_\_

2. Certification: We the undersigned have witnessed the above functional performance tests and certify that the item tested has met the performance requirements in this section of the specifications.

Signature and Date

Contractor's Chief Quality Control Representative

\_\_\_\_\_

Contractor's Mechanical Representative

\_\_\_\_\_

Contractor's Electrical Representative

\_\_\_\_\_

Contractor's Testing, Adjusting and Balancing Representative

\_\_\_\_\_

Contractor's Controls Representative

\_\_\_\_\_

Contracting Officer's Representative

\_\_\_\_\_

Using Agency's Representative

\_\_\_\_\_

#### Functional Performance Test Checklist - HVAC Controls

For HVAC System:

The Contracting Officer will select HVAC control systems to undergo functional performance testing. The number of systems shall not exceed 2.

1. Functional Performance Test: Contractor shall verify operation of HVAC controls by performing the following tests:

a. Verify that controller is maintaining the set point by manually measuring the controlled variable with a thermometer, sling psychrometer, inclined manometer, etc.

b. Verify sensor/controller combination by manually measuring the controlled medium. Take readings from control panel display and compare readings taken manually. Record all readings.

Sensor \_\_\_\_\_  
Manual measurement \_\_\_\_\_  
Panel reading value \_\_\_\_\_

c. Verify system stability by changing the controller set point as follows:

- (1) Air temperature - 10 degrees F
- (2) Water temperature - 10 degrees F
- (3) Static pressure - 10 percent of set point
- (4) Relative humidity - percent (RH)

The control system shall be observed for 10 minutes after the change in set point. Instability or excessive hunting will be unacceptable.

- d. Verify interlock with other HVAC controls.
- e. Verify interlock with fire alarm control panel.
- f. Verify interlock with EMCS.

2. Verify that operation of control system conforms to that specified in the sequence of operation.

3. Certification: We the undersigned have witnessed the above functional performance tests and certify that the item tested has met the performance requirements in this section of the specifications.

Signature and Date

#### Functional Performance Test Checklist - HVAC Controls

For HVAC System:

Contractor's Chief Quality Control Representative \_\_\_\_\_

Contractor's Mechanical Representative \_\_\_\_\_

Contractor's Electrical Representative \_\_\_\_\_

Contractor's Testing, Adjusting and Balancing Representative \_\_\_\_\_

Contractor's Controls Representative \_\_\_\_\_

Contractor's Officer's Representative \_\_\_\_\_

Using Agency's Representative \_\_\_\_\_

-- End of Section --



SECTION 16070

SEISMIC PROTECTION FOR ELECTRICAL EQUIPMENT

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by basic designation only.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM E 580 (1996) Application of Ceiling Suspension Systems for Acoustical Tile and Lay-in Panels in Areas Requiring Moderate Seismic Restraint

CORPS OF ENGINEERS, HUNTSVILLE ENGINEERING AND SUPPORT CENTER (CEHNC)

TI 809-04 (1998) Seismic Design for Buildings

UNDERWRITERS LABORATORIES (UL)

UL 1570 (1995; Rev thru Feb 1999) Fluorescent Lighting Fixtures

1.2 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only. When used, a designation following the "G" designation identifies the office that will review the submittal for the Government. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

SD-02 Shop Drawings

Lighting Fixtures in Buildings; G, RE Equipment Requirements; G, RE

Detail drawings along with catalog cuts, templates, and erection and installation details, as appropriate, for the items listed. Submittals shall be complete in detail; shall indicate thickness, type, grade, class of metal, and dimensions; and shall show construction details, reinforcement, anchorage, and installation with relation to the building construction.

SD-03 Product Data

Lighting Fixtures in Buildings; G, RE Equipment Requirements; G, RE

Copies of the design calculations with the detail drawings. Calculations shall be stamped by a registered engineer and shall verify the capability of structural members to which bracing is attached for carrying the load from the brace.

Contractor Designed Bracing; G, RE

Copies of the Design Calculations with the Drawings. Calculations shall be approved, certified, stamped and signed by a Registered Professional Engineer. Calculations shall verify the capability of structural members to which bracing is attached for carrying the load from the brace.

1.3 SYSTEM DESCRIPTION

1.3.1 General Requirements

The requirements for seismic protection measures described in this section shall be applied to the electrical equipment and systems listed below.

1.3.2 Electrical Equipment

Electrical equipment shall include the following items to the extent required on the drawings or in other sections of these specifications:

- Control Panels
- Light Fixtures
- Transformers
- Switchboards (Floor Mounted)
- Storage Racks
- Panelboards

1.3.3 Electrical Systems

The following electrical systems shall be installed as required on the drawings and other sections of these specifications and shall be seismically protected in accordance with this specification: Fire Alarm Control Panel, Fire Alarm Transmitter, Intrusion Detection Panel, Communications.

1.3.4 Contractor Designed Bracing

The Contractor shall design the bracing in accordance with TI 809-04 and additional data furnished by the Contracting Officer. Resistance to lateral forces induced by earthquakes shall be accomplished without consideration of friction resulting from gravity loads. TI 809-04 uses parameters for the building, not for the equipment in the building; therefore, corresponding adjustments to the formulas shall be required. Loadings determined using TI 809-04 are based on strength design; therefore, the AISC LRFP specifications shall be used for the design. The bracing for the following electrical equipment and systems shall be developed by the Contractor: Panelboards, Light Fixtures, Control Panels.

1.3.5 Conduits Requiring No Special Seismic Restraints

Seismic restraints may be omitted from electrical conduit less than 64 mm trade size and are not critical for life safety. All other interior conduit, shall be seismically protected as specified.

## PART 2 PRODUCTS

### 2.1 LIGHTING FIXTURE SUPPORTS

Lighting fixtures and supports shall conform to UL 1570 as applicable.

## PART 3 EXECUTION

### 3.1 LIGHTING FIXTURES IN BUILDINGS

Lighting fixtures and supports shall conform to the following:

#### 3.1.1 Pendant Fixtures

Pendant fixtures shall conform to the requirements of TI 809-04, Chapter 10.

#### 3.1.2 Ceiling Attached Fixtures

##### 3.1.2.1 Recessed Fluorescent Fixtures

Recessed fluorescent individual or continuous-row mounted fixtures shall be supported by a seismic-resistant suspended ceiling support system built in accordance with ASTM E 580. Seismic protection for the fixtures shall conform to the requirements of TI 809-04, Chapter 10. Recessed lighting fixtures not over 25 kg in weight may be supported by and attached directly to the ceiling system runners using screws or bolts, number and size as required by the seismic design. Fixture accessories, including louvers, diffusers, and lenses shall have lock or screw attachments.

##### 3.1.2.2 Surface-Mounted Fluorescent Fixtures

Surface-mounted fluorescent individual or continuous-row fixtures shall be attached to a seismic-resistant ceiling support system built in accordance with ASTM E 580. Seismic protection for the fixtures shall conform to the requirements of TI 809-04, Chapter 10.

#### 3.1.3 Assembly Mounted on Outlet Box

A supporting assembly, that is intended to be mounted on an outlet box, shall be designed to accommodate mounting features on 100 mm boxes, plaster rings, and fixture studs.

#### 3.1.4 Wall-Mounted Emergency Light Unit

Attachments for wall-mounted emergency light units shall be designed and secured for the worst expected seismic disturbance at the site.

-- End of Section --

01062/BERGER/ABAM  
FY02 Tactical Equipment Complex  
Fort Lewis, Washington

This page intentionally blank.

SECTION 16375

ELECTRICAL DISTRIBUTION SYSTEM, UNDERGROUND

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by basic designation only.

AMERICAN NATIONAL STANDARDS INSTITUTE (ANSI)

- |                |   |
|----------------|---|
| ANSI C57.12.21 | (1995) Requirements for Pad-Mounted, Compartmental-Type, Self-Cooled, Single-Phase Distribution Transformers with High-Voltage Bushings; (High-Voltage, 34 500 Grd Y/19 920 Volts and Below; Low-Voltage, 240/120; 167 kVA and Smaller) |
| ANSI C57.12.26 | (1993) Pad-Mounted Compartmental-Type, Self-Cooled, Three-Phase Distribution Transformers for Use with Separable Insulated High-Voltage Connectors, High-Voltage, 34 500 Grd Y/19 920 Volts and Below; 2500 kVa and Smaller             |
| ANSI C80.1     | (1995) Rigid Steel Conduit - Zinc Coated  |
| ANSI C119.1    | (1986) Sealed Insulated Underground Connector Systems Rated 600 Volts   |

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

- |                   |  |
|-------------------|--|
| ASTM A 48         | (1994a) Gray Iron Castings   |
| ASTM A 123/A 123M | (1997a) Zinc (Hot-Dip Galvanized) Coatings on Iron and Steel Products        |
| ASTM A 153/A 153M | (1995) Zinc Coating (Hot-Dip) on Iron and Steel Hardware                     |
| ASTM B 3          | (1995) Soft or Annealed Copper Wire  |
| ASTM B 8          | (1993) Concentric-Lay-Stranded Copper Conductors, Hard, Medium-Hard, or Soft |
| ASTM B 117        | (1997) Operating Salt Spray (Fog) Apparatus                                  |
| ASTM B 496        | (1992) Compact Round Concentric-Lay-Stranded Copper Conductors               |

ASTM C 478	(1997) Precast Reinforced Concrete Manhole Sections
ASTM C 478M	(1997) Precast Reinforced Concrete Mahhole Sections (Metric)
ASTM D 1654	(1992) Evaluation of Painted or Coated Specimens Subjected to Corrosive Environments

ASSOCIATION OF EDISON ILLUMINATING COMPANIES (AEIC)

AEIC CS5	(1994) Cross-linked Polyethylene Insulated Shielded Power Cables Rated 5 Through 46 kV
----------	--

FACTORY MUTUAL ENGINEERING AND RESEARCH (FM)

FM P7825a	(1998) Approval Guide Fire Protection
-----------	---------------------------------------

INSTITUTE OF ELECTRICAL AND ELECTRONICS ENGINEERS (IEEE)

IEEE C2	(1997) National Electrical Safety Code
IEEE ANSI/IEEE C57.12.00	(1993) IEEE Standard General Requirements for Liquid-Immersed Distribution, Power, and Regulating Transformers
IEEE ANSI/IEEE C57.98	(1993) Guide for Transformer Impulse Tests
IEEE C62.1	(1989; R 1994) Surge Arresters for AC Power Circuits
IEEE C62.2	(1987; R 1994) Guide for the Application of Gapped Silicon-Carbide Surge Arresters for Alternating Current Systems
IEEE C62.11	(1993) IEEE Standard Metal-Oxide Surge Arresters for AC Power Circuits
IEEE Std 48	(1996) Standard Test Procedures and Requirements for Alternating-Current Cable Terminations 2.5 kV through 765 kV
IEEE Std 81	(1983) Guide for Measuring Earth Resistivity, Ground Impedance, and Earth Surface Potentials of a Ground System (Part 1)
IEEE Std 100	(1996) IEEE Standard Dictionary of Electrical and Electronics Terms
IEEE Std 404	(1993; errata) Cable Joints for Use with Extruded Dielectric Cable Rated 5000 V through 138 000 V and Cable Joints for Use with Laminated Dielectric Cable Rated 2500 V Through 500 000 V

IEEE Std 592	(1990; R 1996) Exposed Semiconducting Shields on Premolded High Voltage Cable Joints and Separable Insulated Connectors
--------------	---

NATIONAL ELECTRICAL MANUFACTURERS ASSOCIATION (NEMA)

NEMA FB 1	(1993) Fittings, Cast Metal Boxes and Conduit Bodies for Conduit and Cable Assemblies
NEMA LA 1	(1992) Surge Arresters
NEMA TC 6	(1990) PVC and ABS Plastic Utilities Duct for Underground Installation
NEMA WC 7	(1991; Rev 1) Cross-Linked-Thermosetting-Polyethylene- Insulated Wire and Cable for the Transmission and Distribution of Electrical Energy
NEMA WC 8	(1991; Rev 1; Rev 2) Ethylene-Propylene-Rubber-Insulated Wire and Cable for the Transmission and Distribution of Electrical Energy

NATIONAL FIRE PROTECTION ASSOCIATION (NFPA)

NFPA 70	(1999) National Electrical Code
---------	---------------------------------

UNDERWRITERS LABORATORIES (UL)

UL 6	(1997) Rigid Metal Conduit
UL 467	(1993; Rev thru Aug 1996) Grounding and Bonding Equipment
UL 486A	(1997) Wire Connectors and Soldering Lugs for Use with Copper Conductors
UL 510	(1994; Rev thru Nov 1997) Polyvinyl Chloride, Polyethylene and Rubber Insulating Tape
UL 514A	(1996; Rev Jul 1998) Metallic Outlet Boxes
UL 651	(1995; Rev thru Oct 1998) Schedule 40 and 80 Rigid PVC Conduit
UL 1072	(1995; Rev Mar 1998) Medium-Voltage Power Cable
UL 1242	(1996; Rev Apr 1997) Intermediate Metal Conduit

## 1.2 GENERAL REQUIREMENTS

### 1.2.1 Terminology

Terminology used in this specification is as defined in IEEE Std 100.

### 1.2.2 Service Conditions

Items provided under this section shall be specifically suitable for the following service conditions.

- a. Seismic Parameters Zone 3

## 1.3 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only. When used, a designation following the "G" designation identifies the office that will review the submittal for the Government. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

### SD-02 Shop Drawings

Electrical Distribution System; G, RE

Detail drawings consisting of equipment drawings, illustrations, schedules, instructions, diagrams manufacturers standard installation drawings and other information necessary to define the installation and enable the Government to check conformity with the requirements of the contract drawings.

If departures from the contract drawings are deemed necessary by the Contractor, complete details of such departures shall be included with the detail drawings. Approved departures shall be made at no additional cost to the Government.

Detail drawings shall show how components are assembled, function together and how they will be installed on the project. Data and drawings for component parts of an item or system shall be coordinated and submitted as a unit. Data and drawings shall be coordinated and included in a single submission. Multiple submissions for the same equipment or system are not acceptable except where prior approval has been obtained from the Contracting Officer. In such cases, a list of data to be submitted later shall be included with the first submission. Detail drawings shall consist of the following:

- a. Detail drawings showing physical arrangement, construction details, connections, finishes, materials used in fabrication, provisions for conduit or busway entrance, access requirements for installation and maintenance, physical size, electrical characteristics, foundation and support details, and equipment weight. Drawings shall be drawn to scale and/or dimensioned. All optional items shall be clearly identified as included or excluded.



b. Internal wiring diagrams of equipment showing wiring as actually provided for this project. External wiring connections shall be clearly identified.

Detail drawings shall as a minimum depict the installation of the following items:

a. Medium-voltage cables and accessories including cable installation plan.

b. Transformers.

#### As-Built Drawings; G, RE

The as-built drawings shall be a record of the construction as installed. The drawings shall include the information shown on the contract drawings as well as deviations, modifications, and changes from the contract drawings, however minor. The as-built drawings shall be a full sized set of prints marked to reflect deviations, modifications, and changes. The as-built drawings shall be complete and show the location, size, dimensions, part identification, and other information. Additional sheets may be added. The as-built drawings shall be jointly inspected for accuracy and completeness by the Contractor's quality control representative and by the Contracting Officer prior to the submission of each monthly pay estimate. Upon completion of the work, the Contractor shall provide three full sized sets of the marked prints to the Contracting Officer for approval. If upon review, the as-built drawings are found to contain errors and/or omissions, they will be returned to the Contractor for correction. The Contractor shall correct and return the as-built drawings to the Contracting Officer for approval within 10 calendar days from the time the drawings are returned to the Contractor.

#### SD-03 Product Data

Fault Current Analysis; G, RE  
Protective Device; G, RE  
Coordination Study; G, RE

The study shall be submitted with protective device equipment submittals. No time extension or similar contract modifications will be granted for work arising out of the requirements for this study. Approval of protective devices proposed shall be based on recommendations of this study. The Government shall not be held responsible for any changes to equipment, device ratings, settings, or additional labor for installation of equipment or devices ordered and/or procured prior to approval of the study.

Material and Equipment; G, RE

A complete itemized listing of equipment and materials proposed for incorporation into the work. Each entry shall include an item number, the quantity of items proposed, and the name of the manufacturer of each such item.

SD-06 Test Reports

Factory Tests

Certified factory test reports shall be submitted when the manufacturer performs routine factory tests, including tests required by standards listed in paragraph REFERENCES. Results of factory tests performed shall be certified by the manufacturer, or an approved testing laboratory, and submitted within 7 days following successful completion of the tests. The manufacturer's pass-fail criteria for tests specified in paragraph FIELD TESTING shall be included.

Field Testing; G, RE

A proposed field test plan, 30 days prior to testing the installed system. No field test shall be performed until the test plan is approved. The test plan shall consist of complete field test procedures including tests to be performed, test equipment required, and tolerance limits.

Operating Tests; G, RE

Six copies of the information described below in 215.9 by 279.4 mm (8-1/2 by 11 inch) binders having a minimum of three rings, including a separate section for each test. Sections shall be separated by heavy plastic dividers with tabs.

- a. A list of equipment used, with calibration certifications.
- b. A copy of measurements taken.
- c. The dates of testing.
- d. The equipment and values to be verified.
- e. The condition specified for the test.
- f. The test results, signed and dated.
- g. A description of adjustments made.

Cable Installation

Six copies of the information described below in 215.9 by 279.4 mm (8-1/2 by 11 inch) binders having a minimum of three rings from which material may readily be removed and replaced, including a separate section for each cable pull. Sections shall be separated

by heavy plastic dividers with tabs, with all data sheets signed and dated by the person supervising the pull.

- a. Site layout drawing with cable pulls numerically identified.
- b. A list of equipment used, with calibration certifications. The manufacturer and quantity of lubricant used on pull.
- c. The cable manufacturer and type of cable.
- d. The dates of cable pulls, time of day, and ambient temperature.
- e. The length of cable pull and calculated cable pulling tensions.
- f. The actual cable pulling tensions encountered during pull.

#### SD-07 Certificates

##### Material and Equipment

Where materials or equipment are specified to conform to the standards of the Underwriters Laboratories (UL) or to be constructed or tested, or both, in accordance with the standards of the American National Standards Institute (ANSI), the Institute of Electrical and Electronics Engineers (IEEE), or the National Electrical Manufacturers Association (NEMA), the Contractor shall submit proof that the items provided conform to such requirements. The label of, or listing by, UL will be acceptable as evidence that the items conform. Either a certification or a published catalog specification data statement, to the effect that the item is in accordance with the referenced ANSI or IEEE standard, will be acceptable as evidence that the item conforms. A similar certification or published catalog specification data statement to the effect that the item is in accordance with the referenced NEMA standard, by a company listed as a member company of NEMA, will be acceptable as evidence that the item conforms. In lieu of such certification or published data, the Contractor may submit a certificate from a recognized testing agency equipped and competent to perform such services, stating that the items have been tested and that they conform to the requirements listed, including methods of testing of the specified agencies. Compliance with above-named requirements does not relieve the Contractor from compliance with any other requirements of the specifications.

##### Cable Joints

A certification that contains the names and the qualifications of people recommended to perform the splicing and termination of medium-voltage cables approved for installation under this contract. The certification shall indicate that any person recommended to perform actual splicing and terminations has been adequately trained in the proper techniques and have had at least three recent years of experience in splicing and terminating the

same or similar types of cables approved for installation. In addition, any person recommended by the Contractor may be required to perform a practice splice and termination, in the presence of the Contracting Officer, before being approved as a qualified installer of medium-voltage cables. If that additional requirement is imposed, the Contractor shall provide short sections of the approved types of cables along with the approved type of splice and termination kits, and detailed manufacturer's instruction for the proper splicing and termination of the approved cable types.

#### Cable Installer Qualifications

The Contractor shall provide at least one onsite person in a supervisory position with a documentable level of competency and experience to supervise all cable pulling operations. A resume shall be provided showing the cable installers' experience in the last three years, including a list of references complete with points of contact, addresses and telephone numbers.

#### SD-10 Operation and Maintenance Data

##### Electrical Distribution System; G, RE

Six copies of operation and maintenance manuals, within 7 calendar days following the completion of tests and including assembly, installation, operation and maintenance instructions, spare parts data which provides supplier name, current cost, catalog order number, and a recommended list of spare parts to be stocked. Manuals shall also include data outlining detailed procedures for system startup and operation, and a troubleshooting guide which lists possible operational problems and corrective action to be taken. A brief description of all equipment, basic operating features, and routine maintenance requirements shall also be included. Documents shall be bound in a binder marked or identified on the spine and front cover. A table of contents page shall be included and marked with pertinent contract information and contents of the manual. Tabs shall be provided to separate different types of documents, such as catalog ordering information, drawings, instructions, and spare parts data. Index sheets shall be provided for each section of the manual when warranted by the quantity of documents included under separate tabs or dividers.

Three additional copies of the instructions manual shall be provided within 30 calendar days following the manuals.

#### 1.4 DELIVERY, STORAGE, AND HANDLING

Devices and equipment shall be visually inspected by the Contractor when received and prior to acceptance from conveyance. Stored items shall be protected from the environment in accordance with the manufacturer's published instructions. Damaged items shall be replaced. Oil filled transformers and switches shall be stored in accordance with the manufacturer's requirements. Metal poles shall be handled and stored in accordance with the manufacturer's instructions.

## 1.5 EXTRA MATERIALS

One additional spare fuse or fuse element for each furnished fuse or fuse element shall be delivered to the contracting officer when the electrical system is accepted. Two complete sets of all special tools required for maintenance shall be provided, complete with a suitable tool box. Special tools are those that only the manufacturer provides, for special purposes (to access compartments, or operate, adjust, or maintain special parts).

## PART 2 PRODUCTS

### 2.1 STANDARD PRODUCT

Material and equipment shall be the standard product of a manufacturer regularly engaged in the manufacture of the product and shall essentially duplicate items that have been in satisfactory use for at least 2 years prior to bid opening. Items of the same classification shall be identical including equipment, assemblies, parts, and components.

### 2.2 NAMEPLATES

#### 2.2.1 General

Each major component of this specification shall have the manufacturer's name, address, type or style, model or serial number, and catalog number on a nameplate securely attached to the equipment. Nameplates shall be made of noncorrosive metal. Equipment containing liquid dielectrics shall have the type of dielectric on the nameplate. As a minimum, nameplates shall be provided for transformers, circuit breakers, meters, switches, and switchgear.

#### 2.2.2 Liquid-Filled Transformer Nameplates

Power transformers shall be provided with nameplate information in accordance with IEEE ANSI/IEEE C57.12.00. Nameplates shall indicate the number of liters and composition of liquid-dielectric, and shall be permanently marked with a statement that the transformer dielectric to be supplied is non-polychlorinated biphenyl. If transformer nameplate is not so marked, the Contractor shall furnish manufacturer's certification for each transformer that the dielectric is non-PCB classified, with less than 50 ppm PCB content in accordance with paragraph LIQUID DIELECTRICS. Certifications shall be related to serial numbers on transformer nameplates. Transformer dielectric exceeding the 50 ppm PCB content or transformers without certification will be considered as PCB insulated and will not be accepted.

### 2.3 CORROSION PROTECTION

#### 2.3.1 Aluminum Materials

Aluminum shall not be used.

## 2.3.2 Ferrous Metal Materials

### 2.3.2.1 Hardware

Ferrous metal hardware shall be hot-dip galvanized in accordance with ASTM A 153/A 153M and ASTM A 123/A 123M.

### 2.3.2.2 Equipment

Equipment and component items, including but not limited to transformer stations and ferrous metal luminaries not hot-dip galvanized or porcelain enamel finished, shall be provided with corrosion-resistant finishes which shall withstand 120 hours of exposure to the salt spray test specified in ASTM B 117 without loss of paint or release of adhesion of the paint primer coat to the metal surface in excess of 1.6 mm (1/16 inch) from the test mark. The scribed test mark and test evaluation shall be in accordance with ASTM D 1654 with a rating of not less than 7 in accordance with TABLE 1, (procedure A). Cut edges or otherwise damaged surfaces of hot-dip galvanized sheet steel or mill galvanized sheet steel shall be coated with a zinc rich paint conforming to the manufacturer's standard.

### 2.3.3 Finishing

Painting required for surfaces not otherwise specified and finish painting of items only primed at the factory shall be as specified in Section 09900 PAINTING, GENERAL.

## 2.4 CABLES

Cables shall be single conductor type unless otherwise indicated.

### 2.4.1 Medium-Voltage Cables

#### 2.4.1.1 General

Cable construction shall be Type MV, conforming to NFPA 70 and UL 1072 metallic armored cables, consisting of three-conductor, multi-conductor cables, with insulation and shielding, as specified, using a galvanized steel interlocked tape armor and thermoplastic jacket. Cables shall be manufactured for use in duct applications.

#### 2.4.1.2 Ratings

Cables shall be rated for a circuit voltage of 15 kV as indicated.

#### 2.4.1.3 Conductor Material

Underground cables shall be soft drawn copper complying with ASTM B 3 and ASTM B 8 for regular concentric and compressed stranding or ASTM B 496 for compact stranding.

#### 2.4.1.4 Insulation

Cable insulation shall be cross-linked thermosetting polyethylene (XLP) insulation conforming to the requirements of NEMA WC 7 and AEIC CS5. A 133 percent insulation level shall be used on 15 kV rated cables.

#### 2.4.1.5 Shielding

Cables rated for 2 kV and above shall have a semiconducting conductor shield, a semiconducting insulation shield, and an overall copper wire shield for each phase. The shield wire shall be sized to meet IEEE C2 requirements for a ground fault availability of 100,000 amperes.

#### 2.4.1.6 Neutrals

Neutral conductors shall be copper employing the same insulation and jacket materials as phase conductors, except that a 600-volt insulation rating is acceptable.

#### 2.4.1.7 Jackets

Cables shall be provided with a PVC jacket.

#### 2.4.2 Low-Voltage Cables

Cables shall be rated 600 volts and shall conform to the requirements of NFPA 70, and must be UL listed for the application or meet the applicable section of either ICEA or NEMA standards.

##### 2.4.2.1 Conductor Material

Underground cables shall be annealed copper complying with ASTM B 3 and ASTM B 8. Intermixing of copper and aluminum conductors is not permitted.

##### 2.4.2.2 Insulation

Insulation must be in accordance with NFPA 70, and must be UL listed for the application or meet the applicable sections of either ICEA, or NEMA standards.

##### 2.4.2.3 Jackets

Multiconductor cables shall have an overall PVC outer jacket.

##### 2.4.2.4 In Duct

Cables shall be single-conductor cable, in accordance with NFPA 70.

#### 2.5 CABLE JOINTS, TERMINATIONS, AND CONNECTORS

##### 2.5.1 Medium-Voltage Cable Joints

Medium-voltage cable joints shall comply with IEEE Std 404 and IEEE Std 592. Medium-voltage cable terminations shall comply with IEEE Std 48. Joints shall be the standard products of a manufacturer and shall be either of the

factory preformed type or of the kit type containing tapes and other required parts. Joints shall have ratings not less than the ratings of the cables on which they are installed. Splice kits may be of the heat-shrinkable type for voltages up to 15 kV, of the premolded splice and connector type, the conventional taped type, or the resin pressure-filled overcast taped type for voltages up to 35 kV; except that for voltages of 7.5 kV or less a resin pressure-filled type utilizing a plastic-tape mold is acceptable. Joints used in manholes, handholes, vaults and pull boxes shall be certified by the manufacturer for waterproof, submersible applications.

#### 2.5.2 Low-Voltage Cable Splices

Low-voltage cable splices and terminations shall be rated at not less than 600 Volts. Splices in conductors No. 10 AWG and smaller shall be made with an insulated, solderless, pressure type connector, conforming to the applicable requirements of UL 486A. Splices in conductors No. 8 AWG and larger shall be made with noninsulated, solderless, pressure type connector, conforming to the applicable requirements of UL 486A. Splices shall then be covered with an insulation and jacket material equivalent to the conductor insulation and jacket. Splices below grade or in wet locations shall be sealed type conforming to ANSI C119.1 or shall be waterproofed by a sealant-filled, thick wall, heat shrinkable, thermosetting tubing or by pouring a thermosetting resin into a mold that surrounds the joined conductors.

#### 2.5.3 Terminations

Terminations shall be in accordance with IEEE Std 48, Class 1 or Class 2; of the molded elastomer, wet-process porcelain, prestretched elastomer, heat-shrinkable elastomer, or taped type. Acceptable elastomers are track-resistant silicone rubber or track-resistant ethylene propylene compounds, such as ethylene propylene rubber or ethylene propylene diene monomer. Separable insulated connectors may be used for apparatus terminations, when such apparatus is provided with suitable bushings. Terminations shall be of the outdoor type, except that where installed inside outdoor equipment housings which are sealed against normal infiltration of moisture and outside air, indoor, Class 2 terminations are acceptable. Class 3 terminations are not acceptable. Terminations, where required, shall be provided with mounting brackets suitable for the intended installation and with grounding provisions for the cable shielding, metallic sheath, and armor.

##### 2.5.3.1 Factory Preformed Type

Molded elastomer, wet-process porcelain, prestretched, and heat-shrinkable terminations shall utilize factory preformed components to the maximum extent practicable rather than tape build-up. Terminations shall have basic impulse levels as required for the system voltage level.

##### 2.5.3.2 Taped Terminations

Taped terminations shall use standard termination kits providing terminal connectors, field-fabricated stress cones, and rain hoods. Terminations shall be at least 510 long from the end of the tapered cable jacket to the start of the terminal connector, or not less than the kit manufacturer's recommendations, whichever is greater.



## 2.6 CONDUIT AND DUCTS

Ducts shall be single, round-bore type, with wall thickness and fittings suitable for the application. Duct lines shall be nonencased direct-burial, thick-wall type. Low-voltage lines or Communication lines run elsewhere may be direct-burial, thick-wall type.

### 2.6.1 Metallic Conduit

Intermediate metal conduit shall comply with UL 1242. Rigid galvanized steel conduit shall comply with UL 6 and ANSI C80.1. Metallic conduit fittings and outlets shall comply with UL 514A and NEMA FB 1.

### 2.6.2 Nonmetallic Ducts

#### 2.6.2.1 Concrete Encased Ducts

UL 651 Schedule 40 or NEMA TC 6 Type EB.

#### 2.6.2.2 Direct Burial

UL 651 Schedule 40 or NEMA TC 6 Type DB.

### 2.6.3 Conduit Sealing Compound

Compounds for sealing ducts and conduit shall have a putty-like consistency workable with the hands at temperatures as low as 2 degrees C (35 degrees F), shall neither slump at a temperature of 150 degrees C (300 degrees F), nor harden materially when exposed to the air. Compounds shall adhere to clean surfaces of fiber or plastic ducts; metallic conduits or conduit coatings; concrete, masonry, or lead; any cable sheaths, jackets, covers, or insulation materials; and the common metals. Compounds shall form a seal without dissolving, noticeably changing characteristics, or removing any of the ingredients. Compounds shall have no injurious effect upon the hands of workmen or upon materials.

## 2.7 MANHOLES, HANDHOLES, AND PULLBOXES

Manholes, handholes, and pullboxes shall be as indicated. Strength of manholes, handholes, and pullboxes and their frames and covers shall conform to the requirements of IEEE C2. Precast-concrete manholes shall have the required strength established by ASTM C 478, ASTM C 478M. Frames and covers shall be made of gray cast iron and a machine-finished seat shall be provided to ensure a matching joint between frame and cover. Cast iron shall comply with ASTM A 48, Class 30B, minimum. Handholes for low voltage cables installed in parking lots, sidewalks, and turfed areas shall be fabricated from an aggregate consisting of sand and with continuous woven glass strands having an overall compressive strength of at least 69 MPa (10,000 psi) and a flexural strength of at least 34.5 MPa (5000 psi). Pullbox and handhole covers in sidewalks, and turfed areas shall be of the same material as the box. Concrete pullboxes shall consist of precast reinforced concrete boxes, extensions, bases, and covers.

## 2.8 TRANSFORMERS

Transformers shall be of the outdoor type having the ratings and arrangements indicated. Medium-voltage ratings of cable terminations shall be 15 kV between phases for 133 percent insulation level.

### 2.8.1 Pad-Mounted Transformers

Pad-mounted transformers shall comply with ANSI C57.12.26 and shall be of the loop feed type. Transformer shall be the K-factor rated type. Pad-mounted transformer stations shall be assembled and coordinated by one manufacturer and each transformer station shall be shipped as a complete unit so that field installation requirements are limited to mounting each unit on a concrete pad and connecting it to primary and secondary lines. Stainless steel pins and hinges shall be provided. Barriers shall be provided between high- and low-voltage compartments. High-voltage compartment doors shall be interlocked with low-voltage compartment doors to prevent access to any high-voltage section unless its associated low-voltage section door has first been opened. Compartments shall be sized to meet the specific dimensional requirements of ANSI C57.12.26. Pentahead locking bolts shall be provided with provisions for a padlock.

#### 2.8.1.1 High-Voltage Compartments

The high-voltage compartment shall be dead-front construction. Primary switching and protective devices shall include loadbreak switching, drawout, dry-well-mounted, current-limiting fuses, medium-voltage separable loadbreak connectors, universal bushing wells and inserts or integral one piece bushings and surge arresters. Fuses shall comply with the requirements of paragraph METERING AND PROTECTIVE DEVICES. The switch shall be mounted inside transformer tank with switch operating handle located in high-voltage compartment and equipped with metal loop for hook stick operation. Fuses shall be interlocked with switches so that fuses can be removed only when the associated switch is in the "OPEN" position. Adjacent to medium-voltage cable connections, a nameplate or equivalent stencilled inscription shall be provided inscribed "DO NOT OPEN CABLE CONNECTORS UNLESS SWITCH IS OPEN." Surge arresters shall be fully insulated and configured to terminate on the same bushing as the primary cable by means of a loadbreak, feed-through bushing insert.

#### 2.8.1.2 Load-Break Switch

Loop feed sectionalizer switches: Provide three, two-position, oil-immersed type switches to permit closed transition loop feed and sectionalizing. Each switch shall be rated at 15 kV, 95 kV BIL, with a continuous current rating and load-break rating of 200 amperes, and a make-and-latch rating of

10,000 rms amperes symmetrical. Locate the switch handle in the high-voltage compartment. Operation of switches shall be as follows:

1	Line A connected to Line B and both lines connected to transformer	X	X	X
2	Transformer connected to Line A only	X	X	X
3	Transformer connected to Line B only	X	X	X
4	Transformer open and loop closed	X	X	X
5	Transformer open and loop open	X	X	X

#### 2.8.1.3 Transformer Tank Sections

Transformers shall comply with IEEE ANSI/IEEE C57.12.00, ANSI C57.12.21, and ANSI C57.12.26 and shall be of the mineral oil-insulated type. Transformers shall be suitable for outdoor use and shall have 2 separate windings per phase. Standard NEMA primary taps shall be provided. Where primary taps are not specified, 4, 2-1/2 percent rated kVA high-voltage taps shall be provided below rated, primary voltage. Operating handles for primary tap changers for de-energized operation shall be located within high-voltage compartments, externally to transformer tanks. Adjacent to the tap changer operating handle, a nameplate or equivalent stenciled inscription shall be provided and inscribed "DO NOT OPERATE UNDER LOAD." Transformer ratings at 60 Hz shall be as follows:

Three-phase capacity.....112 1/2 kVA.  
 Impedance.....5 1/2%.  
 Temperature Rise.....65 degrees C.  
 High-voltage winding.....13.8 kilo volts.  
 High-voltage winding connections.....delta.  
 Low-voltage winding.....208 volts.  
 Low-voltage winding connections..... wye

#### 2.8.1.4 Low-Voltage Cable Compartments

Neutrals shall be provided with fully-insulated bushings. Clamp type cable terminations, suitable for copper conductors entering from below, shall be provided as necessary.

#### 2.8.1.5 Accessories

High-voltage warning signs shall be permanently attached to each side of transformer stations. Voltage warning signs shall comply with IEEE C2. Copper-faced steel or stainless steel ground connection pads shall be provided in both the high- and low-voltage compartments. Dial-type thermometer, liquid-level gauge, and drain valve with built-in sampling device shall be provided for each transformer station. Insulated-bushing-type parking stands shall be provided adjacent to each separable load-break elbow to provide for cable isolation during sectionalizing operations.

### 2.9 SURGE ARRESTERS

Surge arresters shall comply with NEMA LA 1, IEEE C62.1, IEEE C62.2, and IEEE C62.11 and shall be provided where indicated. Arresters shall be distribution class, rated as shown. Arresters shall be equipped with mounting brackets suitable for the indicated installations. Arresters shall be of the valve type.

### 2.10 GROUNDING AND BONDING

#### 2.10.1 Driven Ground Rods

Ground rods shall be copper-clad steel conforming to UL 467 not less than 19 mm (3/4 inch) in diameter by 3.1 m (10 feet) in length. Sectional type rods may be used.

#### 2.10.2 Grounding Conductors

Grounding conductors shall be bare, except where installed in conduit with associated phase conductors. Insulated conductors shall be of the same material as phase conductors and green color-coded, except that conductors shall be rated no more than 600 volts. Bare conductors shall be ASTM B 8 soft-drawn unless otherwise indicated. Aluminum is not acceptable.

### 2.11 CONCRETE AND REINFORCEMENT

Concrete work shall have minimum 20 MPa compressive strength and conform to the requirements of Section 03300 CAST-IN-PLACE STRUCTURAL CONCRETE. Concrete reinforcing shall be as specified in Section 03200 CONCRETE REINFORCEMENT.

### 2.12 PADLOCKS

Padlocks shall comply with Section 08700 'Builders' Hardware

## 2.13 CABLE FIREPROOFING SYSTEMS

Cable fireproofing systems shall be listed in FM P7825a as a fire-protective coating or tape approved for grouped electrical conductors and shall be suitable for application on the type of medium-voltage cables provided. After being fully cured, materials shall be suitable for use where exposed to oil, water, gases, salt water, sewage, and fungus and shall not damage cable jackets or insulation. Asbestos materials are not acceptable.

### 2.13.1 Fireproof Coating

Cable fireproofing coatings shall be compounded of water-based thermoplastic resins, flame-retardant chemicals, and inorganic noncombustible fibers and shall be suitable for the application methods used. Coatings applied on bundled cables shall have a derating factor of less than 5 percent, and a dielectric strength of 95 volts per mil minimum after curing.

### 2.13.2 Fireproofing Tape

Fireproofing tape shall be at least 50 mm (2 inches) wide and shall be a flexible, conformable, polymeric, elastomer tape designed specifically for fireproofing cables.

### 2.13.3 Plastic Tape

Preapplication plastic tape shall be pressure sensitive, 0.254 mm (10 mil) thick, conforming to UL 510.

## 2.14 FACTORY TESTS

Factory tests shall be performed, as follows, in accordance with the applicable publications and with other requirements of these specifications. The Contracting Officer shall be notified at least 10 days before the equipment is ready for testing. The Contracting Officer reserves the right to witness the tests.

- a. Transformers: Manufacturer's standard routine tests in accordance with IEEE ANSI/IEEE C57.12.00.
- b. Transformers rated 100 kVA and above: Reduced full-wave, chopped-wave, and full-wave impulse test on each line and neutral terminal, in accordance with IEEE ANSI/IEEE C57.98.

## PART 3 EXECUTION

### 3.1 GENERAL INSTALLATION REQUIREMENTS

Equipment and devices shall be installed and energized in accordance with the manufacturer's published instructions. Steel conduits installed underground shall be installed and protected from corrosion in conformance with the requirements of Section 16415 ELECTRICAL WORK, INTERIOR. Except as covered herein, excavation, trenching, and backfilling shall conform to the requirements of Section 02316 EXCAVATION, TRENCHING, AND BACKFILLING FOR UTILITIES SYSTEMS. Concrete work shall have minimum 20 MPa compressive

strength and conform to the requirements of Section 03300 CAST-IN-PLACE STRUCTURAL CONCRETE.

#### 3.1.1 Conformance to Codes

The installation shall comply with the requirements and recommendations of NFPA 70 and IEEE C2 as applicable.

#### 3.1.2 Verification of Dimensions

The Contractor shall become familiar with details of the work, shall verify dimensions in the field, and shall advise the Contracting Officer of any discrepancy before performing any work.

### 3.2 CABLE INSTALLATION

The Contractor shall obtain from the manufacturer an installation manual or set of instructions which addresses such aspects as cable construction, insulation type, cable diameter, bending radius, cable temperature, lubricants, coefficient of friction, conduit cleaning, storage procedures, moisture seals, testing for and purging moisture, etc. The Contractor shall then prepare a checklist of significant requirements which shall be submitted along with the manufacturers instructions in accordance with SUBMITTALS.

#### 3.2.1 Cable Installation Plan and Procedure

Cable shall be installed strictly in accordance with the cable manufacturer's recommendations. Each circuit shall be identified by means of a fiber, laminated plastic, or non-ferrous metal tags, or approved equal, in each manhole, handhole, junction box, and each terminal. Each tag shall contain the following information; cable type, conductor size, circuit number, circuit voltage, cable destination and phase identification.

##### 3.2.1.1 Cable Inspection

The cable reel shall be inspected for correct storage positions, signs of physical damage, and broken end seals. If end seal is broken, moisture shall be removed from cable in accordance with the cable manufacturer's recommendations.

##### 3.2.1.2 Duct Cleaning

Duct shall be cleaned with an assembly that consists of a flexible mandrel (manufacturers standard product in lengths recommended for the specific size and type of duct) that is 6.4 mm (1/4 inch) less than inside diameter of duct, 2 wire brushes, and a rag. The cleaning assembly shall be pulled through conduit a minimum of 2 times or until less than a volume of 131 cubic centimeters (8 cubic inches) of debris is expelled from the duct.

#### 3.2.1.3 Duct Lubrication

The cable lubricant shall be compatible with the cable jacket for cable that is being installed. Application of lubricant shall be in accordance with lubricant manufacturer's recommendations.

#### 3.2.1.4 Cable Installation

The Contractor shall provide a cable feeding truck and a cable pulling winch as required. The Contractor shall provide a pulling grip or pulling eye in accordance with cable manufacturer's recommendations. The pulling grip or pulling eye apparatus shall be attached to polypropylene or manilla rope followed by lubricant front end packs and then by power cables. A dynamometer shall be used to monitor pulling tension. Pulling tension shall not exceed cable manufacturer's recommendations. The Contractor shall not allow cables to cross over while cables are being fed into duct. For cable installation in cold weather, cables shall be kept at 10 degrees C (50 degrees F) temperature for at least 24 hours before installation.

#### 3.2.1.5 Cable Installation Plan

The Contractor shall submit a cable installation plan for all cable pulls in accordance with the detail drawings portion of paragraph SUBMITTALS. Cable installation plan shall include:

- a. Site layout drawing with cable pulls identified in numeric order of expected pulling sequence and direction of cable pull.
- b. List of cable installation equipment.
- c. Lubricant manufacturer's application instructions.
- d. Procedure for resealing cable ends to prevent moisture from entering cable.
- e. Cable pulling tension calculations of all cable pulls.
- f. Cable percentage conduit fill.
- g. Cable sidewall thrust pressure.
- h. Cable minimum bend radius and minimum diameter of pulling wheels used.
- i. Cable jam ratio.
- j. Maximum allowable pulling tension on each different type and size of conductor.
- k. Maximum allowable pulling tension on pulling device.

### 3.2.2 Duct Line

Cables shall be installed in duct lines where indicated. Cable splices in low-voltage cables shall be made in manholes and handholes only, except as otherwise noted. Cable joints in medium-voltage cables shall be made in manholes or approved pullboxes only. Neutral and grounding conductors shall be installed in the same duct with their associated phase conductors.

### 3.2.3 Electric Manholes

Cables shall be routed around the interior walls and securely supported from walls on cables racks. Cable routing shall minimize cable crossover, provide access space for maintenance and installation of additional cables, and maintain cable separation in accordance with IEEE C2.

### 3.3 CABLE JOINTS

Medium-voltage cable joints shall be made by qualified cable splicers only. Qualifications of cable splicers shall be submitted in accordance with paragraph SUBMITTALS. Shields shall be applied as required to continue the shielding system through each entire cable joint. Shields may be integrally molded parts of preformed joints. Shields shall be grounded at each joint or in accordance with manufacturer's recommended practice. Cable joints shall provide insulation and jacket equivalent to that of the associated cable. Armored cable joints shall be enclosed in compound-filled, cast-iron or alloy, splice boxes equipped with stuffing boxes and armor clamps of a suitable type and size for the cable being installed.

### 3.4 FIREPROOFING

Each medium-voltage cable and conductor in manholes shall be fire-proofed for their entire length within the manhole. Where cables and conductors have been lubricated to enhance pulling into ducts, the lubricant shall be removed from cables and conductors exposed in the manhole before fireproofing.

#### 3.4.1 Tape Method

Before application of fireproofing tape, plastic tape wrapping shall be applied over exposed metallic items such as the cable ground wire, metallic outer covering, or armor to minimize the possibility of corrosion from the fireproofing materials and moisture. Before applying fireproofing tape, irregularities of cables, such as at cable joints, shall be evened out with insulation putty. A flexible conformable polymeric elastomer fireproof tape shall be wrapped tightly around each cable spirally in 1/2 lapped wrapping or in 2 butt-jointed wrappings with the second wrapping covering the joints of the first.

#### 3.4.2 Sprayable Method

Manholes shall be power ventilated until coatings are dry and dewatered and the coatings are cured. Ventilation requirements shall be in accordance with the manufacturer's instruction, but not less than 10 air changes per hour shall be provided. Cable coatings shall be applied by spray, brush, or glove to a wet film thickness that reduces to the dry film thickness



approved for fireproofing by FM P7825a. Application methods and necessary safety precautions shall be in accordance with the manufacturers instructions. After application, cable coatings shall be dry to the touch in 1 to 2 hours and fully cured in 48 hours, except where the manufacturer has stated that because of unusual humidity or temperature, longer periods may be necessary.

### 3.5 DUCT LINES

#### 3.5.1 Requirements

Numbers and sizes of ducts shall be as indicated. Duct lines shall be laid with a minimum slope of 100 mm per 30 m. Depending on the contour of the finished grade, the high-point may be at a terminal, a manhole, a handhole, or between manholes or handholes. Short-radius manufactured 90-degree duct bends may be used only for pole or equipment risers, unless specifically indicated as acceptable. The minimum manufactured bend radius shall be 450 mm (18 inches) for ducts of less than 80 mm (3 inch) diameter, and 900 mm (36 inches) for ducts 80 mm (3 inches) or greater in diameter. Otherwise, long sweep bends having a minimum radius of 7.6 m shall be used for a change of direction of more than 5 degrees, either horizontally or vertically. Both curved and straight sections may be used to form long sweep bends, but the maximum curve used shall be 30 degrees and manufactured bends shall be used. Ducts shall be provided with end bells whenever duct lines terminate in manholes or handholes.

#### 3.5.2 Treatment

Ducts shall be kept clean of concrete, dirt, or foreign substances during construction. Field cuts requiring tapers shall be made with proper tools and match factory tapers. A coupling recommended by the duct manufacturer shall be used whenever an existing duct is connected to a duct of different material or shape. Ducts shall be stored to avoid warping and deterioration with ends sufficiently plugged to prevent entry of any water or solid substances. Ducts shall be thoroughly cleaned before being laid. Plastic ducts shall be stored on a flat surface and protected from the direct rays of the sun.

#### 3.5.3 Concrete Encasement

Ducts requiring concrete encasements shall comply with NFPA 70, except that electrical duct bank configurations for ducts 150 mm (6 inches) in diameter shall be determined by calculation and as shown on the drawings. The separation between adjacent electric power and communication ducts shall conform to IEEE C2. Duct line encasements shall be monolithic construction. Where a connection is made to a previously poured encasement, the new encasement shall be well bonded or doweled to the existing encasement. The Contractor shall submit proposed bonding method for approval in accordance with the detail drawing portion of paragraph SUBMITTALS. At any point, tops of concrete encasements shall be not less than the cover requirements listed in NFPA 70. Separators or spacing blocks shall be made of steel, concrete, plastic, or a combination of these materials placed not farther apart than 1.2 m on centers. Ducts shall be securely anchored to prevent movement during the placement of concrete and joints shall be staggered at least 150 mm vertically.

#### 3.5.4 Nonencased Direct-Burial

Top of duct lines shall be below the frost line depth of 450 mm, but not less than 600 mm below finished grade and shall be installed with a minimum of 75 mm of earth around each duct, except that between adjacent electric power and communication ducts, 300 mm of earth is required. Bottoms of trenches shall be graded toward manholes or handholes and shall be smooth and free of stones, soft spots, and sharp objects. Where bottoms of trenches comprise materials other than sand, a 75 mm layer of sand shall be laid first and compacted to approximate densities of surrounding firm soil before installing ducts. Joints in adjacent tiers of duct shall be vertically staggered at least 150 mm. The first 150 mm layer of backfill cover shall be sand compacted as previously specified. The rest of the excavation shall be backfilled and compacted in 75 to 150 mm layers. Duct banks may be held in alignment with earth. However, high-tiered banks shall use a wooden frame or equivalent form to hold ducts in alignment prior to backfilling.

#### 3.5.5 Installation of Couplings

Joints in each type of duct shall be made up in accordance with the manufacturer's recommendations for the particular type of duct and coupling selected and as approved.

##### 3.5.5.1 Plastic Duct

Duct joints shall be made by brushing a plastic solvent cement on insides of plastic coupling fittings and on outsides of duct ends. Each duct and fitting shall then be slipped together with a quick 1/4-turn twist to set the joint tightly.

#### 3.5.6 Duct Line Markers

Duct line markers shall be provided as indicated. In addition to markers, a 0.127 mm (5 mil) brightly colored plastic tape, not less than 75 mm (3 inches) in width and suitably inscribed at not more than 3 m (10 feet) on centers with a continuous metallic backing and a corrosion-resistant 0.0254 mm (1 mil) metallic foil core to permit easy location of the duct line, shall be placed approximately 300 mm below finished grade levels of such lines.

### 3.6 MANHOLES, HANDHOLES, AND PULLBOXES

#### 3.6.1 General

Manholes shall be constructed approximately where shown. The exact location of each manhole shall be determined after careful consideration has been given to the location of other utilities, grading, and paving. The location of each manhole shall be approved by the Contracting Officer before construction of the manhole is started. Manholes shall be the type noted on the drawings and shall be constructed in accordance with the applicable details as indicated. Top, walls, and bottom shall consist of reinforced concrete. Walls and bottom shall be of monolithic concrete construction. The Contractor may at his option utilize monolithically constructed precast-

concrete manholes having the required strength and inside dimensions as required by the drawings or specifications. In paved areas, frames and covers for manhole and handhole entrances in vehicular traffic areas shall be flush with the finished surface of the paving. In unpaved areas, the top of manhole covers shall be approximately 15 mm above the finished grade. Where existing grades that are higher than finished grades are encountered, concrete assemblies designed for the purpose shall be installed to elevate temporarily the manhole cover to existing grade level. All duct lines entering manholes must be installed on compact soil or otherwise supported when entering a manhole to prevent shear stress on the duct at the point of entrance to the manhole. Duct lines entering cast-in-place concrete manholes shall be cast in-place with the manhole. Duct lines entering precast concrete manholes through a precast knockout penetration shall be grouted tight with a portland cement mortar. PVC duct lines entering precast manholes through a PVC endbell shall be solvent welded to the endbell. A cast metal grille-type sump frame and cover shall be installed over the manhole sump. A cable-pulling iron shall be installed in the wall opposite each duct line entrance.

#### 3.6.2 Electric Manholes

Cables shall be securely supported from walls by hot-dip galvanized cable racks with a plastic coating over the galvanizing and equipped with adjustable hooks and insulators. The number of cable racks indicated shall be installed in each manhole and not less than 2 spare hooks shall be installed on each cable rack. Insulators shall be made of high-glazed porcelain. Insulators will not be required on spare hooks.

#### 3.6.3 Communications Manholes

The number of hot-dip galvanized cable racks with a plastic coating over the galvanizing indicated shall be installed in each telephone manhole. Each cable rack shall be provided with 2 cable hooks. Cables for the telephone and communication systems will be installed by others.

#### 3.6.4 Handholes

Handholes shall be located approximately as shown. Handholes shall be of the type noted on the drawings and shall be constructed in accordance with the details shown.

#### 3.6.5 Pullboxes

Pullbox tops shall be flush with sidewalks or curbs or placed 15 mm above surrounding grades when remote from curbed roadways or sidewalks. Covers shall be marked "Low-Voltage" and provided with 2 lifting eyes and 2 hold-down bolts. Each box shall have a suitable opening for a ground rod. Conduit, cable, ground rod entrances, and unused openings shall be sealed with mortar.

#### 3.6.6 Ground Rods

A ground rod shall be installed at the manholes, handholes and pullboxes. Ground rods shall be driven into the earth before the manhole floor is poured so that approximately 100 mm of the ground rod will extend above the

manhole floor. When precast concrete manholes are used, the top of the ground rod may be below the manhole floor and a No. 1/0 AWG ground conductor brought into the manhole through a watertight sleeve in the manhole wall.

### 3.7 PAD-MOUNTED EQUIPMENT INSTALLATION

Pad-mounted equipment, shall be installed on concrete pads in accordance with the manufacturer's published, standard installation drawings and procedures, except that they shall be modified to meet the requirements of this document. Units shall be installed so that they do not damage equipment or scratch painted or coated surfaces. After installation, surfaces shall be inspected and scratches touched up with a paint or coating provided by the manufacturer especially for this purpose.

#### 3.7.1 Concrete Pads

##### 3.7.1.1 Construction

Concrete pads for pad-mounted electrical equipment may be either pre-fabricated or poured-in-place. Pads shall be constructed as indicated, except that exact pad dimensions and mounting details are equipment specific and are the responsibility of the Contractor. Tops of concrete pads shall be level and shall project 100 mm above finished paving or grade and sloped to drain. Edges of concrete pads shall have 20 mm chamfer. Conduits for primary, secondary, and grounding conductors shall be set in place prior to placement of concrete pads. Where grounding electrode conductors are installed through concrete pads, PVC conduit sleeves shall be installed through the concrete to provide physical protection. To facilitate cable installation and termination, the concrete pad shall be provided with a rectangular hole below the primary and secondary compartments, sized in accordance with the manufacturer's recommended dimensions. Upon completion of equipment installation the rectangular hole shall be filled with masonry grout.

##### 3.7.1.2 Concrete and Reinforcement

Concrete work shall have minimum 20 MPa compressive strength and conform to the requirements of Section 03300 CAST-IN-PLACE STRUCTURAL CONCRETE. Concrete pad reinforcement shall be in accordance with Section 03200 CONCRETE REINFORCEMENT.

##### 3.7.1.3 Sealing

When the installation is complete, the Contractor shall seal all conduit and other entries into the equipment enclosure with an approved sealing compound. Seals shall be of sufficient strength and durability to protect all energized live parts of the equipment from rodents, insects, or other foreign matter.

#### 3.7.2 Padlocks

Padlocks shall be provided for pad-mounted equipment and for each fence gate. Padlocks shall be keyed as directed by the Contracting Officer.

### 3.8 CONNECTIONS BETWEEN AERIAL AND UNDERGROUND SYSTEMS

Connections between aerial and underground systems shall be made as shown. Underground cables shall be extended up poles in conduit to cable terminations. Conduits shall be secured to the poles by 2-hole galvanized steel pipe straps spaced not more than 3 m apart and with 1 strap not more than 300 mm from any bend or termination. Conduits shall be equipped with bushings to protect cables and minimize water entry. Capnut potheads shall be used to terminate medium-voltage multiple-conductor cable. Cables shall be supported by devices separate from the conduit near their point of exit from the conduit.

### 3.9 GROUNDING

A ground consisting of the indicated configuration of bare copper conductors and driven ground rods shall be installed around pad-mounted equipment as shown. Equipment frames of metal-enclosed equipment, and other noncurrent-carrying metal parts, such as cable shields, cable sheaths and armor, and metallic conduit shall be grounded. At least 2 connections shall be provided from a transformer, to the ground mat. Metallic frames and covers of handholes and pull boxes shall be grounded by use of a braided, copper ground strap with equivalent ampacity of No. 6 AWG.

#### 3.9.1 Grounding Electrodes

Grounding electrodes shall be installed as shown on the drawings and as follows:

- a. Driven rod electrodes - Unless otherwise indicated, ground rods shall be driven into the earth until the tops of the rods are approximately 300 mm below finished grade.
- b. Additional electrodes - When the required ground resistance is not met, additional electrodes shall be provided interconnected with grounding conductors to achieve the specified ground resistance. The additional electrodes will be up to three, 3 m rods spaced a minimum of 3 m apart driven perpendicular to grade. In high ground resistance, UL listed chemically charged ground rods may be used. If the resultant resistance exceeds 25 ohms measured not less than 48 hours after rainfall, the Contracting Officer shall be notified immediately.

#### 3.9.2 Grounding and Bonding Connections

Connections above grade shall be made by the fusion-welding process or with bolted solderless connectors, in compliance with UL 467, and those below grade shall be made by a fusion-welding process. Where grounding conductors are connected to aluminum-composition conductors, specially treated or lined copper-to-aluminum connectors suitable for this purpose shall be used.

### 3.9.3 Grounding and Bonding Conductors

Grounding and bonding conductors include conductors used to bond transformer enclosures and equipment frames to the grounding electrode system. Grounding and bonding conductors shall be sized as shown, and located to provide maximum physical protection. Bends greater than 45 degrees in ground conductors are not permitted. Routing of ground conductors through concrete shall be avoided. When concrete penetration is necessary, nonmetallic conduit shall be cast flush with the points of concrete entrance and exit so as to provide an opening for the ground conductor, and the opening shall be sealed with a suitable compound after installation.

### 3.9.4 Surge Arrester Grounding

Surge arresters and neutrals shall be bonded directly to the transformer enclosure and then to the grounding electrode system with a bare copper conductor, sized as shown. Lead lengths shall be kept as short as practicable with no kinks or sharp bends.

### 3.9.5 Manhole, Handhole, or Concrete Pullbox Grounding

Ground rods installed in manholes, handholes, or concrete pullboxes shall be connected to cable racks, cable-pulling irons, the cable shielding, metallic sheath, and armor at each cable joint or splice by means of a No. 4 AWG braided tinned copper wire. Connections to metallic cable sheaths shall be by means of tinned terminals soldered to ground wires and to cable sheaths. Care shall be taken in soldering not to damage metallic cable sheaths or shields. Ground rods shall be protected with a double wrapping of pressure-sensitive plastic tape for a distance of 50 mm above and 150 mm below concrete penetrations. Grounding electrode conductors shall be neatly and firmly attached to manhole or handhole walls and the amount of exposed bare wire shall be held to a minimum.

### 3.9.6 Metal Splice Case Grounding

Metal splice cases for medium-voltage direct-burial cable shall be grounded by connection to a driven ground rod located within 600 mm of each splice box using a grounding electrode conductor having a current-carrying capacity of at least 20 percent of the individual phase conductors in the associated splice box, but not less than No. 6 AWG.

## 3.10 FIELD TESTING

### 3.10.1 General

Field testing shall be performed in the presence of the Contracting Officer. The Contractor shall notify the Contracting Officer 14 days prior to conducting tests. The Contractor shall furnish all materials, labor, and equipment necessary to conduct field tests. The Contractor shall perform all tests and inspections recommended by the manufacturer unless specifically waived by the Contracting Officer. The Contractor shall maintain a written record of all tests which includes date, test performed, personnel involved, devices tested, serial number and name of test.

equipment, and test results. Field test reports shall be signed and dated by the Contractor.

### 3.10.2 Safety

The Contractor shall provide and use safety devices such as rubber gloves, protective barriers, and danger signs to protect and warn personnel in the test vicinity. The Contractor shall replace any devices or equipment which are damaged due to improper test procedures or handling.

### 3.10.3 Ground-Resistance Tests

The resistance of each grounding electrode system shall be measured using the fall-of-potential method defined in IEEE Std 81. Ground resistance measurements shall be made before the electrical distribution system is energized and shall be made in normally dry conditions not less than 48 hours after the last rainfall. Resistance measurements of separate grounding electrode systems shall be made before the systems are bonded together below grade. The combined resistance of separate systems may be used to meet the required resistance, but the specified number of electrodes must still be provided.

- a. Single rod electrode - 25 ohms.

### 3.10.4 Medium-Voltage Cable Test

After installation and before the operating test or connection to an existing system, the medium-voltage cable system shall be given a high potential test. Direct-current voltage shall be applied on each phase conductor of the system by connecting conductors as one terminal and connecting grounds or metallic shieldings or sheaths of the cable as the other terminal for each test. Prior to making the test, the cables shall be isolated by opening applicable protective devices and disconnecting equipment. The test shall be conducted with all splices, connectors, and terminations in place. The method, voltage, length of time, and other characteristics of the test for initial installation shall be in accordance with NEMA WC 7 or NEMA WC 8 for the particular type of cable installed. Should any cable fail due to a weakness of conductor insulation or due to defects or injuries incidental to the installation or because of improper installation of cable, cable joints, terminations, or other connections, the Contractor shall make necessary repairs or replace cables as directed. Repaired or replaced cables shall be retested.

### 3.10.5 Low-Voltage Cable Test

Low-voltage cable, complete with splices, shall be tested for insulation resistance after the cables are installed, in their final configuration, ready for connection to the equipment, and prior to energization. The test voltage shall be 500 volts dc, applied for one minute between each conductor and ground and between all possible combinations conductors in the same trench, duct, or cable, with all other conductors in the same trench, duct, or conduit. The minimum value of insulation shall be:

$R \text{ in megohms} = (\text{rated voltage in kV} + 1) \times 304,800 / (\text{length of cable in meters})$

Each cable failing this test shall be repaired or replaced. The repaired cable shall be retested until failures have been eliminated.

#### 3.10.6 Liquid-Filled Transformer Tests

The following field tests shall be performed on all liquid-filled transformers. Pass-fail criteria shall be in accordance with transformer manufacturer's specifications.

- a. Insulation resistance test phase-to-ground.
- b. Turns ratio test.
- c. Correct phase sequence.
- d. Correct operation of tap changer.

#### 3.11 ACCEPTANCE

Final acceptance of the facility will not be given until the Contractor has successfully completed all tests and after all defects in installation, material or operation have been corrected.

-- End of Section --



SECTION 16415

ELECTRICAL WORK, INTERIOR

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by basic designation only.

AMERICAN NATIONAL STANDARDS INSTITUTE (ANSI)

ANSI C12.10	(1997) Electromechanical Watthour Meters
ANSI C12.11	(1987; R 1993) Instrument Transformers for Revenue Metering, 10 kV BIL Through 350 kV BIL (0.6 kV NSV through 69 kV NSV)
ANSI C39.1	(1981; R 1992) Requirements for Electrical Analog Indicating Instruments
ANSI C78.1	(1991; C78.1a; R 1996) Fluorescent Lamps - Rapid-Start Types - Dimensional and Electrical Characteristics
ANSI C78.1350	(1990) 400-Watt, 100-Volt, S51 Single-Ended High-Pressure Sodium Lamps
ANSI C78.1351	(1989) 250-Watt, 100-Volt S50 Single-Ended High-Pressure Sodium Lamps
ANSI C78.1352	(1990) 1000-Watt, 250-Volt, S52 Single-Ended High-Pressure Sodium Lamps
ANSI C78.2A	(1991) 18 & 26- Watt, Compact Fluorescent Quad Tube Lamps
ANSI C82.1	(1997) Specifications for Fluorescent Lamp Ballasts
ANSI C82.4	(1992) Ballasts for High-Intensity-Discharge and Low-Pressure Sodium Lamps (Multiple-Supply Type)

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM B 1	(1995) Hard-Drawn Copper Wire
ASTM B 8	(1999) Concentric-Lay-Stranded Copper Conductors, Hard, Medium-Hard, or Soft

ASTM D 709 (1992; R 1997) Laminated Thermosetting  
Materials

CODE OF FEDERAL REGULATIONS (CFR)

47 CFR 18 Industrial, Scientific, and Medical Equipment

INSTITUTE OF ELECTRICAL AND ELECTRONICS ENGINEERS (IEEE)

IEEE C37.20.1 (1993) Metal-Enclosed Low-Voltage Power  
Circuit-Breaker Switchgear

IEEE C57.13 (1993) Instrument Transformers

IEEE C62.41 (1991; R 1995) Surge Voltages in Low-Voltage  
AC Power Circuits

IEEE Std 81 (1983) Guide for Measuring Earth Resistivity,  
Ground Impedance, and Earth Surface  
Potentials of a Ground System (Part 1)

NATIONAL ELECTRICAL MANUFACTURERS ASSOCIATION (NEMA)

NEMA 250 (1991) Enclosures for Electrical Equipment  
(1000 Volts Maximum)

NEMA AB 1 (1993) Molded Case Circuit Breakers and  
Molded Case Switches

NEMA FU 1 (1986) Low Voltage Cartridge Fuses

NEMA ICS 6 (1993) Industrial Control and Systems  
Enclosures

NEMA LE 4 (1987) Recessed Luminaires, Ceiling  
Compatibility

NEMA OS 1 (1996) Sheet-Steel Outlet Boxes, Device  
Boxes, Covers, and Box Supports

NEMA PB 1 (1995) Panelboards

NEMA RN 1 (1989) Polyvinyl-Chloride (PVC) Externally  
Coated Galvanized Rigid Steel Conduit and  
Intermediate Metal Conduit

NEMA TC 2 (1990) Electrical Polyvinyl Chloride (PVC)  
Tubing (EPT) and Conduit (EPC-40 and EPC-80)

NEMA VE 1 (1996) Metal Cable Tray Systems

NEMA WD 1 (1983; R 1989) General Requirements for  
Wiring Devices

NEMA WD 6 (1988) Wiring Devices - Dimensional Requirements

NATIONAL FIRE PROTECTION ASSOCIATION (NFPA)

NFPA 70 (1999) National Electrical Code

NFPA 101 (1997; Errata 97-1; TIA 97-1) Life Safety Code

UNDERWRITERS LABORATORIES (UL)

UL 1 (1993; Rev thru Jan 1995) Flexible Metal Conduit

UL 6 (1997) Rigid Metal Conduit

UL 20 (1995; Rev thru Oct 1998) General-Use Snap Switches

UL 50 (1995; Rev thru Oct 1997) Enclosures for Electrical Equipment

UL 67 (1993; Rev thru Nov 1995) Panelboards

UL 83 (1998) Thermoplastic-Insulated Wires and Cables

UL 98 (1994; R thru Jun 1998) Enclosed and Dead-Front Switches

UL 198D (1995) Class K Fuses

UL 198G (1988; Rev May 1988) Fuses for Supplementary Overcurrent Protection

UL 360 (1996; Rev thru Oct 1997) Liquid-Tight Flexible Steel Conduit

UL 467 (1993; Rev thru Aug 1996) Grounding and Bonding Equipment

UL 486A (1997; Rev thru Dec 1998) Wire Connectors and Soldering Lugs for Use with Copper Conductors

UL 486C (1997; Rev thru Aug 1998) Splicing Wire Connectors

UL 486E (1994; Rev thru Feb 1997) Equipment Wiring Terminals for Use with Aluminum and/or Copper Conductors

UL 489 (1996; Rev thru Dec 1998) Molded-Case Circuit Breakers, Molded-Case Switches, and Circuit-Breaker Enclosures

UL 510	(1994; Rev thru Apr 1998) Polyvinyl Chloride, Polyethylene, and Rubber Insulating Tape
UL 512	(1993; R Dec 1995) Fuseholders
UL 514A	(1996; Rev Jul 1998) Metallic Outlet Boxes
UL 514B	(1997; Rev Oct 1998) Fittings for Cable and Conduit
UL 542	(1994; Rev thru Jul 1998) Lampholders, Starters, and Starter Holders for Fluorescent Lamps
UL 651	(1995; Rev thru Oct 1998) Schedule 40 and 80 Rigid PVC Conduit
UL 651A	(1995; Rev thru Apr 1998) Type EB and A Rigid PVC Conduit and HDPE Conduit
UL 797	(1993; Rev thru Mar 1997) Electrical Metallic Tubing
UL 854	(1996; Rev Apr 1998) Service-Entrance Cables
UL 869A	(1998) Reference Standard for Service Equipment
UL 916	(1998) Energy Management Equipment
UL 924	(1995; Rev thru Oct 97) Emergency Lighting and Power Equipment
UL 943	(1993; Rev thru May 1998) Ground-Fault Circuit-Interrupters
UL 1029	(1994; Rev thru Dec 1997) High-Intensity-Discharge Lamp Ballasts
UL 1242	(1996; Rev Mar 1998) Intermediate Metal Conduit
UL 1449	(1996; Rev thru Oct 1998) Transient Voltage Surge Suppressors
UL 1570	(1995; Rev thru Jun 1997) Fluorescent Lighting Fixtures
UL 1572	(1995; Rev thru Jun 1997) High Intensity Discharge Lighting Fixtures

UL Elec Const Dir

(1998) Electrical Construction Equipment  
Directory

## 1.2 GENERAL

### 1.2.1 Rules

The installation shall conform to the requirements of NFPA 70 and NFPA 101, unless more stringent requirements are indicated or shown.

### 1.2.2 Coordination

The drawings indicate the extent and the general location and arrangement of equipment, conduit, and wiring. The Contractor shall become familiar with all details of the work and verify all dimensions in the field so that the outlets and equipment shall be properly located and readily accessible. Lighting fixtures, outlets, and other equipment and materials shall be carefully coordinated with mechanical or structural features prior to installation and positioned according to architectural reflected ceiling plans; otherwise, lighting fixtures shall be symmetrically located according to the room arrangement when uniform illumination is required, or asymmetrically located to suit conditions fixed by design and shown. Raceways, junction and outlet boxes, and lighting fixtures shall not be supported from sheet metal roof decks. If any conflicts occur necessitating departures from the drawings, details of and reasons for departures shall be submitted and approved prior to implementing any change. The Contractor shall coordinate the electrical requirements of the mechanical work and provide all power related circuits, wiring, hardware and structural support, even if not shown on the drawings.

### 1.2.3 Special Environments

#### 1.2.3.1 Weatherproof Locations

Wiring, Fixtures, and equipment in designated locations shall conform to NFPA 70 requirements for installation in damp or wet locations.

#### 1.2.3.2 Ducts, Plenums and Other Air-Handling Spaces

Wiring and equipment in ducts, plenums and other air-handling spaces shall be installed using materials and methods in conformance with NFPA 70 unless more stringent requirements are indicated in this specification or on the contract drawings.

### 1.2.4 Standard Products

Material and equipment shall be a standard product of a manufacturer regularly engaged in the manufacture of the product and shall essentially duplicate items that have been in satisfactory use for at least 2 years prior to bid opening.

#### 1.2.5 Nameplates

##### 1.2.5.1 Identification Nameplates

Major items of electrical equipment and major components shall be permanently marked with an identification name to identify the equipment by type or function and specific unit number as indicated. Designation of motors shall coincide with their designation in the motor control center or panel. Unless otherwise specified, identification nameplates shall be made of laminated plastic in accordance with ASTM D 709 with black outer layers and a white core. Edges shall be chamfered. Plates shall be fastened with black-finished round-head drive screws, except motors, or approved nonadhesive metal fasteners. When the nameplate is to be installed on an irregular-shaped object, the Contractor shall devise an approved support suitable for the application and ensure the proper installation of the supports and nameplates. In all instances, the nameplate shall be installed in a conspicuous location. At the option of the Contractor, the equipment manufacturer's standard embossed nameplate material with black paint-filled letters may be furnished in lieu of laminated plastic. The front of each panelboard, motor control center, switchgear, and switchboard shall have a nameplate to indicate the phase letter, corresponding color and arrangement of the phase conductors. The following equipment, as a minimum, shall be provided with identification nameplates:

Minimum 6.4 mm  
High Letters

Minimum 3.2 mm  
High Letters

Panelboards  
Starters  
Safety Switches  
Equipment Enclosures  
Motors

Control Power Transformers  
Control Devices  
Instrument Transformers

Each panel, section, or similar assemblies shall be provided with a nameplate in addition to nameplates listed above, which shall be provided for individual compartments in the respective assembly, including nameplates which identify "future," "spare," and "dedicated" or "equipped spaces."

##### 1.2.6 As-Built Drawings

Following the project completion or turnover, within 30 days the Contractor shall furnish 2 sets of as-built drawings to the Contracting Officer.

##### 1.2.7 Recessed Light Fixtures (RLF) Option

The Contractor has the option to substitute inch-pound (I-P) RLF to metric RLF. This option shall be coordinated with Section 9510 ACOUSTICAL CEILINGS.

#### 1.3 SUBMITTAL

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only. When used, a designation following the "G" designation identifies the office that

will review the submittal for the Government. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

SD-02 Shop Drawings

Interior Electrical Equipment; G, RE.

Detail drawings consisting of equipment drawings, illustrations, schedules, instructions, diagrams, and other information necessary to define the installation. Detail drawings shall show the rating of items and systems and how the components of an item and system are assembled, function together, and how they will be installed on the project. Data and drawings for component parts of an item or system shall be coordinated and submitted as a unit. Data and drawings shall be coordinated and included in a single submission. Multiple submissions for the same equipment or system are not acceptable except where prior approval has been obtained from the Contracting Officer. In such cases, a list of data to be submitted later shall be included with the first submission. Detail drawings shall show physical arrangement, construction details, connections, finishes, materials used in fabrication, provisions for conduit or busway entrance, access requirements for installation and maintenance, physical size, electrical characteristics, foundation and support details, and equipment weight. Drawings shall be drawn to scale and/or dimensioned. Optional items shall be clearly identified as included or excluded. Detail drawings shall as a minimum include:

- a. Single line electrical diagrams including primary, metering, sensing and relaying, control wiring, and control logic.
- b. Sway bracing for suspended luminaires.

Structural drawings showing the structural or physical features of major equipment items, components, assemblies, and structures, including foundations or other types of supports for equipment and conductors. These drawings shall include accurately scaled or dimensioned outline and arrangement or layout drawings to show the physical size of equipment and components and the relative arrangement and physical connection of related components. Weights of equipment, components and assemblies shall be provided when required to verify the adequacy of design and proposed construction of foundations or other types of supports. Dynamic forces shall be stated for switching devices when such forces must be considered in the design of support structures. The appropriate detail drawings shall show the provisions for leveling, anchoring, and connecting all items during installation, and shall include any recommendations made by the manufacturer.

Electrical drawings including single-line and three-line diagrams, and schematics or elementary diagrams of each electrical system; internal wiring and field connection diagrams of each electrical device when published by the manufacturer; wiring diagrams of cabinets, panels, units, or separate mountings; interconnection diagrams that show the wiring between separate

components of assemblies; field connection diagrams that show the termination of wiring routed between separate items of equipment; internal wiring diagrams of equipment showing wiring as actually provided for this project. Field wiring connections shall be clearly identified.

If departures from the contract drawings are deemed necessary by the Contractor, complete details of such departures, including changes in related portions of the project and the reasons why, shall be submitted with the detail drawings. Approved departures shall be made at no additional cost to the Government.

#### SD-03 Product Data

Manufacturer's Catalog; G, RE.

Data composed of catalog cuts, brochures, circulars, specifications, product data, and printed information in sufficient detail and scope to verify compliance with the requirements of the contract documents.

Material, Equipment, and Fixture Lists; G, RE.

A complete itemized listing of equipment and materials proposed for incorporation into the work. Each entry shall include an item number, the quantity of items proposed, and the name of the manufacturer of each item.

Installation Procedures.

Installation procedures for rotating equipment, transformers, switchgear, battery systems, voltage regulators, and grounding resistors. Procedures shall include diagrams, instructions, and precautions required to install, adjust, calibrate, and test devices and equipment.

As-Built Drawings; G, RE.

The as-built drawings shall be a record of the construction as installed. The drawings shall include all the information shown on the contract drawings, deviations, modifications, and changes from the contract drawings, however minor. The as-built drawings shall be kept at the job site and updated daily. The as-built drawings shall be a full-sized set of prints marked to reflect all deviations, changes, and modifications. The as-built drawings shall be complete and show the location, size, dimensions, part identification, and other information. Additional sheets may be added. The as-built drawings shall be jointly inspected for accuracy and completeness by the Contractor's quality control representative and by the Contracting Officer prior to the submission of each monthly pay estimate. Upon completion of the work, the Contractor shall submit three full sized sets of the marked prints to the Contracting Officer for approval. If upon review, the as-built drawings are found to contain errors and/or omissions, they will be returned to the Contractor for correction.



The Contractor shall correct and return the as-built drawings to the Contracting Officer for approval within ten calendar days from the time the drawings are returned to the Contractor.

Onsite Tests; G, RE.

A detailed description of the Contractor's proposed procedures for on-site tests.

#### SD-06 Test Reports

Factory Test Reports; G, RE.

Six copies of the information described below in 216 x 280 mm binders having a minimum of 5 rings from which material may readily be removed and replaced, including a separate section for each test. Sections shall be separated by heavy plastic dividers with tabs.

- a. A list of equipment used, with calibration certifications.
- b. A copy of measurements taken.
- c. The dates of testing.
- d. The equipment and values to be verified.
- e. The conditions specified for the test.
- f. The test results, signed and dated.
- g. A description of adjustments made.

Field Test Plan; G, RE.

A detailed description of the Contractor's proposed procedures for onsite test submitted 30 days prior to testing the installed system. No field test will be performed until the test plan is approved. The test plan shall consist of complete field test procedures including tests to be performed, test equipment required, and tolerance limits.

Field Test Reports; G, RE.

Six copies of the information described below in 216 x 280 mm binders having a minimum of 5 rings from which material may readily be removed and replaced, including a separate section for each test. Sections shall be separated by heavy plastic dividers with tabs.

- a. A list of equipment used, with calibration certifications.

- b. A copy of measurements taken.
- c. The dates of testing.
- d. The equipment and values to be verified.
- e. The conditions specified for the test.
- f. The test results, signed and dated.
- g. A description of adjustments made.
- h. Final position of controls and device settings.

#### SD-07 Certificates

##### Materials and Equipment.

The label or listing of the Underwriters Laboratories, Inc., will be accepted as evidence that the materials or equipment conform to the applicable standards of that agency. In lieu of this label or listing, a statement from a nationally recognized, adequately equipped testing agency indicating that the items have been tested in accordance with required procedures and that the materials and equipment comply with all contract requirements will be accepted. However, materials and equipment installed in hazardous locations must bear the UL label unless the data submitted from other testing agency is specifically approved in writing by the Contracting Officer. Items which are required to be listed and labeled in accordance with Underwriters Laboratories must be affixed with a UL label that states that it is UL listed. No exceptions or waivers will be granted to this requirement. Materials and equipment will be approved based on the manufacturer's published data.

For other than equipment and materials specified to conform to UL publications, a manufacturer's statement indicating complete compliance with the applicable standard of the American Society for Testing and Materials, National Electrical Manufacturers Association, or other commercial standard, is acceptable.

#### 1.4 WORKMANSHIP

Materials and equipment shall be installed in accordance with NFPA 70, recommendations of the manufacturer, and as shown.

#### 1.5 SEISMIC REQUIREMENTS

Seismic details shall conform to Section 16070 SEISMIC PROTECTION FOR ELECTRICAL EQUIPMENT.

## PART 2 PRODUCTS

Products shall conform to the respective publications and other requirements specified below. Materials and equipment not listed below shall be as specified elsewhere in this section. Items of the same classification shall be identical including equipment, assemblies, parts, and components.

### 2.1 CABLES AND WIRES

Conductors No. 8 AWG and larger diameter shall be stranded. Conductors No. 10 AWG and smaller diameter shall be solid, except that conductors for remote control, alarm, and signal circuits, classes 1, 2, and 3, shall be stranded unless specifically indicated otherwise. Conductor sizes and ampacities shown are based on copper, unless indicated otherwise. All conductors shall be copper.

#### 2.1.1 Equipment Manufacturer Requirements

When manufacturer's equipment requires copper conductors at the terminations or requires copper conductors to be provided between components of equipment, provide copper conductors or splices, splice boxes, and other work required to meet manufacturer's requirements.

#### 2.1.2 Insulation

Unless indicated otherwise, or required by NFPA 70, power and lighting wires shall be 600-volt, Type THWN, THHN, or THW conforming to UL 83, except that grounding wire may be type TW conforming to UL 83; remote-control and signal circuits shall be Type TW, THW or TF, conforming to UL 83. Where lighting fixtures require 90-degree Centigrade (C) conductors, provide only conductors with 90-degree C insulation or better.

#### 2.1.3 Bonding Conductors

ASTM B 1, solid bare copper wire for sizes No. 8 AWG and smaller diameter; ASTM B 8, Class B, stranded bare copper wire for sizes No. 6 AWG and larger diameter.

#### 2.1.4 Service Entrance Cables

Service entrance (SE) and underground service entrance (USE) cables, UL 854.

### 2.2 CABLE TRAYS

NEMA VE 1 cable trays shall form a wireway system, and shall be of nominal 100 mm depth. Cable trays shall be constructed of aluminum. Trays shall include splice and end plates, dropouts, and miscellaneous hardware. Edges, fittings, and hardware shall be finished free from burrs and sharp edges. Fittings shall have not less than the load-carrying ability of straight tray sections and shall have manufacturer's minimum standard radius. Radius of bends shall be 610 mm.

#### 2.2.1 Ladder

Ladder-type cable trays shall be of nominal 300 mm width. Rung spacing shall be on 230 mm maximum centers.

### 2.3 TRANSIENT VOLTAGE SURGE PROTECTION

Transient voltage surge suppressors shall be provided as indicated. Surge suppressors shall meet the requirements of IEEE C62.41 and be UL listed and labeled as having been tested in accordance with UL 1449. Surge suppressor ratings shall be 100,000 volts rms, operating voltage; 60 Hz; 3-phase; 4 wire with ground; transient suppression voltage (peak let-through voltage) of 200,000 volts. Fuses shall not be used as surge suppression.

### 2.4 CIRCUIT BREAKERS

#### 2.4.1 MOLDED-CASE CIRCUIT BREAKERS

Molded-case circuit breakers shall conform to NEMA AB 1 and UL 489. Circuit breakers may be installed in panelboards, switchboards, enclosures, or combination motor controllers.

##### 2.4.1.1 Construction

Circuit breakers shall be suitable for mounting and operating in any position. Lug shall be listed for copper conductors only in accordance with UL 486E. Single-pole circuit breakers shall be full module size with not more than one pole per module. Multi-pole circuit breakers shall be of the common-trip type having a single operating handle such that an overload or short circuit on any one pole will result in all poles opening simultaneously. Sizes of 100 amperes or less may consist of single-pole breakers permanently factory assembled into a multi-pole unit having an internal, mechanical, nontamperable common-trip mechanism and external handle ties. All circuit breakers shall have a quick-make, quick-break overcenter toggle-type mechanism, and the handle mechanism shall be trip-free to prevent holding the contacts closed against a short-circuit or sustained overload. All circuit breaker handles shall assume a position between "ON" and "OFF" when tripped automatically. All ratings shall be clearly visible.

##### 2.4.1.2 Ratings

Voltage ratings shall be not less than the applicable circuit voltage. The interrupting rating of the circuit breakers shall be at least equal to the available short-circuit current at the line terminals of the circuit breaker and correspond to the UL listed integrated short-circuit current rating specified for the panelboards and switchboards. Molded-case circuit breakers shall have nominal voltage ratings, maximum continuous-current ratings, and maximum short-circuit interrupting ratings in accordance with NEMA AB 1. Ratings shall be coordinated with system X/R ratio.

#### 2.4.1.3 Cascade System Ratings

Circuit breakers used in series combinations shall be in accordance with UL 489. Equipment, such as switchboards and panelboards, which house series-connected circuit breakers shall be clearly marked accordingly. Series combinations shall be listed in the UL Recognized Component Directory under "Circuit Breakers-Series Connected."

#### 2.4.1.4 Thermal-Magnetic Trip Elements

Thermal magnetic circuit breakers shall be provided as shown. Automatic operation shall be obtained by means of thermal-magnetic tripping devices located in each pole providing inverse time delay and instantaneous circuit protection. The instantaneous magnetic trip shall be adjustable and accessible from the front of all circuit breakers on frame sizes above 150 amperes.

#### 2.4.2 Solid-State Trip Elements

Solid-state circuit breakers shall be provided as shown. All electronics shall be self-contained and require no external relaying, power supply, or accessories. Printed circuit cards shall be treated to resist moisture absorption, fungus growth, and signal leakage. All electronics shall be housed in an enclosure which provides protection against arcs, magnetic interference, dust, and other contaminants. Solid-state sensing shall measure true RMS current with error less than one percent on systems with distortions through the 13th harmonic. Peak or average actuating devices are not acceptable. Current sensors shall be torodial construction, encased in a plastic housing filled with epoxy to protect against damage and moisture and shall be integrally mounted on the breaker. Where indicated on the drawings, circuit breaker frames shall be rated for 100 percent continuous duty. Circuit breakers shall have tripping features as shown on the drawings and as described below:

- a. Long-time current pick-up, adjustable from 50 percent to 100 percent of continuous current rating.
- b. Adjustable long-time delay.
- c. Short-time current pick-up, adjustable from 1.5 to 9 times long-time current setting.
- d. Adjustable short-time delay.
- e. Instantaneous current pick-up, adjustable from 1.5 to 9 times long-time current setting.
- f. Ground-fault pick-up, adjustable from 20 percent to 60 percent of sensor rating, but not greater than 1200 amperes. Sensing of ground-fault current at the main bonding jumper or ground strap will not be permitted.
- g. Fixed ground-fault delay.
- h. Ground-fault  $I^2 t$  switch.

#### 2.4.3 Current-Limiting Circuit Breakers

Current-limiting circuit breakers shall be provided as shown. Current-limiting circuit breakers shall limit the let-through  $I^2t$  to a value less than the  $I^2t$  of one-half cycle of the symmetrical short-circuit current waveform. On fault currents below the threshold of limitation, breakers shall provide conventional overload and short-circuit protection. Integrally-fused circuit breakers shall not be used.

#### 2.5 CONDUIT AND TUBING

##### 2.5.1 Electrical, Zinc-Coated Steel Metallic Tubing (EMT)

UL 797

##### 2.5.2 Electrical Plastic Tubing and Conduit

NEMA TC 2.

##### 2.5.3 Flexible Conduit, Steel and Plastic

General-purpose type, UL 1; liquid tight, UL 360.

##### 2.5.4 Intermediate Metal Conduit

UL 1242.

##### 2.5.5 PVC Coated Rigid Steel Conduit

NEMA RN 1.

##### 2.5.6 Rigid Metal Conduit

UL 6.

##### 2.5.7 Rigid Plastic Conduit

NEMA TC 2, UL 651 and UL 651A.

#### 2.6 CONDUIT AND DEVICE BOXES AND FITTINGS

##### 2.6.1 Boxes, Metallic Outlet

NEMA OS 1 and UL 514A.

##### 2.6.2 Boxes, Switch (Enclosed), Surface-Mounted

UL 98.

##### 2.6.3 Fittings for Conduit and Outlet Boxes

UL 514B.

01062/BERGER/ABAM  
Tactical Equipment Complex  
Fort Lewis, Washington

2.6.4 Fittings, PVC, for Use with Rigid PVC Conduit and Tubing

UL 514B.

2.7 CONDUIT COATINGS PLASTIC RESIN SYSTEM

NEMA RN 1, Type A-40.

2.8 CONNECTORS, WIRE PRESSURE

2.8.1 For Use With Copper Conductors

UL 486A.

2.9 ELECTRICAL GROUNDING AND BONDING EQUIPMENT

UL 467.

2.9.1 Ground Rods

Ground rods shall be of copper-clad steel conforming to UL 467 not less than 19.1 mm in diameter by 3.1 meter in length of the sectional type driven full length into the earth.

2.9.2 Ground Bus

The ground bus shall be bare conductor or flat copper in one piece, if practicable.

2.10 ENCLOSURES

NEMA ICS 6 or NEMA 250 unless otherwise specified.

2.10.1 Cabinets and Boxes

Cabinets and boxes with volume greater than 0.0164 cubic meters shall be in accordance with UL 50, hot-dip, zinc-coated, if sheet steel.

2.10.2 Circuit Breaker Enclosures

UL 489.

2.11 LIGHTING FIXTURES, LAMPS, BALLASTS, EMERGENCY EQUIPMENT, CONTROLS AND ACCESSORIES

The following specifications are supported and supplemented by information and details on the drawings. Additional fixtures, if shown, shall conform to this specification. Lamps, lampholders, ballasts, transformers, electronic circuitry and other lighting system components shall be constructed according to industry standards. Equipment shall be tested and listed by a recognized independent testing laboratory for the expected installation conditions. Equipment shall conform to the standards listed below.

#### 2.11.1 Lamps

Lamps shall be constructed to operate in the specified fixture, and shall function without derating life or output as listed in published data. Lamps shall meet the requirements of the Energy Policy Act of 1992.

a. Fluorescent lamps shall have color temperature of 3,500 degrees Kelvin. They shall be designed to operate with the ballasts and circuitry of the fixtures in which they will be used. Fluorescent lamps, including spares, shall be manufactured by one manufacturer to provide for color and performance consistency. Fluorescent lamps shall comply with ANSI C78.1. Fluorescent tube lamp efficiencies shall meet or exceed the following requirements.

T8, 32 watts	(4' lamp)	2800 lumens
T8/U, 31-32 watts	(U-tube)	2600 lumens

(1) Linear fluorescent lamps, unless otherwise indicated, shall be 1219 mm long 32 watt T8, 265 mA, with minimum CRI of 75. Lamps of other lengths or types shall be used only where specified or shown. Lamps shall deliver rated life when operated on rapid start ballasts.

(2) Small compact fluorescent lamps shall be twin, double, or triple tube configuration as shown with bi-pin or four-pin snap-in base and shall have minimum CRI of 85. They shall deliver rated life when operated on ballasts as shown. 18 and 26 watt double tube lamps shall comply with ANSI C78.2A. Minimum starting temperature shall be 0 degrees C for twin tube lamps and for double and triple twin tube lamps without internal starter; and -9 degrees C for double and triple twin tube lamps with internal starter.

(3) Long compact fluorescent lamps shall be 18, 27, 39, 40, 50, or 55 watt bi-axial type as shown with four-pin snap-in base; shall have minimum CRI of 85; and shall have a minimum starting temperature of 10 degrees C. They shall deliver rated life when operated on rapid start ballasts.

c. High intensity discharge lamps, including spares, shall be manufactured by one manufacturer in order to provide color and performance consistency. High intensity discharge lamps shall be designed to operate with the ballasts and circuitry of the fixtures in which they will be used and shall have wattage, shape and base as shown. High intensity discharge lamps, unless otherwise shown, shall have medium or mogul screw base and minimum starting temperature of -29 degrees C. Metal halide lamps, unless otherwise shown, shall have minimum CRI of 65; color temperature of 4,300 degrees Kelvin; shall be -BU configuration if used in base-up position; and shall be -H or high output configuration if used in horizontal position. Lamps shall comply with all applicable ANSI C78.1350, ANSI C78.1351, ANSI C78.1352.



## 2.11.2 Ballasts and Transformers

Ballasts or transformers shall be designed to operate the designated lamps within their optimum specifications, without derating the lamps. Lamp and ballast combinations shall be certified as acceptable by the lamp manufacturer.

a. Fluorescent ballasts shall comply with ANSI C82.1 and shall be mounted integrally within fluorescent fixture housing unless otherwise shown. Ballasts shall have maximum current crest factor of 1.7; high power factor; Class A sound rating; maximum operating case temperature of 25 degrees C above ambient; and shall be rated Class P. Unless otherwise indicated, the minimum number of ballasts shall be used to serve each individual fixture. A single ballast may be used to serve multiple fixtures if they are continuously mounted, identically controlled and factory manufactured for that installation with an integral wireway.

(1) Compact fluorescent ballasts shall comply with IEEE C62.41 Category A transient voltage variation requirements and shall be mounted integrally within compact fluorescent fixture housing unless otherwise shown. Ballasts shall have minimum ballast factor of 0.95; maximum current crest factor of 1.6; high power factor; maximum operating case temperature of 25 degrees C above ambient; shall be rated Class P; and shall have a sound rating of Class A. Ballasts shall meet FCC Class A specifications for EMI/RFI emissions. Ballasts shall operate from nominal line voltage of 120 volts at 60 Hz and maintain constant light output over a line voltage variation of 10%. Ballasts shall have an end-of-lamp-life detection and shut-down circuit. Ballasts shall be UL listed and shall contain no PCBs. Ballasts shall contain potting to secure PC board, provide lead strain relief, and provide a moisture barrier.

(2) Electronic fluorescent ballasts shall comply with 47 CFR 18 for electromagnetic interference. Ballasts shall withstand line transients per IEEE C62.41, Category A. Ballasts shall have total harmonic distortion between 10 and 20%; minimum frequency of 20,000Hz; filament voltage between 2.5 and 4.5 volts; maximum starting inrush current of 20 amperes; and shall comply with the minimum Ballast Efficacy Factors shown in the table below. Minimum starting temperature shall be 10 degrees C. Ballasts shall carry a manufacturer's full warranty of three years, including a minimum \$10 labor allowance per ballast.

-0.33

LAMP TYPE	TYPE OF STARTER & LAMP	NOMINAL OPERATIONAL VOLTAGE	NUMBER OF LAMPS	MINIMUM BALLAST EFFICACY FACTOR
32W T8	rapid	120 or 277 V	1	2.54
	start		2	1.44
	linear &		3	0.93
	U-tubes		4	0.73

---

b. High intensity discharge ballasts shall comply with UL 1029 and, if multiple supply types, with ANSI C82.4. Ballasts shall have minimum ballast factor of 0.9; high power factor; Class A sound rating; and maximum operating case temperature of 25 degrees C above ambient.

(1) Electronic high intensity discharge ballasts shall be constant wattage autotransformer type; shall have less than 10% ballast loss; shall have total harmonic distortion between 10 and 20%; and shall have a minimum starting temperature of -18 degrees C.

(2) Magnetic high intensity discharge ballasts shall have a minimum starting temperature of -29 degrees C.

#### 2.11.3 Fixtures

Fixtures shall be in accordance with the size, shape, appearance, finish, and performance shown. Unless otherwise indicated, lighting fixtures shall be provided with housings, junction boxes, wiring, lampholders, mounting supports, trim, hardware and accessories for a complete and operable installation. Recessed housings shall be minimum 20 gauge cold rolled or galvanized steel as shown. Extruded aluminum fixtures shall have minimum wall thickness of 3 mm. Plastic lenses shall be 100% virgin acrylic or as shown. Glass lenses shall be tempered. Heat resistant glass shall be borosilicate type. Conoid recessed reflector cones shall be Alzak with clear specular low iridescent finish.

a. Fluorescent fixtures shall comply with UL 1570. Recessed ceiling fixtures shall comply with NEMA LE 4. Fixtures shall be plainly marked for proper lamp and ballast type to identify lamp diameter, wattage, color and start type. Marking shall be readily visible to service personnel, but not visible from normal viewing angles. Fluorescent fixture lens frames on recessed and surface mounted troffers shall be one assembly with mitered corners. Parabolic louvers shall have a low iridescent finish and 45 degree cut-off. Louver intersection joints shall be hairline type and shall conceal mounting tabs or other assembly methods. Louvers shall be free from blemishes, lines or defects which distort the visual surface. Integral ballast and wireway compartments shall be easily accessible without the use of special tools. Housings shall be constructed to include grounding necessary to start the lamps.

Open fixtures shall be equipped with a sleeve, wire guard, or other positive means to prevent lamps from falling. Medium bi-pin lampholders shall be twist-in type with positive locking position. Long compact fluorescent fixtures and fixtures utilizing U-bend lamps shall have clamps or secondary lampholders to support the free ends of the lamps.

b. High intensity discharge fixture shall comply with UL 1572. Recessed ceiling fixtures shall comply with NEMA LE 4. Reflectors shall be anodized aluminum. Fixtures for horizontal lamps shall have position oriented lampholders. Lampholders shall be pulse-rated to 5,000 volts. Recessed lens fixtures shall have extruded aluminum lens frames. Ballasts shall be integral to fixtures and shall be accessible without the use of special tools. Lamps shall be shielded from direct view with a UV absorbing material such as tempered glass, and shall be circuited through a cut-off switch which will shut off the lamp circuit if the lens is not in place.

c. Emergency lighting fixtures and accessories shall be constructed and independently tested to meet the requirements of applicable codes. Batteries shall be Nicad or equal with no required maintenance, and shall have a minimum life expectancy of five years and warranty period of three years.

d. Exit Signs

Exit signs shall be ENERGY STAR compliant, thereby meeting the following requirements. Input power shall be less than 5 watts per face. Letter size and spacing shall adhere to NFPA 101. Luminance contrast shall be greater than 0.8. Average luminance shall be greater than 15 cd/m<sup>2</sup> measured at normal (0 degree) and 45 degree viewing angles. Minimum luminance shall be greater than 8.6 cd/m<sup>2</sup> measured at normal and 45 degree viewing angles. Maximum to minimum luminance shall be less than 20:1 measured at normal and 45 degree viewing angles. The manufacturer warranty for defective parts shall be at least 5 years.

2.11.4 Lampholders, Starters, and Starter Holders

UL 542

2.11.5 Ultrasonic, and Passive Infrared Occupancy Sensors

UL 916

2.12 LOW-VOLTAGE FUSES AND FUSEHOLDERS

2.12.1 Fuses, Low Voltage Cartridge Type

NEMA FU 1.

2.12.2 Fuses, Class K, High-Interrupting-Capacity Type

UL 198D.

2.12.3 Fuses for Supplementary Overcurrent Protection

UL 198G.

2.12.4 Fuseholders

UL 512.

2.13 INSTRUMENTS, ELECTRICAL INDICATING

ANSI C39.1.

2.14 PANELBOARDS

Dead-front construction, NEMA PB 1 and UL 67.

2.15 RECEPTACLES

2.15.1 Heavy Duty Grade

NEMA WD 1. Devices shall conform to all requirements for heavy duty receptacles.

2.15.2 Ground Fault Interrupters

UL 943, Class A or B.

2.15.3 NEMA Standard Receptacle Configurations

NEMA WD 6.

a. Single and Duplex, 20-Ampere, 125 Volt

20-ampere, non-locking: NEMA type 5-20R.

b. 15-Ampere, 250 Volt

2.16 Service Entrance Equipment

UL 869A.

2.17 SPLICE, CONDUCTOR

UL 486C.

2.18 POWER-SWITCHGEAR ASSEMBLIES INCLUDING SWITCHBOARDS

Assemblies shall be metal-enclosed, general-purpose type in accordance with NEMA PB 1, and IEEE C37.20.1 and shall be installed to provide front and rear access. Busses shall be copper. Arrangement of circuit breakers and other items specified shall be as indicated. The withstand rating and

interrupting capacity of the switchgear and circuit breakers shall be based on the maximum fault current available.

#### 2.18.1 Circuit Breakers

Circuit breakers shall be stationary medium-voltage power circuit breakers molded-case circuit breakers.

#### 2.19 SNAP SWITCHES

UL 20.

#### 2.20 TAPES

##### 2.20.1 Plastic Tape

UL 510.

##### 2.20.2 Rubber Tape

UL 510.

#### 2.21 WATTHOUR/DEMAND METERS, CHECK

ANSI C12.10 for self-contained watthour-demand meter with pulse-initiators for remote monitoring of watt-hour usage and instantaneous demand. Meter shall be socket-mounted indoor type. Meter shall be Class 200.

#### 2.22 INSTRUMENT TRANSFORMERS

##### 2.22.1 General

Instrument transformers shall comply with ANSI C12.11 and IEEE C57.13. Instrument transformers shall be configured for mounting in/on the device to which they are applied. Polarity marks on instrument transformers shall be visually evident and shown on drawings.

##### 2.22.2 Current Transformers

Unless otherwise indicated, bar, wound, or window-type transformers are acceptable; and except for window-type units installed over insulated buses, transformers shall have a BIL rating consistent with the rated BIL of the associated switchgear or electric power apparatus bushings, buses or conductors. Current transformers shall have the indicated ratios. The continuous thermal-current rating factor shall be not less than 2.0. Other thermal and mechanical ratings of current transformer and their primary leads shall be coordinated with the design of the circuit breaker and shall be not less than the momentary rating of the associated circuit breaker. Circuit protectors shall be provided across secondary leads of the current transformers to prevent the accidental open-circuiting of the transformers while energized. Each terminal of each current transformer shall be connected to a short-circuiting terminal block in the circuit interrupting mechanism cabinet, power transformer terminal cabinet, and in the associated instrument and relay cabinets.

#### 2.22.2.1 Current Transformers for kWH and Demand Metering (Low Voltage)

Current transformers shall conform to IEEE C57.13. Provide current transformers with a metering accuracy Class of 0.3 through B-0.2, with a minimum RF of 4.0 at 30 degrees C, with 600-volt insulation, and 10 kV BIL. Provide butyl-molded, window-type current transformers mounted in the current transformer cabinet.

#### 2.23 WIRING DEVICES

NEMA WD 1 for wiring devices, and NEMA WD 6 for dimensional requirements of wiring devices.

### PART 3 EXECUTION

#### 3.1 GROUNDING

Grounding shall be in conformance with NFPA 70, the contract drawings, and the following specifications.

##### 3.1.1 Ground Rods

The resistance to ground shall be measured using the fall-of-potential method described in IEEE Std 81. The maximum resistance of a driven ground shall not exceed 25 ohms under normally dry conditions. If this resistance cannot be obtained with a single rod, additional rods not less than 1.8 meters on centers, and driven with the first rod. In high-ground-resistance, UL listed chemically charged ground rods may be used. If the resultant resistance exceeds 25 ohms measured not less than 48 hours after rainfall, the Contracting Officer shall be notified immediately. Connections below grade shall be fusion welded. Connections above grade shall be fusion welded or shall use UL 467 approved connectors.

##### 3.1.2 Ground Bus

Ground bus shall be provided in the communications equipment rooms as indicated. Noncurrent-carrying metal parts of electrical equipment shall be effectively grounded by bonding to the ground bus. The ground bus shall be bonded to both the entrance ground, and to a ground rod or rods as specified above having the upper end terminating approximately 100 mm above the floor. Connections and splices shall be of the brazed, welded, bolted, or pressure-connector type, except that pressure connectors or bolted connections shall be used for connections to removable equipment. Connections shall be bolted type in lieu of thermoweld, so they can be changed as required by additions and/or alterations.

##### 3.1.3 Grounding Conductors

All equipment grounding conductors, including metallic raceway systems used as such, shall be bonded or joined together in each wiring box or equipment enclosure. Metallic raceways and grounding conductors shall be checked to assure that they are wired or bonded into a common junction. Metallic boxes and enclosures, if used, shall also be bonded to these grounding conductors by an approved means per NFPA 70. When switches, or other utilization devices are installed, any designated grounding terminal on these devices

shall also be bonded to the equipment grounding conductor junction with a short jumper.

### 3.2 WIRING METHODS

Wiring shall conform to NFPA 70, the contract drawings, and the following specifications. Unless otherwise indicated, wiring shall consist of insulated conductors installed in rigid zinc-coated steel conduit rigid plastic conduit electrical metallic tubing intermediate metal conduit. Where cables and wires are installed in cable trays, they shall be of the type permitted by NFPA 70 for use in such applications. Wire fill in conduits shall be based on NFPA 70 for the type of conduit and wire insulations specified.

#### 3.2.1 Conduit and Tubing Systems

Conduit and tubing systems shall be installed as indicated. Conduit sizes shown are based on use of copper conductors with insulation types as described in paragraph WIRING METHODS. Minimum size of raceways shall be 16 mm. Only metal conduits will be permitted when conduits are required for shielding or other special purposes indicated, or when required by conformance to NFPA 70. Nonmetallic conduit may be used in damp, wet or corrosive locations when permitted by NFPA 70 and the conduit or tubing system is provided with appropriate boxes, covers, clamps, screws or other appropriate type of fittings. Electrical metallic tubing (EMT) may be installed only within buildings. EMT may be installed in concrete and grout in dry locations. EMT installed in concrete or grout shall be provided with concrete tight fittings. EMT shall not be installed in damp or wet locations, or the air space of exterior masonry cavity walls. Bushings, manufactured fittings or boxes providing equivalent means of protection shall be installed on the ends of all conduits and shall be of the insulating type, where required by NFPA 70. Only UL listed adapters shall be used to connect EMT to rigid metal conduit, cast boxes, and conduit bodies. Penetrations of above grade floor slabs, time-rated partitions and fire walls shall be firestopped in accordance with Section 07840 FIRESTOPPING. Except as otherwise specified, IMC may be used as an option for rigid steel conduit in areas as permitted by NFPA 70. Raceways shall not be installed under the firepits of boilers and furnaces and shall be kept 150 mm away from parallel runs of flues, steam pipes and hot-water pipes. Raceways shall be concealed within finished walls, ceilings, and floors unless otherwise shown. Raceways crossing structural expansion joints or seismic joints shall be provided with suitable expansion fittings or other suitable means to compensate for the building expansion and contraction and to provide for continuity of grounding. Wiring installed in underfloor raceway system shall be suitable for installation in wet locations.

#### 3.2.1.1 Pull Wires

A pull wire shall be inserted in each empty raceway in which wiring is to be installed if the raceway is more than 15 meters in length and contains more than the equivalent of two 90-degree bends, or where the raceway is more than 45 meters in length. The pull wire shall be of No. 14 AWG zinc-coated steel, or of plastic having not less than 1.4 MPa (200 psi) tensile strength. Not less than 254 mm of slack shall be left at each end of the pull wire.

#### 3.2.1.2 Conduit Stub-Ups

Where conduits are to be stubbed up through concrete floors, a short elbow shall be installed below grade to transition from the horizontal run of conduit to a vertical run. A conduit coupling fitting, threaded on the inside shall be installed, to allow terminating the conduit flush with the finished floor. Wiring shall be extended in rigid threaded conduit to equipment, except that where required, flexible conduit may be used 150 mm above the floor. Empty or spare conduit stub-ups shall be plugged flush with the finished floor with a threaded, recessed plug.

#### 3.2.1.3 Below Slab-on-Grade or in the Ground

Electrical wiring below slab-on-grade shall be protected by a conduit system. Conduit passing vertically through slabs-on-grade shall be rigid steel or IMC. Rigid steel or IMC conduits installed below slab-on-grade or in the earth shall be field wrapped with 0.254 mm thick pipe-wrapping plastic tape applied with a 50 percent overlay, or shall have a factory-applied polyvinyl chloride, plastic resin, or epoxy coating system.

#### 3.2.1.4 Installing in Slabs Including Slabs on Grade

Conduit installed in slabs-on-grade shall be rigid steel or IMC. Conduits shall be installed as close to the middle of concrete slabs as practicable without disturbing the reinforcement. Outside diameter shall not exceed 1/3 of the slab thickness and conduits shall be spaced not closer than 3 diameters on centers except at cabinet locations where the slab thickness shall be increased as approved by the Contracting Officer. Where conduit is run parallel to reinforcing steel, the conduit shall be spaced a minimum of one conduit diameter away but not less than 25.4 mm from the reinforcing steel.

#### 3.2.1.5 Changes in Direction of Runs

Changes in direction of runs shall be made with symmetrical bends or cast-metal fittings. Field-made bends and offsets shall be made with an approved hickey or conduit-bending machine. Crushed or deformed raceways shall not be installed. Trapped raceways in damp and wet locations shall be avoided where possible. Lodgment of plaster, dirt, or trash in raceways, boxes, fittings and equipment shall be prevented during the course of construction. Clogged raceways shall be cleared of obstructions or shall be replaced.



#### 3.2.1.6 Supports

Metallic conduits and tubing, and the support system to which they are attached, shall be securely and rigidly fastened in place to prevent vertical and horizontal movement at intervals of not more than 3 meters and within 900 mm of boxes, cabinets, and fittings, with approved pipe straps, wall brackets, conduit clamps, conduit hangers, threaded C-clamps, beam clamps, or ceiling trapeze. Loads and supports shall be coordinated with supporting structure to prevent damage or deformation to the structure. Loads shall not be applied to joist bridging. Attachment shall be by wood screws or screw-type nails to wood; by toggle bolts on hollow masonry units; by expansion bolts on concrete or brick; by machine screws, welded threaded studs, heat-treated or spring-steel-tension clamps on steel work. Nail-type nylon anchors or threaded studs driven in by a powder charge and provided with lock washers and nuts may be used in lieu of expansion bolts or machine screws. Raceways or pipe straps shall not be welded to steel structures. Cutting the main reinforcing bars in reinforced concrete beams or joists shall be avoided when drilling holes for support anchors. Holes drilled for support anchors, but not used, shall be filled. In partitions of light steel construction, sheet-metal screws may be used. Raceways shall not be supported using wire or nylon ties. Raceways shall be independently supported from the structure. Upper raceways shall not be used as a means of support for lower raceways. Supporting means shall not be shared between electrical raceways and mechanical piping or ducts. Cables and raceways shall not be supported by ceiling grids. Except where permitted by NFPA 70, wiring shall not be supported by ceiling support systems. Conduits shall be fastened to sheet-metal boxes and cabinets with two locknuts where required by NFPA 70, where insulating bushings are used, and where bushings cannot be brought into firm contact with the box; otherwise, a single locknut and bushing may be used. Threadless fittings for electrical metallic tubing shall be of a type approved for the conditions encountered. Additional support for horizontal runs is not required when EMT rests on steel stud cutouts.

#### 3.2.1.7 Exposed Raceways

Exposed raceways shall be installed parallel or perpendicular to walls, structural members, or intersections of vertical planes and ceilings. Raceways under raised floors and above accessible ceilings shall be considered as exposed installations in accordance with NFPA 70 definitions.

#### 3.2.1.8 Communications Raceways

Communications raceways indicated shall be installed in accordance with the previous requirements for conduit and tubing and with the additional requirement that no length of run shall exceed 15 meters for 15 mm and 20 mm sizes, and 30 meters for 25 mm or larger sizes, and shall not contain more than two 90-degree bends or the equivalent. Additional pull or junction boxes shall be installed to comply with these limitations whether or not indicated. Inside radii of bends in conduits of 25 mm (1 inch) size or larger shall not be less than ten times the nominal diameter.

### 3.2.2 Cable Trays

Cable trays shall be supported in accordance with the recommendations of the manufacturer but at no more than 1.8 meter intervals. Contact surfaces of aluminum connections shall be coated with an antioxidant compound prior to assembly. Adjacent cable tray sections shall be bonded together by connector plates of an identical type as the cable tray sections. The Contractor shall submit the manufacturer's certification that the cable tray system meets all requirements of Article 318 of NFPA 70. The cable tray shall be installed and grounded in accordance with the provisions of Article 318 of NFPA 70. Data submitted by the Contractor shall demonstrate that the completed cable tray systems will comply with the specified requirements. Cable trays shall terminate 250 mm from both sides of smoke and fire partitions. Conductors run through smoke and fire partitions shall be installed in 103 mm (4 inch) rigid steel conduits with grounding bushings, extending 300 mm beyond each side of the partitions. The installation shall be sealed to preserve the smoke and fire rating of the partitions. Penetrations shall be firestopped in accordance with Section 07840 FIRESTOPPING.

### 3.2.3 Cables and Conductors

Installation shall conform to the requirements of NFPA 70. Covered, bare or insulated conductors of circuits rated over 600 volts shall not occupy the same equipment wiring enclosure, cable, or raceway with conductors of circuits rated 600 volts or less.

#### 3.2.3.1 Sizing

Unless otherwise noted, all sizes are based on copper conductors and the insulation types indicated. Sizes shall be not less than indicated. Branch-circuit conductors shall be not smaller than No. 12 AWG. Conductors for branch circuits of 120 volts more than 30 meters long from panel to load center, shall be no smaller than No. 10 AWG. Class 1 remote control and signal circuit conductors shall be not less than No. 14 AWG. Class 2 remote control and signal circuit conductors shall be not less than No. 16 AWG. Class 3 low-energy, remote-control and signal circuits shall be not less than No. 22 AWG.

#### 3.2.3.2 Use of Aluminum Conductors in Lieu of Copper

Aluminum conductors shall not be used.

#### 3.2.3.3 Cable Systems

Cable systems shall be installed where indicated. Cables shall be installed concealed behind ceiling or wall finish where practicable. Cables shall be threaded through holes bored on the approximate centerline of wood members; notching of surfaces will not be permitted. Sleeves shall be provided through bond beams of masonry-block walls for threading cables through hollow spaces. Exposed cables shall be installed parallel or at right angles to walls or structural members. In rooms or areas not provided with ceiling or wall finish, cables and outlets shall be installed so that a room finish may be applied in the future without disturbing the cables or resetting the boxes. Exposed nonmetallic-sheathed cables less than 1.2

meters above floors shall be protected from mechanical injury by installation in conduit or tubing.

#### 3.2.3.4 Cable Splicing

Splices shall be made in an accessible location. Crimping tools and dies shall be approved by the connector manufacturer for use with the type of connector and conductor.

- a. Copper Conductors, 600 Volt and Under: Splices in conductors No. 10 AWG and smaller diameter shall be made with an insulated, pressure-type connector. Splices in conductors No. 8 AWG and larger diameter shall be made with a solderless connector and insulated with tape or heat-shrink type insulating material equivalent to the conductor insulation.

#### 3.2.3.5 Conductor Identification and Tagging

Power, control, and signal circuit conductor identification shall be provided within each enclosure where a tap, splice, or termination is made. Where several feeders pass through a common pull box, the feeders shall be tagged to indicate clearly the electrical characteristics, circuit number, and panel designation. Phase conductors of low voltage power circuits shall be identified by color coding. Phase identification by a particular color shall be maintained continuously for the length of a circuit, including junctions.

- a. Color coding shall be provided for service, feeder, branch, and ground conductors. Color shall be green for grounding conductors and white for neutrals; except where neutrals of more than one system are installed in the same raceway or box, other neutral shall be white with colored (not green) stripe. The color coding for 3-phase and single-phase low voltage systems shall be as follows:

120/208-volt, 3-phase: Black(A), red(B), and blue(C).

- b. Conductor phase and voltage identification shall be made by color-coded insulation for all conductors smaller than No. 6 AWG. For conductors No. 6 AWG and larger, identification shall be made by color-coded insulation, or conductors with black insulation may be furnished and identified by the use of half-lapped bands of colored electrical tape wrapped around the insulation for a minimum of 75 mm of length near the end, or other method as submitted by the Contractor and approved by the Contracting Officer.

- c. Control and signal circuit conductor identification shall be made by color-coded insulated conductors, plastic-coated self-sticking printed markers, permanently attached stamped metal foil markers, or equivalent means as approved. Control circuit terminals of equipment shall be properly identified. Terminal and conductor identification shall match that shown on approved detail drawings. Hand lettering or marking is not acceptable.

### 3.3 BOXES AND SUPPORTS

Boxes shall be provided in the wiring or raceway systems where required by NFPA 70 for pulling of wires, making connections, and mounting of devices or fixtures. Pull boxes shall be furnished with screw-fastened covers. Indicated elevations are approximate, except where minimum mounting heights for hazardous areas are required by NFPA 70. Unless otherwise indicated, boxes for wall switches shall be mounted 1.2 meters above finished floors. Switch and outlet boxes located on opposite sides of fire rated walls shall be separated by a minimum horizontal distance of 600 mm. The total combined area of all box openings in fire rated walls shall not exceed 0.0645 square meters per 9.3 square meters. Maximum box areas for individual boxes in fire rated walls vary with the manufacturer and shall not exceed the maximum specified for that box in UL Elec Const Dir. Only boxes listed in UL Elec Const Dir shall be used in fire rated walls.

#### 3.3.1 Box Applications

Each box shall have not less than the volume required by NFPA 70 for number of conductors enclosed in box. Boxes for metallic raceways shall be listed for the intended use when located in normally wet locations, when flush or surface mounted on outside of exterior surfaces, or when located in hazardous areas. Boxes installed in wet locations and boxes installed flush with the outside of exterior surfaces shall be gasketed. Boxes for mounting lighting fixtures shall be not less than 102 mm square, or octagonal, except smaller boxes may be installed as required by fixture configuration, as approved. Cast-metal boxes with 2.4 mm wall thickness are acceptable. Large size boxes shall be NEMA 1 or as shown. Boxes in other locations shall be sheet steel and nonmetallic boxes may be used with nonmetallic when permitted by NFPA 70. Boxes for use in masonry-block or tile walls shall be square-cornered, tile-type, or standard boxes having square-cornered, tile-type covers.

#### 3.3.2 Brackets and Fasteners

Boxes and supports shall be fastened to wood with wood screws or screw-type nails of equal holding strength, with bolts and metal expansion shields on concrete or brick, with toggle bolts on hollow masonry units, and with machine screw or welded studs on steel work. Threaded studs driven in by powder charge and provided with lockwashers and nuts, or nail-type nylon anchors may be used in lieu of expansion shields, or machine screws. Penetration of more than 38.1 mm (1-1/2 inches) into reinforced-concrete beams or more than 19.1 mm (3/4 inch) into reinforced-concrete joists shall avoid cutting any main reinforcing steel. The use of brackets which depend on gypsum wallboard or plasterboard for primary support will not be permitted. In partitions of light steel construction, bar hangers with 25 mm long studs, mounted between metal wall studs or metal box mounting brackets shall be used to secure boxes to the building structure. When metal box mounting brackets are used, additional box support shall be provided on the side of the box opposite the brackets. This additional box support shall consist of a minimum 300 mm long section of wall stud, bracketed to the opposite side of the box and secured by two screws through the wallboard on each side of the stud. Metal screws may be used in lieu of the metal box mounting brackets.

### 3.3.3 Mounting in Walls, Ceilings, or Recessed Locations

In walls or ceilings of concrete, tile, or other non-combustible material, boxes shall be installed so that the edge of the box is not recessed more than 6 mm from the finished surface. Boxes mounted in combustible walls or ceiling material shall be mounted flush with the finished surface. The use of gypsum or plasterboard as a means of supporting boxes will not be permitted. Boxes installed for concealed wiring shall be provided with suitable extension rings or plaster covers, as required. The bottom of boxes installed in masonry-block walls for concealed wiring shall be mounted flush with the top of a block to minimize cutting of the blocks, and boxes shall be located horizontally to avoid cutting webs of block. Separate boxes shall be provided for flush or recessed fixtures when required by the fixture terminal operating temperature, and fixtures shall be readily removable for access to the boxes unless ceiling access panels are provided.

### 3.3.4 Installation in Overhead Spaces

In open overhead spaces, cast-metal boxes threaded to raceways need not be separately supported except where used for fixture support; cast-metal boxes having threadless connectors and sheet metal boxes shall be supported directly from the building structure or by bar hangers. Hangers shall not be fastened to or supported from joist bridging. Where bar hangers are used, the bar shall be attached to raceways on opposite sides of the box and the raceway shall be supported with an approved type fastener not more than 600 mm from the box.

## 3.4 DEVICE PLATES

One-piece type device plates shall be provided for all outlets and fittings. Plates on unfinished walls and on fittings shall be of zinc-coated sheet steel, cast-metal, or impact resistant plastic having rounded or beveled edges. Plates on finished walls shall be of steel with baked enamel finish or impact-resistant plastic and shall be ivory. Screws shall be of metal with countersunk heads, in a color to match the finish of the plate. Plates shall be installed with all four edges in continuous contact with finished wall surfaces without the use of mats or similar devices. Plaster fillings will not be permitted. Plates shall be installed with an alignment tolerance of 1.6 mm. The use of sectional-type device plates will not be permitted. Plates installed in wet locations shall be gasketed and provided with a hinged, gasketed cover, unless otherwise specified.

## 3.5 RECEPTACLES

### 3.5.1 Single and Duplex, 20-ampere, 125 volt

Single and duplex receptacles shall be rated 20 amperes, 125 volts, two-pole, three-wire, grounding type with polarized parallel slots. Bodies shall be of ivory to match color of switch handles in the same room or to harmonize with the color of the respective wall, and supported by mounting strap having plaster ears. Contact arrangement shall be such that contact is made on two sides of an inserted blade. Receptacle shall be side- or back-wired with two screws per terminal. The third grounding pole shall be connected to the metal mounting yoke. Switched receptacles shall be the same as other receptacles specified except that the ungrounded pole of each

suitable receptacle shall be provided with a separate terminal. Only the top receptacle of a duplex receptacle shall be wired for switching application. Receptacles with ground fault circuit interrupters shall have the current rating as indicated, and shall be UL Class A type unless otherwise shown. Ground fault circuit protection shall be provided as required by NFPA 70 and as indicated on the drawings.

### 3.5.2 Floor Outlets

Floor outlets shall be adjustable and box shall be compatible with the environment in which it is installed. Unit shall be multiple service outlet assembly consisting of a pre-set insert and activating unit. General design shall consist of a pre-set insert, activation unit and cover for the distribution of electrical power and communication/data signal systems. Device panels shall consist of two duplex receptacles on the power side and two each telephone and data on the low voltage side. Telephone and data outlets shall be per Section 16710 Premises Distribution System.

### 3.5.3 Weatherproof Applications

Weatherproof receptacles shall be suitable for the environment, damp or wet as applicable, and the housings shall be labeled to identify the allowable use. Receptacles shall be marked in accordance with UL 514A for the type of use indicated; "Damp locations", "Wet Locations", "Wet Location Only When Cover Closed". Assemblies shall be installed in accordance with the manufacturer's recommendations.

#### 3.5.3.1 Damp Locations

Receptacles in damp locations shall be mounted in an outlet box with a gasketed, weatherproof, cast-metal cover plate (device plate, box cover) and a gasketed cap (hood, receptacle cover) over each receptacle opening. The cap shall be either a screw-on type permanently attached to the cover plate by a short length of bead chain or shall be a flap type attached to the cover with a spring loaded hinge.

#### 3.5.3.2 Wet Locations

Receptacles in wet locations shall be installed in an assembly rated for such use whether the plug is inserted or withdrawn, unless otherwise indicated. In a duplex installation, the receptacle cover shall be configured to shield the connections whether one or both receptacles are in use.

### 3.6 WALL SWITCHES

Wall switches shall be of the totally enclosed tumbler type. The wall switch handle and switch plate color shall be ivory. Wiring terminals shall be of the screw type or of the solderless pressure type having suitable conductor-release arrangement. Not more than one switch shall be installed in a single-gang position. Switches shall be rated 20-ampere 277-volt for use on alternating current only.

### 3.7 SERVICE EQUIPMENT

Service-disconnecting means shall be of the enclosed molded-case circuit breaker type. When service disconnecting means is a part of an assembly, the assembly shall be listed as suitable for service entrance equipment. Enclosures shall be sheet metal with hinged cover for surface mounting unless otherwise indicated.

### 3.8 PANELBOARDS

Circuit breakers and switches used as a motor disconnecting means shall be capable of being locked in the open position. Door locks shall be keyed alike. Nameplates shall be as approved. Directories shall be typed to indicate loads served by each circuit and mounted in a holder behind a clear protective covering. Busses shall be copper.

#### 3.8.1 Panelboards

Panelboards shall be circuit breaker equipped as indicated on the drawings.

### 3.9 FUSES

Equipment provided under this contract shall be provided with a complete set of properly rated fuses when the equipment manufacturer utilize fuses in the manufacture of the equipment, or if current-limiting fuses are required to be installed to limit the ampere-interrupting capacity of circuit breakers or equipment to less than the maximum available fault current at the location of the equipment to be installed. Fuses shall have a voltage rating of not less than the phase-to-phase circuit voltage, and shall have the time-current characteristics required for effective power system coordination. Time-delay and non-time-delay options shall be as specified.

#### 3.9.1 Cartridge Fuses; Current-Limiting Type

Cartridge fuses, current-limiting type, Class K shall have tested interrupting capacity not less than 200,000 amperes. Fuse holders shall be the type that will reject all Class H fuses.

#### 3.9.2 Motor and Transformer Circuit Fuses

Motor, motor controller, transformer, and inductive circuit fuses shall be Class RK1 or RK5, current-limiting, time-delay with 200,000 amperes interrupting capacity.

### 3.10 UNDERGROUND SERVICE

Unless otherwise indicated, interior conduit systems shall be stubbed out 1.5 m beyond the building wall and 600 mm below finished grade, for interface with the exterior service lateral conduits and exterior communications conduits. Outside conduit ends shall be bushed when used for direct burial service lateral conductors. Outside conduit ends shall be capped or plugged until connected to exterior conduit systems. Underground service lateral conductors will be extended to building service entrance and terminated in accordance with the requirements of Section 16375 ELECTRICAL DISTRIBUTION SYSTEM, UNDERGROUND and NFPA 70.

### 3.11 MOTORS

Each motor shall conform to the kW and voltage ratings indicated, and shall have a service factor and other characteristics that are essential to the proper application and performance of the motors under conditions shown or specified. Three-phase motors for use on 3-phase 208-volt systems shall have a nameplate rating of 200 volts. Unless otherwise specified, all motors shall have open frames, and continuous-duty classification based on a 40 degree C ambient temperature reference. Polyphase motors shall be squirrel-cage type, having normal-starting-torque and low-starting-current characteristics, unless other characteristics are specified in other sections of these specifications or shown on contract drawings. The Contractor shall be responsible for selecting the actual kilowatt (horsepower) ratings and other motor requirements necessary for the applications indicated. When electrically driven equipment furnished under other sections of these specifications materially differs from the design, the Contractor shall make the necessary adjustments to the wiring, disconnect devices and branch-circuit protection to accommodate the equipment actually installed.

### 3.12 MOTOR CONTROL

Each motor or group of motors requiring a single control and not controlled from a motor-control center shall be provided under other sections of these specifications with a suitable controller and devices that will perform the functions as specified for the respective motors. Each motor of 93 W (1/8 hp) or larger shall be provided with thermal-overload protection. Polyphase motors shall have overload protection in each ungrounded conductor. The overload-protection device shall be provided either integral with the motor or controller, or shall be mounted in a separate enclosure. Unless otherwise specified, the protective device shall be of the manually reset type. Single or double pole tumbler switches specifically designed for alternating-current operation only may be used as manual controllers for single-phase motors having a current rating not in excess of 80 percent of the switch rating. Automatic control devices such as thermostats, float or pressure switches may control the starting and stopping of motors directly, provided the devices used are designed for that purpose and have an adequate kilowatt rating. When the automatic-control device does not have such a rating, a magnetic starter shall be used, with the automatic-control device actuating the pilot-control circuit. When combination manual and automatic control is specified and the automatic-control device operates the motor directly, a double-throw, three-position tumbler or rotary switch shall be provided for the manual control; when the automatic-control device actuates the pilot control circuit of a magnetic starter, the latter shall be provided with a three-position selector switch marked MANUAL-OFF-AUTOMATIC. Connections to the selector switch shall be such that only the normal automatic regulatory control devices will be bypassed when the switch is in the Manual position; all safety control devices, such as low- or high-pressure cutouts, high-temperature cutouts, and motor-overload protective devices, shall be connected in the motor-control circuit in both the Manual and the Automatic positions of the selector switch. Control circuit connections to any MANUAL-OFF-AUTOMATIC switch or to more than one automatic regulatory control device shall be made in accordance with wiring diagram approved by the Contracting Officer unless such diagram is included on the



drawings. All controls shall be 120 volts or less unless otherwise indicated.

### 3.13 MOTOR-DISCONNECT MEANS

Each motor shall be provided with a disconnecting means when required by NFPA 70 even though not indicated. For single-phase motors, a single or double pole toggle switch, rated only for alternating current, will be acceptable for capacities less than 30 amperes, provided the ampere rating of the switch is at least 125 percent of the motor rating. Switches shall disconnect all ungrounded conductors.

### 3.14 LIGHTING FIXTURES, LAMPS AND BALLASTS

This paragraph shall cover the installation of lamps, lighting fixtures and ballasts in interior or building mounted applications.

#### 3.14.1 Lamps

Lamps of the type, wattage, and voltage rating indicated shall be delivered to the project in the original cartons and installed just prior to project completion. Lamps installed and used for working light during construction shall be replaced prior to turnover to the Government if more than 15% of their rated life has been used. Lamps shall be tested for proper operation prior to turn-over and shall be replaced if necessary with new lamps from the original manufacturer. 10% spare lamps of each type, from the original manufacturer, shall be provided.

#### 3.14.2 Lighting Fixtures

Fixtures shall be as shown and shall conform to the following specifications and shall be as detailed on the drawings. Illustrations shown on the drawings are indicative of the general type desired and are not intended to restrict selection to fixtures of any particular manufacturer. Fixtures of similar designs and equivalent energy efficiency, light distribution and brightness characteristics, and of equal finish and quality will be acceptable if approved. In suspended acoustical ceilings with fluorescent fixtures, the fluorescent emergency light fixtures shall be furnished with self-contained battery packs.

##### 3.14.2.1 Accessories

Accessories such as straps, mounting plates, nipples, or brackets shall be provided for proper installation.

##### 3.14.2.2 Ceiling Fixtures

Ceiling fixtures shall be coordinated with and suitable for installation in, on or from the ceiling as shown. Installation and support of fixtures shall be in accordance with NFPA 70 and manufacturer's recommendations. Where seismic requirements are specified herein, fixtures shall be supported as shown or specified. Recessed fixtures shall have adjustable fittings to permit alignment with ceiling panels. Recessed fixtures installed in fire-resistive ceiling construction shall have the same fire rating as the ceiling or shall be provided with fireproofing boxes having materials of the

same fire rating as the ceiling, in conformance with UL Elec Const Dir. Surface-mounted fixtures shall be suitable for fastening to the ceiling panel structural supports.

#### 3.14.2.3 Fixtures for Installation in Grid Type Ceilings

Fixtures for installation in grid type ceilings which are smaller than a full tile shall be centered in the tile. 305 by 1219 mm fixtures shall be mounted along the grid rail as shown. Work above the ceiling shall be coordinated among the trades to provide the lighting layout shown. Fixtures mounted to the grid shall have trim exactly compatible with the grid. Contractor shall coordinate trims with ceiling trades prior to ordering fixtures. Metric fixtures shall be designed to fit the metric grid specified. Fixtures in continuous rows shall be coordinated between trades prior to ordering. Fixtures shall be mounted using independent supports capable of supporting the entire weight of the fixture. No fixture shall rest solely on the ceiling grid. Recessed fixtures installed in seismic areas should be installed utilizing specially designed seismic clips. Junction boxes shall be supported at four points.

#### 3.14.2.4 Suspended Fixtures

Suspended fixtures shall be provided with swivel hangers or hand-strights so that they hang plumb. Pendants, rods, or chains 1.2 meters or longer excluding fixture shall be braced to prevent swaying using three cables at 120 degrees of separation. Suspended fixtures in continuous rows shall have internal wireway systems for end to end wiring and shall be properly aligned to provide a straight and continuous row without bends, gaps, light leaks or filler pieces. Aligning splines shall be used on extruded aluminum fixtures to assure hairline joints. Steel fixtures shall be supported to prevent "oil-canning" effects. Fixture finishes shall be free of scratches, nicks, dents, and warps, and shall match the color and gloss specified. Pendants shall be finished to match fixtures. Aircraft cable shall be stainless steel. Canopies shall be finished to match the ceiling and shall be low profile unless otherwise shown. Maximum distance between suspension points shall be 3.1 meters or as recommended by the manufacturer, whichever is less.

Suspended fixtures installed in seismic areas shall have 45% swivel hangers and shall be located with no obstructions within the 45% range in all directions. The stem, canopy and fixture shall be capable of 45% swing.

#### 3.14.3 Emergency Light Sets

Emergency light sets shall conform to UL 924 with the number of heads as indicated. Sets shall be permanently connected to the wiring system by conductors installed in short lengths of flexible conduit.

### 3.15 EQUIPMENT CONNECTIONS

Wiring not furnished and installed under other sections of the specifications for the connection of electrical equipment as indicated on the drawings shall be furnished and installed under this section of the specifications. Connections shall comply with the applicable requirements of paragraph WIRING METHODS. Flexible conduits 2 m or less in length shall be provided to all electrical equipment subject to periodic removal, vibration, or movement and for all motors. All motors shall be provided with separate grounding conductors. Liquid-tight conduits shall be used in damp or wet locations.

#### 3.15.1 Motors and Motor Control

Motors, and motor control shall be installed in accordance with NFPA 70, the manufacturer's recommendations, and as indicated. Wiring shall be extended to motors, and motor control and terminated.

#### 3.15.2 Installation of Government-Furnished Equipment

Wiring shall be extended to the equipment and terminated.

### 3.16 CIRCUIT PROTECTIVE DEVICES

The Contractor shall calibrate, adjust, set and test each new adjustable circuit protective device to ensure that they will function properly prior to the initial energization of the new power system under actual operating conditions.

### 3.17 PAINTING AND FINISHING

Field-applied paint on exposed surfaces shall be provided under Section 09900 PAINTING, GENERAL.

### 3.18 REPAIR OF EXISTING WORK

The work shall be carefully laid out in advance, and where cutting, channeling, chasing, or drilling of floors, walls, partitions, ceiling, or other surfaces is necessary for the proper installation, support, or anchorage of the conduit, raceways, or other electrical work, this work shall be carefully done, and any damage to building, piping, or equipment shall be repaired by skilled mechanics of the trades involved at no additional cost to the Government.

### 3.19 FIELD TESTING

Field testing shall be performed in the presence of the Contracting Officer. The Contractor shall notify the Contracting Officer 10 days prior to conducting tests. The Contractor shall furnish all materials, labor, and equipment necessary to conduct field tests. The Contractor shall perform all tests and inspection recommended by the manufacturer unless specifically waived by the Contracting Officer. The Contractor shall maintain a written record of all tests which includes date, test performed, personnel involved, devices tested, serial number and name of test equipment, and test results. All field test reports will be signed and dated by the Contractor.

### 3.19.1 Safety

The Contractor shall provide and use safety devices such as rubber gloves, protective barriers, and danger signs to protect and warn personnel in the test vicinity. The Contractor shall replace any devices or equipment which are damaged due to improper test procedures or handling.

### 3.19.2 Ground-Resistance Tests

The resistance of each grounding electrode shall be measured using the fall-of-potential method defined in IEEE Std 81. Soil resistivity in the area of the grid shall be measured concurrently with the grid measurements. Ground resistance measurements shall be made before the electrical distribution system is energized and shall be made in normally dry conditions not less than 48 hours after the last rainfall. Resistance measurements of separate grounding electrode systems shall be made before the systems are bonded together below grade. The combined resistance of separate systems may be used to meet the required resistance, but the specified number of electrodes must still be provided.

- a. Single rod electrode - 25 ohms.

### 3.19.3 Cable Tests

The Contractor shall be responsible for identifying all equipment and devices that could be damaged by application of the test voltage and ensuring that they have been properly disconnected prior to performing insulation resistance testing. An insulation resistance test shall be performed on all low and medium voltage cables after the cables are installed in their final configuration and prior to energization. The test voltage shall be 500 volts DC applied for one minute between each conductor and ground and between all possible combinations of conductors. The minimum value of resistance shall be:

$$R \text{ in megohms} = (\text{rated voltage in kV} + 1) \times 304.8 / (\text{length of cable in meters})$$

Each cable failing this test shall be repaired or replaced. The repaired cable system shall then be retested until failures have been eliminated.

#### 3.19.3.1 Low Voltage Cable Tests

- a. Continuity test.
- b. Insulation resistance test.

### 3.19.4 Motor Tests

- a. Phase rotation test to ensure proper directions.
- b. Operation and sequence of reduced voltage starters.
- c. High potential test on each winding to ground.
- d. Insulation resistance of each winding to ground.

- e. Vibration test.
- f. Dielectric absorption test on motor and starter.

### 3.19.5 Circuit Breaker Tests

The following field tests shall be performed on circuit breakers.

#### 3.19.5.1 Circuit Breakers, Low Voltage

- a. Insulation resistance test phase-to-phase, all combinations.
- b. Insulation resistance test phase-to-ground, each phase.
- c. Closed breaker contact resistance test.
- d. Manual and electrical operation of the breaker.

#### 3.19.5.2 Circuit Breakers, Molded Case

- a. Insulation resistance test phase-to-phase, all combinations.
- b. Insulation resistance test phase-to-ground, each phase.
- c. Closed breaker contact resistance test.
- d. Manual operation of the breaker.

### 3.19.6 Protective Relays

Protective relays shall be visually and mechanically inspected, adjusted, tested, and calibrated in accordance with the manufacturer's published instructions. These tests shall include pick-up, timing, contact action, restraint, and other aspects necessary to insure proper calibration and operation. Relay settings shall be implemented in accordance with the coordination study. Relay contacts shall be manually or electrically operated to verify that the proper breakers and alarms initiate. Relaying current transformers shall be field tested in accordance with IEEE C57.13.

### 3.20 OPERATING TESTS

After the installation is completed, and at such time as the Contracting Officer may direct, the Contractor shall conduct operating tests for approval. The equipment shall be demonstrated to operate in accordance with the specified requirements. An operating test report shall be submitted in accordance with paragraph FIELD TEST REPORTS.

01062/BERGER/ABAM  
Tactical Equipment Complex  
Fort Lewis, Washington

### 3.21 ACCEPTANCE

Final acceptance of the facility will not be given until the Contractor has successfully completed all tests and after all defects in installation, material or operation have been corrected.

-- End of Section --

SECTION 16710

PREMISES DISTRIBUTION SYSTEM

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by basic designation only.

ELECTRONIC INDUSTRIES ALLIANCE (EIA)ANSI/TIA/EIA-568-A (1995) Commercial Building Telecommunications Cabling Standard

ANSI/TIA/EIA-568-A-5 (2000) Transmission Performance Specifications for 4-pair 100 ohm Category 5E Cabling

ANSI/TIA/EIA-569-A (1998) Commercial Building Standard for Telecommunications Pathways and Spaces

ANSI/TIA/EIA-606 (1993) Administration Standard for the Telecommunications Infrastructure of Commercial Buildings

ANSI/TIA/EIA-607 (1994) Commercial Building Grounding and Bonding Requirements for Telecommunications

TIA/EIA TSB 67 (1995) Transmission Performance Specifications for Field Testing of Unshielded Twisted-Pair Cabling Systems

INSULATED CABLE ENGINEERS ASSOCIATION (ICEA)

ICEA S-80-576 (1994) Communications Wire and Cable for Wiring of Premises

ICEA S-83-596 (1994) Fiber Optic Premises Distribution Cable

NATIONAL FIRE PROTECTION ASSOCIATION (NFPA)

NFPA 70 (1999) National Electrical Code

1.2 SYSTEM DESCRIPTION

The premises distribution system shall consist of inside-plant horizontal, riser, and backbone cables and connecting hardware to transport telephone and data (including LAN) signals between equipment items in a building.

### 1.3 ENVIRONMENTAL REQUIREMENTS

Connecting hardware shall be rated for operation under ambient conditions of 0 to 60 degrees C and in the range of 0 to 95 percent relative humidity, noncondensing.

### 1.4 QUALIFICATIONS

#### 1.4.1 Minimum Contractor Qualifications

All work under this section shall be performed by and all equipment shall be furnished and installed by a certified Telecommunications Contractor, hereafter referred to as the Contractor. With the exception of furnishing and installing conduit, electrical boxes, and pullwires, this work shall not be done by the Electrical Contractor. The Contractor shall have the following qualifications in Telecommunications Systems installation:

- a. Contractor shall have a minimum of 3 years experience in the application, installation and testing of the specified systems and equipment.
- b. All supervisors and installers assigned to the installation of this system or any of its components shall have factory certification from each equipment manufacturer that they are qualified to install and test the provided products. General electrical trade staff (electricians) shall not be used for the installation of the Premises Distribution System cables and associated hardware.
- c. All installers assigned to the installation of this system or any of its components shall have a minimum of 3 years experience in the installation of the specified copper and fiber optic cable and components.

#### 1.4.2 Minimum Manufacturer Qualifications

The equipment and hardware provided under this contract will be from manufacturers that have a minimum of 3 years experience in producing the types of systems and equipment specified.

### 1.5 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only. When used, a designation following the "G" designation identifies the office that will review the submittal for the Government. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

#### SD-02 Shop Drawings

Premises Distribution System; G, RE.

Detail drawings including a complete list of equipment and material. Detail drawings shall contain complete wiring and schematic diagrams and other details required to demonstrate that



the system has been coordinated and will function properly as a system. Drawings shall include vertical riser diagrams, equipment rack details, elevation drawings of telecommunications closet walls, outlet face plate details for all outlet configurations, sizes and types of all cables, conduits, and cable trays. Drawings shall show proposed layout and anchorage of equipment and appurtenances, and equipment relationship to other parts of the work including clearance for maintenance and operation.

Record Drawings; G, RE.

Record drawings for the installed wiring system infrastructure per ANSI/TIA/EIA-606. The drawings shall show the location of all cable terminations and location and routing of all backbone and horizontal cables. The identifier for each termination and cable shall appear on the drawings.

#### SD-03 Product Data

Record Keeping and Documentation; G, RE.

Documentation on cables and termination hardware in accordance with ANSI/TIA/EIA-606.

Spare Parts.

Lists of spare parts, tools, and test equipment for each different item of material and equipment specified, after approval of detail drawings, not later than 2 months prior to the date of beneficial occupancy. The data shall include a complete list of parts and supplies, with current unit prices and source of supply, and a list of spare parts recommended for stocking.

Manufacturer's Recommendations; G, RE.

Where installation procedures, or any part thereof, are required to be in accordance with the recommendations of the manufacturer of the material being installed, printed copies of these recommendations, prior to installation shall be provided. Installation of the item will not be allowed to proceed until the recommendations are received and approved.

Test Plan; G, RE.

Test plan defining the tests required to ensure that the system meets technical, operational and performance specifications, 60 days prior to the proposed test date. The test plan must be approved before the start of any testing. The test plan shall identify the capabilities and functions to be tested, and include detailed instructions for the setup and execution of each test and procedures for evaluation and documentation of the results.

Qualifications; G, RE.

The qualifications of the Manufacturer, Contractor, and the Installer to perform the work specified herein. This shall include proof of the minimum qualifications specified herein.

#### SD-06 Test Reports

Test Reports; G, RE.

Test reports in booklet form with witness signatures verifying execution of tests. Test results will also be provided on 89 mm diskettes in Windows format. Reports shall show the field tests performed to verify compliance with the specified performance criteria. Test reports shall include record of the physical parameters verified during testing. Test reports shall be submitted within 14 days after completion of testing.

#### SD-07 Certificates

Premises Distribution System.

Written certification that the premises distribution system complies with the ANSI/TIA/EIA-568-A, ANSI/TIA/EIA-569-A, and ANSI/TIA/EIA-606 standards.

Materials and Equipment; G, RE.

Where materials or equipment are specified to conform, be constructed or tested to meet specific requirements, certification that the items provided conform to such requirements. Certification by a nationally recognized testing laboratory that a representative sample has been tested to meet the requirements, or a published catalog specification statement to the effect that the item meets the referenced standard, will be acceptable as evidence that the item conforms. Compliance with these requirements does not relieve the Contractor from compliance with other requirements of the specifications.

Installers; G, RE.

The Contractor shall submit certification that all the installers are factory certified to install and test the provided products.

#### 1.6 DELIVERY AND STORAGE

Equipment delivered and placed in storage shall be stored with protection from the weather, humidity and temperature variation, dirt and dust or other contaminants.

## 1.7 OPERATION AND MAINTENANCE MANUALS

Commercial off the shelf manuals shall be furnished for operation, installation, configuration, and maintenance for all products provided as a part of the premises distribution system. Specification sheets for all cable, connectors, and other equipment shall be provided.

## 1.8 RECORD KEEPING AND DOCUMENTATION

### 1.8.1 Cables

A record of all installed cable shall be provided in hard copy format per ANSI/TIA/EIA-606. The cable records shall include only the required data fields per ANSI/TIA/EIA-606.

### 1.8.2 Termination Hardware

A record of all installed patch panels and outlets shall be provided in hard copy format per ANSI/TIA/EIA-606. The hardware records shall include only the required data fields per ANSI/TIA/EIA-606.

## PART 2 PRODUCTS

### 2.1 MATERIALS AND EQUIPMENT

Materials and equipment shall be the standard products of a manufacturer regularly engaged in the manufacture of the products and shall be the manufacturer's latest standard design that has been in satisfactory use for at least 1 year prior to installation. Materials and equipment shall conform to the respective publications and other requirements specified below and to the applicable requirements of NFPA 70.

### 2.2 UNSHIELDED TWISTED PAIR CABLE SYSTEM

#### 2.2.1 Backbone Cable

Backbone cable shall meet the requirements of ICEA S-80-576 and ANSI/TIA/EIA-568-A for Category 5 100-ohm unshielded twisted pair cable. Cable shall be label-verified. Cable jacket shall be factory marked at regular intervals indicating verifying organization and performance level. Conductors shall be solid untinned copper 22 AWG. Cable shall be rated CMP per NFPA 70.

#### 2.2.2 Horizontal Cable

Horizontal cable shall meet the requirements of ANSI/TIA/EIA-568-A-5 for Category 5e. Cable shall be label-verified. Cable jacket shall be factory marked at regular intervals indicating verifying organization and performance level. Cable shall be rated CMP per NFPA 70.

#### 2.2.3 Connecting Hardware

Connecting and cross-connecting hardware shall be the same category as the cable it serves. Hardware shall be in accordance with ANSI/TIA/EIA-568-A.

#### 2.2.3.1 Telecommunications Outlets

Wall and desk outlet plates shall come equipped with four modular jacks, with the top jacks labeled "voice" and the bottom jacks labeled "data". RJ-11 for voice and Category 5, RJ-45 for data and shall meet the requirements of EIA ANSI/TIA/EIA-568-A. Modular jack pin/pair configuration shall be T568A per EIA ANSI/TIA/EIA-568-A. Modular jacks shall be unkeyed. Faceplates shall be provided and shall be ivory in color, impact resistant plastic. Mounting plates shall be provided for system furniture and shall match the system furniture in color. Outlet assemblies used in the premises distribution system shall consist of modular jacks assembled into both simplex and duplex outlet assemblies in single or double gang covers as specified in this section. The modular jacks shall conform to the requirements of EIA ANSI/TIA/EIA-568-A, Category 5 for voice and 5 for data (LAN).

#### 2.2.3.2 Patch Panels

Patch panels shall consist of eight-position modular jacks, with rear mounted type 110 insulation displacement connectors, arranged in rows or columns on 480 mm (19 inch) rack mounted panels. Jack pin/pair configuration shall be T568A per ANSI/TIA/EIA-568-A. Jacks shall be unkeyed. Panels shall be labeled with alphanumeric x-y coordinates. The modular jacks shall conform to the requirements of ANSI/TIA/EIA-568-A, and shall be rated for use with Category 5e cable in accordance with ANSI/TIA/EIA-568-A-5 and shall meet the Link Test parameters as listed in TIA/EIA TSB 67 and supplemented by ANSI/TIA/EIA-568-A-5.

#### 2.2.3.3 Patch Cords

Patch cords shall be cable assemblies consisting of flexible, twisted pair stranded wire with eight-position plugs at each end. Cable shall be label-verified. Cable jacket shall be factory marked at regular intervals indicating verifying organization and performance level. Patch cords shall be wired straight through; pin numbers shall be identical at each end and shall be paired to match T568A patch panel jack wiring per ANSI/TIA/EIA-568-A. Patch cords shall be unkeyed. Patch cords shall be factory assembled. Patch cords shall conform to the requirements of ANSI/TIA/EIA-568-A-5 for Category 5e.

#### 2.2.3.4 Terminal Blocks

Terminal blocks shall be wall mounted wire termination units consisting of insulation displacement connectors mounted in plastic blocks, frames or housings. Blocks shall be type 66M1-50 which meet the requirements of ANSI/TIA/EIA-568-A, and shall be rated for use with Category 5e cable in accordance with ANSI/TIA/EIA-568-A-5 and shall meet the Link Test parameters as listed in TIA/EIA TSB 67 and supplemented by ANSI/TIA/EIA-568-A-5. Blocks shall be mounted on standoffs and shall include cable management hardware. Insulation displacement connectors shall terminate 22 or 24 gauge solid copper wire as a minimum, and shall be connected in pairs so that horizontal cable and connected jumper wires are on separate connected terminals.

## 2.3 FIBER OPTIC CABLE SYSTEM

### 2.3.1 Horizontal Distribution Cable

#### 2.3.1.1 Multimode

Multimode fiber optic horizontal cable shall meet the requirements of ANSI/TIA/EIA-568-A and ICEA S-83-596 for 62.5/125 micrometer multimode graded index optical fiber cable. Numerical aperture for each fiber shall be a minimum of 0.275. Cable construction shall be tight buffered type, two strands. Individual fibers shall be color coded for identification. Cable shall be imprinted with fiber count, fiber type, and aggregate length at regular intervals of 1.0 m. Cable shall be rated and marked OFNP per NFPA 70.

### 2.3.2 Connecting Hardware

#### 2.3.2.1 Connectors

Connectors shall be SC type with ceramic ferrule material with a maximum insertion loss of .5 dB. Connectors shall meet performance requirements of ANSI/TIA/EIA-568-A. Connectors shall be field installable. Connectors shall utilize adhesive for fiber attachment to ferrule. Connectors shall terminate fiber sizes as required for the service.

#### 2.3.2.2 Patch Panels

Patch panels shall be a complete system of components by a single manufacturer, and shall provide termination, splice storage, routing, radius limiting, cable fastening, storage, and cross-connection. Patch panels shall be 480 mm (19 inch) rack mounted panels. Patch panels shall provide strain relief for cables. Panels shall be labeled with alphanumeric x-y coordinates. Patch panel connectors and couplers shall be the same type and configuration as used elsewhere in the system.

#### 2.3.2.3 Patch Cords

Patch cords shall be cable assemblies consisting of flexible optical fiber cable with connectors of the same type as used elsewhere in the system. Optical fiber shall be the same type as used elsewhere in the system. Patch cords shall be complete assemblies from manufacturer's standard product lines.

## 2.4 EQUIPMENT RACKS

### 2.4.1 Floor Mounted Open Frame

Floor mounted equipment racks shall be aluminum relay racks with uprights to mount equipment 480 mm wide. Uprights shall be 75 mm deep channel, 32 mm wide, drilled and tapped 12-24 in a 13 mm pattern. Racks shall be provided with a standard top crossmember, and predrilled base plate to allow floor fastening. Open frame equipment racks shall be 2.1 m in height and clear coated. AC outlets shall be provided as shown. Earthquake bracing to wall shall be provided.

#### 2.4.2 Cable Guides

Cable guides shall be specifically manufactured for the purpose of routing cables, wires and patch cords horizontally and vertically on 480 mm (19 inch) equipment racks. Cable guides shall consist of ring or bracket-like devices mounted on rack panels for horizontal use or individually mounted for vertical use. Cable guides shall mount to racks by screws and/or nuts and lockwashers.

#### 2.5 EQUIPMENT MOUNTING BACKBOARD

Plywood backboards shall be provided, sized as shown, painted with white or light colored paint.

#### 2.6 TELECOMMUNICATIONS OUTLET BOXES

Electrical boxes for telecommunication outlets shall be 117 mm square by 53 mm deep with minimum 9 mm deep single or two gang plaster ring as shown. Provide a minimum 25 mm conduit.

### PART 3 EXECUTION

#### 3.1 INSTALLATION

System components and appurtenances shall be installed in accordance with NFPA 70, manufacturer's instructions and as shown. Necessary interconnections, services, and adjustments required for a complete and operable signal distribution system shall be provided. Components shall be labeled in accordance with ANSI/TIA/EIA-606. Penetrations in fire-rated construction shall be firestopped in accordance with Section 07840 FIRESTOPPING. Conduits, outlets and raceways shall be installed in accordance with Section 16415 ELECTRICAL WORK, INTERIOR. Wiring shall be installed in accordance with ANSI/TIA/EIA-568-A and as specified in Section 16415 ELECTRICAL WORK, INTERIOR. Wiring, and terminal blocks and outlets shall be marked in accordance with ANSI/TIA/EIA-606. Cables shall not be installed in the same cable tray, utility pole compartment, or floor trench compartment with ac power cables. Cables not installed in conduit or wireways shall be properly secured and neat in appearance and, if installed in plenums or other spaces used for environmental air, shall comply with NFPA 70 requirements for this type of installation.

##### 3.1.1 Horizontal Distribution Cable

The rated cable pulling tension shall not be exceeded. Cable shall not be stressed such that twisting, stretching or kinking occurs. Cable shall not be spliced. Fiber optic cables shall be installed either in conduit or through type cable trays to prevent microbending losses. Copper cable not in a wireway shall be suspended a minimum of 200 mm above ceilings by cable supports no greater than 1.5 m apart. Cable shall not be run through structural members or in contact with pipes, ducts, or other potentially damaging items. Placement of cable parallel to power conductors shall be avoided, if possible; a minimum separation of 300 mm (12 inches) shall be maintained when such placement cannot be avoided. Cables shall be terminated; no cable shall contain unterminated elements. Minimum bending radius shall not be exceeded during installation or once installed. Cable

ties shall not be excessively tightened such that the transmission characteristics of the cable are altered.

### 3.1.2 Telecommunications Outlets

#### 3.1.2.1 Faceplates

As a minimum each jack shall be labeled as to its function and a unique number to identify cable link.

#### 3.1.2.2 Cables

Unshielded twisted pair and fiber optic cables shall have a minimum of 150 mm of slack cable loosely coiled into the telecommunications outlet boxes. Minimum manufacturers bend radius for each type of cable shall not be exceeded.

#### 3.1.2.3 Pull Cords

Pull cords shall be installed in all conduit serving telecommunications outlets which do not initially have fiber optic cable installed.

### 3.1.3 Terminal Blocks

Terminal blocks shall be mounted in orderly rows and columns. Adequate vertical and horizontal wire routing areas shall be provided between groups of blocks. Industry standard wire routing guides shall be utilized.

### 3.1.4 Unshielded Twisted Pair Patch Panels

Patch panels shall be mounted in equipment racks with sufficient modular jacks to accommodate the installed cable plant plus 10 percent spares. Cable guides shall be provided above, below and between each panel.

### 3.1.5 Fiber Optic Patch Panels

Patch panels shall be mounted in equipment racks with sufficient ports to accommodate the installed cable plant plus 10 percent spares. A slack loop of fiber shall be provided within each panel. Loop shall be 900 mm in length. The outer jacket of each cable entering a patch panel shall be secured to the panel to prevent movement of the fibers within the panel, using clamps or brackets specifically manufactured for that purpose.

### 3.1.6 Equipment Racks

Open frame equipment racks shall be bolted to the floor slab. Cable guides shall be bolted or screwed to racks. Racks shall be installed level. Ganged racks shall be bolted together. Ganged rack cabinets shall have adjacent side panels removed.

### 3.1.7 Rack Mounted Equipment

Equipment to be rack mounted shall be securely fastened to racks by means of the manufacturer's recommended fasteners.

### 3.2 TERMINATION

Cables and conductors shall sweep into termination areas; cables and conductors shall not bend at right angles. Manufacturer's minimum bending radius shall not be exceeded. When there are multiple system type drops to individual workstations, relative position for each system shall be maintained on each system termination block or patch panel.

#### 3.2.1 Unshielded Twisted Pair Cable

Each pair shall be terminated on appropriate outlets, terminal blocks or patch panels. No cable shall be unterminated or contain unterminated elements. Pairs shall remain twisted together to within the proper distance from the termination as specified in ANSI/TIA/EIA-568-A. Conductors shall not be damaged when removing insulation. Wire insulation shall not be damaged when removing outer jacket.

#### 3.2.2 Backboard Cable Termination

Contractor shall terminate all cables from floor up to punch down blocks or building entrance terminal.

#### 3.2.3 Fiber Optic Cable

Each fiber shall have connectors installed. The pull strength between the connector and the attached fiber shall be not less than 11.3 kg. The mated pair loss, without rotational optimization, shall not exceed 1.0 dB. Fiber optic connectors shall be installed per ANSI/TIA/EIA-568-A.

### 3.3 GROUNDING

Signal distribution system ground shall be installed in the telecommunications entrance facility and in each telecommunications closet in accordance with ANSI/TIA/EIA-607 and Section 16415 ELECTRICAL WORK, INTERIOR. Equipment racks shall be connected to the electrical safety ground.

### 3.4 ADDITIONAL MATERIALS

The Contractor shall provide the following additional materials required for facility startup.

- a. 10 of each type outlet.
- b. 10 of each type cover plate.
- c. 1 of each type terminal block for each telecommunications closet.
- d. 4 Patch cords of 3 m for each telecommunications closet.



- e. 1 Set of any and all special tools required to establish a cross connect and to change and/or maintain a terminal block.

### 3.5 ADMINISTRATION AND LABELING

#### 3.5.1 Labeling

##### 3.5.1.1 Labels

All labels shall be in accordance with ANSI/TIA/EIA-606.

##### 3.5.1.2 Cable

All cables will be labeled using color labels on both ends with encoded identifiers per ANSI/TIA/EIA-606.

##### 3.5.1.3 Termination Hardware

All workstation outlets and patch panel connections will be labeled using color coded labels with encoded identifiers per ANSI/TIA/EIA-606.

### 3.6 TESTING

Materials and documentation to be furnished under this specification are subject to inspections and tests. All components shall be terminated prior to testing. Equipment and systems will not be accepted until the required inspections and tests have been made, demonstrating that the signal distribution system conforms to the specified requirements, and that the required equipment, systems, and documentation have been provided.

#### 3.6.1 Unshielded Twisted Pair Tests

All metallic cable pairs shall be tested for proper identification and continuity. All opens, shorts, crosses, grounds, and reversals shall be corrected. Correct color coding and termination of each pair shall be verified in the communications closet and at the outlet. Horizontal wiring shall be tested from and including the termination device in the communications closet to and including the modular jack in each room. Backbone wiring shall be tested end-to-end, including termination devices, from terminal block to terminal block, in the respective communications closets. These test shall be completed and all errors corrected before any other tests are started.

#### 3.6.2 Category 5e Circuits

All category 5e circuits shall be tested using a test set that meets the Class II accuracy requirements of TIA/EIA TSB 67 standard, including the additional tests and test set accuracy requirements of ANSI/TIA/EIA-568-A-5. Testing shall use the Basic Link Test procedure of TIA/EIA TSB 67, as supplemented by ANSI/TIA/EIA-568-A-5.. Cables and connecting hardware which contain failed circuits shall be replaced and retested to verify the standard is met.

01062/BERGER/ABAM  
FY02 Tactical Equipment Complex  
Fort Lewis, Washington

### 3.6.3 Fiber Optic Cable

Unless stated otherwise, tests shall be performed from both ends of each circuit. Connectors shall be visually inspected for scratches, pits or chips and shall be reterminated if any of these conditions exist. Each circuit leg and complete circuit shall be tested for insertion loss at 850 and 1300 nm using a light source similar to that used for the intended communications equipment. High-resolution optical time domain reflectometer (OTDR) tests shall be performed from one end of each fiber. Scale of the OTDR trace shall be such that the entire circuit appears over a minimum of 80 percent of the X-axis.

-- End of Section --

SECTION 16711

TELEPHONE SYSTEM, OUTSIDE PLANT

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by basic designation only.

AMERICAN NATIONAL STANDARDS INSTITUTE (ANSI)

ANSI C62.61 (1993) Gas Tube Surge Arrestors on Wire Line Telephone Circuits

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM D 2239 (1996a) Polyethylene (PE) Plastic Pipe (SIDR-PR) Based on Controlled Inside Diameter

ELECTRONIC INDUSTRIES ASSOCIATION (EIA)

EIA ANSI/TIA/EIA-607 (1994) Commercial Building Grounding and Bonding Requirements for Telecommunications

INSTITUTE OF ELECTRICAL AND ELECTRONICS ENGINEERS (IEEE)

IEEE C2 (1997) National Electrical Safety Code

NATIONAL FIRE PROTECTION ASSOCIATION (NFPA)

NFPA 70 (1999) National Electrical Code

RURAL UTILITIES SERVICE (RUS)

REA Bulletin 345-50 (1979) Trunk Carrier Systems (PE-60)

REA Bulletin 345-65 (1985) Shield Bonding Connectors (PE-33)

REA Bulletin 345-72 (1985) Filled Splice Closures (PE-74)

REA Bulletin 345-151 (1989) Conduit and Manhole Construction, REA Form 515c

REA Bulletin 1753F-205 (PE-39) (1993) Filled Telephone Cables

REA Bulletin 1753F-207 (PE-87) (1994) Terminating Cables

REA Bulletin 1753F-208 (1993) Filled Telephone Cables with Expanded Insulation (PE-89)

RUS Bulletin 1751F-643 (1998) Underground Plant Design

RUS Bulletin 1753F-302 (PE-91) (1994) Outside Plant Housings and Serving  
Area Interface Systems

RUS Bulletin 1753F-401(PC-2) (1995) Splicing Copper and Fiber Optic Cables

RUS REA Bulletin 1751F-641 (1995) Construction of Buried Plant

RUS REA Bull 1753F-201 (PC-4) (1997) Acceptance Tests and Measurements of  
Outside Plant

RUS REA Bulletin 1755I-100 (1999) List of Materials Acceptable for Use  
on Telecommunications Systems of RUS  
Borrowers

UNDERWRITERS LABORATORIES (UL)

UL 497 (1995; Rev Mar 1996) Protectors for Paired  
Conductor Communication Circuits

1.2 SYSTEM DESCRIPTION

The outside plant system shall consist of all cable, conduit, manholes, etc. required to provide signal paths from the closest point of presence to the new facility, including free standing frames or backboards, terminating cables, lightning and surge protection modules at the entry facility. The work consists of furnishing, installing, testing and making operational a complete outside plant system for continuous use.

1.3 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only. When used, a designation following the "G" designation identifies the office that will review the submittal for the Government. The following shall be submitted in accordance with Section 01330 SUBMITTAL PROCEDURES:

SD-02 Shop Drawings

Telephone System; G, RE  
Installation; G, RE

Detail drawings, consisting of a complete list of equipment and material, including manufacturer's descriptive and technical literature, performance charts and curves, and catalog cuts. Detail drawings shall also contain complete configuration information, wiring diagrams and any other details required to demonstrate that the cable system has been coordinated to support the transmission systems identified in the specifications and drawings. Drawings shall show proposed layout and anchorage of equipment and appurtenances, and equipment relationship to other parts of the work including clearance for maintenance and operations.

Record Drawings; G, RE

Record drawings for the installed wiring system showing the actual location of all cable terminations, splices, routing, and size and type of all cables. The identifier for each termination and cable shall appear on the drawings. The drawings shall include gauge and pair or fiber count for each cable, duct and innerduct arrangement, or conductor assignment of outside plant, and protector and connector block layout at the termination points after installation.

SD-03 Product Data

Spare Parts  
Equipment

A data list of recommended spare parts, tools, and test equipment for each different item of material and equipment specified prior to beneficial occupancy. The data shall include a complete list of parts and supplies, with current unit prices and source of supply.

Installation; G, RE

Printed copies of the manufacturer's recommendations for the material being installed, prior to installation. Installation of the item will not be allowed to proceed where installation procedures, or any part thereof, are required to be in accordance with those recommendations until the recommendations are received and approved.

Acceptance Tests; G, RE

Test plans defining all tests required to ensure that the system meets specified requirements. The test plans shall define milestones for the tests, equipment, personnel, facilities, and supplies required. The test plans shall identify the capabilities and functions to be tested.

Cutover and Records; G, RE

The cutover plan shall provide procedures and schedules for relocation of facility station numbers without interrupting service to any active location.

SD-06 Test Reports

Acceptance Tests

Test reports in booklet form showing all field tests performed, upon completion and testing of the installed system. Measurements shall be tabulated on a pair by pair or strand by strand basis.

## SD-07 Certificates

### Telephone System

Proof that the items furnished under this section conform to the specified requirements in FCC, ICEA, REA, RUS, ANSI, ASTM, NFPA, EIA, or UL, where materials and equipment are so specified.

Qualifications; G, RE

The qualifications of the manufacturer, splicer, and installation supervisor as specified.

## 1.4 QUALIFICATIONS

### 1.4.1 Cable Installers

Installation shall be under the direct supervision of an individual with a minimum of 3 years experience in the installation of the specified copper and fiber optic cable and components.

### 1.4.2 Cable Splicing and Termination

All cable splicers shall have training in the proper techniques and have a minimum of 3 years experience in splicing and terminating the specified cables. Modular splices shall be performed by factory certified personnel or under direct supervision of factory trained personnel for products used.

### 1.4.3 Manufacturers

The cable, equipment, and hardware provided shall be from manufacturers that have a minimum of 3 years experience in producing the types of cable, equipment, and hardware specified.

## 1.5 DELIVERY AND STORAGE

### 1.5.1 Cable Requirements-

All cable shall be shipped on reels. The diameter of the drum shall be large enough to prevent damage to the cable during reeling and unreeling. The reels shall be constructed to prevent damage during shipment and handling. The outer end of the cable shall be securely fastened to the reel head to prevent the cable from becoming loose in transit. The inner end of the cable shall project into a slot in the side of the reel, or into a housing on the inner slot of the drum, with sufficient length to make it available for testing. The inner end shall be fastened to prevent the cable from becoming loose during installation. End seals shall be applied to each of the cables to prevent moisture from entering the cable. The reels with cable shall be suitable for outside storage conditions when the temperature ranges from minus 40 to plus 65 degrees C, with relative humidity from 0 to 100 percent.

### 1.5.2 Equipment

All equipment shall be stored with protection from the weather, humidity and temperature variations, dirt and dust, or other contaminants, in accordance with the manufacturer's requirements.

## PART 2 PRODUCTS

### 2.1 STANDARD PRODUCTS

Materials and equipment shall be the standard products of a manufacturer regularly engaged in the manufacture of such products and shall be the manufacturer's latest standard design that has been in satisfactory use for at least 2 years prior to bid opening. Each major component of equipment shall have the manufacturer's name and type identified on the equipment. All products supplied shall be specifically designed and manufactured for use with outside plant communications systems. All items of the same class of equipment shall be the products of a single manufacturer.

### 2.2 CABLE

#### 2.2.1 Copper Conductor Cable

Copper conductor cable shall conform to the following:

##### 2.2.1.1 Underground

Cable shall be manufactured per REA Bulletin 1753F-205 (PE-39) or REA Bulletin 1753F-208. A 0.2 mm coated aluminum or 0.12 mm copper metallic shield shall be provided.

##### 2.2.1.2 Screened

Screened cable shall comply with REA Bulletin 1753F-205 (PE-39) or REA Bulletin 1753F-208.

### 2.3 CLOSURES

#### 2.3.1 Copper Conductor Closures

##### 2.3.1.1 Underground Closure

Underground closures shall conform to REA Bulletin 345-72. The closure shall be of thermoplastic, thermoset, or stainless steel material and be suitable for use in a vault or manhole.

##### 2.3.2 Fiber Optic Closures

### 2.4 CABLE SPLICES AND ORGANIZERS

#### 2.4.1 Copper Cable Splices

All cables greater than 25 pairs shall be spliced using modular splicing connectors, which accommodate 25 pairs of conductors at a time. The correct connector size shall be used to accommodate the wire gauge of the cable to

be spliced. The connectors used shall be listed in RUS REA Bulletin 1755I-100.

## 2.5 CABLE TERMINALS

### 2.5.1 Pedestal-Type Cable Terminals

Pedestal-type cable terminals shall conform to RUS Bulletin 1753F-302 (PE-91).

### 2.5.2 Cross-connect Cable Terminals

Cross-connect cable terminals shall be weatherproofed for outdoor use and suitable for pole, pad, or stake mounting. The terminal shall be equipped with mounting columns and distribution rings for jumper-wire routing. The terminal shall be of aluminum or steel construction and ribbed for strength.

## 2.6 MANHOLE AND DUCT

All manhole and duct products shall conform to RUS Bulletin 1751F-643.

### 2.6.1 New Manholes

New manholes shall be equipped with pulling-in irons, cable racks, and ground rod, and conform to the requirements of REA Bulletin 345-151. Manholes shall be a minimum of 3.7 m long by 1.8 m wide by 2.0 m high. Manholes shall be designed so that the main trunk conduits enter and exit near the center of the ends, and lateral conduits exit on the sides near the corners. Manholes may be pre-cast or cast in place.

### 2.6.2 Duct/Conduit

Conduit shall be furnished as specified in Sections 16415 ELECTRICAL WORK, INTERIOR and 16375 ELECTRICAL DISTRIBUTION SYSTEM, UNDERGROUND and as shown on project drawings.

### 2.6.3 Innerduct

Innerduct shall be SIDR 11.5 polyethylene plastic pipe conforming to ASTM D 2239.

## 2.7 CONNECTOR BLOCKS

Connector blocks consisting of flame-retardant molded plastic fastened to a metal mounting bar shall be provided to terminate the outside plant cable as shown. The connector blocks shall be of 100-pair block size and equipped with protection modules. The connector blocks shall be 24 gauge stub type. The cable stubs shall be 100 pair and conform to REA Bulletin 1753F-207 (PE-87).



## 2.8 PROTECTOR MODULES

The protector modules shall be of the two-element gas tube type. Protection modules shall be heavy duty,  $A > 10$  kA,  $B > 400$ ,  $C > 65A$  where A is the maximum single impulse discharge current, B is the impulse life and C is the AC discharge current per ANSI C62.61. The gas modules shall shunt high voltage to ground, fail short, be equipped with an external spark gap and heat coils, and shall comply with UL 497.

## 2.9 MISCELLANEOUS ITEMS

### 2.9.1 Shield Connectors

Shield connectors shall make a stable, low-impedance electrical connection between the shield of the communications cable and a conductor such as a strap, bar, or wire. The connector shall be made of tin-plated tempered brass. Shield bond connectors shall comply with REA Bulletin 345-65.

### 2.9.2 Grounding Braid

Grounding braid shall provide low electrical impedance connections for dependable shield bonding. The braid shall be made from flat tin-plated copper.

### 2.9.3 Warning Tape

Marking and locating tape shall be acid and alkali resistant polyethylene film, 150 mm wide with a minimum strength of 12.1 MPa lengthwise and 10.3 MPa crosswise. The tape shall be manufactured with integral wires, foil backing, or other means to enable detection by a metal detector when the tape is buried up to 1 m deep. The metallic core shall be encased in a protective jacket or provided with other means to protect it from corrosion and shall be specifically manufactured for marking and locating underground utilities. The warning tape shall be orange in color and continuously imprinted with the words "WARNING - COMMUNICATIONS CABLE BELOW" at not more than 1.2 m intervals.

## PART 3 EXECUTION

### 3.1 INSTALLATION

All system components and appurtenances shall be installed in accordance with the manufacturer's instructions and as shown. All installation work shall be done in accordance with the safety requirements set forth in the general requirements of IEEE C2 and NFPA 70.

#### 3.1.1 Cable Inspection and Repair

All cable and wire used in the construction of the project shall be handled with care. Each reel shall be inspected for cuts, nicks or other damage. All damage shall be repaired to the satisfaction of the Contracting Officer. The reel wrap shall remain intact on the reel until the cable or wire is ready to be placed.

### 3.1.2 Underground Cable

Underground cable installation shall be accomplished in accordance with the requirements set forth in RUS REA Bulletin 1751F-641.

#### 3.1.2.1 Cable Pulling

For cable installed in ducts and conduit, a cable feeder guide shall be used, between the cable reel and the face of the duct and conduit, to protect the cable and guide it into the duct and conduit as it is paid off the reel. As the cable is paid off the reel, it shall be inspected for jacket defects. Precautions shall be taken during installation to prevent the cable from being kinked or crushed. A pulling eye shall be attached to the cable and used to pull the cable through the duct and conduit system. Cable shall be hand fed and guided through each manhole. As the cable is paid off the reel into the cable feeder guide, it shall be sufficiently lubricated with a type of lubricant recommended by the cable manufacturer. Where the cable is pulled through a manhole, additional lubricant shall be applied at all intermediate manholes. Dynamometers or load-tension instruments shall be used to ensure that the pulling line tension does not exceed the installation tension value specified by the cable manufacturer. The mechanical stress placed upon a cable during installation shall not cause the cable to be twisted or stretched.

#### 3.1.2.2 Penetrations for Cable Access

Penetrations in walls, ceilings or other parts of the building, made to provide for cable access, shall be caulked and sealed. Where conduits and ducts pass through fire walls, fire partitions, above grade floors, and fire rated chase walls, the penetration shall be sealed with fire stopping materials as specified in section 07840 FIRE STOPPING. Fire stopped penetrations shall not compromise the fire rating of the walls or floors. All underground building entries shall be through waterproof facilities.

#### 3.1.2.3 Cable Bends

Telephone cable bends shall have a radius of not less than 10 times the cable diameter. Only large radius sweeps shall be used in conduit runs and shall not exceed a cumulative 90 degrees between manholes.

### 3.1.3 Manhole and Ducts

Manhole and duct systems shall be installed in accordance with Section 16375 ELECTRICAL DISTRIBUTION SYSTEM, UNDERGROUND. Manholes shall be placed in line with the main duct. Splice cases shall be mounted in the center on the long sides. Lateral conduits shall exit the long sides near the corners.

#### 3.1.3.1 Innerduct Installation

Innerduct shall be pulled through existing duct-manhole system in continuous sections. Splices, joints, couplings, or connections of any type will not be allowed between manholes. Innerduct shall be plugged at both ends with polyurethane foam duct seal; this material shall also be inserted between the innerduct and the duct if cables are placed in the innerducts. Only one

cable shall be installed in a given innerduct. Existing and new unoccupied innerducts shall be trimmed leaving 50 mm exposed.

#### 3.1.3.2 Pull Cord

Pull cords of 10 mm polypropylene shall be installed in all unused ducts and inner-ducts with a minimum of 610 mm spare cord protruding from each end.

#### 3.1.4 Surge Protection

Except for fiber optic cable, all cables and conductors, which serve as communication lines, shall have surge protection meeting the requirements of REA Bulletin 345-50 installed at the entry facility.

### 3.2 SPLICING

#### 3.2.1 Copper Conductor Splices

Copper conductor cable splicing shall be accomplished in accordance with RUS Bulletin 1753F-401(PC-2). Modular splicing shall be used on all cables larger than 25 pairs.

#### 3.2.2 Backboard Cable Termination

Contractor shall terminate all cables from floor up to punch down blocks or building entrance terminal.

### 3.3 GROUNDING

Except where specifically indicated otherwise, all exposed non-current carrying metallic parts of telephone equipment, cable sheaths, cable splices, and terminals shall be grounded. Grounding shall be in accordance with requirements of NFPA 70, Articles 800-33 and 800-40.

#### 3.3.1 Ground Bars

##### 3.3.1.1 Telecommunications Ground Bar (TGB)

Copper TGB shall be provided in accordance with EIA ANSI/TIA/EIA-607 in each communications closet and room and each frame. The TGB shall be connected to the TMGB in accordance with EIA ANSI/TIA/EIA-607. Each TGB shall be connected to the TMGB by the most direct route utilizing a copper wire conductor with a total resistance of less than 0.01 ohms.

#### 3.3.2 Incoming Outside Plant Cables

All incoming outside plant cable shields shall be bonded directly to the closest TGB.

#### 3.3.3 Cable Stubs

All shields of cable stubs shall be bonded to a TGB located on the frame.

#### 3.3.4 Shields

The shields of all incoming cables shall not be bonded across the splice to the cable stubs.

#### 3.3.5 Protection Assemblies

The protector assemblies shall be mounted directly on the vertical frame ironwork. The assemblies mounted on each vertical frame shall be connected with a No. 6 AWG copper conductor to provide a low resistance path to the TGB.

#### 3.3.6 Manholes

The shields of all cables in each manhole shall be bonded together by a bonding wire or ribbon. At intermediate manholes, where the cable is pulled through without a sheath opening, bonds are not required. If the manhole has a lacerating bonding ribbon, the shields of spliced cables shall be attached to it.

### 3.4 CUTOVER AND RECORDS

All necessary transfers and cutovers, shall be accomplished by the Contractor.

### 3.5 ACCEPTANCE TESTS

The Contractor shall provide all personnel, equipment, instrumentation, and supplies necessary to perform all required testing. Notification of any planned testing shall be given to the Contracting Officer at least 14 days prior to any test; testing shall not proceed until after the Contractor has received written Contracting Officer's approval of the test plans as specified. The test plans shall define all the tests required to ensure that the system meets technical, operational, and performance specifications. The test plans shall define milestones for the tests, equipment, personnel, facilities, and supplies required. The test plans shall identify the capabilities and functions to be tested.

#### 3.5.1 Copper Conductor Cable

The following acceptance tests shall be performed in accordance with RUS REA Bull 1753F-201 (PC-4):

- a. Shield continuity.
- b. Conductor continuity.
- c. Conductor insulation resistance.
- d. Structural return loss.
- e. Cable insertion loss and loss margin at carrier frequencies.
- f. Shield ground for single jacketed cables.
- g. DC loop resistance.

-- End of Section --